

The name DUTCH-BROS. and all associated logos, distinctive designs, content, information, and other materials featured, contained herein, and made available by Dutch Bros., including but not limited to, the "hook and leaf" of the establishments and products, all text, images, colors, configurations, graphics, designs, illustrations, photographs, and pictures (collectively, the "Materials") are owned by and/or licensed by DB Franchising USA, LLC and are protected by copyright, trademark, trade dress, patent, and/or other intellectual property rights and unfair competition laws under the United States and foreign laws.



IMAGE FOR GENERAL ILLUSTRATIVE PURPOSES ONLY - ACTUAL BUILDING DESIGN MAY DIFFER

SYMBOL LEGEND:

SECTION REFERENCE

ELEVATION MARKER

DOOR SCHEDULE REFERENCE

WALL ASSEMBLY TYPE REFERENCE

CENTERLINE



ENLARGED DETAIL REFERENCE

MASTER MATERIAL SCHEDULE REFERENCE

REVISION TAG

EQUIPMENT SCHEDULE REFERENCE

REVISION CLOUD

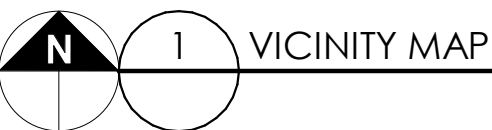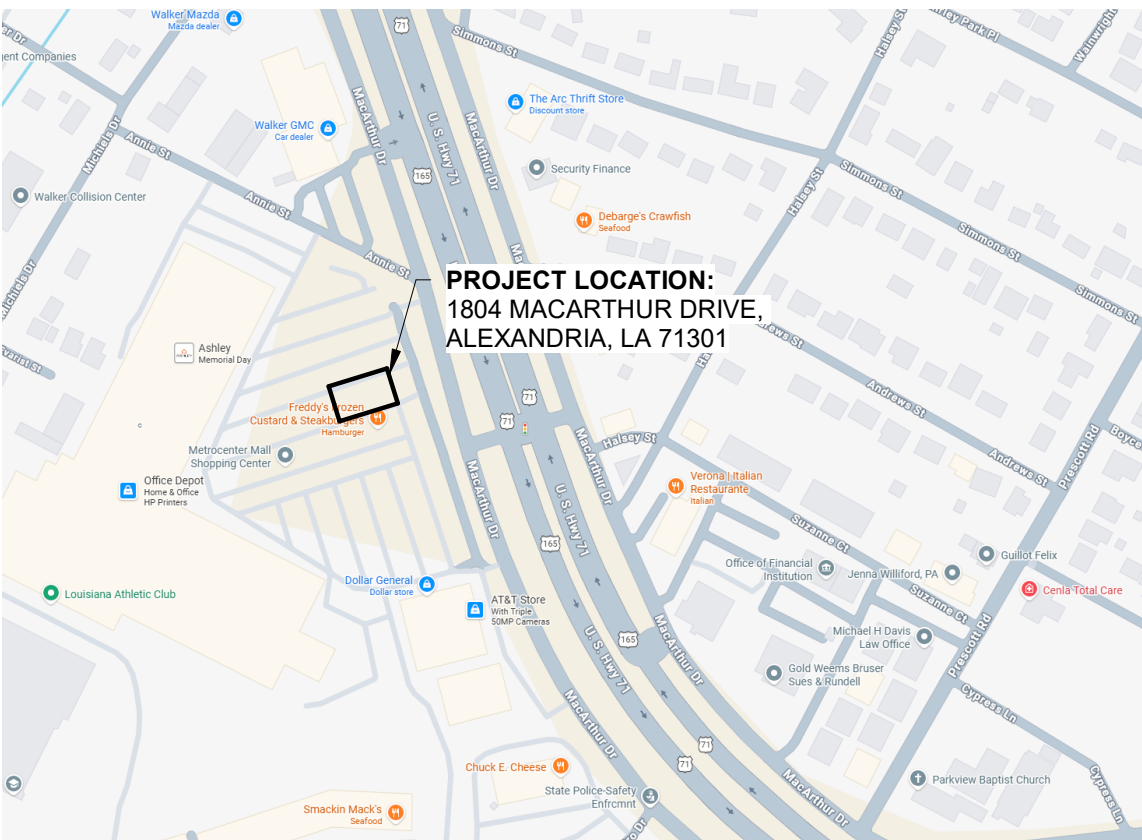

NOT TO SCALE

GENERAL REQUIREMENTS:

1. ANY DISCREPANCIES IN DRAWINGS OR SPECIFICATIONS SHALL BE BROUGHT TO THE ATTENTION OF THE DUTCH BROS CONSTRUCTION MANAGER PRIOR TO CONSTRUCTION, AND IF NOT CLARIFIED, THE CONTRACTOR SHALL ASSUME THE MOST STRINGENT REQUIREMENTS INDICATED.
2. THE CONTRACTOR SHALL PROVIDE THE DUTCH BROS CONSTRUCTION MANAGER/ ARCHITECT WITH SCHEDULING INFORMATION PRIOR TO COMMENCEMENT OF CONSTRUCTION, AND WILL UPDATE THE SCHEDULE AS NECESSARY TO REFLECT ANY CHANGES IN ACTIVITIES AND MILESTONES.
3. ALL CONSTRUCTION AND MATERIALS SHALL COMPLY WITH ANY AND ALL APPLICABLE CODES, RULES AND LAWS, AS ADOPTED BY THE AUTHORITY HAVING JURISDICTION. ALL DIMENSIONS SHALL BE FIELD VERIFIED. BEFORE PROCEEDING WITH ANY WORK, THE CONTRACTOR SHALL CAREFULLY CHECK AND VERIFY ALL DIMENSIONS. ANY DISCREPANCIES SHALL BE REPORTED TO THE DUTCH BROS CONSTRUCTION MANAGER/ ARCHITECT.
4. SUBMIT FOR APPROVAL, PRIOR TO FABRICATION OR PURCHASE, SHOP DRAWINGS AND/OR SAMPLES FOR ITEMS AS REQUESTED BY THE CONSTRUCTION MANAGER AND/OR ARCHITECT.
5. UNLESS NOTED, EXISTING CONSTRUCTION, MATERIALS AND FINISHES SHALL REMAIN. ANY DAMAGE DONE TO THESE ITEMS SHALL BE REPAIRED TO THE ORIGINAL CONDITION BY A MEANS APPROVED BY THE OWNER.
6. ALL WORK SHALL BE IN STRICT ACCORDANCE WITH ALL GOVERNMENTAL CODES, LAWS AND REGULATIONS. ALL MATERIAL SHALL MEET FLAME SPREAD AND SMOKE CONTRIBUTION REQUIREMENTS OF THE LOCALLY ADOPTED BUILDING CODE, AND AS NOTED IN THE CONTRACT DOCUMENTS.
7. THE DRAWINGS SHALL SERVE AS WORKING DRAWINGS FOR THE GENERAL LAYOUT OF THE VARIOUS ITEMS OF EQUIPMENT. HOWEVER, LAYOUT OF EQUIPMENT, ACCESSORIES, SPECIALTIES (INCLUDING FURNITURE), AND CONDUIT SYSTEMS ARE DIAGRAMMATIC UNLESS SPECIFICALLY DIMENSIONED. IF ADDITIONAL JUNCTION BOX, PULL-BOX, OR OTHER DEVICES ARE REQUIRED TO COMPLETE AN INSTALLATION, THE CONTRACTOR SHALL NOTIFY THE CONSTRUCTION MANAGER OF THE ADDITIONAL WORK AND COST PRIOR TO PROCEEDING.
8. ALL SHOP DRAWINGS PREPARED BY THE MANUFACTURER MUST BE REVIEWED BY THE CONTRACTOR. THE CONTRACTOR'S STAMP OF APPROVAL AND DATE MUST BE INCLUDED ON ALL SUBMITTED MATERIALS ALONG WITH THE PROJECT NAME. SUBMITTALS NOT CONTAINING THE ABOVE INFORMATION WILL BE RETURNED WITHOUT ACTION. THE REVIEW OF SHOP DRAWINGS DOES NOT RELIEVE THE CONTRACTOR FROM RESPONSIBILITY FOR ERRORS, OMISSIONS OR DEVIATIONS FROM THE CONTRACT DOCUMENTS, UNLESS THEY ARE CALLED OUT IN WRITING AT THE TIME OF SUBMISSION AND WRITTEN ACCEPTANCE. THE ENGINEER IS RESPONSIBLE FOR DETAILS, SIZE OF MEMBERS AND QUANTITIES IN SHOP DRAWINGS, BASED ON INFORMATION PROVIDED ON THE ENGINEERED PLANS; OMISSIONS OF COMPONENTS OR FITTINGS; AND FOR COORDINATING ITEMS WITH ACTUAL BUILDING CONDITIONS AND ADJACENT WORK. ERRORS AND OMISSIONS DISCOVERED AT A LATER TIME WILL BE CONSIDERED NON CONFORMING WORK.
9. THE CONTRACTOR SHALL MAINTAIN ON THE SITE AN UP-TO-DATE COMPLETE "RECORD" SET OF PRINTS WHICH ARE CORRECTED DAILY WITH ALL CHANGES IN LAYOUT FROM THE ORIGINAL DRAWINGS AND SPECIFICATIONS. CONTRACTOR SHALL DELIVER "RECORD" SET TO CONSTRUCTION MANAGER PRIOR TO FINAL PAYMENT. "RECORD" SET SHALL INCLUDE: ONE FULL PERMIT SET AND ONE SET OF CONSTRUCTION REDLINES.
10. CONTRACTOR IS RESPONSIBLE FOR OBTAINING ALL PERMITS AND INSPECTIONS. DUTCH BROS WILL BE RESPONSIBLE FOR FEES PAYMENT. CONTRACTOR SHALL PROVIDE THE OWNER A COPY OF THE BUILDING PERMIT PRIOR TO COMMENCING ANY WORK. CONTRACTOR WILL NOTIFY THE CONSTRUCTION MANAGER/ ARCHITECT OF ALL PERMIT AND CODE INSPECTIONS. CONTRACTOR SHALL BE RESPONSIBLE FOR OF BUILDING PAD CERTIFICATION PER THE AUTHORITY HAVING JURISDICTION. CONTRACTOR SHALL BE RESPONSIBLE FOR ALL 3RD PARTY INSPECTIONS/ CERTIFICATIONS IN ORDER TO OBTAIN THE CERTIFICATE OF OCCUPANCY.
11. CONTRACTOR IS RESPONSIBLE FOR THE COORDINATION OF THE WORK OF ALL SUBCONTRACTORS, AND WORK RELATED DIRECTLY TO THE PROJECT BEING PERFORMED UNDER SEPARATE CONTRACT. CONTRACTOR SHALL SUBMIT A LIST OF EACH SUBCONTRACTOR'S NAME, CONTACT, ADDRESS AND TELEPHONE NUMBER AS WELL AS EMERGENCY CONTACT INFORMATION TO CONSTRUCTION MANAGER PRIOR TO BEGINNING CONSTRUCTION.
12. CONTRACTOR SHALL MAKE EVERY EFFORT TO KEEP THE BUILDING AREAS CLEAN AND SAFE DURING THE CONSTRUCTION PERIOD. CONTRACTOR SHALL USE WALK-OFF MATS TO PROTECT FLOORING. CONTRACTOR AND ITS SUBCONTRACTORS SHALL PREVENT NOISE, DUST, SMOKE AND ODORS FROM INTERFERING WITH THE NORMAL OPERATIONS OF NEIGHBORING AREAS, INCLUDING WALKWAYS AND STREETS.
 - CONSTRUCTION DEBRIS WILL BE REMOVED FROM THE SITE. THE SITE AREA SHALL BE KEPT CLEAN AND ORGANIZED AT ALL TIMES.
 - ALL WALL, FLOOR OR CEILING PENETRATIONS SHALL BE SLEEVED AND ADEQUATELY SEALED TO PREVENT THE SPREAD OF SMOKE, FIRE AND RODENTS PER APPLICABLE CODES. THE CONTRACTOR SHALL PROVIDE TEMPORARY PROTECTION WHEN WORK CANNOT BE COMPLETED IN ONE WORK SHIFT.
 - THE CONTRACTOR SHALL PROVIDE AN ADEQUATE NUMBER OF FIRE EXTINGUISHERS IN THE WORK AREA THROUGHOUT THE CONSTRUCTION PERIOD.
 - THE CONTRACTOR SHALL NOTIFY THE OWNER 72 HOURS PRIOR TO ANY ELECTRICAL SHUTDOWNS WHICH MAY AFFECT EXISTING TENANTS OR NEIGHBORS.
 - THE CONTRACTOR SHALL PROHIBIT SMOKING ON AND WITHIN 25 FEET OF THE BUILDING AREA.
13. CLEAN-UP - THE PROJECT SITE SHALL BE SWEEPED UP AND TRASH SHALL BE REMOVED ON A DAILY BASIS. CARE SHALL BE TAKEN TO KEEP ADJACENT TENANT AREA CLEAN DURING CONSTRUCTION ON A DAILY BASIS WHERE WORK REQUIRED BY THIS PROJECT DISTURBS ADJACENT AREAS.
 - THE CONTRACTOR IS RESPONSIBLE FOR REMOVAL OF CONSTRUCTION DEBRIS. LOCATION OF LARGE DUMPSTERS FOR CONTRACTORS MUST BE APPROVED AND PLACED AS DIRECTED BY THE CONSTRUCTION MANAGER. THE CONTRACTOR WILL OBTAIN THE PERMIT FOR THE DUMPSTER.
 - PRIOR TO OCCUPANCY, SPACE SHALL BE LEFT CLEAN OF ALL DEBRIS, WALL AND OTHER SURFACES SHALL BE WIPED DOWN, GLASS WASHED, BLINDS DUSTED, FLOORS SWEEP AND/OR VACUUMED, TILE CLEANED AND WOODWORK CLEANED.
 - CONTRACTOR IS RESPONSIBLE FOR DELIVERING THE PREMISES AT COMPLETION IN A "MOVE-IN" CONDITION.
 - CONTRACTOR WILL BE REQUIRED TO LEAVE EXTRA MATERIALS IN THE WORKROOM: TWELVE TILES, ONE BOX OF VINYL FACED CEILING TILE, ONE BOX OF QUARRY TILES, MINIMUM 1/2 GALLON OF EACH PAINT AND BASE PAINT USED, TO BE LEFT IN BATHROOM OR MONOLITH AT SITE SPACE.

PROJECT STATISTICS:

SCOPE

NEW CONSTRUCTION FOR DUTCH BROS COFFEE LOCATED AT: 1804 MACARTHUR DRIVE, ALEXANDRIA LA 71301

THE BUILDING CONSISTS OF (1) DRIVE-THRU SERVICE WINDOW AND (1) WALK-UP SERVICE WINDOW; NO INDOOR OR OUTDOOR SEATING IS PROVIDED. SITE DEVELOPMENT INCLUDES A SMALL PARKING AREA, (2) DRIVE AISLES, AND A TRASH ENCLOSURE AREA.

PARCEL DATA

AREA: 31,228 SQ. FT. (0.7168 ACRES)
ZONING: C-2

CODE SUMMARY

BUILDING CODE

2021 INTERNATIONAL BUILDING CODE

ELECTRICAL CODE

2020 NATIONAL ELECTRIC CODE

MECHANICAL CODE

2021 INTERNATIONAL MECHANICAL CODE

FUEL/ GAS CODE

2021 INTERNATIONAL FUEL GAS CODE

PLUMBING CODE

2021 INTERNATIONAL PLUMBING CODE

FIRE CODE

NFPA 101 LIFE SAFETY CODE - 2015

ENERGY CODE

2021 INTERNATIONAL ENERGY CODE

CLIMATE ZONE: 2A

ACCESSIBILITY CODE

2010 ADA - ABA

BUILDING CONSTRUCTION DATA

CONSTRUCTION TYPE:

V-B

AUTOMATIC SPRINKLER SYSTEM:

NO

PROPOSED BUILDING HEIGHT:

24'-0"

MAXIMUM ALLOWABLE HEIGHT:

40'-0"

PROPOSED STORIES:

1

MAXIMUM STORIES:

2

BASEMENT:

NO

TOTAL FLOOR AREA:

986 S.F. GROSS

MAXIMUM ALLOWABLE AREA:

9,000 S.F.

FIRE-RESISTANCE RATING FOR STRUCTURAL ELEMENTS:

0 HOURS (PER IBC TABLE 601)

BUILDING OCCUPANCY DATA

OCCUPANCY CLASSIFICATION:

GROUP B (BUSINESS)

GROSS AREA:

986 S.F.

LOAD FACTOR:

1/150

OCCUPANT LOAD:

6.57

TOTAL OCCUPANT LOAD:

7

EXITS:

1

TOTAL EXITS:

1

7 (OCCUPANT LOAD) X 2' / PERSON:

1.40 INCHES

EXIT WIDTH PROVIDED:

40 INCHES

MAXIMUM EXIT ACCESS TRAVEL DISTANCE:

75 FEET

TOILETS:

1 PROVIDED

TOTAL NUMBER OF TOILET FACILITIES:

1 PROVIDED

PROJECT DIRECTORY:

OWNER / DEVELOPER

SCC ALEXANDRIA PARTNERS, LLC
556 8TH AVENUE,
FORT WORTH, TX 76104

ATTN: SCOTT A DESKINS
SDESKINS@SCCDEVELOPMENT.COM
(817) 900-2100

TENANT

DUTCH BROS. COFFEE
1930 W. RIO SALADO PARKWAY
TEMPE, AZ 85281

ATTN: RON VOLSKE - CONSTRUCTION MANAGER
RON.VOLSKE@DUTCHBROS.COM
(785) 201-7930

ARCHITECT OF RECORD

CORALIC ARCHITECTURE
A MISSOURI LIMITED LIABILITY COMPANY
9700 MACKENZIE ROAD, SUITE 222
ST. LOUIS, MO 63123

ATTN: EDIN CORALIC, PRINCIPAL
EDIN@CORALICARCHITECTURE.COM
(314) 578-4953

CIVIL ENGINEER

AUBRY ENTERPRISES LLC
5912 MAPLE STREET,
MISSION, KS, 66202

ATTN: JAY D. O'DELL, P.E.
J.O'DELL@AUBRYENTERPRISES.COM
(913) 488-5584

STRUCTURAL ENGINEER

KREHER ENGINEERING
208 N. MAIN STREET,
COLUMBIA, IL 62236

ATTN: NATHAN DREYER
NDREYER@KREHERENGINEERING.COM
(618) 281-8505

ELECTRICAL/ MECHANICAL/ PLUMBING ENGINEER

CASE ENGINEERING, INC.
796 MERUS COURT,
ST. LOUIS, MO 63026

ATTN: MATT CASE
MCASE@CASEENGINEERING.COM
(636) 349-1600

GEOTECHNICAL ENGINEER

GEOTECHNICAL TESTING LABORATORY, INC.
226 PARKWOOD DRIVE,
ALEXANDRIA, LA 71306

ATTN: SAMUEL CARROLL, P.E.
(318) 443-7429

DRAWING INDEX

GENERAL INFORMATION	
G0.0	COVER SHEET
G0.1	ACCESSIBILITY DETAILS / REQUIRED VENDORS
G1.0	SPECIFICATIONS
G1.1	SPECIFICATIONS
G1.2	SPECIFICATIONS
G1.3	SPECIFICATIONS
G1.4	SPECIFICATIONS
CIVIL	
C-	SUBMITTED BY OTHERS UNDER A SEPARATE COVER
LANDSCAPE	
L-	SUBMITTED BY OTHERS UNDER A SEPARATE COVER
SITE PLAN	
SP1.0	ARCHITECTURAL SITE PLAN
SP1.1	SITE & BUILDING SIGNAGE DETAILS
ARCHITECTURAL	
A1.0	EQUIPMENT/ ENLARGED COOLER/ FIRE LIFE SAFETY PLAN
A1.1	BUILDING/ITI/ LIGHTING/ PLUMBING/ TABLE SCHEDULES
A2.0	FLOOR PLAN
A2.1	FLOOR FINISH PLAN
A2.2	DETAILS, SCHEDULES, & PARTITIONS
A3.0	REFLECTED CEILING PLAN
A3.1	CEILING DETAILS
A3.2	AWNING/ CANOPY DETAILS
A4.0	ROOF PLAN
A4.1	ROOF DETAILS
A5.0	INTERIOR ELEVATIONS
A5.1	INTERIOR ELEVATIONS - EQUIPMENT
A6.0	BUILDING ELEVATIONS
A6.1	BUILDING ELEVATIONS - COLOR
A7.0	BUILDING SECTIONS
A7.1	WALL SECTIONS
A7.2	WALL SECTIONS
A8.0	BUILDING DETAILS
A8.1	WINDOW AND DOOR DETAILS
A9.0	TRASH ENCLOSURE PLAN/ ELEV.
A9.1	TRASH ENCLOSURE DETAILS
STRUCTURAL	
S1.0	STRUCTURAL DESIGN CRITERIA
S1.1	GENERAL NOTES
S1.2	SPECIAL INSPECTIONS
S1.3	CONCRETE TYPICAL DETAILS
S1.4	MASONRY TYPICAL DETAILS
S1.5	WOOD TYPICAL DETAILS
S2.1	FOUNDATION PLAN
S2.2	FOUNDATION SECTIONS
S2.3	ROOF FRAMING PLAN
S2.4	HIGH ROOF PLAN AND DETAILS
S2.5	ROOF SECTIONS

DRAWING INDEX

ELECTRICAL	
E0.0	ELECTRICAL SITE PLAN
E0.1	ELECTRICAL SITE PHOTOMETRIC PLAN
E1.0	LIGHTING PLAN
E2.0	POWER PLAN
E2.1	ROOF POWER PLAN
E2.2	SPECIAL SYSTEMS FLOOR PLAN
E3.0	PANEL SCHEDULES & RISER DIAGRAM
E4.0	ELECTRICAL SPECIFICATIONS
MECHANICAL	
M1.0	MECHANICAL PLAN
M1.1	MECHANICAL ROOF PLAN
M1.2	CO2 ALARM PLAN
M2.0	MECHANICAL DETAILS
M3.0	MECHANICAL SPECIFICATIONS
PLUMBING	
P1.0	PLUMBING LEGENDS & NOTES
P1.1	PLUMBING SCHEDULES
P2.0	PLUMBING WASTE/VENT FLOOR PLAN
P2.1	PLUMBING DIMENSION PLAN
P3.0	PLUMBING SUPPLY FLOOR PLAN
P3.0A	PLUMBING SUPPLY FLOOR PLAN
P3.1	PLUMBING ROOF PLAN
P4.0	PLUMBING ISOMETRIC PLANS
P5.0	PLUMBING DETAILS
P5.1	PLUMBING DETAILS
P6.0	PLUMBING SPECIFICATIONS
FOOD SERVICE	
FS101	EQUIPMENT LAYOUT
FS101.1	CEILING EQUIPMENT SCHEDULE
FS101.2	UNISTRUT RUNS
FS101.3	EQUIPMENT SCHEDULE
FS102	TABLE LAYOUT
FS103	ELECTRICAL ROUGH-INS & SCHEDULE
FS104	PLUMBING ROUGH-INS & SCHEDULE
FS105	ELEVATIONS
FS105.1	ELEVATIONS ELECTRICAL
FS106	EQUIPMENT ISO
FS106.1	EQUIPMENT ISO
FS106.2	EQUIPMENT ISO

ARCHITECT
CORALIC, LLC
9700 MACKENZIE ROAD, STE. 222
ST. LOUIS, MO 63125

TJ 314.578.4953
EDIN@CORALICARCHITECTURE.COM

STRUCTURAL ENGINEER
KREHER ENGINEERING, INC.
208 N. MAIN STREET,
COLUMBIA, IL 62236

TJ 618.281.8505
NDREYER@KREHERENGINEERING.COM

MEP ENGINEER
CASE ENGINEERING, INC.
796 MERUS CT.
FENTON, MO 63026

TJ 636.349.1600
MCASE@CASEENGINEERINGINC.COM



5.21.2026

Project No: LA0701

Dutch Bros Coffee - New Freestanding Store

1804 MACARTHUR DRIVE,

ALEXANDRIA, LA 71301

For: Dutch Bros Coffee

1930 W. Rio Salado Parkway
Tempe, AZ 85281

ANNIHILATOR A1

ISSUED FOR PERMIT

5.21.2026

REV:	DATE:	DESCRIPTION:

SHEET NAME:

COVER SHEET

SHEET NUMBER:

G0.0

02 DEMOLITION

Furnish labor, material and equipment required for the demolition and removal of existing structures, foundations, slabs, vegetation, and other material as required preparatory to site excavation, construction, and grading. Include stripping and stockpiling of topsoil, and erosion control.

EXISTING CONDITIONS: Verify existing conditions at the site and include all work evident by site inspection, whether or not, shown on the Drawings.

Field Measurements: The layout on the Drawings has been developed from the survey information available to the Architect. Some variation and adjustment may be required on the site layout. Stake the areas to be cleared and obtain the approval of the Architect prior to starting the clearing operation. Notify the Architect in advance of cutting, alteration or excavation which may affect the structural safety of any portion of the project.

All material and debris resulting from demolition Work shall become property of the Contractor and be removed from the site at Contractor's expense.

EXAMINATION
Inspect the work to determine condition of existing building, as applicable, and amount of existing materials and debris to be removed.

PREPARATION AND COORDINATION
Utilities: Coordinate demolition work with affected utility agencies or electrical and mechanical crafts. Completely remove all existing utility services which are not a part of new work or designated to remain. Save and protect existing utilities shown to remain. Notify Architect at once if unknown utilities are found in the work.
Laws and Ordinances: Comply with the applicable laws and ordinances governing the disposal of debris on or off the site and commit no trespass on any public or private property in any operation due to or connected with demolition and site clearing. Decommission buried oil storage tanks in accordance with governing jurisdiction requirements.

Tree Protection:
Use care in preparing the demolition and clearing operation to protect all trees outside the limits required for construction work, or trees designated to remain undisturbed-Protect all existing trees remain against unnecessary cutting, breaking and skimming of roots and branches, skimming and bruising of bark. Engage a Consulting Arborist to remove branches from trees and large shrubs which are to remain, if required, to clear new construction and where indicated, and to direct tree root pruning and relocation work. Consulting Arborist to perform tree repair work damaged by construction operations in a manner acceptable to the Architect. Make repairs promptly after damage occurs to prevent progressing deterioration of damaged trees.
Contractor shall pay the Owner the value of existing trees to remain that died or were damaged because of the Contractor's failure to provide adequate protection and maintenance. Value of existing trees will be determined by a Consulting Arborist in accordance with the evaluation formula set forth in "The Shade Tree Evaluation Guidebook" of the International Society of Arboriculture and American Society of Consulting Arborists.

EROSION CONTROL
Contractor's erosion control responsibilities include but are not limited to:
Conduct all erosion control activities in accordance with all governing jurisdictions including but not limited to city, county, state and federal DEQ requirements.
Design erosion control methods.
Submit to the governing jurisdictions erosion control documents that have been stamped and signed by a civil engineer licensed in the State of Project location.
Obtain erosion control permits and pay permit fees.
Maintain compliant erosion control during construction.
Pay all fines and other penalties levied against the Project for non-compliance of erosion control.

CLEARING AND GRUBBING
Clear the site within the limits shown and remove all remaining brush, stumps and waste material that would interfere with construction operation, except as specifically indicated otherwise on the Drawings.
Remove all roots larger than 1-1/4-inch diameter down to 18 inches below grade in building or paved areas and to 8 inches below finished grades over remaining site areas. Apply an approved herbicide to remaining roots under 1-1/4-inch diameter. Cleared items shall be removed from the site or otherwise disposed of by the Contractor.

Topsoil:
Cut existing grass and weeds; dispose of offsite.
Existing grass not longer than 3 inches and sod may be included if cut up and well distributed in the topsoil; no sticks, rocks and large roots.
Strip 12 inches deep below existing grade from existing site areas wherever site is to be excavated or graded, from areas to be covered by pavements, and strip topsoil completely everywhere within building lines.
Strip topsoil from remainder of site as required to obtain additional topsoil for redistribution at depths indicated. Depths of stripping as approved by Architect. Stripping is generally limited to those areas requiring excavation and fill areas exceeding 12 inch depths. Areas scheduled to receive only topsoil fill do not require stripping of topsoil except as required to obtain ample topsoil for redistribution.

Stockpiling:
Stockpile topsoil required for redistribution, kept separate from other excavated material, at locations on site acceptable to the Architect. If redistribution is possible immediately after stripping operation, stockpiling is not required.
Protect and maintain stockpiles until topsoil is needed for redistribution in designated areas. Grade surface of stockpiles remaining over winter months to prevent ponding of water. Compact top 1 foot of stockpile or cover to minimize the infiltration of water.

DEMOLITION PREPARATION
Existing Utilities: Locate, identify, disconnect, and seal or cap off indicated utilities serving buildings and structures to be demolished.
Arrange to shut off indicated utilities with utility companies.
If utility services are required to be removed, relocated, or abandoned, before proceeding with building demolition provide temporary utilities that bypass buildings and structures to be demolished and that maintain continuity of service to other buildings and structures.
Cut off pipe or conduit a minimum of 24-inches below grade. Cap, valve, or plug and seal remaining portion of pipe or conduit after bypassing.

Temporary Shoring: Provide and maintain interior and exterior shoring, bracing, or structural support to preserve stability and prevent unexpected movement or collapse of construction being demolished. Strengthen or add new supports when required during progress of demolition.

DEMOLITION PROTECTION
Existing Facilities: Protect adjacent walks, building entries, and other building facilities during demolition operations.
Existing Items to Remain: Protect construction indicated to remain against damage and soiling during demolition. When permitted by Architect, items may be removed to a suitable, protected storage location during demolition and cleaned and reinstalled in their original locations after demolition operations are complete.
Existing Utilities: Maintain utility services indicated to remain and protect them against damage during demolition operations.
Do not interrupt existing utilities serving adjacent occupied or operating facilities unless authorized in writing by Owner and authorities having jurisdiction.
Provide temporary services during interruptions to existing utilities, as acceptable to Owner and to authorities having jurisdiction.

Temporary Protection: Erect temporary protection, such as walks, fences, and railings, where required by authorities having jurisdiction and as indicated.
Protect existing site improvements, appurtenances, and landscaping to remain-Erect a plainly visible fence around drip line of individual trees or around perimeter drip line of groups of trees to remain.
Provide temporary barricades and other protection required to prevent injury to people and damage to adjacent buildings and facilities to remain.
Provide protection to ensure safe passage of people around building demolition area and to and from occupied portions of adjacent buildings and structures.
Protect walls, windows, roofs, and other adjacent exterior construction that are to remain and that are exposed to building demolition operations.
Erect and maintain dustproof partitions and temporary enclosures to limit dust and dirt migration and to separate areas from fumes and noise from occupied portions of adjacent building

DEMOLITION, GENERAL
General: Demolish indicated existing buildings and site improvements as detailed. Use methods required to complete the Work within limitations of governing regulations and as follows:
Do not use cutting torches until work area is cleared of flammable materials. Maintain fire watch and portable fire-suppression devices during flame-cutting operations.
Maintain adequate ventilation when using cutting torches.
Locate building demolition equipment and remove debris and materials so as not to impose excessive loads on supporting walls, floors, or framing.
Site Access and Temporary Controls: Conduct building demolition and debris-removal operations to ensure minimum interference with roads, streets, walks, and other adjacent occupied and used facilities.
Do not close or obstruct streets, walks, or other adjacent occupied or used facilities without permission from Owner and authorities having jurisdiction. Provide alternate routes around closed or obstructed traffic ways if required by authorities having jurisdiction.
Use water mist and other suitable methods to limit spread of dust and dirt. Comply with governing environmental-protection regulations. Do not use water when it may cause damage adjacent construction or create hazardous or objectionable conditions, such as ice, flooding, and pollution.

DISPOSAL OF DEMOLISHED MATERIALS
Remove demolished materials from Project site and legally dispose of them in an EPA-approved landfill-Do not allow demolished materials to accumulate on-site-Remove all transport debris in a manner that will prevent spillage on adjacent surfaces and areas.
Burning: Do not burn demolished materials.

HAZARDOUS MATERIAL REMOVAL
If during the course of the demolition work, the Contractor observes or suspects the existence of hazardous material in the building, the Contractor shall immediately stop work in that area and promptly notify the Owner and the Architect. The Owner will consult with the Architect regarding removal and encapsulation of the hazardous material which will be performed under a separate contract between the Owner and an Environmental Health Science Consultant.
Do not perform any work pertinent to the hazardous material prior to the receipt of special instructions from the Owner.

REPAIR AND REPLACEMENT
Repair or replace all sidewalks, streets, and curbs damaged by the Work of the Project as required by the governing jurisdiction.

BARRIERS, SAFETY GUARDS, & WARNING LIGHTS:
Provide where necessary for Public, Neighboring Property and Adjacent Spaces protect

03 CONCRETE CONCRETE FORMWORK
WOOD PLANK FORMS
Material: Lumber - Species: Douglas Fir or Hemlock
Moisture Content: Contractor's choice
Casting Face Texture: Smooth
Casting Face Appearance: No loose Knots or Knot Holes; maximum Knot size 1-1/2 inch and well scattered.
Size: Support Concrete at rate poured
Provide at Footing and Flatwork perimeters, unless otherwise indicated.

PLYWOOD FORMS
At Vertical Concrete Exposed to View:
Type: 1-step Medium Density Overlay
APA Grade: EXT-MDO
Surface Finish: Matte
At all other Vertical Concrete:
APA Grade: B-B Plyform
Class: 1
Thickness: As required by Concrete placement rate

FORM TREATMENT MATERIALS
Clean Water Nox-Crete "Pre-Form," or approved.

EMBEDDED ITEMS
Anchor Bolts: Furnished by Steel Fabricators and Equipment Suppliers.
Vapor Barrier Sheet: ASTM E1745 Class A (threshold puncture resistance no less than 2,200 grams per ASTM D1709), and permeance no greater than 0.020 U.S. Perms per ASTM E96. Vapor barrier sheet shall maintain permeance no greater than 0.020 U.S. Perms after conditioning tests per ASTM E154 Sections 8, 1112 and 13. Product: Slego Industries 15 mil "Slego Wrap Vapor Barrier" and "Slego Wrap Red Polyethylene Tape," 877/223-4333.

INSTALLATION
Construct forms according to the recommended practices as outlined in ACI "form work for concrete," special publication no. 4, and ACI 347.
Conform to shapes, lines, and dimensions shown on Drawings.
Brace and tie together to ensure that position and shape are maintained.
Make tight to prevent Concrete leakage.
Arrange Joints as indicated or directed.

VAPOR BARRIER
General: Provide when required by governing jurisdiction.
Vapor Barrier: Install in accordance with ASTM E1643. Verify that compacted underslab base fill is in place, then cover with vapor barrier sheet, lapping edges 6-inches minimum and taping all seams with vapor barrier tape. Use vapor barrier sheet to boot around all penetrations and seal with tape to create a continuous vapor barrier. Tape and seal edge of vapor barrier to foundation walls. Sand or other granular fill prohibited above vapor barrier.

CONCRETE REINFORCING SHOP & PLACEMENT DRAWINGS
Follow ACI 315 Detailing Manual, published by American Concrete Institute
Submit to Owner & Architect for Review

REINFORCEMENT BARS
Material: Steel
Manufacturing Standard: ASTM A-615
Grade: 60, unless otherwise shown on Drawings.
Sizes & Locations: See Drawings

INSTALLATION
General: Conform to International Building Code (IBC) 1907 & ACI 318.

Bending:
Bend Bars without heat.
Field bending partially embedded Bars, not permitted

Placing:
Secure against displacement.
Extend Wire Mesh to within 1/2 inches of Concrete edges. Support Mesh with Chairs.

Spacing:
Conform to Code paragraph 1907.6
Clear distance between parallel Bars, including splices not less than:
Nominal Bar diameter
1-1/2 times maximum Concrete Aggregate size.
1 inch

Splicing:
Do not weld or tack-weld Reinforcement Splices.
Minimum Lap at Splices:
At Tensile Bar Reinforcement: 48 Bar Diameters
At Wire Mesh: Lap one full mesh, plus 2 inches.

ALLOWABLE PLACEMENT VARIATION FROM DRAWING DIMENSIONS
Concrete Cover: Plus or minus 1/4 inch
Spacing between Bars: 1/4 inch

CAST IN PLACE CONCRETE WEATHER REQUIREMENTS
General: Follow Standard Specification for Cold & Warm Weather Concreting, ACI 306 & 305

PORTLAND CEMENT
Type: I-II
Manufacturer: Use only one for all exposed Concrete.

AGGREGATE
Maximum Size: 3/4 inch.

FLY ASH
Fly ash: Conform to ASTM C618, including Table 24, Class F
May be used at Contractor's option to replace up to 20% of cement content, provided the mix design strength is substantiated by test data.

ENTRAINED AIR
Mixture (in percentage of Concrete Volume): ASTM C260
At Interior Concrete Flatwork: 2% to 4%

WATER REDUCING ADMIXTURES
Type: A, ASTM C494
Material: All concrete shall contain a Type A admixture in the basic design with dosages high enough to reduce water by at least 10% from the same mix without the admixture. This admixture shall produce no retardation.

FINISHING AID FOR HOT WEATHER PLACEMENT:
Specially formulated material to be sprayed on fresh concrete to prevent rapid drying during hot and windy weather. Sprayed over plastic concrete, finishing aid produces a monomolecular film that reduces evaporation to improve workability of concrete until the next finishing operation. Product contains a yellow fluorescent color tint to easily identify the areas covered.

Products:
"Confirm" by Master Builders.
"Day 1 Finishing Aid" by Solomon Colors.

PROHIBITED ADMIXTURES
Calcium Chloride, Thiocyanates, and any others containing more than 0.05% Chloride Ions.

BONDING AGENT
At Dry Surfaces: Euclid Euco Weld, Sonneborn Sonocrete, or approved.
At Damp Surfaces: Euclid Euco Epoxy 452 MV or 620, Sika Sikadur Hi-Mod, or approved.

NON-SHRINK GROUT
Manufacturer & Brand: Euclid Euco-NS, L&M Crystx, Sonneborn SonogROUT, or approved.
Minimum 28 day Compressive Strength: 5000 psi
Extent of Work: Under Column Base Plates and Elsewhere shown on Drawings.

FLOOR FILLER
Manufacturer & Brand: Dowman Fix-All, Euclid Euco-Speed, Webtech Webpatch, Sonneborn Sonopatch, or approved.
Provide over Concrete Flatwork which is too rough or too untrue to provide satisfactory Base to receive Finish Flooring.

CURING COMPOUNDS
At Interior Flatwork: ASTM C309, Type 1.
Type: Clear, colorless, water-base, VOC-compliant, and acceptable to Covering Contractor.
Manufacturer: Sonneborn, Meadows, or approved.

FREEZE-THAW PROTECTION SEALER
Manufacturer & Brand: L&M, Aquapel or approved.
Type: Penetrating, water-based, VOC-compliant, non-yellowing, non-gloss, and odorless.
Provide over exposed surfaces of Concrete to prevent freeze-thaw damage to Concrete caused by Salts, Deicer Chemicals, and other Contaminates.

MXING CONCRETE
General: Readymix type conforming to ASTM C-94.
Assume responsibility for Mix design and Product performance.

Design Strength:
Minimum Density: 145 pcf, plus or minus 5%
Minimum 28 day compressive strengths, locations, and minimum Cement content as follows:
At 3000 psi Concrete; 5-1/2 sacks per cu. yd.
Design is for 2500 psi: No special inspection required
Verify Notes on Structural Drawings: Contradiction follow Structural Notes

Maximum Water-Cement Ratios:
Where Air-entrained: 0.45
Where not Air-entrained: 0.50

Maximum Slump:
4 inches (plus or minus 1 inch) at any time is maximum

CONSOLIDATING CONCRETE
Employ mechanical, high-frequency Vibrators to consolidate Concrete around Reinforcement, into corners and angles of Forms, and to exclude rock pockets, air bubbles, and honeycomb. Hold Vibrator in one spot no longer than 15 seconds; keep in constant motion, insert and withdraw at points approximately 18 inches o.c.

VOIDS & GRAVEL POCKETS
Repair where necessary and where directed by Owner's Representative.
Satisfactory repair of Concrete is virtually impossible, therefore take all necessary precautions to assure that repairs are unnecessary. If imperfections are sufficiently objectionable, replace Work in question when directed.
Submit Samples for approval

CONCRETE FLATWORK FINISHES
Required Preparation Work:
Screed all Flatwork to true levels or slopes.
Prior to finishing Concrete, remove any accumulated Bleed Water.
Evenly slope to any Drain at 3/16 inch per ft., unless otherwise shown on Drawings.
Smooth Finish:
Finish Flatwork as smooth as possible without troweling.
Extent of Work: Provide at Concrete Flatwork to receive tile.

04 MASONRY, MORTARS, AND GROUTS HARDENED MORTAR COLOR SAMPLES
Submit Samples for approval
Required Quantity: 2
Minimum Face Size: 12x12 inches

PORTLAND CEMENT
Type: 1-11
Manufacturer & Brand: Contractor's choice; use only one brand at exposed Work.

LIME
Manufacturing Standard: ASTM C-207
Type: S hydrated
Manufacturer & Brand: Contractor's choice; use one Brand only at exposed Work.

AGGREGATE
Material: Sand
Manufacturing Standard:
For Mortar: ASTM C-144
For Grout: ASTM C-107

MORTAR COLOR
Material: Pure inorganic Mineral Oxide
Manufacturer & Brand: Sonneborn Sonobrite, or approved.
Type: Harmless to Mortar strength and set, and stable at high temperatures.
Color: See Schedule on Drawings, or match masonry color
Provide in all exposed Mortar.

WATERPROOFING ADMIXTURE
Manufacturers Brand: WR Grace Dry Block, or approved.

ACCELERATOR
Manufacturers Brand: Sonneborn Trimix, Anti-Hydro, or approved.

RETARDANT
Manufacturers Brand: Sika Plastiment, Protex, or approved.

MORTAR & GROUT
Minimum 28 Day Compressive Strengths:
Unit Masonry Mortar: 1800 psi.
Masonry Grout: 2000 psi.

RETEMPERING
Use Mortar and Grout only within 2 hours after initial mixing.
Discard unused Mortar and Grout 2 hours after initial mixing.

UNIT MASONRY REFERENCES
• American Society for Testing and Materials (ASTM).
• Brick Institute of America (BIA), Technical Notes on Brick Construction.
• Building Code Requirements and Specifications for Masonry Structures (ACI 530-11 and ACI 530.1-11).

QUALITY ASSURANCE
Masonry veneer anchorage shall comply with provision of Chapter 6 of ACI 530/ASCE 5/TMS 402.
Source Limitations for Masonry Units: Obtain exposed masonry units of a uniform texture and color blend within the ranges accepted for these characteristics, from single source manufacturer for each product required.
Source Limitations for Mortar Materials: Obtain mortar ingredients of a uniform quality, including color for exposed masonry, from single manufacturer for each cementitious component and from single source or producer for each aggregate.
Mock Ups: Build sample unit masonry wall approximately 4 foot by 6 foot size showing bond, jointing, mortar color, and blending of the color range of units as applicable. Approval required before ordering unit masonry and proceeding with masonry wall work.

SAMPLES
Prior to starting work submit 2 full size samples of Masonry Units for approval.
Show texture and full color range.

BRICK:
as listed on Exterior Materials Schedule
Durability Grade: ASTM C216 or ASTM C652, FBS Type SW. Provide brick "solids" where detailed and as required where wide face is exposed.

Size: 2x4x8 inches
Face Texture: Wire Cut and tumbled
Color: See Color Schedule on Drawings.
Extent of Work: Veneer on exterior

CONCRETE BLOCK
Manufacturer: Basalite or sim.
At Exterior Walls:
Type: Hollow-core and load-bearing
Manufacturing Standard: ASTM C90-90, Type 1, modified as follows:
Class: Normal Weight
Maximum Fly Ash Content, if used: 22% of combined Cement and Fly Ash weight.
Minimum Compressive Strength fm: 1500 psi
Minimum Dry Density: 125 lbs. per cubic ft.
Maximum Absorption: 10 lbs. per cubic ft.
Integral moisture resistant additive, amount as recommended by additive manufacturer.
Exposed Chips: Unacceptable
Moisture Resistant Additive Manufacturers:
W. R. Grace "Dry Block."
Master Builders "Rheomix Rheopel."

Nominal Size: 8x4x16 and 8x8x16 inches, unless shown otherwise on Drawings.
Face Texture: Manufacturer's standard or as listed on Exterior Materials Schedule:
Split Face (2-face), Standard Face
Color: Manufacturer's standard or as indicated in Exterior Materials Schedule
Required Special Shapes:
6x2x16 inches, sill cap
10x2x16 inches, solid wall cap
Bond Beam Units
Any other shown on Drawings

Color: Manufacturer's standard, see Exterior Materials Schedule
Alternate: Mr. Standarte: 10x2x16 inch color, stained with 2-3 coats: Loxon Vertical Semi-transparent Concrete Stain, LX31175

Preparation:
Remove all surface contaminants, mildew, and loose particles. Allow the surface to dry thoroughly. Concrete/CMU should absorb water. Test various sections by spraying water directly only the surface to be stained. If the water does not absorb rapidly then the surface should be acid etched following label instructions. Do not apply the stain until all surfaces are porous.

Application:
Stir stain thoroughly before and during application. Thinning is not required.

REINFORCING BARS
Masonry Joint Reinforcement for Single-Wythe Masonry: Either ladder or truss type with single pair of side rods, ASTM A951.
Exterior Walls: Hot-dip galvanized, carbon steel, Grade 60.
Wire Size for Side Rods: 0.148-inch diameter (9 ga.).
Wire Size for Cross Rods: 0.148-inch diameter (9 ga.).
Spacing of Cross Rods: Tabs, and Cross Ties: Not more than 16 inches o.c.
Provide in lengths of not less than 10 feet.
Extent of Work: Furnish and install all required for Unit Masonry Work.

VENEER ANCHORS
Manufacturer & Brand: Contractor's choice
Material: Steel with Hot-dip Galvanized Coating
Type: Permitting vertical and horizontal differential movement between Masonry Facing and Backup Support, and complying with IBC Sect.1405.5. Steel adjustable ties, 3/16 inch diameter wire by the length necessary to anchor in mortar joint a minimum of 2-inches. 1/4 inch diameter wire ties required for cavity space 2-inches or more between back face of brick and structural support.
Seismic Reinforcing: Where required by Code for seismic loading, Hohmann & Barnard Seismic Interlock System, and ASTM A641 Class 3 mill galvanized continuous 0.148 inch diameter wire (W1.7) at each anchor location.

SILL FLASHING
Manufacturer: MortarNet, (800) 664-6638, or approved.
Brand: TotalFlash
Components: Factory-assembled flexible flashing, termination bar, vertical edge-dam, clogpreventing drainage matle & weep labs, stainless steel drip-edge, corner pieces, fasteners, adhesive, and other items required for complete and waterproof assembly.
Extent of Work: Provide at Veneer Wall Sills.

MASONRY INSTALLATION
General:
Do not install cracked, broken, or chipped Masonry Units.
Use Masonry Saws to cut and fit exposed Units.
Lay Units plumb, true to line, and with level courses accurately spaced within allowable tolerances.
Do not furrow Bed Joints.
Stop horizontal runs by racking back in each course; toothing not permitted.
Adjust Units to final position while Mortar is soft and plastic.

Laying Exposed Brick:
Layout:
Unless otherwise shown on Drawings, select and arrange Brick Units to achieve uniform appearance, including randomly and evenly distributing Units without discernible repeating patterns or accumulations of same colors.
Refer to Drawings for masonry bonding patterns.
Make Joints uniform and approximately 3/8 inch wide.
Flashing: Build in all flashing required to waterproof wall and to join with adjacent work.
Brick Anchors:
Provide approved anchors in compliance with Governing Code and not less than one per each 2 s.f. of wall area and at not over 32-inches o.c. horizontal and 18-inches o.c. vertical spacing. At vertical expansion and isolation joints and at openings larger than 16" in the shortest direction, provide additional anchors along each edge at 36" o.c. max. and 12" max. from edges. Install anchors in second course above and below ledger angles.
Ties shall slope down and out not over 10 degrees from horizontal, to divert water to outside, be of proper size for each installation and kept 5/8 inch minimum back of exposed masonry face.

At all Horizontal Joints: Compress with Round Tool to produce concave Mortar shape.
At all Vertical Joints: Compress with Round Tool to produce concave Mortar shape.
Lintels: Install hot dip galvanized structural steel or precast reinforced brick masonry lintels over all openings. Build to details on Drawings. Minimum 4-inches bearing at each end for structural steel.
Bond Beam Lintels for Concrete Block Openings:
Provide Bond Beam at first course above Opening.
Reinforce as shown on Drawings, fill Beam Core with Masonry Grout.
Provide not less than 8-inch Bond Beam bearing on each side of Opening.

Building In and Setting Other Work: Locate accurately by dimension or template built in anchors, accessories, and work of other trades where installed in or supported by masonry. Fill hollow metal frames with mortar or grout where built into masonry.
Expansion Joints: Lay up 1/2-inch-wide continuous vertical joints, plumb and true as detailed. Do not exceed 20-feet o.c. at exterior locations to divide large wall areas. Provide joints within (2) masonry unit lengths at (1) side of each wall corner. Do not continue horizontal joint reinforcement through expansion joints, nor will saw cutting of expansion joints be permitted. Minimum number of expansion joints shall be as required by the BIA's Technical Notes on Brick Construction, whether or not shown on the Drawings.
ALLOWABLE INSTALLATION TOLERANCES
Construct Masonry Work true within 1/8 inch per 10 ft.
Accurately size Masonry Openings within 1/4 inch, plus or minus.
Align exposed faces of unit masonry.

CLEANING
Remove excess mortar and mortar smears.
Replace defective mortar. Match adjacent work.
Clean soiled surfaces with cleaning solution. Use non metallic tools in cleaning operations.

MANUFACTURED STONE VENEER MASONRY - SIDING SCHEDULE ALTERNATE
Furnish all labor, material, and equipment required for the installation of portland cement based manufactured stone veneer and trim.

SUBMITTALS
Product Data and manufacturer's printed installation instructions.
Samples:
Standard sample board consisting of small-scale pieces of veneer units showing full range of textures and colors.
Full range of mortar colors.
Verification Samples: Following initial sample selection submit "laid-up" sample board using the selected stone and mortar materials and showing the full range of colors expected in the finished Work; minimum sample size: 3 by 3 feet (1 by 1 m).
MATERIALS
Stone Veneer: Eldorado Stone, LLC, 800- 925-1491 Website: www.eldoradostone.com
Profile: Include matching corner pieces.
Color: As shown on Drawings.
Texture: As selected by Architect.
Veneer Unit properties: Precast veneer units consisting of portland cement, lightweight aggregates, and mineral oxide pigments.
Compressive Strength: ASTM C 192 and ASTM C 39, 5 sample average; greater than 1,800 psi (12.4MPa).
Shear Bond: ASTM C 482: 50 psi (345kPa), minimum.
Freeze-Thaw Test: ASTM C 67: Less than 3 percent weight loss and no disintegration.
Thermal Resistance: ASTM C 177: 0.473 at 1.387 inches thick
Weight per square foot: ASTM C1670, 15 pounds, saturated.
Reinforcing: ASTM C 847, 2.5lb/yd2 (1.4kg/m2) galvanized expanded metal lath complying with code agency requirements for the type of substrate over which stone veneer is installed.
Mortar:
Cement: Portland cement complying with ASTM C 1329.
Lime: ASTM C 207.
Sand: ASTM C 144, natural or manufactured sand.
Color Pigment: ASTM C 979, mineral oxide pigments.
Water: Potable.
Pre-Packaged Latex-Portland Cement Mortar: ANSI A118.4.
Bonding Agent: Exterior surface applied bonding agent meeting ASTM C 932.
Water Repellent: Water based silane or siloxane masonry water repellent.
MORTAR MIXES
Standard Installation (Grouted Joints):
Mix mortar in accordance with ASTM C 270.
Polymer modified mortar complying with ANSI A118.4.
Add color pigment in grout joint mortar in accordance with pigment manufacturer's instructions not to exceed 10% by weight of cement.
Moisture Resistant Additive Manufacturers:
W. R. Grace "Dry Block."
Master Builders "Rheomix Rheopel."

INSTALLATION
Install and clean stone in accordance with manufacturer's installation instructions for Standard Installation (Grouted Joint) as specified above.

CLEANING
Remove protective coverings from adjacent work.
Cleaning Veneer Units:
Wash with soft bristle brush and water/granulated detergent solution.
Rinse immediately with clean water.
Removing Efflorescence:
Allow veneer to dry thoroughly.
Scrub with soft bristle brush and clean water.
Rinse immediately with clean water; allow to dry.
If efflorescence is still visible, contact ES Customer Service for assistance.

ARCHITECT
CORALIC, LLC
9700 MACKENZIE ROAD, STE. 222
ST. LOUIS, MO 63125
TJ 314.751.4953
EDIN@CORALICARCHITECTURE.COM
STRUCTURAL ENGINEER
KREHER ENGINEERING, INC.
208 N. MAIN STREET,
COLUMBIA, IL 62236
TJ 636.281.8505
NDREYER@KREHERENGINEERING.COM
MEP ENGINEER
CASE ENGINEERING, INC.
796 MERUS CT.
FENTON, MO 63026
TJ 636.349.1600
MCASE@CASEENGINEERINGINC.COM



Project No: LA0701
Dutch Bros Coffee - New Freestanding Store
1804 MACARTHUR DRIVE,
ALEXANDRIA, LA 71301
For: Dutch Bros Coffee
1930 W. Rio Salado Parkway
Tempe, AZ 85281
ANNIHILATOR A1

ISSUED FOR PERMIT

5.21.2026

REV:	DATE:	DESCRIPTION:

SHEET NAME:

SPECIFICATIONS

SHEET NUMBER:

G1.0

05 MISCELLANEOUS FABRICATED STEEL

SHOP DRAWINGS
Submit for Miscellaneous Fabricated Steel:
Show locations, critical dimensions, required clearances, construction details, installation methods including any splices, attachments, and anchors.

QUALIFICATIONS
Fabricator, Erector and Welder to be qualified with not less than 5 years experience and able to perform in accordance with AWS D11 Standards.

STEEL SHAPES
ALL STEEL SHAPES, BARS, & PLATES
Manufacturing Standard: ASTM A-36 or A-572
Minimum Yield Strength: 36 ksi
STEEL PIPE
Manufacturing Standard: ASTM A-53
Type: Where Exposed to View: S, Concealed from View: E
Grade: B
STEEL TUBING & HOLLOW STEEL SECTIONS (HSS)
For Structural Uses:
Manufacturing Standard: ASTM A-500
Grade: B
Minimum Yield Strength: 46 ksi
For Non-structural Uses:
Manufacturing Standard: ASTM A-501
Minimum Yield Strength: 36 ksi
STANDARD STRENGTH THREADED FASTENERS
Manufacturing Standard:
Bolts & Nuts: ASTM A 307, Grade A
Washers: ANSI Standard B 27
Size & Spacing: See Drawings
Finish: Manufacturer's standard.

Extent of Work: Provide for all Work, except where High-Strength Threaded fasteners are required.
ANCHOR BOLTS
Manufacturing Standard ASTM F-1554
Grade: 58

MISCELLANEOUS ITEMS
Custom Steel Fence: Square tube posts, top and bottom rails, tube size as detailed, 10 gauge 2" square, welded wire mesh infill, all surfaces powder coat finish, Dutch Bros Gray.
Provide all other Steel Items shown on Drawings not classed as Structural Steel.

SHOP PAINT
Primer: compatible with Powder Coating
FABRICATION
General:
Punch and shear to leave clean Surfaces.
Weld permanent Connections; grind exposed Welds smooth.
Cut abutting Members to fit with full bearing contact.
Form Elbows and Bends to uniform radii, free of buckles and twists, finished Surfaces smooth.
Miter and cope intersections within 2 degrees, fit to within 0.02 inches, and weld all around.
Where exposed to weather, form to exclude water; allow for expansion and contraction.
Do not use Screws or Bolts when they can be avoided; when used countersink Heads, draw up tight, and nick Threads to prevent loosening.
Fabricate: (See Drawings)
Trash enclosure gates and posts
Custom steel fence

SHOP TREATMENT
Surface Preparation:
Remove Grease, Oil, Dirt, loose Rust, loose Mill Scale, and any other bond-reducing Materials.

Within 8 hours of Surface Preparation, apply the following:
Powder Coat Paint Finish: All surfaces powder coated, Tiger Drylac "Tiger Series 75 Fluoropolymer," AAMA 621, custom color and gloss as selected by Architect.
Coating includes substrate pretreatment, primer, and top coat in accordance i coating manufacturer's application specifications.

MISCELLANEOUS FABRICATED STEEL INSTALLATION
General:
Follow Manufacturers' instructions and approved Shop Drawings.
Install to true lines, plumb and level, and as detailed or required for rigidity and permanence.
Secure to Substrate.
Touch up damaged Paint Surfaces with matching Paint. Apply in accordance with Paint Manufacturer's instructions

06 WOOD, PLASTICS AND COMPOSITES
ROUGH CARPENTRY
FRAMING LUMBER - GENERAL
Species: Where Pressure-preservative Treated: WWP No. 2 S4S Douglas fir, shall be pressure treated with ammoniacal copper quaternary (ACQ) or copper azole (CA) in accordance with WPA Standard UL, minimum Use Category UC2. All pressure treated lumber shall bear the AWWPA Use Category quality mark. Lumber marked "treatment to point of refusal" is not acceptable. Elsewhere: Douglas Fir

Finish: Surfaced 4 sides
Sizes & Shapes: Standard nominal dimensions. Western Wood Products Association (WWPA)
Standards designation:
Beams: No. 1 & free of Heart Center (FOHC)
Joists & Rafters: No. 2
Wall Studs up to 10 ft. Long:
2x4 inch & Smaller: No. 2
2x6 inch & Larger: No. 2
Wall Studs Longer than 10 ft.: No. 2
Stud Wall Plates: No. 2
Furring, Blocking, Curbng, & Bracing: No. 2.

Maximum Moisture content when installed in Project:
Douglas Fir: 19%
Hemlock, if any: 17%

PLYWOOD GENERAL
U.S.Product Standard 1: APA Grades, unless otherwise specified elsewhere:
Exposed Surfaces: A-D
Elsewhere: C-D

Types, unless otherwise specified elsewhere:
Where exposed to Moisture: Exterior.
Elsewhere: Exposure 1
Allowable added Urea-Formaldehyde Resins: None

Wall Sheathing and Roof Sheathing: Structural Use panels of all veneer construction, Group 1, APA Rated Sheathing, Exposure 1, C, D, thickness as detailed, span rating to match support spacing.
Roof Deck Sheathing: 5/8" plywood sheathing
Plywood for Equipment Boards: 3/4-inch thick APA Group 1, C-D, UL FR-S label.
Glue Laminated Beams:
Lumber for laminating shall meet the Structural Requirements of Laminating Specifications, Voluntary Product Standard PSS6, for Structural Glue Laminated Timber, and AITC 117. Stress Grades of beams to provide glue laminated members with allowable values as detailed. All members fabricated with waterproof adhesive, camber as noted, and in conformance with ANSI A190.1.
Beams in concealed spaces shall be Industrial Appearance Classification. Exposed beams and surfaces shall be Architectural Appearance Classification with voids filled with clear wood inserts or neutral colored filler.
End seal all members and protect in transit and against weather and construction stains by individually wrapping each member. Protect and clean all exposed surfaces scheduled for transparent finish.
Mark beams with AITC or APA Quality mark in a location that will not interfere with a transparent finish.
Coordinate with Drawing Notes that take precedence over this Section

ENGINEERED LUMBER
Laminated Veneer Lumber (LVL): RedBuilt RedLam, Weyerhaeuser iLevel Microlam, Rosburg RigidRim or approved.
Laminated Strand Lumber (LSL): Weyerhaeuser iLevel Timberstrand, or approved.
Parallel Strand Lumber (PSL): Weyerhaeuser iLevel Parallam, or approved.
Lumber Manufacturing Standard: ICC ES Report ESR-2993
Adhesive Manufacturing Standard: ASTM D-2559
Size: See Drawings

FRAMING CONNECTORS
Manufacturer: Simpson, K.C. Metals, USP, or approved

FASTENERS
Provide all necessary for installation of Work specified herein.
Sizes and quantities noted in Building Code.

ADHESIVE
Manufacturers Brand: Contractor's choice
Type: Water-based with 15 grams/liter maximum VOCs

EXTERIOR WALL SHEATHING PAPER
Manufacturer: VaproShield, Fortifiber, Tyvek or approved.
Material: Breathable, high-density 3-ply Polypropylene Fabric
xtent of Work: Cover Exterior Wall Sheathing.

SILL SEALER
Manufacturer: Owens-Corning Sill Sealer, or approved.
Material: Fiberglass
Thickness: 1 inch
Width: Match Sill Plate
Provide under any Wood Plates bearing directly on concrete.

SHOP-FABRICATED WOOD TRUSSES
Structural Performance: Provide metal-plate-connected wood trusses capable of withstanding design loads within limits and under conditions indicated. Comply with requirements in Truss Plate Institute, Inc. (TPI) 1 unless more stringent requirements are specified below.
Design Loads: As indicated on Drawings
Maximum Deflection Under Design Loads:
Roof Trusses: Vertical deflection of 1/360 of span.

SUBMITTALS
Shop Drawings: Prepared by or under the supervision of a qualified professional engineer licensed in the State of the Project location. Show fabrication and installation details for trusses.
For installed products indicated to comply with design loads, include structural analysis data signed and sealed by the qualified professional engineer responsible for their preparation.
Product Certificates: For metal-plate-connected wood trusses, signed by officer of truss fabricating firm.
Qualification Data: For metal-plate manufacturer, professional engineer, fabricator, and installer, Material Certificates: For dimension lumber specified to comply with minimum allowable unit stresses. Indicate species and grade selected for each use and design values approved by the ALSC Board of Review.
QUALITY ASSURANCE
Metal Connector-Plate Manufacturer Qualifications: A manufacturer that is a member of TPI and that complies with quality-control procedures in TPI 1 for manufacture of connector plates.
Manufacturer's responsibilities include providing professional engineering services needed to assume engineering responsibility.
Engineering Responsibility: Preparation of Shop Drawings and comprehensive engineering analysis by a qualified professional engineer.
Fabricator Qualifications: Shop that participates in a recognized quality-assurance program that complies with quality-control procedures in TPI 1 and that involves third-party inspection by an independent testing and inspecting agency acceptable to Architect and authorities having jurisdiction.
Source Limitations for Connector Plates: Obtain metal connector plates from a single manufacturer. Comply with applications and recommendations of the following publications:
TPI 1, "National Design Standard for Metal Plate Connected Wood Truss Construction."
TPI DSB, "Recommended Design Specification for Temporary Bracing of Metal Plate Connected Wood Trusses."
TPI HIB, "Commentary and Recommendations for Handling, Installing & Bracing Metal Plate

Connected Wood Trusses."
Wood Structural Design Standard: Comply with applicable requirements in AF&PA's "National Design Specifications for Wood Construction" and its "Supplement."
DELIVERY, STORAGE, AND HANDLING
Handle and store trusses to comply with recommendations of TPI HIB, "Commentary and Recommendations for Handling, Installing & Bracing Metal Plate Connected Wood Trusses."

Store trusses flat, off of ground, and adequately supported to prevent lateral bending. Protect trusses from weather by covering with waterproof sheeting, securely anchored.
Provide for air circulation around stacks and under coverings.

DIMENSION LUMBER
Lumber: Provide lumber graded by an agency certified by the ALSC Board of Review to inspect and grade lumber under the rules indicated.
Factory mark each piece of lumber with grade stamp of grading agency.
For exposed lumber indicated to receive a stained or natural finish, omit grade stamp and provide certificates of grade compliance issued by grading agency.
Provide dressed lumber, S4S.
Provide dry lumber with 15 percent maximum moisture content at time of dressing.
Grade and Species: Provide visually graded dimension lumber for truss chord and web members, of not less than the following grade:
Grade for Chord Members: Select Structural No. 1.
Grade for Web Members: No. 2
Minimum Chord Size For Roof Trusses: [2 by 6 inches nominal (38 by 140 mm actual) for both top and bottom chords and

METAL CONNECTOR PLATES
General: Fabricate connector plates to comply with TPI 1.
Hot-Dip Galvanized Steel Sheet: ASTM A 653/A 653M; Structural Steel (SS), high-strength low-alloy steel
Type A (HSLAS Type A), or high-strength low-alloy steel Type B (HSLAS Type B); G60 (Z180) coating designation; and not less than 0.036 inch (0.9 mm) thick.

INSTALLATION GENERAL
Install Proprietary Products in accordance with Manufacturer's instructions.
Use additional Fasteners to those specified herein where necessary to insure rigidity and permanence. Provide Washers under Nuts and Heads when making Bolted or Lag Screwed connections. Drive Nails perpendicular to grain in lieu of toe-nailing where feasible.
Accurately locate, cut, fit, and install Work secure, rigid, to true lines, plumb, and level, unless otherwise indicated.

ERECTION
Follow Manufacturer's instructions and approved Shop Drawings.
Hoist Joists and wood trusses with non-marring Slings attached to designated Lifting Points.
Prevent excessive out-of-plane bending.
Accurately locate and install Joists and wood trusses plumb, secure, and rigid with adjacent Frame Members in true alignment.
Provide necessary Hangers, Anchors, Bearing Plates, Bridging, and Bracing required to resist temporary and permanent vertical and lateral loads as defined in Building Code and on Drawings.

FINISH CARPENTRY
PLYWOOD APA grade trademarked "Medium Density Overlay (MDO)," thickness as detailed for Restroom ceilings, paint finish.

EXTERIOR SOFFIT
Manufacturer: Hewn Elements
Product: Natural Northwestern Spruce, factory pre-stained, color as selected by Architect.
Profile: board size and milled edge as detailed

FIBERGLASS-REINFORCED PLASTIC (FRP) PANELS
PANELS
Manufacturer: Marlite, or approved.
Brand: Marlite, S 100 G
Material: Fiberglass-reinforced Plastic (FRP)
ASTM E-84 Fire Rating Class: C
Size: 4'x10' Panels, Full Height, no horizontal seams
Surface Texture: Smooth
Color: White

TRIM PIECES
Type: Recommended by Panel Manufacturer for conditions of use
Color: White, to match adjacent Panels.
Extent of Work: Provide at Panel edges.

PRIMERS & ADHESIVES
Manufacturer & Brand: Contractor's choice
Type: Mildew-resistant, satisfying conditions of use, and permitting removal of Panels without Substrate damage.

FASTENERS
Manufacturer: Contractor's choice
Type: Concealed and satisfying conditions of use.

07 THERMAL AND MOISTURE PROTECTION
THERMAL INSULATION
AIR-INFILTRATION SPRAY-FOAM SEALANT
Manufacturer & Brand: Contractor's choice
Minimum ASTM E-98 Water Vapor Permeance:
Dry Cup: 2 perms
Wet Cup: 30 perm
ASTM C-719 Durability over more than 10 cycles: Co cohesive-failure or cracking
Maximum ASTM E-84 Flame Spread: 25
Maximum ASTM E-84 Smoke Developed: 450

MINERAL FIBER BATT INSULATION
Manufacturer: Certainteed, Johns Manville, Knauf, Owens/Corning, US Gypsum, or approved.
Material: Formaldehyde-free Glass Fiber
Manufacturing Standard: ASTM C-665
Type: Friction-fit Blanket or Batt
Minimum Post-consumer Recycled Content: 20%
Minimum Post-industrial Recycled Content: 5%
Minimum Total Recycled Content: 30%
Vapor Retarding Facing:
Material: Material: White Vinyl
Manufacturer & Brand: Contractor's choice.
Approximate Permeability Rating: 0.0 perms
Extent of Work: Provide Insulation of the following minimum Thermal Resistance Factor (R) in the following locations:
Above roof framing: R = 25, Rigid (verify with local requirements as minimum)
Within Exterior Frame Walls: R = 21 (verify with local requirements as minimum)

TIE WIRE
Material: 18 ga. Steel

AIR Baffles
Manufacturer & Brand: Contractor's choice
Material: Formed Plastic, Metal, or Cardboard
Size: Full-width of Rafter spaces.
Provide where necessary to prevent batt Loose Fill Insulation from being displaced or infiltrated by Ventilation Air.

ADHESIVE
Type: Recommended by Manufacturer of Material to be secured.

MECHANICAL FASTENERS
At Batt Type Insulation:
Type: Staples or Nails recommended by Manufacturer of Material to be secured.
Material: Electroplated Steel
Length: Penetrate Substrate at least 1/2 inch.
Perimeter Foundation and Under Slab Insulation:
Expanded polystyrene insulation board; R 15; 3 inch minimum thickness, nominal density of 2.0 lb./cu. ft., HFC-free.
Conform to ASTM C578, Type IX. Minimum compressive strength 25 psi., R-5 per inch thickness.
Manufacturer: Insulfoam "Insulgrade IX," NOT USED

Anchors, Spindle Type, Adhesively Attached:
Plate welded to projecting spindle; capable of holding insulation, of thickness indicated, securely in position without self-locking washers in place.
Plate: Perforated galvanized low carbon steel sheet, 0.106 inch thick x 2 inches square.
Spindle: Copper coated or galvanized low carbon steel, fully annealed, 0.105 inch in diameter (12 gauge).
Washers: Galvanized steel, 1-1/2-inch diameter self-locking.

Manufacturers:
AGM Industries "TACTOO Insul Hangers" and "RC 150 Round Self-Locking Washers."
Gemco "Insulation Hangers," spindle type hangers and "R-150 Round Self-LockinWashers."

Spindle Adhesive:
Product with demonstrated capability to bond insulation anchors securely to substrates indicated without damaging insulation, fasteners, and substrates. Verify compatibility with weather resistant barrier.
Manufacturers:
AGM Industries "TACTOO GPA-72 Adhesive," 404.5 g/l VOC.
Gemco "Tuff Bond Hanger Adhesive," 404.5 g/l VOC.
Foundation Insulation Adhesive: Dow "Great Stuff Pro Wall and Floor Adhesive."
INSULATION INSTALLATION, GENERAL
Follow Manufacturer's instructions and Referenced Specifications.
Fit insulation snugly between Framing without forcing.
Doors, Windows, or other Openings occurring in Framing, pack Insulation into Voids.
Where adjacent pieces of Insulation about, fit snugly together without overlapping.
Permit no gaps for Air passage.
Carefully cut and fit Insulation around Pipes, Conduits, and other Obstructions.
Do not compress Insulation more than 10%.
Install rigid insulation to foundation wall areas with mastic adhesive as recommended by the manufacturer or with spindle type anchors at approximately 2 foot to 3 foot centers.
Foam-Plastic Board Insulation Under Concrete: Install rigid insulation as detailed and secure in-place as recommended by insulation manufacturer to prevent movement during concrete placement. Tape joints, factory edges and cut edges.

WEATHER RESISTANT BARRIERS
WRB-1, Weather Resistant Barrier Spunbonded polyolefin, non-woven, non-perforated, weather barrier DuPont™ Tyvek® Commercialwrap® and related assembly components.

ACCESSORIES
Seam Tape: 3 inch wide, DuPont™ Tyvek® Tape for commercial applications.
Fasteners: Tyvek® Wrap Caps, as distributed by DuPont: #4 nails with large 1-inch plastic cap fasteners, or 1-inch plastic cap staples with leg length sufficient to achieve a minimum penetration of 5/8-inch into the wood stud.
Adhesives: Provide adhesive recommended by weather barrier manufacturer.

Products:
Liquid Nails® LN-109.
Denso Butyl Liquid.
3M High Strength 90.

Primers: Provide flashing manufacturer recommended primer to assist in adhesion between substrate and flashing.
Products:
3M High Strength 90.
Denso Butyl Spray.
Permagrip 105

Sam-1 Self-Adhering Membrane flashing: Tremco Exoair 111, 20 mils of high-performance butyl laminated to 4 mils of metallized high density polypropylene film and a siliconized release liner.
Penetration Flashing: Quickflash Weatherproofing Products, Inc., preformed flashing suitable for penetration type.
SAM-2, Self-Adhering, High-Temperature Flexible Flashing: W.R. Grace & Co. "Ultra," Minimum 30 mils thick, consisting of slip-resisting polyethylene-film top surface laminated to layer of butyl adhesive, with release-paper backing; cold applied. Provide primer when recommended by flashing manufacturer. Use in conjunction with TPO or PVC roofing membrane.
Bedding Sealant: Dow Corning 795 Silicone Building Sealant.

INSTALLATION
Install weather barrier over exterior face of exterior wall substrate in accordance with manufacturer recommendations. Install weather barrier prior to installation of windows and doors.
Connect and seal exterior wall WRB continuously to roofing membrane air barrier, concrete below-grade structures, exterior glazing and window systems, glazed storefront systems, through-wall flashings at rainscreens, exterior louvers, exterior door framing, and other construction used in exterior wall openings using auxiliary materials.
Weather Barrier Attachment: Attach weather barrier to studs through exterior sheathing. Secure using weather barrier manufacturer recommended fasteners, space 12 -18 inches vertically on center along stud line, and 24 inch on center, maximum horizontally. Number of fasteners may be reduced by attachment of cladding anchors.
Apply 4 inch by 7 inch piece of SAM-1 or weather barrier manufacturer approved alternate to weather barrier membrane prior to the installation cladding anchors.
OPENING PREPARATION FOR USE WITH NON-FLANGED WINDOWS
Flush cut weather barrier at edge of sheathing around full perimeter of opening.
Cut a head flap at 45-degree angle in the weather barrier at window head to expose 8 inches of sheathing. Temporarily secure weather barrier flap away from sheathing with tape.

FLASHING FOR USE WITH NON-FLANGED WINDOWS
Cut 9-inch wide SAM-1 a minimum of 12 inches longer than width of sill rough opening. Apply primer as required by manufacturer.
Cover horizontal sill by aligning SAM-edge with inside edge of sill. Adhere to rough opening across sill and up jambs a minimum of 6 inches. Secure flashing tightly into corners by working in along the sill before adhering up the jambs.
Fan SAM-1 at bottom corners onto face of wall. Firmly press in place. Mechanically fasten fanned edges.
Apply 9-inch wide strips of SAM-1 at jambs. Align flashing with interior edge of jamb framing. Start SAM-1 at head of opening and lap sill flashing down to the sill.
Spray-apply primer to top 6 inches of jambs and exposed sheathing.
Install SAM-1 at opening head using same installation procedures used at sill. Overlap jamb flashing a minimum of 2 inches.
Coordinate flashing with window installation.
On exterior, install backer-rod in joint between window frame and flashed rough framing. Apply sealant at jambs and head, leaving sill unsealed. Apply sealants in accordance with sealant manufacturer's instructions and ASTM C 1193.
Position weather barrier head flap across head flashing. Adhere using 4-inch wide SAM-1 over the 45-degree seams.
Tape top of window in accordance with manufacturer recommendations.
On interior, install backer rod in joint between frame of window and flashed rough framing. Apply sealant around entire window to create air seal. Apply sealant in accordance with sealant manufacturer's instructions and ASTM C 1193.
BUILDING TRANSITION CONDITIONS
Tie-in to floor slabs, parapet curbs, foundation walls, through-wall flashings at rainscreen construction, roofing systems, and at the interface of dissimilar materials with SAM transition and flashing membranes.
Use high temperature SAM-2 under metal copings and other high temperature exposures.
Align and position SAM transition and flashing membrane, remove protective film and press firmly into place. Provide minimum 3 inch lap on to substrates.
Ensure minimum 3 inch overlap at side and end laps of membrane.
WRB PENETRATIONS
Install appropriate Quickflash preformed penetration flashings in accordance with flashing manufacturer's printed installation instructions.

METAL WALL PANELS AND ALTERNATES
Material: Cold-coated Steel
Metal Thickness: 24 ga.
Length: Full-length, single-piece.
Manufacturer: Western States Metal Roofing
Profile: Western Wave, 16" coverage, 7/8" deep

Installation: Concealed fastener, Vertical and Horizontal, see drawings for use of Type
Finish: Baked fluoropolymer coating with 70% PVDF in resin conforming to the requirements of AAMA 2605, color as selected by Architect from manufacturer's full color range
See Exterior Materials Schedule on Drawings.
Extent of Work: Type where shown on drawings
FLASHING
Material: Match adjacent Panels
JOINT SEALANT
Manufacturer & Type: Recommended by Panel Manufacturer
Color to match adjacent Panel

ARCHITECT
CORALIC, LLC
9700 MACKENZIE ROAD, STE. 222
ST. LOUIS, MO 63125

TJ 314.578.4953
EDIN@CORALICARCHITECTURE.COM

STRUCTURAL ENGINEER
KREHER ENGINEERING, INC.
208 N. MAIN STREET,
COLUMBIA, IL 62236

TJ 618.281.8505
NDREYER@KREHERENGINEERING.COM

MEP ENGINEER
CASE ENGINEERING, INC.
796 MERUS CT.
FENTON, MO 63026

TJ 636.349.1600
MCASE@CASEENGINEERINGINC.COM



5.21.2026

Project No: LA0701

Dutch Bros Coffee - New Freestanding Store
1804 MACARTHUR DRIVE,
ALEXANDRIA, LA 71301
For: Dutch Bros Coffee
1930 W. Rio Salado Parkway
Tempe, AZ 85281

ANNIHILATOR A1

ISSUED FOR PERMIT

5.21.2026

REV:	DATE:	DESCRIPTION:

SHEET NAME:

SPECIFICATIONS

SHEET NUMBER:

G1.1

FASTENERS
Length: Penetrate Wood Framing as recommended by Manufacturer.
Material: Fasteners Penetrating Weather Resistant Barrier, Type 304 stainless steel screws.
Type: Concealed fasteners as indicated on Drawings
ELECTROLYTIC PROTECTION
Treat Contacting Surfaces of Dissimilar Materials to prevent Corrosion.
General:
Follow Manufacturer's instructions
Include all labor, material, and equipment necessary and incidental to furnishing and installing preformed metal panels. Include all flashings, closures, fasteners, sealants, and accessories required for complete watertight installation.
Provide additional Struts, Stiffeners, Girts, etc. required to securely support Panels.
Do not stretch or compress Side-lap Interlocks.
Secure Panels flat and square to Support Members without warp or deflection.
Use sufficient Fasteners to assure rigid and permanent installation.
Examine alignment of building components adjoining this material to assure accurate and secure installation. Use care to prevent "Joint Build Up" error. Furnish panels in exact length required to avoid field cutting.

Siding Panels:
Vertical Installation: Place Corrugations vertical; lap self-locking top corrugation away from Prevailing Winds.
Horizontal Installation: Place corrugations horizontal; lap self-locking top corrugation down to shed water shingle style.

FIBER CEMENT SIDING – SIDING SCHEDULE ALTERNATE
SCOPE:Exterior, panelized fiber cement cladding system and accessories to complete a drained and back-ventilated rainscreen.
PRE-INSTALLATION MEETINGS: Prior to beginning installation, conduct conference to verify and discuss substrate conditions, manufacturer's installation instructions, warranty requirements, and project requirements.
MANUFACTURER, PRODUCT: Nichiha USA, Inc. "Nichiha VintageWood"; "Nichiha Illumination"; complies with ASTM C-1186, Type A, Grade II
Product: VintageWood
Profile colors: VintageWood: Bark, Cedar, Redwood, Ash, and Spruce, as selected by Architect.
Profiles: Wood plank texture with three, 3/8" grooves running lengthwise, spaced 5-5/8" apart.
Accessory/Component Options:
Outside Corners: Manufactured Panel Corners with 3-1/2" returns faces for each profile color.
Inside Corners: Manufacturer's standard closure.
Finish: Bark, Cedar, Clear Anodized, or Primed as selected by architect.
Essential Flashing System: Starter, Overhang.
Finish: Matte black.

Product: Illumination
Profile colors: Bldg DB Blue, Bldg DB Dark Gray and Bldg DB Light Gray, as selected by Architect.
Profiles: Smooth
Accessory/Component Options:
Outside Corners: Manufactured Panel Corners with 3-1/2" return faces, painted to match panel color.
Inside Corners: Manufacturer's standard closure; painted to match panel color.
Essential Flashing System: Starter, Overhang.
Finish: Matte black.

Dimensions:
AWP-1818: 455mm (17-7/8") (h) x 1,818 mm (71-9/16") (l).
AWP-3030: 455mm (17-7/8") (h) x 3,030 mm (119-5/16") (l).
Panel Thickness: 16 mm (5/8")

Factory sealed on six (6) sides.

MATERIALS
Fiber cement panels manufactured from a pressed, stamped, and autoclaved mix of Portland cement, fly ash, silica, recycled rejects, and wood fiber bundles.
Panel surface pre-finished and machine applied. Panels profiled along 3030mm edges so that the long joints between the installed panels are ship-lapped.
Factory-applied sealant gasket added to top panel edge; all 3030mm edge joints contain a factory sealant.
INSTALLATION COMPONENTS
Ultimate Clip System:
Starter Track:
Horizontal Panel Installations - FA 700 – 3,030mm (l) galvalume coated steel.
Vertical Panel Installations (AWP-3030 only) – FA 710T – 3,030mm (l) galvalume coated steel.
Panel Clips: JEL 778 "Ultimate Clip II" (10mm rainscreen for 16mm AWP) – Zinc-Aluminum-Magnesium alloy coated steel.
Joint Tab Attachments (included) – used at all AWP-1818 panel to panel vertical joints. NOT used with AWP-3030 installations.
Corner Clips: JE 777C (10mm rainscreen for 5/8" AWP Manufactured Corners) -- Zinc-Aluminum-Magnesium alloy coated steel.
Single Flange Sealant Backer – FHK 1015 R (10mm) – 6.5" (l) fluorine coated galvalume.
Double Flange Sealant Backer – FH 1015 R (10mm) – 10" (l) fluorine coated galvalume.
Corrugated Spacer – FS 1005 (5mm), FS 1010 (10mm) – 4" (l).
Aluminum Trim: No exposed aluminum trim.
Essential Flashing System:
Starter – main segments (3,030mm), inside corners, outside corners
Overhang – main segments (3,030mm), inside corners, outside corners, joint clips
Fasteners: Corrosion resistant fasteners, such as hot-dipped galvanized screws appropriate to local building codes and practices must be used. Use Stainless Steel fasteners in high humidity and high-moisture regions, or penetrate the weather resistant barrier. See manufacturer's instructions for appropriate fasteners for construction method used.
Flashing: Flash all areas specified in manufacturer's instructions. Do not use raw aluminum flashing. Flashing must be galvanized, anodized, or PVC coated.
Sealant: Sealant shall comply with ASTM C920, Class 35.
Furring: 5/8-inch APA Exterior rated plywood, width as detailed, spaced no more than 16" oc, pressure preservative treated.
Inset Screen: Polyester coated glass fiber, color black.

INSTALLATION
General: Install products in accordance with the latest installation guidelines of the manufacturer and all applicable building codes and other laws, rules, regulations and ordinances. Review all manufacturer installation, maintenance instructions, and other applicable documents before installation.
Vertical Control/Expansion Joints are required with AWP-1818, for walls wider than 30 feet, within 2-12 feet of outside corners finished with metal trim and approximately every 30 feet thereafter.
SINGLE PLY ROOFING
PRE-INSTALLATION MEETING
Prior to starting work, Roofer shall arrange meeting to clarify any questions about Specifications, details, and other application requirements.
SUBMITTALS
Submit Roofing Manufacturer's Certificate of Roofing Applicator Approval.
At least 2 weeks prior to Roofing, submit 1 electronic copy of each of the following:
Roofing Manufacturer's applicable Installation Specifications
Roofing Contractor's Layout Drawings as follows:
Include Roof outline, Splice locations, Penetrations, and Edge details.
Include Membrane Manufacturer's approval of Drawings.
Immediately following Work completion submit to Owner's Representative and Project Manager Certification that Manufacturer's Representative has inspected Work prior to, during, and after Work completion, and that Work complies with these Specifications and Manufacturer's instructions.
Submit the following to General Contractor for inclusion in Owner's Maintenance Manual:
Roofing Maintenance Warranty as specified below
Roofing Maintenance Instructions

CRICKET FORMING BOARD
Material: Polyisocyanurate Insulation Board or approved.
Manufacturer: As provided by Roofing system manufacturer
Compressive Strength: 20 psi, min.
Shape: Tapered 1/2 inch per ft., minimum.
Extent of Work: Provide where necessary to form Roof Slope Crickets.
ROOF INSULATION
Manufacturer & Brand: As provided by roofing system manufacturer
Insulating Material: Polyisocyanurate Foam
Type: HCFC-free with zero Ozone-depletion
Manufacturing Standard: ASTM C-1289, Type II, Class 1
Minimum Compressive Strength: 20 psi (Grade 2)
Facing Material: Glass fiber-reinforced cellululosic felt (GRF)
Top Surface Shape: Tapered or flat as noted on the drawings.
Average Long Term Thermal Resistance (LTR): R-value as noted on the Drawings.
COVER BOARD
G-P Gypsum Corporation "Dens-Deck Prime with Eonic Technology Roof Board", moisture resistant, 1/4-inch thick, 48-inches wide, 96-inches long, fire resistance rating (UL 790 and ASTM E108), Class A.
ROOFING MEMBRANE
Manufacturer: Everguard TPO
Minimum UL 790 Fire-resistiveness Class: A
Thickness: 60 mil.
Color: White
FLASHING MEMBRANE
Material & Thickness: Recommended by Roofing Membrane Manufacturer for conditons of use.
Color: Match Roofing Membrane
VAPOR RETARDER
Self-adhered, vapor-inhibiting membrane utilizing a tri-laminated woven polyethylene facer combined with a high-tack butyl rubber adhesive.
Material: GAF-SA Vapor Retarder XL or as recommended by roofing manufacturer
MEMBRANE FLASHING ADHESIVE
Low VOC solvent-based, sprayable, contact adhesive.
Material: GAF TPO Quick Spray Adhesive - LV50 or as recommended by roofing manufacturer.
Furnished by Membrane Manufacturer.

INSULATION AND COVER BOARD INSTALLATION
General:
Apply in dry condition in accordance with Manufacturer's instructions. and Regulatory Agency requirements.
Apply in 2 or more layers to specified overall thickness.
Stagger Joints between adjacent Insulation layers and cover board at least 8 inches.
Maximum Open Space between adjacent Insulation Sheets: 1/8 inch
Position long sides of Insulation Sheets with Continuous Joints. Stagger adjacent Transverse Joints.
Nestly cut and fit Insulation at Roof Edges and at any Vertical Projections through Insulation. Fill Open Spaces with Edge Expansion Strips.
Miter Insulation at any Ridges.
Do not damage Insulation or cover board edges or faces during installation.

MEMBRANE INSTALLATION
Follow Manufacturer's instructions using Mechanically Attached method.
Overlap adjacent Sheets 6" at side laps & 3" at end laps.
Remove any Wrinkles or Air Pockets.
Secure Membrane as instructed by Membrane Manufacturer.
Make Seams and Penetrations watertight.
Check Seam sealing for continuity and integrity.

SHEET METAL FLASHING AND TRIM
GALVANIZED STEEL SHEETS
Metal Manufacturing Standards: ASTM A-863
Quality: Lock-forming
Pattern: Smooth without texture
Minimum Galvanizing Coating Designation: G-90
Minimum Metal Thickness: Specified below
Factory-applied Finish where exposed to Ground Level View:
Baked Fluoropolymer with 70% minimum PVDF in resin content per AAMA 621.
Minimum Dry Film Thickness: 1 mil
Color: See Exterior Finish Schedule on Drawings.
STAINLESS STEEL SHEETS
Manufacturing Standard: ASTM A-167
Type: 304
Temper: Soft, fully annealed.
Finish: 2D, dull.
Pattern: Flat without texture
REGLETS
Manufacturer: Contractor's choice
Type: Shown on Drawings, unless otherwise required by conditions of use.
Material: 24 ga. Galvanized Steel
Finish: Factory-paint or field-paint to match adjacent Sheetmetal Flashing color.
Accessories: Provide all necessary including Factory-formed Corners and Joint Connectors.
Provide where shown on Drawings and elsewhere necessary for Flashing installation.

SEALANT
Manufacturer & Brand: Dow 999-A, GE Silicone II, Mameco Vulkem 116, Ruscoe Permanent Sealer, Sonneborn NP-1, Tremco Gutter Seal, or approved.
PRIME COATING & UNDERCOATING
Material: For Galvanized Steel: Galvanized Primer specified in Section 09 FINISHES
ASPHALT COATING COMPOUND
Manufacturing Standard: Fed. Spec. TT-C-494
Type: II
FABRICATION
General: Sheet Metal Fabrication Standard: Fabricate sheet metal flashing and trim to comply with recommendations of SMACNA's "Architctural Sheet Metal Manual" that apply to the design, dimensions, metal, and other characteristics of the item indicated.
Form to shapes and dimensions shown with planes and lines in true alignment.
Fabricate with longest practicable lengths.
Form Openings Head and Sill Flashing with End Dams. End dams welded or soldered.
Hem exposed edges.
Angle bottom edges of vertical surfaces to form drip.

Seams:
Common Lock Seams: 3/4 inch finish width; 4-ply loose-locked.
Flat Lock Seams: 5/8 inch finish width; 4-ply flat locked, malletted tight; sweat full with Solder.
Single Corner Seams: 3/4 inch finish width; 3-ply loose locked.
Solder-Lap Seams: 1 inch finish width; sweat full with Solder.

INSTALLATION, GENERAL
Install Work watertight, without waves, warps, buckles, tool marks, fastening stresses, distortion, or defects which impair strength or mar appearance.
Install planes and lines in true alignment.
Allow for Sheet metal expansion and contraction.
ROOF ACCESSORIES
Roof Access Hatches:
Single leaf, 30 inch x 36 inch, Blico Type S.
Single leaf, 36 inch x 36 inch, Blico Type E.
Provide size as detailed on the Drawings
Safety Post: Blico "LadderUP LU-1."
Roof Hatch Safety Railing: Blico "Bil-Guard Hatch Railing System," model to match hatch size.
INSTALLATION, GENERAL
Vents, Hatches, and Curbs: Install in accordance with manufacturer's instructions, securely anchoring to roof deck. Coordinate with roofing application to ensure watertight installation.
Safety Rail: Bolt to hatch cover curb in accordance with manufacturer's instructions.
Safety Post: Bolt to hatch cover curb or ladder as applicable, in accordance with manufacturer's instructions.

JOINT SEALANTS
Caulk Exterior Joints as follows:
Masonry Wall Control Joints: Modified Silicone (STPe) Sealant with Sand matching Mortar color impregnated into Sealant surface to approximate Mortar Joint appearance
Joints around Window Frames, Door Frames, and other Openings in Exterior Walls: Modified Silicone (STPe) Sealant
Joints between Floor and bottom of Door Frames: Modified Silicone (STPe) Sealant
Joints between adjacent Dissimilar Materials: Modified Silicone (STPe) Sealant
Elsewhere caulking is shown on Drawings or required to weatherproof Building: Modified Silicone (STPe) Sealant
Caulk within Exterior Frame Walls as follows:
Space between Wall Framing Members and Windows, Doors, and other Openings where subject to Air-infiltration: Foam Air-Infiltration Sealant
Caulk Interior Joints as follows:
Acrylic Latex Sealant. If and where Masonry Joint is exposed to view impregnate Joint with Sand matching Mortar color to approximate Mortar Joint appearance.
Joints around Window Frames, Door Frames, and other Openings in Exterior Walls: Paintable Acrylic Latex Sealant
Joints between adjacent Dissimilar Materials: Paintable Acrylic Latex Sealant
Joints around toilet room fixtures: Modified Silicone (STPe) Sealant.
Wet areas: One-part mildew resistant silicone sealant, in service exposure to conditions of high humidity and temperature extremes.
Elsewhere caulking is shown on Drawings or required to fill Open Joints: Paintable Acrylic Latex Sealant
MODIFIED SILICONE (STPe) SEALANT
Manufacturer & Brand: Sonneborn Sonolastic 150, or approved.
Material: 1-component Silyl Terminated Polyester
Manufacturing Standard: ASTM C-920, Type S, Class 25, Grade NS.
ASTM C-861 Shore A Hardness Range: 15-20
Joint Movement Range: Plus 100% to Minus 50%
Minimum Elongation: 1200%
ACRYLIC LATEX SEALANT
Manufacturer & Brand: Contractor's choice
Components: 1
Manufacturing Standard: ASTM C-834
Minimum ASTM C-736 Recovery: 75%
Joint Movement Range: Plus or Minus 7½ %
FOAM AIR-INFILTRATION SEALANT
Manufacturer & Brand: Grace Polycol One, or approved.
MILDREW RESISTANT SILICONE SEALANT
Manufacturer & Brand: Tremco Tremsil 200, Pecora 898
Material: One part mildew resistant silicone sealant
Manufacturing Standard: FS TT S 00230C, Class A, TT S 1543A, Class A, or ASTM C920, Type S, Grade NS, Class 25.
SEALANT COLORS
Foam Sealant: Contractor's choice
Approximate color of Adjacent Surfaces, unless otherwise indicated, and subject to Owner's Representative's approval. Obtain Owner's Representative's instructions if Sealant is adjacent to more than 1 different color.
PRIMER & SURFACE CONDITIONER
Manufacturer & Type: Recommended by Sealant Manufacturer
BACKER ROD
Manufacturer & Brand: Nomaco SOF Rod
Material: Polyolefin Open & Closed-cell, soft-rod, non-off gasing, and recommended by Sealant Manufacturer for conditions of use.
Chemically inert. Non-absorbing.
Diameter: 25% greater than Joint width
Extent of Work: Provide for all Sealants, except Foamed types.
BOND BREAKER TAPE
Manufacturer & Brand: Contractor's choice
Material: Polyethylene Tape, or approved.
Extent of Work: Where Backer Rod can not be used, provide Tape where necessary to prevent 3-sided adhesion of Sealant to Substrate
FOAM SEALANT DAMS
Material: Contractor's choice
Minimum UL Fire Resistance Rating:
At Dams Remaining in Place: Match adjacent Wall or Floor Rating.
At Dams to Be Removed: None required
INSTALLATION - GENERAL
Follow Manufacturers' instructions.

08 OPENINGS
HOLLOW STEEL DOORS & FRAMES
Submit Shop Drawings:
Show locations, elevations, principal construction features, and dimensions of each Door type and Frame type, cut-outs, reinforcement, joints, welds, finish, anchoring, and other pertinent details.
DOORS:
SDI Model: 1 (Full flush, hollow, and with exposed Edge Seams only)
SDI Grade: 1 (Standard Duty)
Minimum Metal Thickness: 16 gauge.
Core: 90 lb. minimum Phenolic Resin impregnated Honeycomb completely filling Core and bonded to both Face Skins.
Urethane Foam (maximum U = 0.09) fully bonded to both Face Skins in cold climate locations.
Sizes & Shapes: See Door Schedule and Drawings.
FRAMES:
Type: Head and Jamb Intersections mitered and continuously welded over full depth of Frame, including Returns and Rabbits: Exterior and interior.
Minimum Metal Thickness: 16 gauge
Sizes & Shapes: See Door Schedule and Drawings.
FABRICATION:
Accurately form Metal to required sizes and shapes.
Bevel Lock-side Edge of Doors 1/8 inch in 2 inches. Square edged Doors not acceptable.
Provide suitable sinkage in doors and frames for all mortised or countersunk hardware, with steel reinforcement inserted for attaching hardware. Reinforcement of doors and frames to be as follows:
Hinge Pockets: Reinforce hinge pockets with 3/16-inch-thick x 12 inch long x full frame width steel backing welded fabrication.
All Other Hardware Mountings: Reinforce all other hardware mountings at heads, jambs, stiles, or rails with minimum 12-gauge (0.097 inch) steel plate welded fabrication at all machine screw sinkages and 14-gauge (0.068 inch) minimum at all cylinder lock hole locations to prevent collapsing of doors and malfunctioning of hardware. Double gauge sheet metal reinforcing is not acceptable for hardware backing.
SHOP FINISH
Dress Surface irregularities to smooth surface.
Chemically treat and clean exposed Surfaces.
Treatment: Doors and frames for doors formed from minimum 16 gauge (0.054 inch thick) commercial quality cold-rolled steel conforming to ASTM A366 or tension leveled steel conforming to ASTM A924,
galvanized to ASTM A653, commercial steel, type B, coating designation A40, commercially known as airtable galvalume. Steel for fabrication of all members exposed on exterior walls shall be galvanized to ASTM A653 with a minimum total coating weight of A125, 1.25 oz./s.f..
Finish: Manufacturer's standard Baked Enamel Finish; see Color Schedule on Drawings.

INSTALLATION
Follow Referenced Specifications and Manufacturer's instructions.
Secure Anchors to Adjacent Construction.
Set Frames true with Adjacent Construction.
Accurately position Work.
Set Doors flush with Frame face.
Set Doors plumb to hold any desired position.
Fill any exposed Fastener Heads, and finish to match adjacent Surface.

Installation:
Provide access panels in non-accessible walls and ceilings wherever there is equipment or a device that needs maintenance. Locate access panels directly under or in front of the equipment
or device to enable service personnel to reach and service equipment. Panels shall be sized to accommodate the largest piece of equipment. The location of access panels shall be designed to ensure the location is accessible for maintenance and operation requirements. Provision of access shall be provided to all maintained equipment such as valves, relays, resets, monitor devices, etc. Coordinate elements being installed by multiple trades to ensure clear access to elements requiring maintenance.

GLASS PANEL SECTIONAL OVERHEAD DOORS
MANUFACTURER/PRODUCT: Overhead Door Corp. "521 Series." **SUBMITTALS**
Shop drawings: Include detailed plans, elevations, details of framing members, required clearances, anchors, and accessories. Include relationship with adjacent materials.


COMPONENTS
Sectional Door Assembly: Stile and rail assembly secured with 1/4-inch diameter through rods.
Operation: Motorized
Lock: Interior keyed slide lock, keyed to building master, and interlock switch for automatic operator.
Weatherstripping: Vinyl closures at jambs and head, flexible PVC on bottom section.
Glazing: 1/2-inch thermal pane, clear DSB glass inside, tempered glass outside, Vitro Solarban 60 Low-E coating on No. 2 surface.
Finish: AAMA 611 Architectural Class I clear anodized coating conforming with AA M12C22A41.
Electric Motor Operation: Provide UL listed electric operator, size and type as recommended by manufacturer to move door in either direction at not less than 2/3 foot per more than 1 foot per second. Operator shall meet UL325/2010 requirements for continuous monitoring of safety devices.
Operator Controls: Key operated control station with open, close, and stop buttons.

ALUMINUM ENTRANCE & WINDOW WALL SYSTEM
SYSTEM DESIGN REQUIREMENTS
In accordance with governing laws, regulations, codes, and requirements of governing jurisdiction.; design, engineer, fabricate, and install Work of this Section, including System Supports & Attachments, in compliance with Drawings, Specifications, and the following Design Loads:
Loads listed in Structural Notes on Drawings
Wind Loads: Satisfy Building Code Exposure B requirements
Maximum Surface Deflection:
Spans up to 14 ft.: L/240
Spans 14 ft. & Greater: L/300
Do not cause loss of Glass Bite greater than 25% of Design Dimension
SYSTEM PERFORMANCE REQUIREMENTS
Design, engineer, fabricate, and install Work of this Section to satisfy the following:
Withstand Thermal Expansion induced by up to 60° F Temperature Shift without System buckling, Glass stress, Sealant failure, Fastener damage, or other detrimental effects.
Minimum AAMA 1502.2 Condensation Resistance Factor (CRF): 60
ASTM E-1105 System Water Penetration Field Test conducted prior to installation of Interior Finish Materials: No penetration at 8 psf.
Submit Shop Drawings
Show construction, materials, profiles, thicknesses, dimensions, fasteners, supports, anchors, required clearances, and other pertinent details.

ALUMINUM
Alloys & Tempers, unless otherwise modified, as follows:
Exposed Extrusions: 6063-T6
Structural Shapes, Blocking, Bracing, & other Concealed Members: 60603-T6
Casting: 214-T6
Sheetmetal: 5005-H32
Finish: Concealed Work: Mill finish
Exposed Work: AAMA 611 Architectural Class I clear anodized coating conforming with AAMA M12-C22
A41
FASTENERS
Type: Recommended by Manufacturer for conditions of use
Material: Galvanically compatible with Adjacent Materials
Finish:
Where Exposed to View: Match Adjacent Material
Where Concealed: Contractor's choice

CORROSION INSULATING COMPOUND
Material: Asphaltic Coating Compound
Manufacturing Standard: Fed. Spec. TT-C-494 type II
DOOR FRAMES & WINDOW WALL FRAMES
Material: Aluminum
Manufacturer: Arcadia, Kawneer, US Aluminum, Vistawall, or approved.
Series: Match Kawneer "Trifab VG 451T" thermally broken framing system
SWINGING DOORS
Material: Aluminum
Manufacturer: Arcadia, Kawneer, US Aluminum, Vistawall, or approved.
Stile Width: Medium
GLAZING STOPS
Shape: Beveled
SASH WEATHERSTRIPPING
Material: Manufacturer's standard
Maximum Allowable Air Infiltration: 0.5 cfm per lineal ft. of Operating Sash perimeter
DOOR WEATHERSTRIPPING
Material: Flexible nonporous Polymeric Strip
Features:
All Weather stripping: Easily replaceable
Sill Weather stripping: Easily adjustable for wear

FABRICATION
Provide concealed Steel Reinforcement where indicated or required to resist Wind or other Applied Loads.
Fabricate Connections as required for strength and rigidity using concealed Mechanical Fasteners wherever possible. Where not possible, welding may be used.
Drain Glazing Channels to prevent Insulating Glass or Laminated Glass from standing in Water.
Fabricate with Weep Holes to evacuate to Building Exterior any exterior Water or interior Condensation.
Cut Horizontal Members between Vertical Members.
Match exposed Welds with adjacent Material, free of porosity, cracks, and blow-holes.
Select Materials carefully for matching Color and Texture after finishing.
Fabricate Flat Surface smooth and true, and free from waves, buckles, and seams.
Fabricate Edges, Corners, and Angles clean, sharp, and square.
Fit Members with hairline, virtually invisible joints.
Allow for expansion and contraction.
Prevent Noise resulting from thermally-induced Material movement, Vibration harmonics, or Wind passage.
Make Exterior Work permanently weather tight. Seal all joints in system and at perimeters to prevent infiltration and entry of water. Protect aluminum from galvanic attack where in contact with dissimilar metals by approved paints or tape.
Fabricate with the following clearances:
Between Doors & Frames: 1/8 inch
Between Door Bottoms & Thresholds: 1/4 inch
Between Door Bottoms & Floor: 3/4 inch
ALLOWABLE INSTALLATION TOLERANCES
Member Alignment: True within 1/8 inch per 12 feet.
Openings:
Accurately size and locate within 1/4 inch.
Squareness: 1/8 inch maximum difference between opposite Diagonal Measurements.

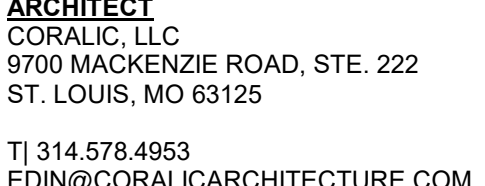

ARCHITECT
CORALIC, LLC
9700 MACKENZIE ROAD, STE. 222
ST. LOUIS, MO 63125

TJ 314.578.4953
EDIN@CORALICARCHITECTURE.COM

STRUCTURAL ENGINEER
KREHER ENGINEERING, INC.
208 N. MAIN STREET,
COLUMBIA, IL 62236

TJ 618.281.8505
NDREYER@KREHERENGINEERING.COM

MEP ENGINEER
CASE ENGINEERING, INC.
796 MERUS CT.
FENTON, MO 63026

TJ 636.349.1600
MCASE@CASEENGINEERINGINC.COM



5.21.2026

Project No: LA0701

Dutch Bros Coffee - New Freestanding Store

1804 MACARTHUR DRIVE,
ALEXANDRIA, LA 71301

For: Dutch Bros Coffee
1930 W. Rio Salado Parkway
Tempe, AZ 85281

ANNIHILATOR A1

ISSUED FOR PERMIT		
5.21.2026		
REV:	DATE:	DESCRIPTION:
SHEET NAME:		
SPECIFICATIONS		
SHEET NUMBER:		

PASS WINDOWS MANUFACTURER: QUIKSERV PRODUCTS: IFSC-4040- Self-closing drive thru window Unit Size: 48"W x 48"H Service Opening: 20-1/4"W x 41"H 1" insulating clear tempered safety glass Weather-resistant and sealed Clear Anodized Aluminum Corrosion-resistant material: anodized aluminum and #304 – #3 finish stainless steel Air Curtain Non-heated Berner air curtain for SC-3030 and IFSC-4040 window units. Max Air Volume 645 CFM Max Air Velocity 2100 FPM Volts: 120V, single phase Pre wiring with drive-thru window for easy mounting and installation on-site Relay to sync operation of air curtain with window opening and closing	Apply one coat of bonding agent over all surfaces to be plastered in accordance with the manufacturer's directions. Apply plaster in three coats to a minimum thickness of 7/8 inch over sheathing. Add only enough water for the mixing and application. Keep water to a minimum in mix. Scratch coat 3/8 inch; brown coat 3/8 inch; the brown coat (second coat) can be applied over scratch coat (first coat) immediately after initial set of scratch coat when the plaster system is applied over a solid substrate (double back method). Wait 14 days between application of the brown coat and the finish coat, moist curing during the first 48 hours. Finish coat shall be applied no sooner than 14 days after application of brown coat, to an evenly dampened surface, to a thickness of no less than 1/8 inch. Trowel to a fine sand finish. Moist cure for at least 48 hours after application.	Follow Manufacturer's instructions, and Layout Drawings, except as modified hereunder. Delay start of Work until above-ceiling Work by other Trades has been completed. Tile Suspension System: Where Mechanical and Electrical Work interferes with regular spacing of Hangers, provide additional Hangers and Channels and make necessary adjustments in Ceiling construction. Do not attach to or pass Hangers through Mechanical or Electrical Ductwork. Provide Framing around any recessed Lighting Fixtures and other Openings. Maximum Vertical Hanger Splay: 6 inches per 4 ft. Acoustic Tile: Install in level plane, in straight line courses, and with solid bearing on Support Members. Minimum Border Tile Width: 1/2 Unit dimension, unless otherwise shown on Drawings. Install any Pattern grain in one direction. Seal Openings around Pipe, Duct, or other penetrations through Tile with Foam Penetration Sealant. Where Acoustic Tiles abut Vertical Surfaces, trim Joints with Suspension Metal Edge Trim. Maximum Vertical Hanger Splay: 6 inches per 4 ft. Install in level plane, in straight line courses, and with solid bearing on Support Members. Minimum Border Tile Width: 1/2 Unit dimension, unless otherwise shown on Drawings. Install any Pattern grain in one direction. Seal Openings around any penetrations through Tile with Foam Penetration Sealant. Where Acoustic Tiles abut Vertical Surfaces, trim Joints with Suspension System Metal Edge Trim. TOLERANCES Maximum fully loaded Ceiling Deflection in accordance with ASTM C-635: 1/360 of Span Install Finish Surface level and true within 1/8 inch per 12 ft. Maximum Ceiling Suspension System Runner rotation from plumb: 2 degrees	10 SPECIALTIES SIGNS ROOM IDENTITY SIGNS Manufacturer & Style: Contractor's Choice Material: Plastic Laminated Background Color: Blue Letter Color: white Letter Height: 1 inch minimum Letter Style: Arial Letter Case: Upper Sign Length: 1 inch longer on each end than Sign wording Sign Height: 1/4 inch beyond each edge of Sign wording Special Requirement: Include Braille Language where required by ADA. Wording, Symbols, Locations, & Quantities: See Drawings FASTENERS Where Exposed Fasteners are shown on Drawings, or otherwise approved: Material: Stainless Steel Type: Satisfy conditions of use. Size & Quantity: As required to secure Members in position. VEHICLE PARKING CONTROL SIGNS Manufacturer: Contractor's choice Sign Panel: Approximate Face Size: 12x18 inches Material: Sheet Steel or Aluminum Letter Height: 3/4 inch Colors: White Letters on Blue background or vice versa Required Markings: Disabled Parkers Signs: Wording: Per State and Local jurisdiction requirements Logo: International Symbol of Access for Handicapped Users At Parking Stalls adjacent to 8 ft. wide Aisles, if any: Provide 3 inch high "VAN-ACCESSIBLE" Sign mounted directly below Main Sign. Mounting Methods: Where so indicated on Drawings: Wall-mount Elsewhere: Mount on Galvanized Steel Support Post Mounting Heights above adjacent Walkway Surface to Sign Bottom: If and where mounted on Wall: 48 inches If and where mounted on Post: 84 inches Extent of Work: Provide 1 Sign centered on each Vehicle Parking Stall reserved for Disabled Users. INSTALLATION Follow Manufacturer's instructions. Install plumb, level, square, and true as applicable. Secure to Substrate. CORNER GUARDS Manufacturer/ Product: AIS Industries, Custom, Drilled, 2" wings, 120" long, stainless steel flush mount, sharp 90-degree corner. Mounting hardware included. Install on all outside corners of interior walls. TOILET & BATH ACCESSORIES TOILET PAPER DISPENSERS (OFCl) Mounting: Surface Provide 1 adjacent to each Toilet. PAPER TOWEL DISPENSERS (OFCl) Mounting: Surface Provide 1 adjacent to each Lavatory or as shown on Drawings LIQUID SOAP DISPENSERS (OFCl) Mounting: Through Counter top Accessories: Provide with Spacer to raise Dispenser Spout above Sink Rim. Provide 1 adjacent to each Lavatory Sink. TOILET SEAT COVER DISPENSERS (OFCl) Mounting: Surface Provide 1 adjacent to each Toilet. SANITARY NAPKIN DISPOSALS (OFCl) Mounting: Surface Provide 1 adjacent to each Women's Toilet. HOOKS (OFCl) Mounting Height above Floor, unless otherwise shown on Drawings: 54 inches. Provide where shown on Drawings. MIRROR Manufacturer & Model: Bobrick B-165 1836, or approved. Type: Channel Frame Material: Stainless Steel Mounting: Surface Provide 1 at each Lavatory GRAB BARS Manufacturer & Model: Bobrick B-5806, or approved. Material: Satin-finish Stainless Steel Wall Clearance: 1-1/2 inches At Toilet intended for Disabled Users: Quantity: 3 Bars per Compartment Horizontal Bars Mounting Height above Floor: 33 inches Length: At Side: Horizontal Bar: 42 inches (Space 12 inches away from Rear Wall) Vertical Bar: 18 inches (Extend vertically from front-end of Horizontal Bar) At Rear: 36 inches (Extend 12 inches beyond Toilet centerline toward Compartment side wall and extend 24 inches beyond Toilet centerline toward open side of Toilet.) INSTALLATION If Mounting Locations are not specified herein, or shown on Drawings, locate where directed by Architect. Follow Manufacturer's installation instructions and comply with ADA requirements of the Local Jurisdiction Mount plumb, level, true, and secure.		
09 FINISHES PLASTER ASSEMBLIES – SIDING SCHEDULE ALTERNATE Scope: Furnish all labor, material, equipment, and services necessary for the installation and finishing of all lath and plaster on wood framing. REFERENCES - ASTM C1063, Standard Specification for Installation of Lathing and Furring to Receive Interior and Exterior Portland Cement-Based Plaster. - Metal Lath Association Specifications for Metal Lathing and Furring. - USG Co. Lathing and Plastering Handbook. - American Concrete Institute (ACI) 524R Guide to Portland Cement Plastering. MATERIALS Stucco Netting: ASTM C1032, 1 1/2 inch x 17 gauge self furring, hexagonal shaped wire mesh, hot dip galvanized finish per ASTM A123, Coating Grade 60. Metal Molding On Metal lath: Dietrich Metal Framing, "CBZA" 1-A Expanded Flange Corner Bead, zinc; "XXZB" 7/8-inch Type 66 Casing Bead, zinc; "VVZJ" Double-V, 7/8-inch expansion joint, zinc; "FHA7" 7/8-inch foundation weep screed, 26 gauge hot-dip galvanized steel. Fasteners for Attaching Metal Lath to Substrates: Complying with ASTM C 1063. Portland Cement: ASTM C150, Type I. Cement Plaster Aggregate: ASTM C144, fine graded plastering type sand. Lime: ASTM C206, Type S. Reinforcing: 1/2 inch chopped fiberglass strands, Type AR. Building Paper: Grade D building paper UUB 790A, 30 minute water resistant. Bonding Agent: Cement Plaster, Spray On: Larsen Products "Weld Crete." Cement Plaster, Additive: Thoro System "Acryl 60" and Larsen Products "Acrylic Admix 101." Waterproofing / Hardening Agent: Anti-Hydro International, Inc. "Anti-Hydro." MIXES Cement Plaster: ASTM C926, Type CL. Scratch and brown coats may be applied with the double back method. Plaster mix for scratch and brown coats: 1 part Portland cement Type 1. 3/4 to 1-1/2 parts lime. 4 parts sand, scratch coat; 5 parts sand, brown coat. 1/4-pound fiberglass shorts (or greater if required by manufacturer) per 100 pounds of cement. Bonding Agent Additive: 1 part bonding agent, 3 parts water. Finish Coat: ASTM C926, Type FL. 1 part portland cement. 3 parts cement plaster aggregate. 1 1/2 to 2 parts lime. Bonding Agent Additive: 1 part bonding agent, 3 parts water. All parts by volume.	Tile Installation: Conform to Tile Council of North America (TCNA) Handbook for Ceramic, Glass Stone Tile Installation SAMPLES Prior to ordering, submit: Two of each type of tile, grout and accessory to be used in this Project for review and approval to Architect CRACK BRIDGING MEMBRANE Manufacturer & Brand: Laticrete – Hydroban Waterproofing – provide when necessary. Material: Elastomeric Membrane satisfying conditions of use, and capable of bridging open Cracks and Joints without inducing stress onto Tile. Provide a continuous barrier over entire area to receive tile. Include Reinforcing Fabric at problem areas such as coves, corners, cracks, and drains. BACKING BOARD Manufacturer & Brand: Custom Building Products Wonderboard, FinPan Utl-A-Crete, James Hardie Hardibacker Cement Board, National Gypsum PermaBase, Schluter Kerdi-Board, USG Durock, or approved. Material: Glass-mesh reinforced Cement Board Minimum Thickness At Walls: 1/2 inch or match adjacent substrate Fasteners: Screws, and where necessary Washers, recommended by Board Manufacturer. Joint Reinforcement Tape: 2 inch wide Vinyl-coated Fiberglass Mesh Provide over Wall Framing Studs where schedule to receive Ceramic Tile Moisture Retarder, Wall: Type 1, 15 lb. asphalt saturated felt, ASTM D226; or 6 mil polyethylene sheet, ASTM D4397. MORTAR Manufacturer & Brand: LATICRETE – 4-XLT Gray Type: Premium Large and Heavy Tile Mortar with Polymer. Provide at all tile GROUT Manufacturer & Brand: LATICRETE – IG 2000 Ind. Epoxy Grout #2 Kit - Black Type: 100% solids epoxy grout. Provide at all tile. Install in strict adherence to Manufacturer's printed instructions. With less than 30 ft. candles of Available Light measured 3 ft. above adjacent Floor. COLOGRS See Color Schedule on Drawings. PRODUCT Manufacturer: Sherwin Williams, no substitute SURFACE PREPARATION General: Remove any Loose Material, Dirt, Dust, Rust, Grease, Oil, loose Scale, or Foreign Matter. Zinc Alloy & Galvanized Steel: Thoroughly clean with Solvent or pressure-wash with Detergent in hot Water. Etch Metal with Metal Conditioner or in accordance with Steel Structures Painting Council Specifications. COATING APPLICATION General: Follow Coating Manufacturer's instructions. Do not apply initial Coating until Surface Moisture Content is within limitations recommended by Coating Manufacturer. Wipe in dot-stare Meter. Apply Coatings with suitable Brush, Roller, or Spray Equipment recommended by Coating Manufacturer. Back-roll or brush-in spray-applied Primer Coats to assure Coating penetration. FIELD QUALITY CONTROL Before proceeding with remaining Work, request Owner's Representative to inspect each first-finished Room, Space, and Item for acceptability. Immediately following application, Wet Film Thickness of Coatings may be tested in compliance with ASTM D-4414. PAINTING SCHEDULE General: Prime Coats specified below may be omitted where Factory-applied Shop Coatings have been applied by other Trades. Quantities of Coats specified below are minimum. Finished Work shall be even, uniform, and free from cloudy and mottled appearance. Apply additional (4 minimum) Coats of any Deep or Bright Tone Colors where necessary to hide Substrate. Minimum Dry Film Thicknesses specified below include Prime Coat and Finish Coats combined. Exterior Stucco Prime Coat: 100% Acrylic, Alkali Resistant Sherwin Williams Loxon Concrete & Masonry Primer, LX2W50, no substitutions. Second and Third Coats: One component, pigmented, water-based elastomeric. Sherwin Williams ComFlex XL Smooth, CF11 Series. Exterior Ferrous Metal: Latex Enamel 1 coat Bonding Primer (MPI Product #107 - Min. Solids Volume 38% & Max. VOC 100 grams/liter), followed by; 2 coats Semi-gloss (MPI Level #5) Latex Enamel (MPI Product #11 - Min. Solids Volume 39% & Max. VOC 50 grams/liter) Minimum Total Dry Film Thickness: 4.0 mils Interior Wood Prime and Backprime Coat: Water-based acrylic wood primer. Sherwin Williams Premium Wall & Wood Primer, B29W8111. Second and Third Coats: Interior water-based alkyl enamel, gloss level 5. Sherwin Williams ProMar 200 Waterbased Acrylic-Alkyd Semi-gloss, B34-8250 Series. Interior and Exterior Galvanized Steel: Latex Enamel 1 coat Galvanized Primer, (MPI Product #134), followed by: 2 coats Semi-gloss (MPI Level #5) Latex Enamel (MPI Product #11) Minimum Total Dry Film Thickness: 4.0 mils Exposed Mechanical & Electrical Work: Piping, Equipment, & Supports: 1 coat Anti-corrosive Metal Primer (MPI Product #79 - Min. Solids Volume 44% & Max. VOC 100 grams/liter), followed by; 2 coats Semi-gloss (MPI Level #5) Alkyd Enamel (MPI Product #81 - Min. Solids Volume 39% & Max. VOC 50 grams/liter) Minimum Total Dry Film Thickness: 4 mils Mechanical Grilles, Diffusers, & Louvers: 2 coats Semi-gloss (MPI Level #5) Alkyd Enamel (MPI Product #81) - Min. Solids Volume 39% & Max. VOC 50 grams/liter Minimum Total Dry Film Thickness: 4.0 mils Electrical Conduit: 1 coat Galvanized Primer (MPI Product #134), followed by: 2 coats Semi-gloss (MPI Level #5) Latex Enamel (MPI Product #94) Minimum Total Dry Film Thickness: 4.0 mils Electrical Panel Board Doors and Access Panels: 1 coat Galvanized Primer (MPI Product #134), followed by: 2 coats Semi-gloss (MPI Level #5) Latex Enamel (MPI Product #94) Minimum Total Dry Film Thickness: 4.0 mils	ANTI-GRAFFITI COATINGS Scope: Furnish all labor, material, and equipment required for the installation of anti-graffiti coatings on brick, cast stone, concrete, stucco, metal, and CMU. Penetrating Graffiti Control for porous material (brick, cast stone, concrete, and CMU): Clear Penetrating Anti-Graffiti Coating: Penetrating organofluorosiloxane solution with water solvent and less than 25 g/l VOCs. No appreciable difference in surface appearance to non-coated surface. Manufacturer/Product: Evonk "Protectosil ANTIGRAFFITI." Clear Sacrificial Anti-Graffiti Coating for non-porous material (painted stucco and pre-coated metal): Manufacturer/Product: Prosoco, "Defacer Eraser Sacrificial Coating SC-1." Application: Read manufacturer's "Preparation" and the Safety Data Sheet before use. Provide graffiti resistant coating for all exterior cladding materials accessible to the public to a height of 10'0" above grade. Always test each type of surface for suitability and results before overall application. Different surface compositions may result in absorption and/or appearance differences. Also test for application speed, pattern and technique needed for a uniform, even coat. Apply in strict accordance with manufacturer's printed application instructions.			
PREPARATION For plaster work of all types, maintain continuous work area temperature of 55 degrees F minimum, and 80 degrees F maximum for period of seven days before, during, and eight days following plaster application; heat and ventilation evenly distributed to all areas; with deflectors used to prevent hot spots and uneven drying defects. INSTALLATION Prior to installation of stucco netting on exterior surfaces, apply one layer of building paper over the Weather Resistant Barrier, lapping succeeding courses shingle fashion minimum 6 inches. Installation of all stucco netting, laths, fastenings, control joints, corner beads, casing beads, and all other metal molding accessories required for a complete installation shall conform to ASTM C1063, The Metal Lath Association Specifications. Cement Plaster: Mix cement plaster additive with the water at a ratio of two gallons minimum, three gallons maximum of water to one gallon of bonding agent.					
ARCHITECT CORALIC, LLC 9700 MACKENZIE ROAD, STE. 222 ST. LOUIS, MO 63125 TJ 314.578.4953 EDIN@CORALICARCHITECTURE.COM STRUCTURAL ENGINEER KREHER ENGINEERING, INC. 208 N. MAIN STREET, COLUMBIA, IL 62236 TJ 618.281.8505 NDREYER@KREHERENGINEERING.COM MEP ENGINEER CASE ENGINEERING, INC. 796 MERUS CT. FENTON, MO 63026 TJ 636.349.1600 MCASE@CASEENGINEERINGINC.COM	ANNIHILATOR A1	PROJECT NO: LA0701 Dutch Bros Coffee - New Freestanding Store 1804 MACARTHUR DRIVE, ALEXANDRIA, LA 71301 For: Dutch Bros Coffee 1930 W. Rio Salado Parkway Tempe, AZ 85281	ISSUED FOR PERMIT 5.21.2026 REV: DATE: DESCRIPTION: SHEET NAME: SPECIFICATIONS SHEET NUMBER: G1.3 © 2025 DB Franchising USA, LLC		

31 EARTHWORK
Refer to Project's Geotechnical Report for specific project requirements.
EARTH MOVING
Strip at least 6 inches of existing Topsoil, and stockpile for possible future use.
Remove from Topsoil any Vegetation, Sticks, Clods, Rocks larger than 1-1/2 inches, excessive Gravel, Subsoil, and Debris.
Leave Bearing Surfaces undisturbed, level, and true. Where necessary, compact.
Where Excavation, through Contractor's error, is carried to levels lower than those shown on Drawings, fill to proper levels at Contractor's expense as follows:
Under Footings: Fill with Concrete as specified in Section 03-30-00. Earth Fill or Gravel Fill under Footings not permitted.
Under Paving & Walkways: Fill with compacted Gravel or Crushed Rock.
Following Subgrade preparation and within 24 hours prior to Fill or Base Course placement, proof-roll Subgrade beneath Building and Pavement Areas with fully-loaded 10 to 12 cu. yd. Dump Truck.
BAR RUN GRAVEL:
Maximum Size: 4 inches, Minimum Size: 5% maximum passing #200 Sieve
ALL OTHER GRAVEL:
Round, water-worn; washed; sound; durable Rock which is free of soft, friable, thin, elongated, or laminated Pieces; disintegrated Material; organic Matter; Oil; Alkali; or other Deleterious Substances.
SAND:
Fine granular, naturally produced by Rock disintegration and free from organic Material
NATIVE MATERIAL:
Existing Soil excavated from Project Site and stockpiled
IMPORTED LOAM:
Fertile, friable, natural, native of locality, and reasonably free of Subsoil, Clay, Silt, Stones, Lumps, Plants, Roots, Sticks, Weeds, Seeds, and other Extraneous Matter
GROUND STABILIZATION FABRIC:
Amoco, Type: Propex 2002 or approved
UTILITY TRENCHING
System layout on Drawings, including existing Utility locations, is diagrammatic and may not be exact. Verify prior to starting Work.
If field measurements differ slightly from Drawing dimensions modify Work as required for accurate fit.
EXCAVATING:
Excavate to Lines and Grades shown on Drawings
Allow ample Space for Pipe and Pipe Bedding.
Leave Bearing Surfaces undisturbed, level, and true.
Allow for at least 24 inches cover over Pipe
Width: Where parallel Pipes are to be laid within single Trench:
At least 18 inches wider than sum of inside diameters of parallel Pipes plus distance between Pipes.
Elsewhere:
For 4 inch I.D. Pipes & Smaller, if any: 18 inches minimum
For 6 inch I.D. & larger Pipes, if any: 24 inches minimum
PIPE BEDDING INSTALLATION:
At any Plastic Pipe or direct-buried Electrical Wiring: Sand
At Other Pipe: Crushed Rock
Fill full Trench width.
Minimum thickness below Pipe bottom: 4 inches

BURIED UTILITY MARKER INSTALLATION:
Minimum: 10 inches
Maximum: 12 inches
BACKFILLING:
Place Fills in 6 to 8 inch maximum Lifts
Compact with Mechanical Vibration.
Under and within 2 ft. of Structure Foundations, Slabs, or Pavements: 95%
Elsewhere: 90%
MATERIALS:
CRUSHED ROCK:
Mechanically crush as follows:
Fracture at least 70 percent of Particles on at least 2 faces.
Unfractured Particles:
3/8 inch and larger: 10% maximum
Smaller than 3/8 inch: 5% maximum
Gradation: Even from Coarse to Fine.
Maximum Size:
At Pipe Beds and Pipe Zones: 3/4 inch
At Backfills: 1-1/2 inches
PEA GRAVEL:
Round, water-worn, washed, sound, durable, uniform, Maximum Size: 1/2 inch

32 EXTERIOR IMPROVEMENTS
Refer to Project's Geotechnical Report for specific project requirements.
ASPHALT PAVING:
SOIL, STERILANT:
Type: Recommended by Applicator to satisfy conditions of use, without endangering any adjacent Planting areas.
Provide over Gravel Base to receive Asphaltic Paving.
ASPHALTIC PAVING
Sound, angular, crushed River-run or Quarry Rock with 70% minimum fracture.
Gradation: 1-1/2 inch minus, evenly graded. If and where thickness exceeds 12 inches, provide Bar Run
Gravel from underside of 1-1/2 inch Material down to solid bearing.
Minimum Compacted Base Thickness: Drawings
Verify Subgrade elevation and condition.
Proof-roll Subgrade prior to Granular Base placement using fully loaded 10 cu. yd. Dump Truck with dual axle, or approved, to discover any unstable areas or areas requiring additional compaction.
Do not apply Granular Base when Subgrade is not properly graded or compacted.
ALLOWABLE TOLERANCES
In-place Compacted Thickness:
Granular Base: Within 0.05 ft. above and 0.02 ft. below specified thickness
Surface Smoothness:
Measured parallel with and at right angles to Pavement centerlines using 12 ft. Straightedge: 0.02 ft. plus or minus
PORTLAND CEMENT CONCRETE PAVING:
Follow Standard Specification for Cold and Warm Weather Concreting, ACI 306.1
Place no Concrete until Subgrade, Formwork, and Reinforcement have been inspected.
REINFORCEMENT BARS
Material: Steel
Manufacturing Standard: ASTM A-615
Grade: 60, unless otherwise shown on Drawings.
Sizes & Locations: See Drawings
PORTLAND CEMENT
Manufacturing Standard: ASTM C-150
Type: I-II
AGGREGATE
Manufacturing Standard: ASTM C-33
Maximum Size: 1-1/2 inch
WATER REDUCING ADMIXTURES
Manufacturing Standard: ASTM C-494
Type: A
Used at Contractor's option
CALCIUM CHLORIDE
Not permitted
ENTRAINED AIR
Manufacturing Standard: ASTM C-260
Air Amount: 5%, plus or minus 1-1/2%, of Concrete Volume.
CONCRETE MIXING
General: Readymix type conforming to ASTM C-94
Assume responsibility for Mix design and Product performance.
Design Strength:
Minimum 28 day compressive strength: 4000 psi
Minimum Cement Content per cu. yd. of Concrete: 564 lbs
CONCRETE PLACING
Convey and place by methods which will prevent Material separation and loss.
Do not retemper or use set Concrete.
If placing 2 consecutive Concrete Batches, stop Paving operations and separate Batches with Construction Joint.
Minimum Concrete Placement Width: 1 full Traffic Lane, unless otherwise approved by Owner's Representative.

Using suitable Vibrating Equipment, consolidate Concrete without segregation.
PAVEMENT JOINTS
General:
Submit Joint Layout Drawings for Owner's Representative's approval. Layout Joints in accordance with approved Drawings.
Form to true, straight lines, with Slabs flush at joints.
CONCRETE WALKS, GUTTERS & CURBS
Follow Standard Specification for Cold and Warm Weather Concreting, ACI 306.1
Reinforcing: Grade: 60, unless otherwise shown on Drawings.
Extent of Work: Unless otherwise shown on Drawings, provide the following:
One #4 Bar continuously in both top and bottom of each Cast-in-place Concrete Curb.
One #4 Bar continuously in top, bottom, and toe of each Concrete Gutter.
PORTLAND CEMENT
Manufacturing Standard: ASTM C-150
Type: I-II
AGGREGATE
Maximum Size: 3/4 inch at Exposed Aggregate Flatwork, 1-1/2 inches elsewhere
ENTRAINED AIR
Manufacturing Standard: ASTM C-260
Air Amount: 5% to 7% of Concrete Volume.
Provide in all Concrete.
FLY ASH
Class: F
Used at Contractor's option.
WATER REDUCING ADMIXTURES
Type: A
Used at Contractor's option.
CALCIUM CHLORIDE
None permitted.
DETECTABLE STRIPS FOR WARNING DISABLED PERSONS
Manufacturer: Vanguard, Wausau Tile or approved.
Style: Truncated Dome
Color: Yellow
Comply with U.S. Americans with Disabilities Act (ADA), Where located on Drawings.
CURING COMPOUND
Type: While pigmented, non-yellowing, and disappearing.
Manufacturer & Brand: Contractor's choice
CONCRETE MIXING
General:
Readymix type conforming to ASTM C-94
Assume responsibility for Mix design and Product performance.
Design Strength:
Minimum 28 day compressive strength: 3500 psi
Maximum Slump: 4 inch Slump at any time is maximum.
WALKWAY JOINTS
General:
Make perpendicular to line of Walkway, location in accordance with approved Drawings.
Form to true, straight lines, with Slabs flush at joints.
Construction Joints:
Space Joints no greater than 25 ft. apart.
Provide Expansion Joint Fillers and fill to surface with Expansion Joint Sealing Compound.
Weakened-plane Shrinkage-control Joints:
Over Walk Length: Equally space Joints between 4 ft. min. and 5 ft. max. apart.
Over Walk Width:
At Walks up to 5 ft. wide: No Joints required
At Walks 5 ft & 10 ft. wide: Provide Longitudinal Joint centered in Walk width.
At Walks wider than 10 ft.: Layout Joints in approved pattern.
Joint Depth: 1/3 of Slab thickness
Joint Width: 1/8 inch
CURB & GUTTER JOINTS
Construction Joints:
Maximum Spacing: 15 ft. apart
Expansion Joints:
Maximum Spacing: 45 ft. apart
STAMP-PATTERNED CONCRETE PAVEMENT
SYSTEM DESCRIPTION
Specified System is patented by Bomanite Corp.; Madera, CA 93639; (209) 673-2411.
Concrete as indicated in PORTLAND CEMENT CONCRETE PAVING
Pattern: While Concrete is still plastic, imprint Concrete surface with pattern.

CHAIN LINK FENCING
PURPOSE
Provide only for on-site security during demolition and construction. At Substantial Completion, remove fencing and complete site work to intended final condition.
POSTS & FRAMES
Zinc-coated Steel: 7 mil thick PVC thermally-fused to Wire
Color: See Color Schedule on Drawings.
Shape: Round
Diameter: Line Posts: 2-3/8 inches o.d.
Top & Brace Rails: 1.66 inches o.d.
Terminal Posts: 2-7/8 inches o.d.
Fence Height: 72 inches
Required Brace Locations: Between Post tops, Gate Posts, End Posts, Pull Posts
Corner Posts, including adjustable, diagonal, 3/8 inch diameter Tension Rods.
Tension Cables between Posts: top and bottom.
GATES
Material: Match Posts and Frames.
Type: Double Leaf and Single Leaf
Gate Frame Section Shape: Round
Corner Fittings: Manufacturer's standard for conditions of use
Bracing: Adjustable, 3/8 inch diameter, diagonal Tension Rod
Swinging Gate Hinges:
Type: Non-lift-off
Quantity: 1 1/2 pr.
Swinging Gate Required Accessories:
Latching Devices Type:
At Double Gates: Plunger
At Single Gates: Fork
Operable from either side of Gate
Wheels on ends
Hold-open Keepers on Gates over 5 ft. wide
rovisions for Padlocking
FABRIC Material: 9ga. Steel Wire
Coating: 7 mil thick PVC thermally-fused to Wire
Mesh Opening Size: 2 inches square
Selvage: Knuckled top and bottom
SLATS Material: Vinyl Plastic
Size: Fit Fabric Mesh openings.
Provide Slats in all Fencing.

INSTALLATION
General:
Install rigid, plumb, true, in perfect alignment,
Posts: Set plumb to 1/4 inch in 10 ft. and not more than 10 ft. apart.
In Ground:
Set not less than 36 inches deep into 12-inch diameter Concrete Footings; not less than 4 inches of Concrete below Post bottom.
Remove excess Earth or spread on Site.
Fabric: Install taut, cover full-height of Fence, and extend to within approximately 1 inch above adjacent Ground Surface at Posts.
Join Fabric ends by weaving with single strand of Fabric Wire to form continuous mesh pattern with Selvage twisted to match Fabric.
Gates: Install plumb and level within 1/4 inch in 10 ft.
Install Ground-Set Items in Concrete.


33 UTILITIES
Refer to Project's Geotechnical Report for specific project requirements.
UNDERGROUND WATER SUPPLY SYSTEM
PIPE INSTALLATION
General: Follow Manufacturer's instructions and Regulatory Agency requirements.
Joints:
Install without Joints where possible; no Joints within 10 ft. of Sanitary Sewer Line.
Make necessary Joints watertight.
At Joint between Dissimilar Materials, if any: Use Insulated Unions
Tolerances: Locate within 1/4 inch of indicated grade and location
SYSTEM DISINFECTION: After flushing, but prior to placing System into service, disinfect System as specified in AWWA C-651.
PRESSURE TESTS per governing Regulatory Agency requirements.
Conduct prior to disinfecting and concealing Pipe.
MATERIALS:
PIPE & FITTINGS: Contractor's choice
Type & Size: Satisfy conditions of use.
Quantity: Provide all required for complete and properly operating System.
UNDERGROUND SANITARY SEWER SYSTEM
PIPE INSTALLATION
General: Follow Manufacturer's instructions and Regulatory Agency requirements.
Joints:
Install without Joints where possible;
Make necessary Joints watertight.
At Joint between Dissimilar Materials, if any: Use Insulated Unions
Tolerances: Locate within 1/4 inch of indicated grade and location
PRESSURE TESTS per governing Regulatory Agency requirements.
MATERIALS:
PIPE & FITTINGS: Contractor's choice
Type & Size: Satisfy conditions of use.
Quantity: Provide all required for complete and properly operating System.
CLEANOUTS
Manufacturer & Brand: Contractor's choice, Satisfy Conditions of use
Body Material: Match adjacent Sewer Pipe
Vertical Section Diameter: Match adjacent Pipe size
Cover Plate Type: Vandal proof
Markers: Provide permanent, labeled Marker directly above any buried or concealed Cleanouts.

MANHOLES
Material:
Base: Reinforced, cast-in-place Concrete
Walls: Precast Concrete
Frames & Lids: Cast Iron
Manufacturing Standard: ASTM C-478
Joints: T&G
Diameter, unless otherwise shown on drawings: 42 inches
Pipe Inlets and Outlets: Water tight
Cover Label: Cast the word "SEWER" into Cover face with 2 inch high raised letters
Ladder Rungs:
Material: Galvanized Steel conforming to ASTM A-386
Extent of Rungs: Extend from Manhole top to bottom at 12 inch maximum spacings.

UNDERGROUND STORM SEWER SYSTEM
PIPE INSTALLATION
General: Follow Manufacturer's instructions and Regulatory Agency requirements.
Cast Iron Pipe or Concrete Pipe: Install Pipe Joints with Rubber Rings.
Plastic Pipe: Install with Manufacturer-recommended Fittings using Solvent-weld Joints.
Follow Manufacturer's instructions and Regulatory Agency requirements.
Tolerances: Locate within 1/4 inch of indicated grade and location
MATERIALS:
PIPE & FITTINGS: Under Building Foundations & Asphalt Paving:
Material: Cast Iron
Manufacturing Standard: ASTM A-74
Elsewhere: Contractor's choice
Type & Size: Satisfy conditions of use.
Quantity: Provide all required for complete and properly operating System.
CLEANOUTS
Manufacturer: Contractor's choice
Type: Satisfy Conditions of use
CULVERT PIPE
Reinforced Concrete:
Class: 3
Wall-Type: B
End Pattern: Bell & Spigot
Steel:
Material: Galvanized Steel
Pattern: Corrugated
Shape: Contractors Choice
Minimum Metal Thickness: 16 ga.
Seams: Annular
STEEL CATCH BASINS
Manufacturer: Contractors Choice
Material: 10 ga. Steel
Exterior & Interior Coating: Asphalt
Opening Size: 24x24 inches, unless otherwise shown on Drawings
Outlet Sizes & Depth: Satisfy conditions of use.
PLASTIC AREA DRAINS
Drain Manufacturer & Brand: Contractor Choice
Drain Material: Black Plastic with Outlets for Drain connections
Grate Manufacturer: GRS, or approved.
Grate Material: Black Plastic complying with CS 288
Drain Diameter: 6 inches
Drain Depth: 8 inches



ARCHITECT
CORALIC, LLC
9700 MACKENZIE ROAD, STE. 222
ST. LOUIS, MO 63125
TJ 314.578.4953
EDIN@CORALICARCHITECTURE.COM
STRUCTURAL ENGINEER
KREHER ENGINEERING, INC.
208 N. MAIN STREET,
COLUMBIA, IL 62236
TJ 618.281.8505
NDREYER@KREHERENGINEERING.COM
MEP ENGINEER
CASE ENGINEERING, INC.
796 MERUS CT.
FENTON, MO 63026
TJ 636.349.1600
MCASE@CASEENGINEERINGINC.COM

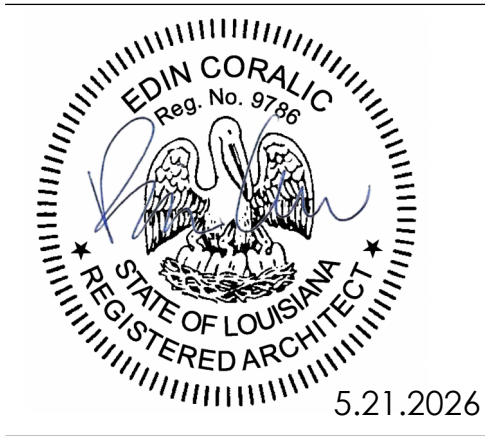

5.21.2026

Project No: LA0701

Dutch Bros Coffee - New Freestanding Store
1804 MACARTHUR DRIVE,
ALEXANDRIA, LA 71301
For: Dutch Bros Coffee
1930 W. Rio Salado Parkway
Tempe, AZ 85281

ANNIHILATOR A1

ISSUED FOR PERMIT

5.21.2026

REV:	DATE:	DESCRIPTION:

SHEET NAME:

SPECIFICATIONS



SHEET NUMBER:

G1.4

"The name DUTCH BROS. and all associated logos, distinctive designs, content, information, and other materials featured, contained herein, and made available by Dutch Bros., including but not limited to, the "hook and leaf" of the establishments and products, all text, images, colors, configurations, graphics, designs, illustrations, photographs, and pictures (collectively, the "Materials") are owned by and/or licensed by DB Franchising USA, LLC and are protected by copyright, trademark, trade dress, patent, and/or other intellectual property rights and unfair competition laws under the United States and foreign laws."


SITE PLAN KEYNOTES:

- 1 ACCESSIBLE PARKING STALL W/ "ACCESSIBLE PARKING ONLY" SIGN.
- 2 INTERNATIONAL ACCESSIBLE SYMBOL ON PAVEMENT- RE: CIVIL PLANS.
- 3 ACCESSIBLE PARKING STALL ASLE STRIPING- RE: CIVIL PLANS.
- 4 TYP. PARKING STALL STRIPING- RE: CIVIL PLANS.
- 5 PAINTED DIRECTIONAL SYMBOLS- RE: CIVIL PLANS.
- 6 PROPOSED CROSSWALK STRIPING- RE: CIVIL PLANS.
- 7 PROPOSED PAVEMENT- RE: CIVIL PLANS.
- 8 PROPOSED CONC. CURB RE: CIVIL PLANS.
- 9 TRASH ENCLOSURE- RE: SHEET A9.0 AND A9.1 FOR MORE INFORMATION.
- 10 TRASH LOADING ZONE- RE: CIVIL FOR PAVEMENT.
- 11 EXIT LANE W/ STRIPING, STRIPES 4" WIDE, 24" O.C., SAFETY WHITE- RE: CIVIL PLANS.
- 12 STRIPED "RUNNERS" MEDIAN, MIN. 2'-6" WIDE.
- 13 (NOT IN USE)
- 14 PROPOSED LANDSCAPING AREAS- RE: LANDSCAPE PLANS.
- 15 (NOT IN USE)
- 16 CONCRETE SIDEWALK- RE: CIVIL PLANS.
- 17 ACCESSIBLE CURB-CUT RAMP, TYP.- RE: CIVIL PLANS.
- 18 6" BOLLARD W/ DB BOLLARD COVERS- RE: STRUCTURAL PLANS AND DETAILS.
- 19 PROVIDE 2" CONDUIT W/ PULL STRING TO CHRISTY BOX FOR FUTURE DRIVE- THRU SENSORS.
- 20 POLE MOUNTED STATIC BACKLIT LED MENU BOARD, BY OTHERS, PROVIDE POWER AND DATA IN WEATHERPROOF J-BOX, REFERENCE SHEET SP1.1.
- 21 PROVIDE 2" CONDUIT W/ PULL STRING TO CHRISTY BOX, FOR FUTURE DIGITAL MENU BOARD UPGRADE.
- 22 RAISED CONCRETE CURB/ ISLAND- RE: CIVIL PLANS.
- 23 EXIT ONLY / THANK YOU VERTICAL POLE SIGNAGE- BY OTHERS.
- 24 POLE MOUNTED DIRECTIONAL SIGNAGE, BY OTHERS, REFERENCE SHEET SP1.1.
- 25 DRIVE-THRU WINDOW LOCATION- RE: FLOOR PLAN.
- 26 RUNNER DOOR LOCATION- RE: FLOOR PLAN.
- 27 DELIVERY/ EMPLOYEE ENTRANCE- RE: FLOOR PLAN.
- 28 WALK-UP SERVICE WINDOW- RE: FLOOR PLAN.
- 29 SHOWN DASHED, ALUMINUM PREFABRICATED CANOPY.
- 30 PROPOSED FRAMED BUILDING CANOPY AND COLUMNS- RE: FLOOR PLANS.
- 31 BUILDING'S INTERNAL ROOF DRAINS AND PREFAB. CANOPY DOWNSPOUTS TO BE ROUTED BELOW SIDEWALK AND CONNECTED TO AN UNDERGROUND STORM SEWER SYSTEM- RE: CIVIL PLANS.
- 32 (NOT IN USE)
- 33 MOBILE "ORDER AHEAD" SIGN- GC TO PROVIDE FOOTING AND POLE- SIGN TO COME FROM SIGN COMPANY- PROVIDE TYPICAL DETAIL SIMILAR TO ADA VERTICAL SIGNAGE- RE: CIVIL PLANS.
- 34 (NOT IN USE)
- 35 MONUMENT SIGN SEE APPROVED SIGNAGE PLANS (SEPARATE PERMIT), BY OTHERS, REFERENCE SHEET SP1.1.
- 36 SITE LIGHT- RE: ELECTRICAL PLANS.

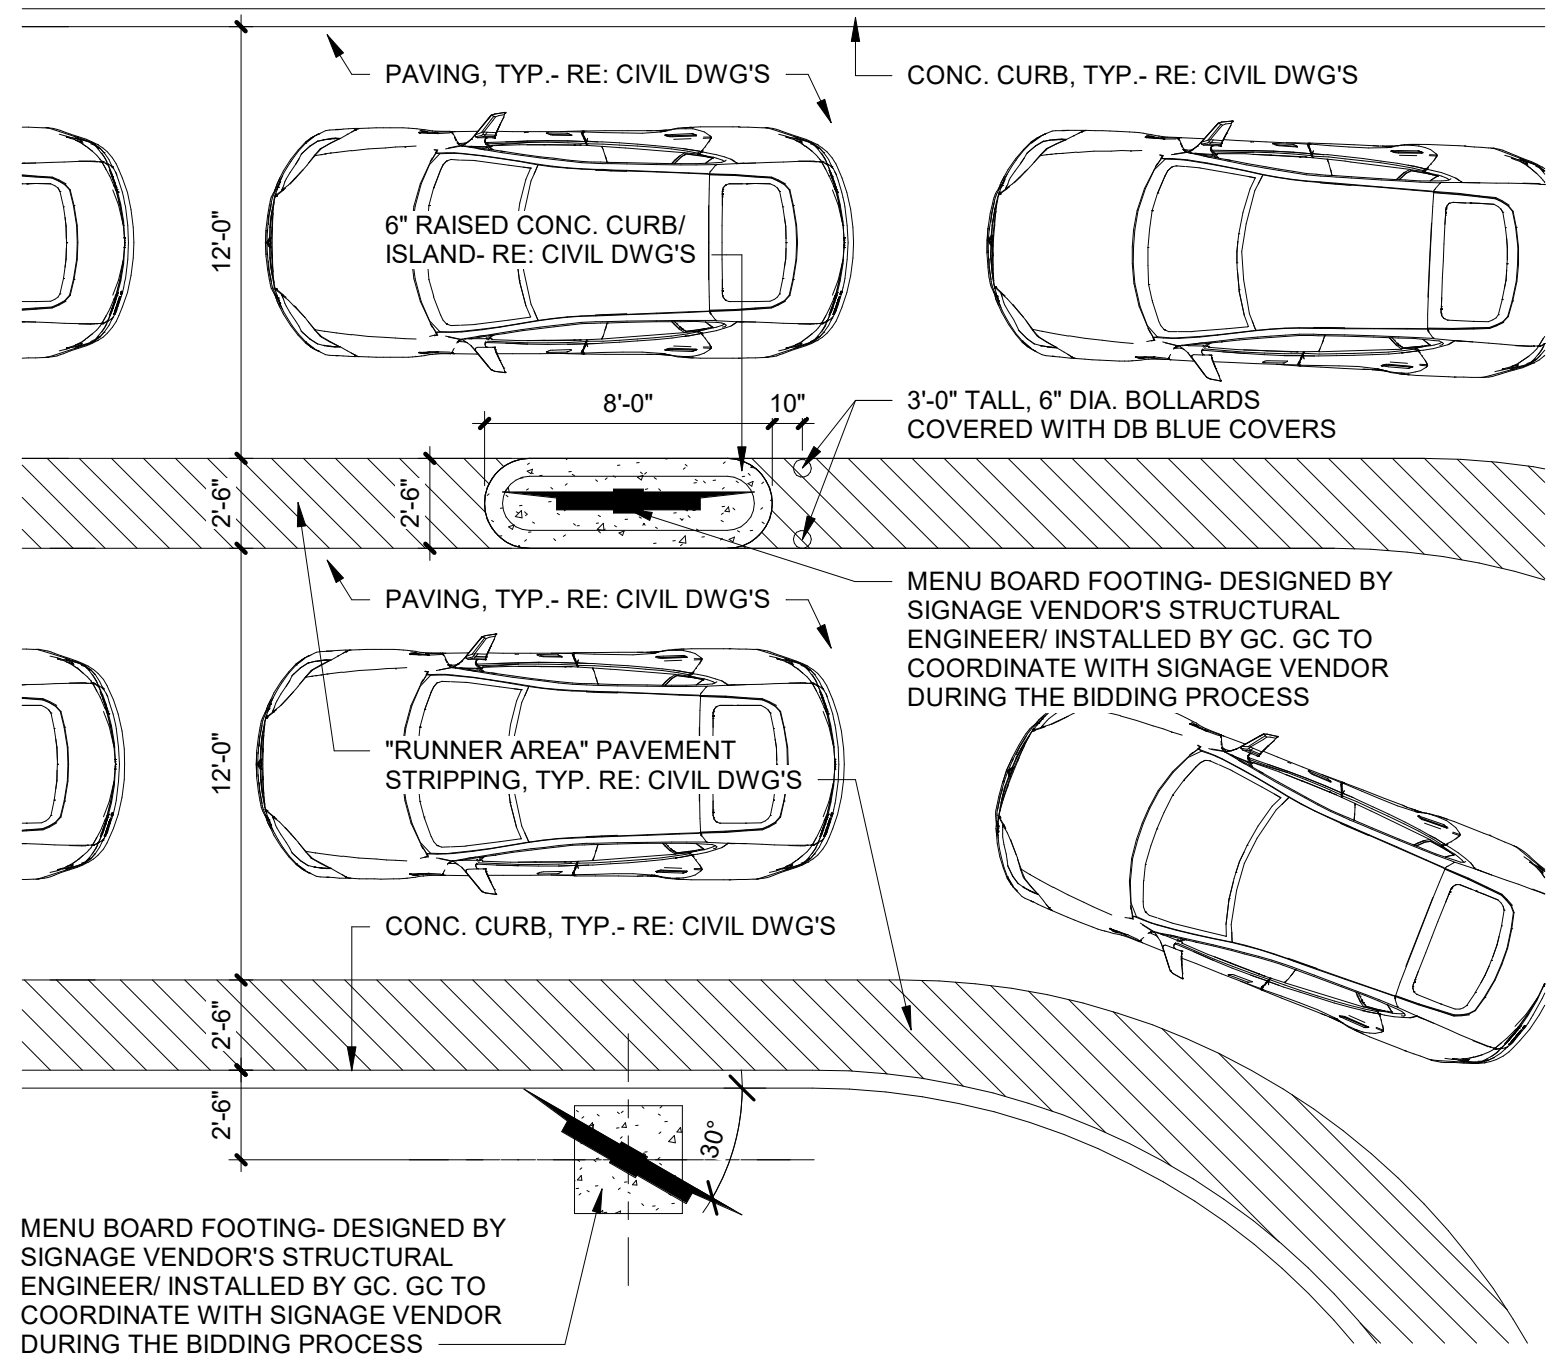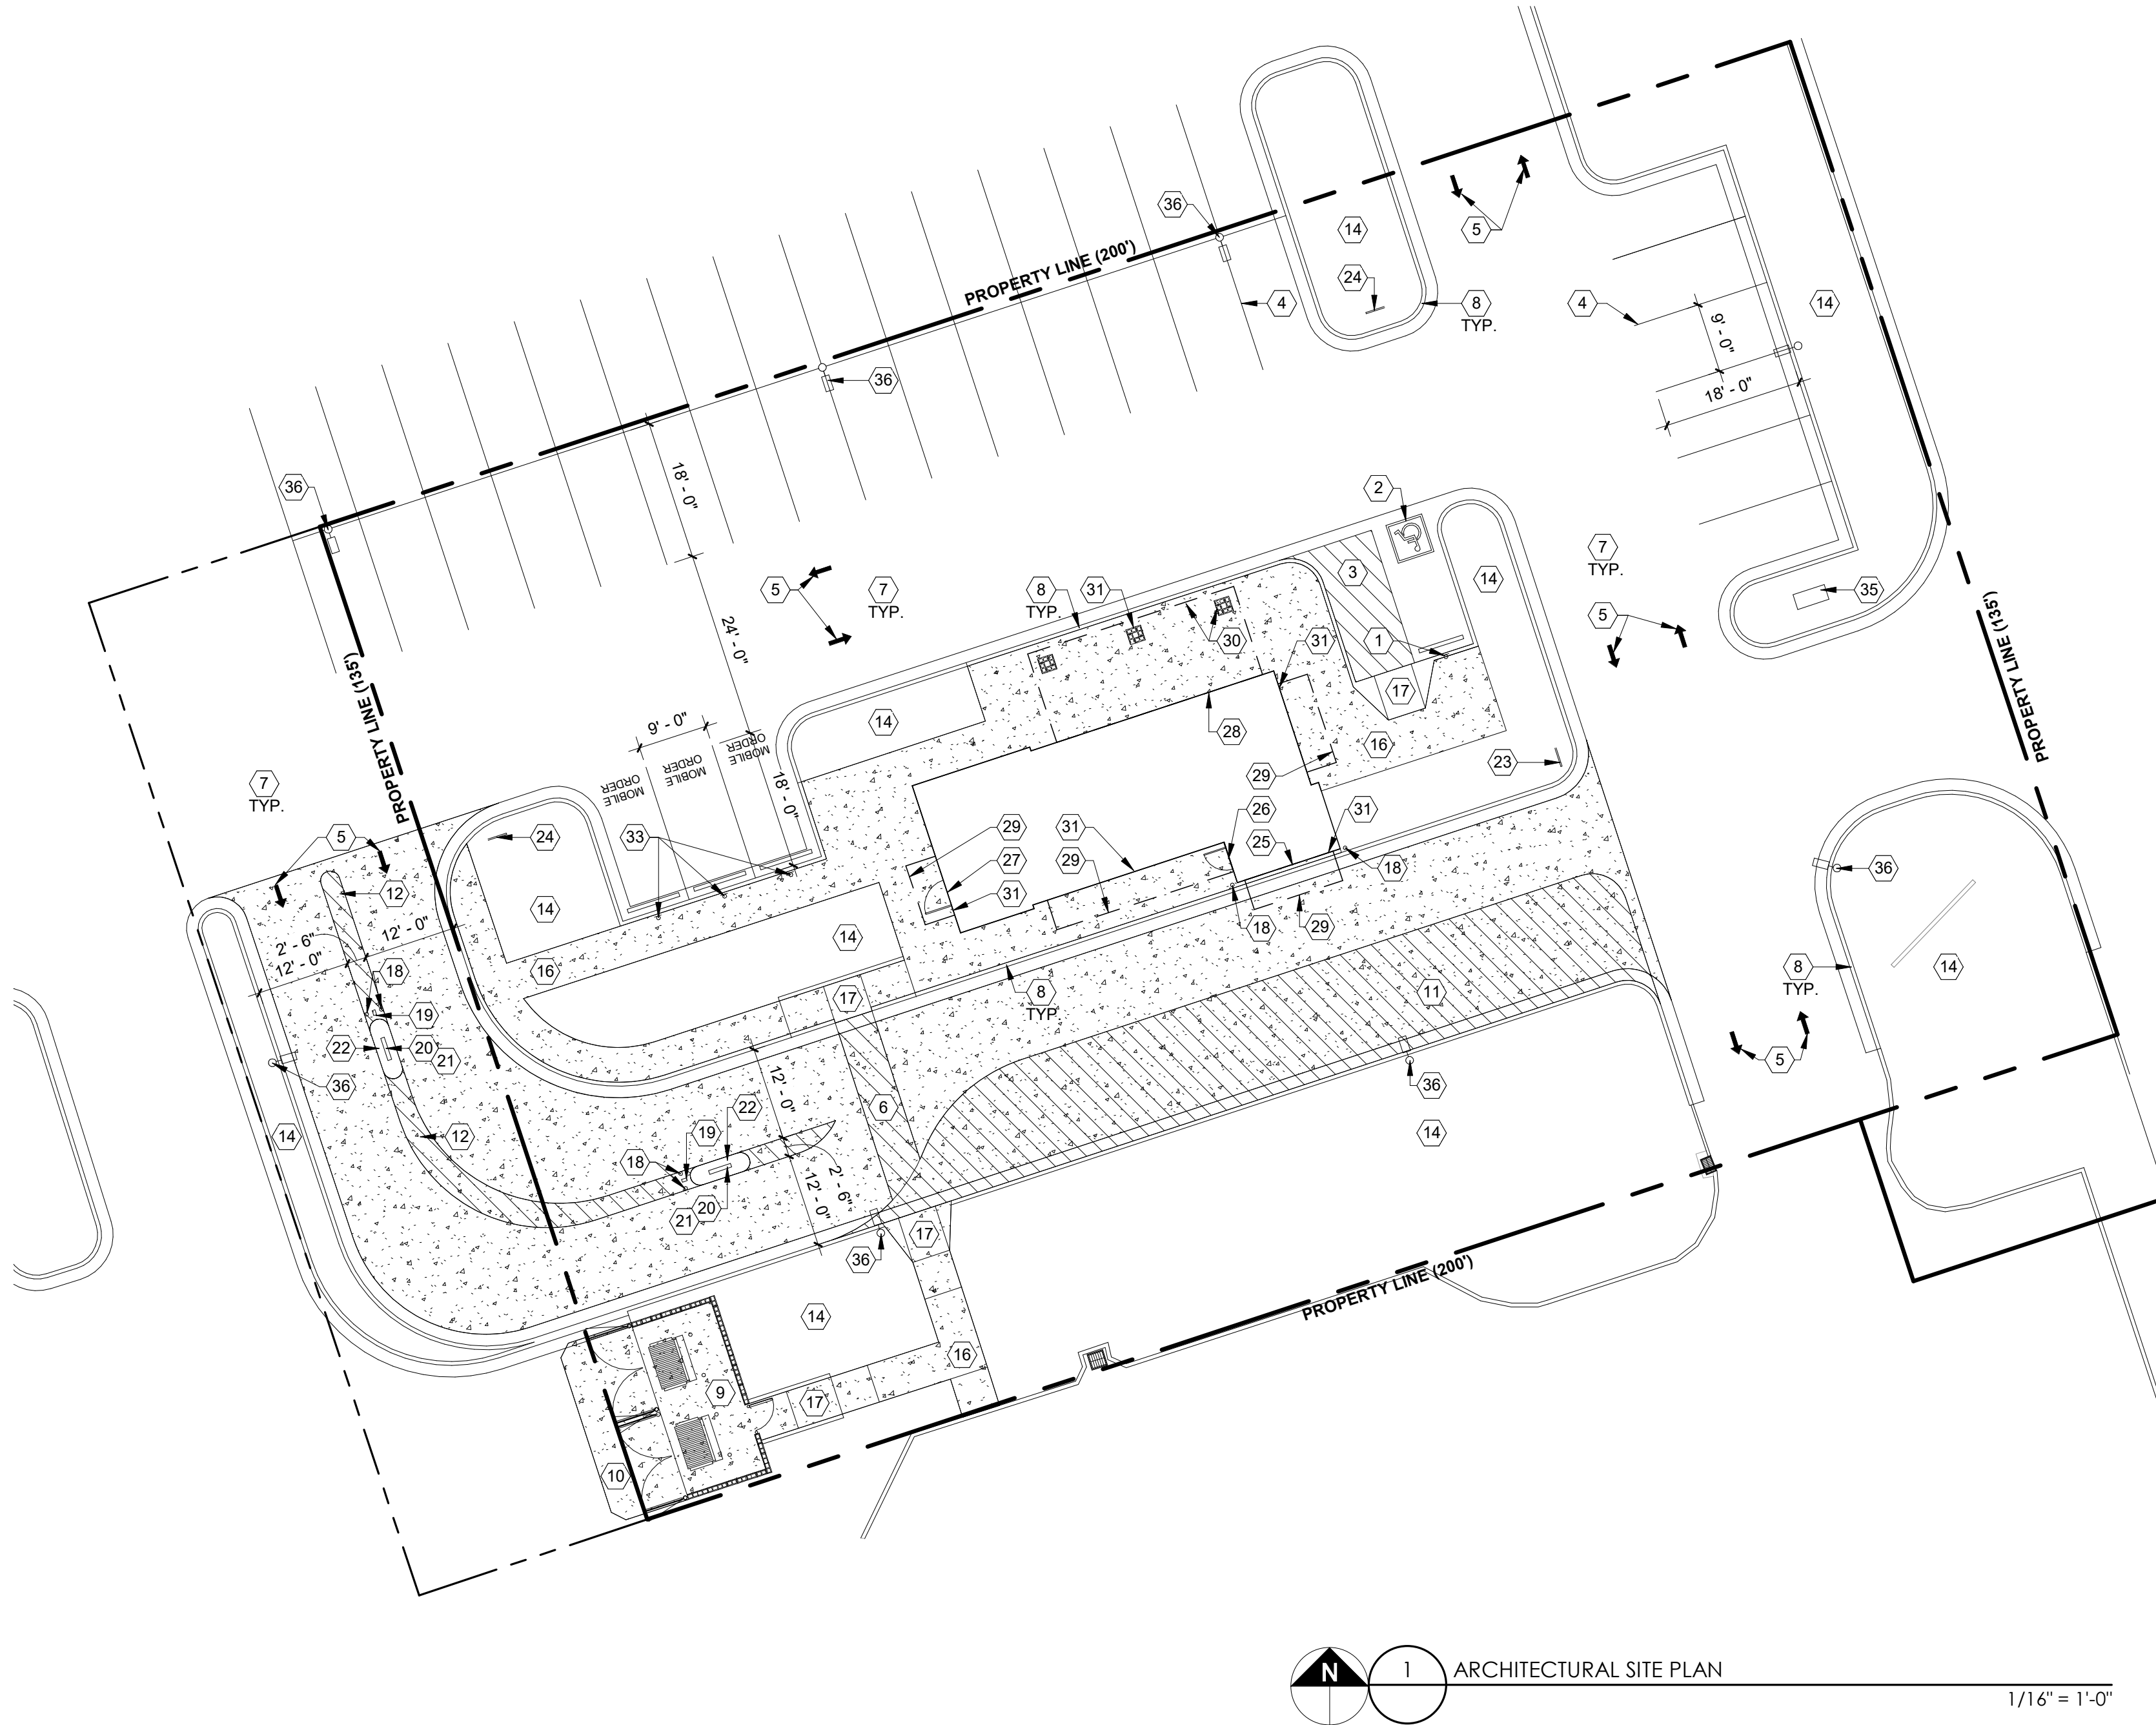

3 ENLARGED PLAN - MENU BOARD
3/16" = 1'-0"

NOTES:
ALL WORK TO BE BY
GC & SUBS - SIGN CO.
TO PROVIDE SIGN ONLY-
GC TO INSTALL

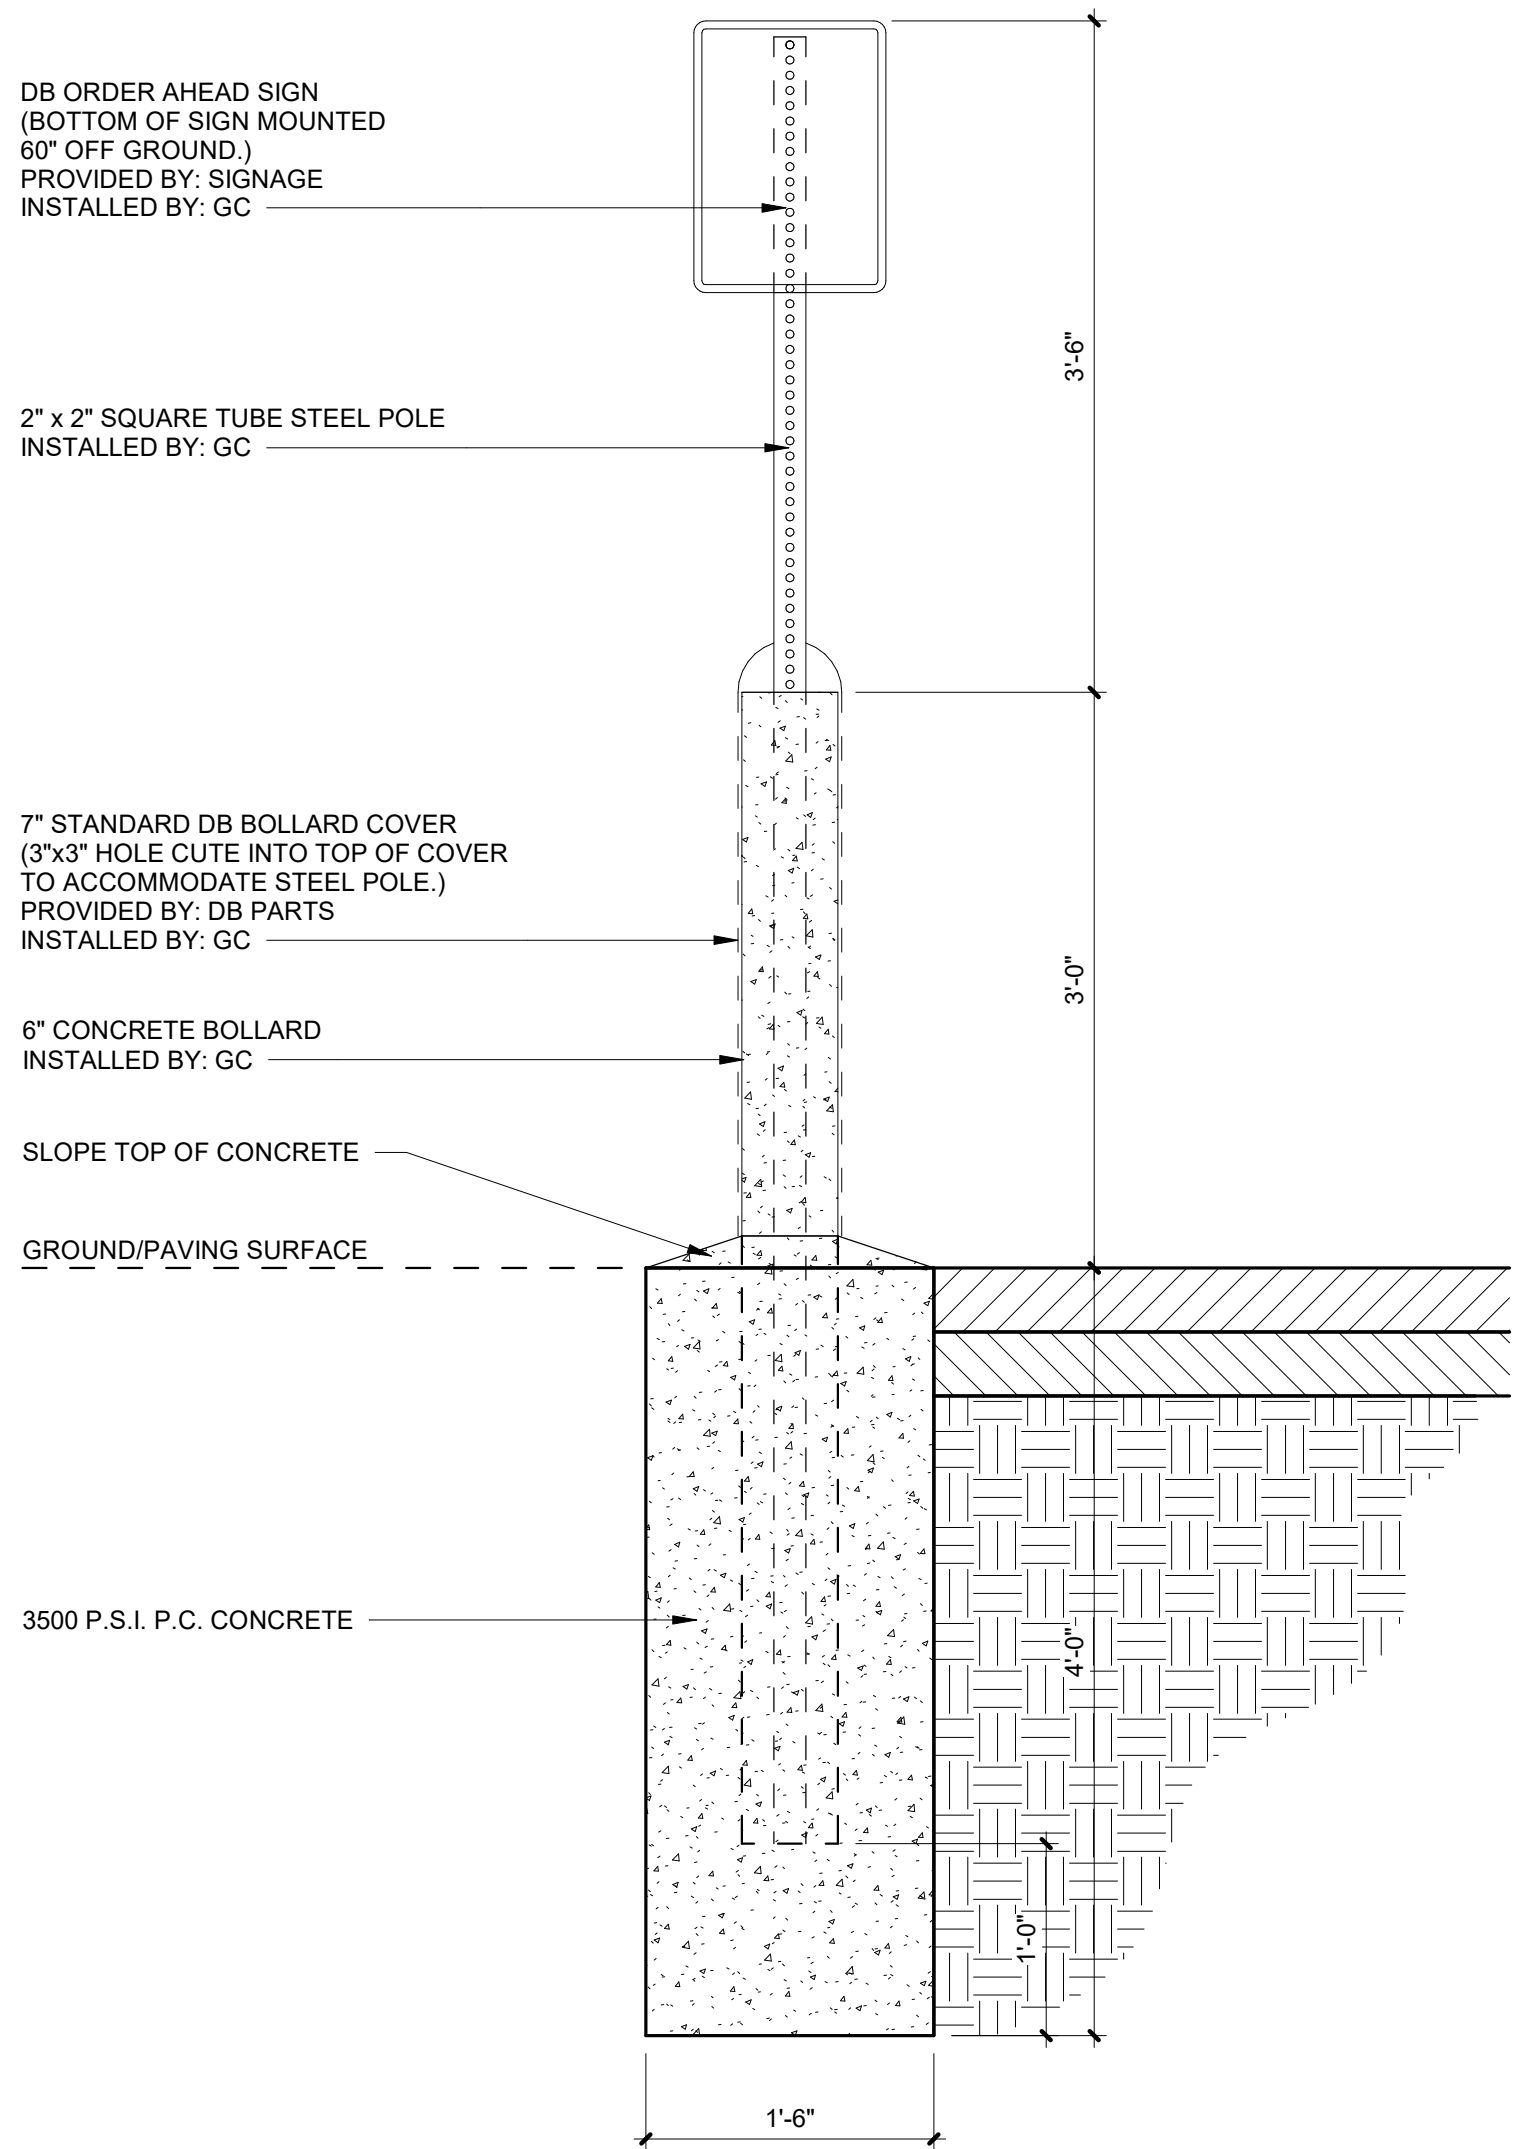

2 MOBILE PICKUP SIGNAGE BOLLARD DETAIL
1" = 1'-0"



ARCHITECT
CORALIC, LLC
9700 MACKENZIE ROAD, STE. 222
ST. LOUIS, MO 63125
TJ 314.578.4953
EDIN@CORALICARCHITECTURE.COM
STRUCTURAL ENGINEER
KREHER ENGINEERING, INC.
208 N. MAIN STREET,
COLUMBIA, IL 62236
TJ 618.281.8505
NDREYER@KREHERENGINEERING.COM
MEP ENGINEER
CASE ENGINEERING, INC.
796 MERUS CT.
FENTON, MO 63026
TJ 636.349.1600
MCASE@CASEENGINEERINGINC.COM



Project No: LA0701
Dutch Bros Coffee - New Freestanding Store
1804 MACARTHUR DRIVE,
ALEXANDRIA, LA 71301
For: Dutch Bros Coffee
1930 W. Rio Salado Parkway
Tempe, AZ 85281
ANNIHILATOR A1

ISSUED FOR PERMIT

5.21.2026

REV:	DATE:	DESCRIPTION:



SHEET NAME:

ARCHITECTURAL SITE
PLAN

SHEET NUMBER:











SP1.0

5. WINDMILLS - REQUIRE A 4' MC CABLE STUBBED OUT THROUGH THE WALL, CENTERED ON THE WINDMILL. INSTALLER WILL MAKE THE FINAL CONNECTION INSIDE OF THE WINDMILL.

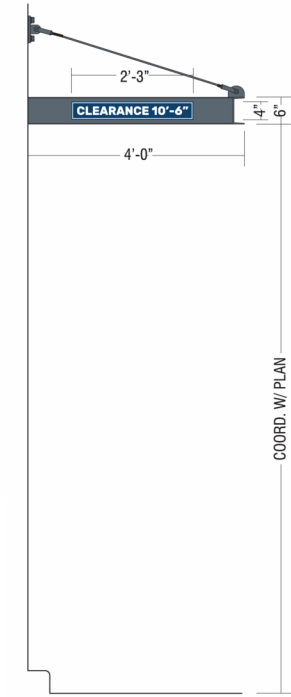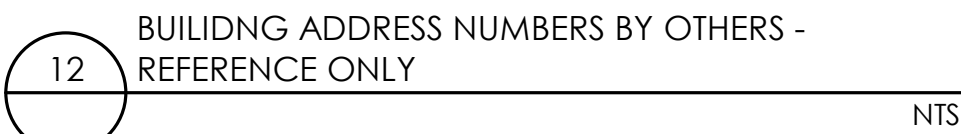

MEP ENGINEER
CASE ENGINEERING, INC.
796 MERUS CT.
FENTON, MO 63026

T| 636.349.1600
MCASE@CASEENGINEERINGINC.COM

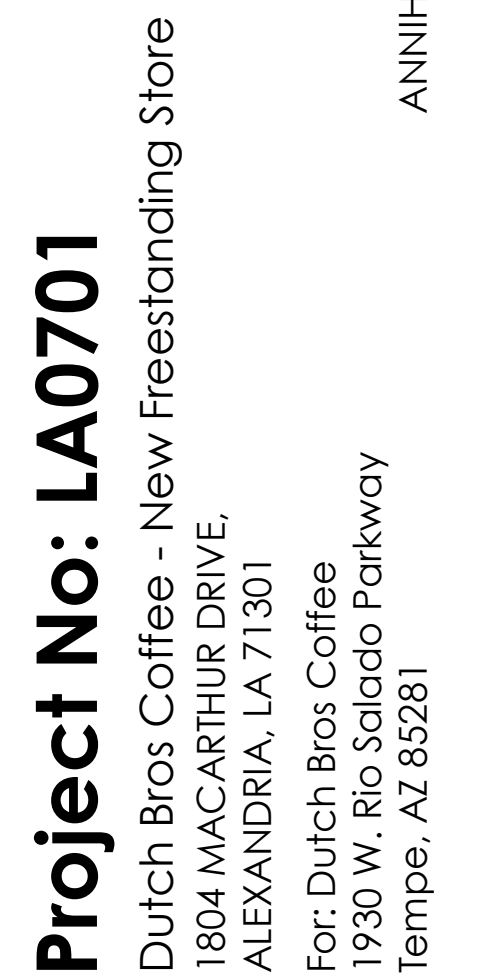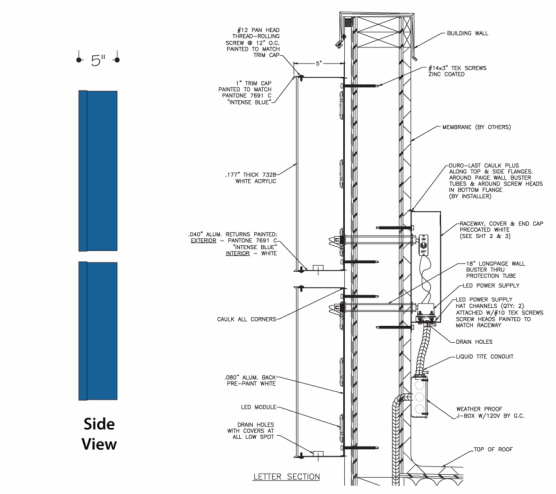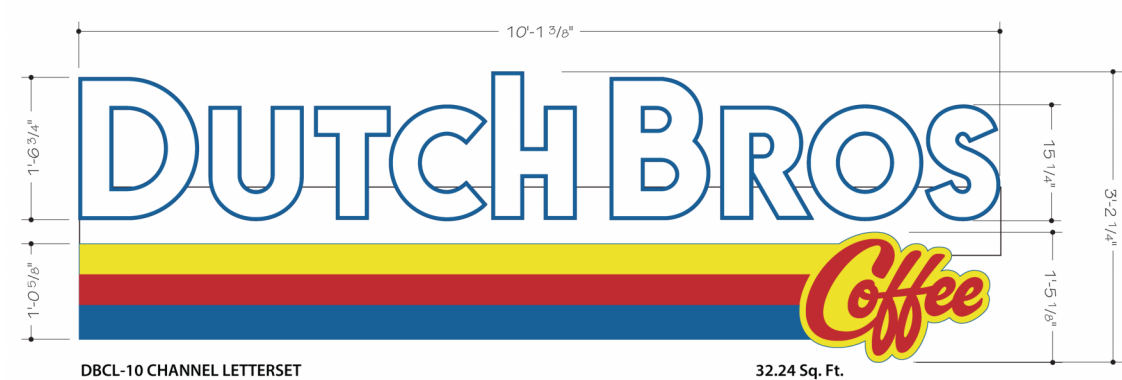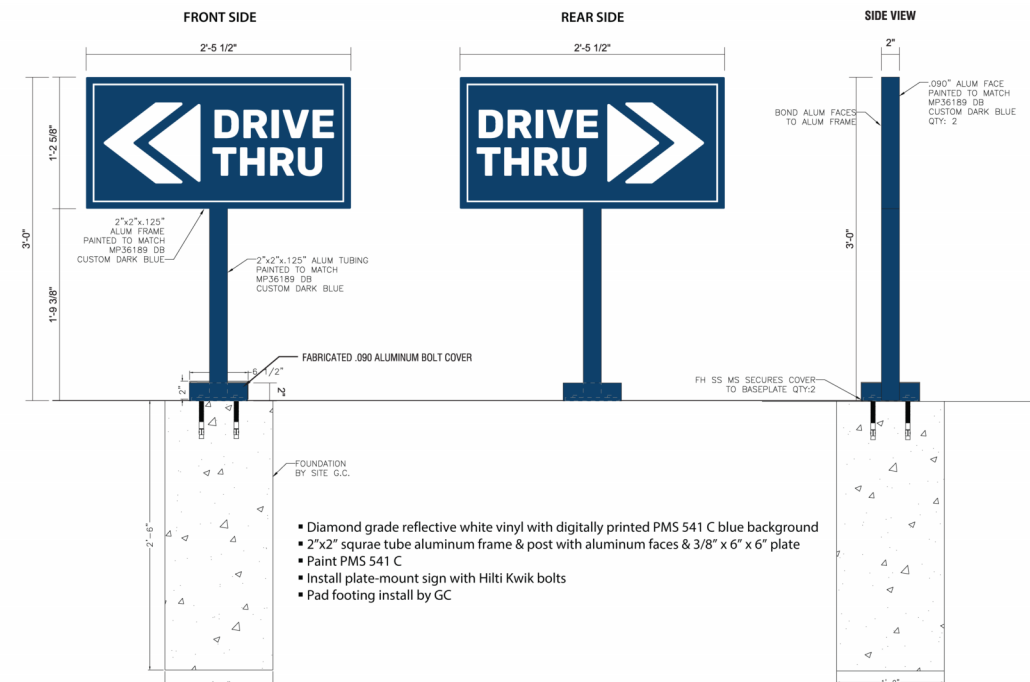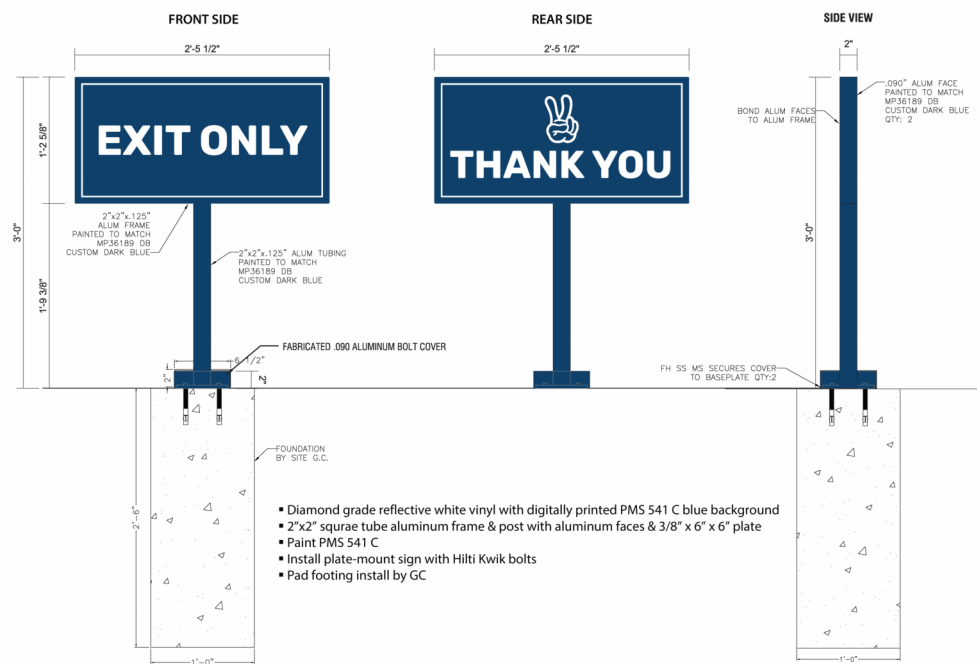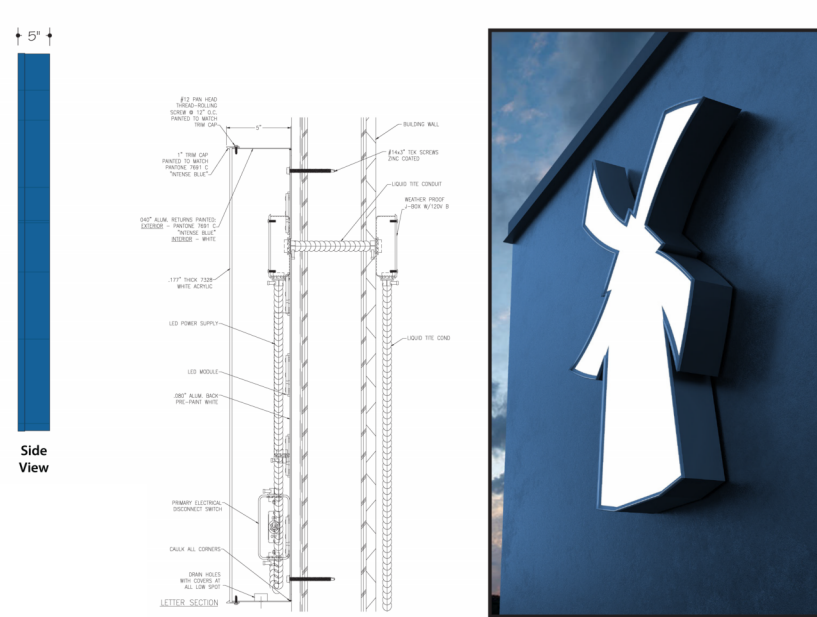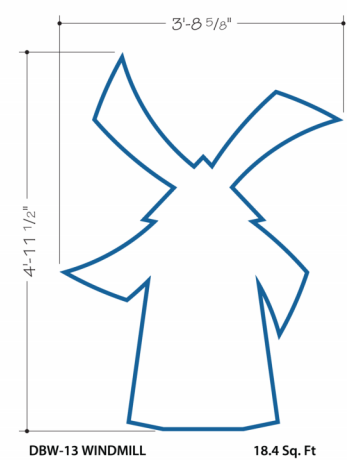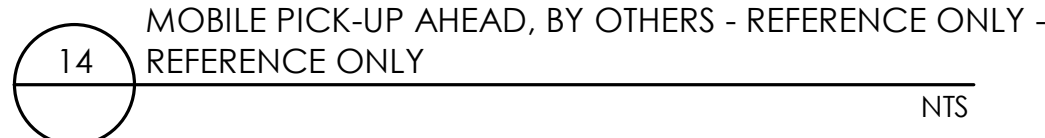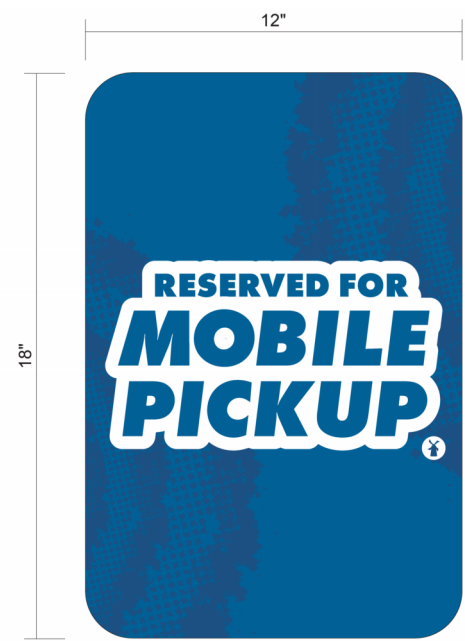

ISSUED FOR PERMIT

5.21.2026

SITE & BUILDING SIGNAGE DETAILS

SHEET NUMBER:


SP 1.1

© 2025 DB Franchising USA, LLC


© 2011 Dutch Bros Coffee LLC. All rights reserved. The name DUTCH-BROS and all associated logos, distinctive designs, content, information, and other materials featured, displayed, contained herein, and made available by Dutch Bros., including but not limited to, the "look and feel" of the establishments and products, all text, images, colors, configurations, graphics, designs, illustrations, photographs, and pictures (collectively, the "Materials") are owned by and/or licensed by DB Franchising USA, LLC.

ANNIHILATOR A1

"The name DUTCH BROS. and all associated logos, distinctive designs, content, information, and other materials featured, displayed, contained herein, and made available by Dutch Bros., including but not limited to, the "hook and leaf" of the establishments and products, all text, images, colors, configurations, graphics, designs, illustrations, photographs, and pictures (collectively, the "Materials") are owned by and/or licensed by DB Franchising USA, LLC and are protected by copyright, trademark, trade dress, patent, and/or other intellectual property rights and under competition laws under the United States and foreign laws."

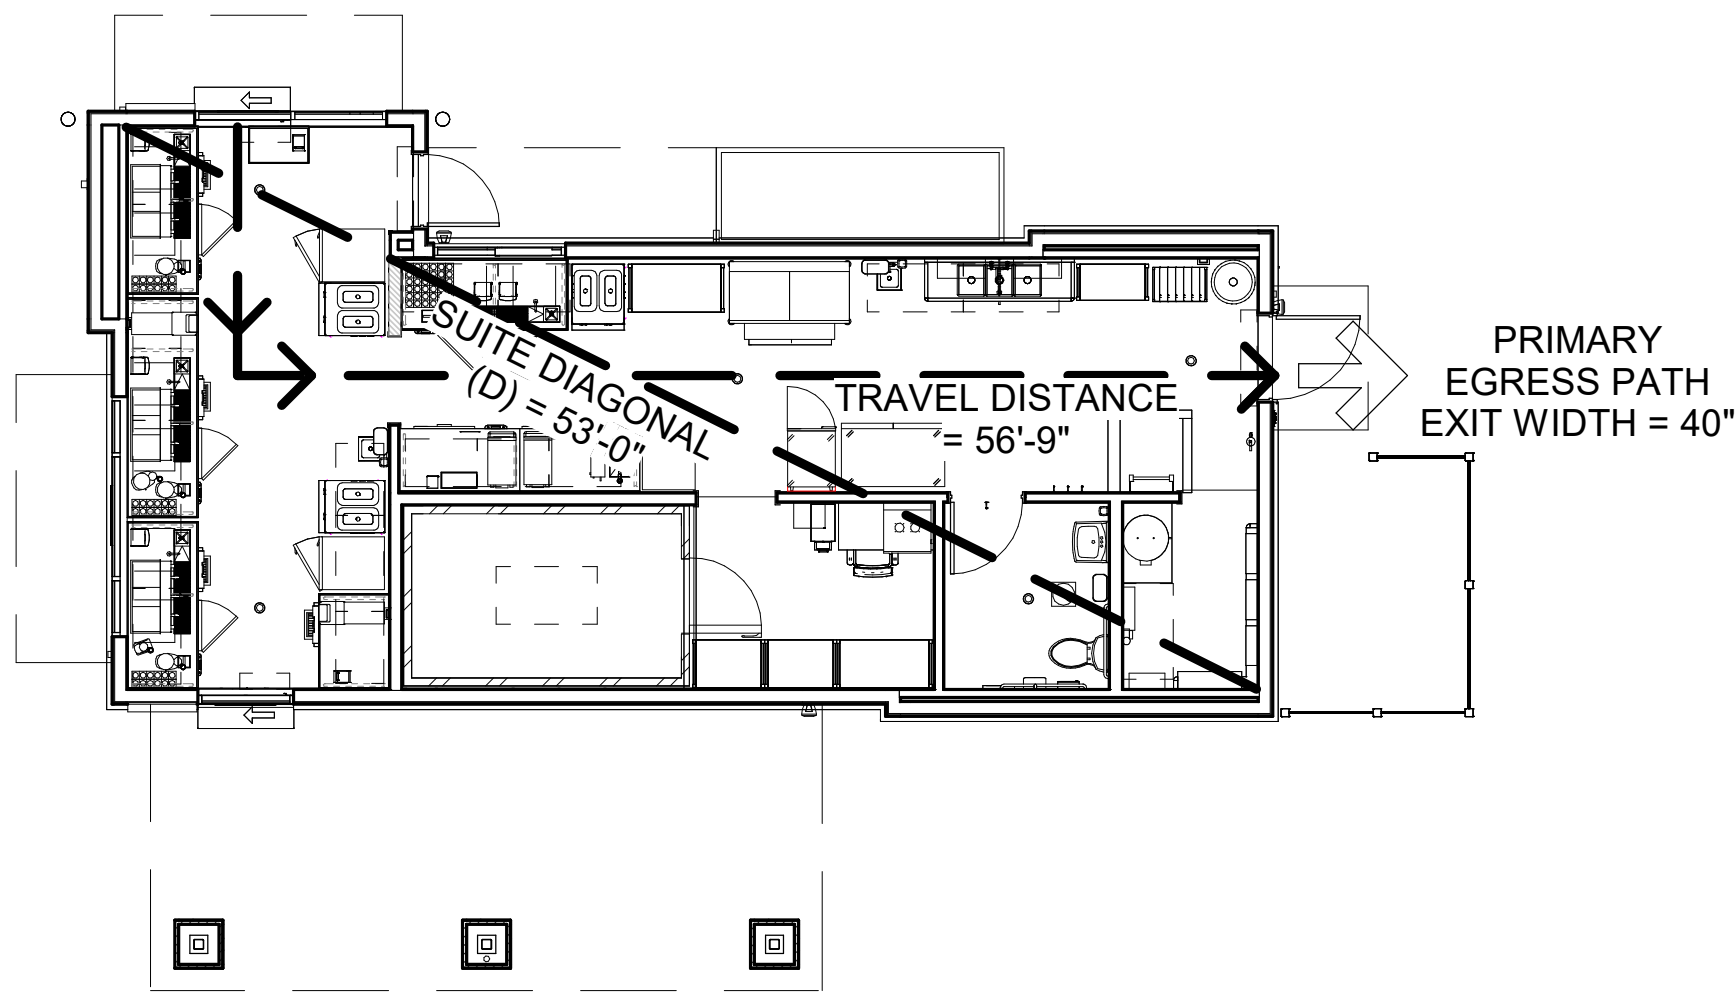

3 FIRE/LIFE SAFETY PLAN
1/8" = 1'-0"

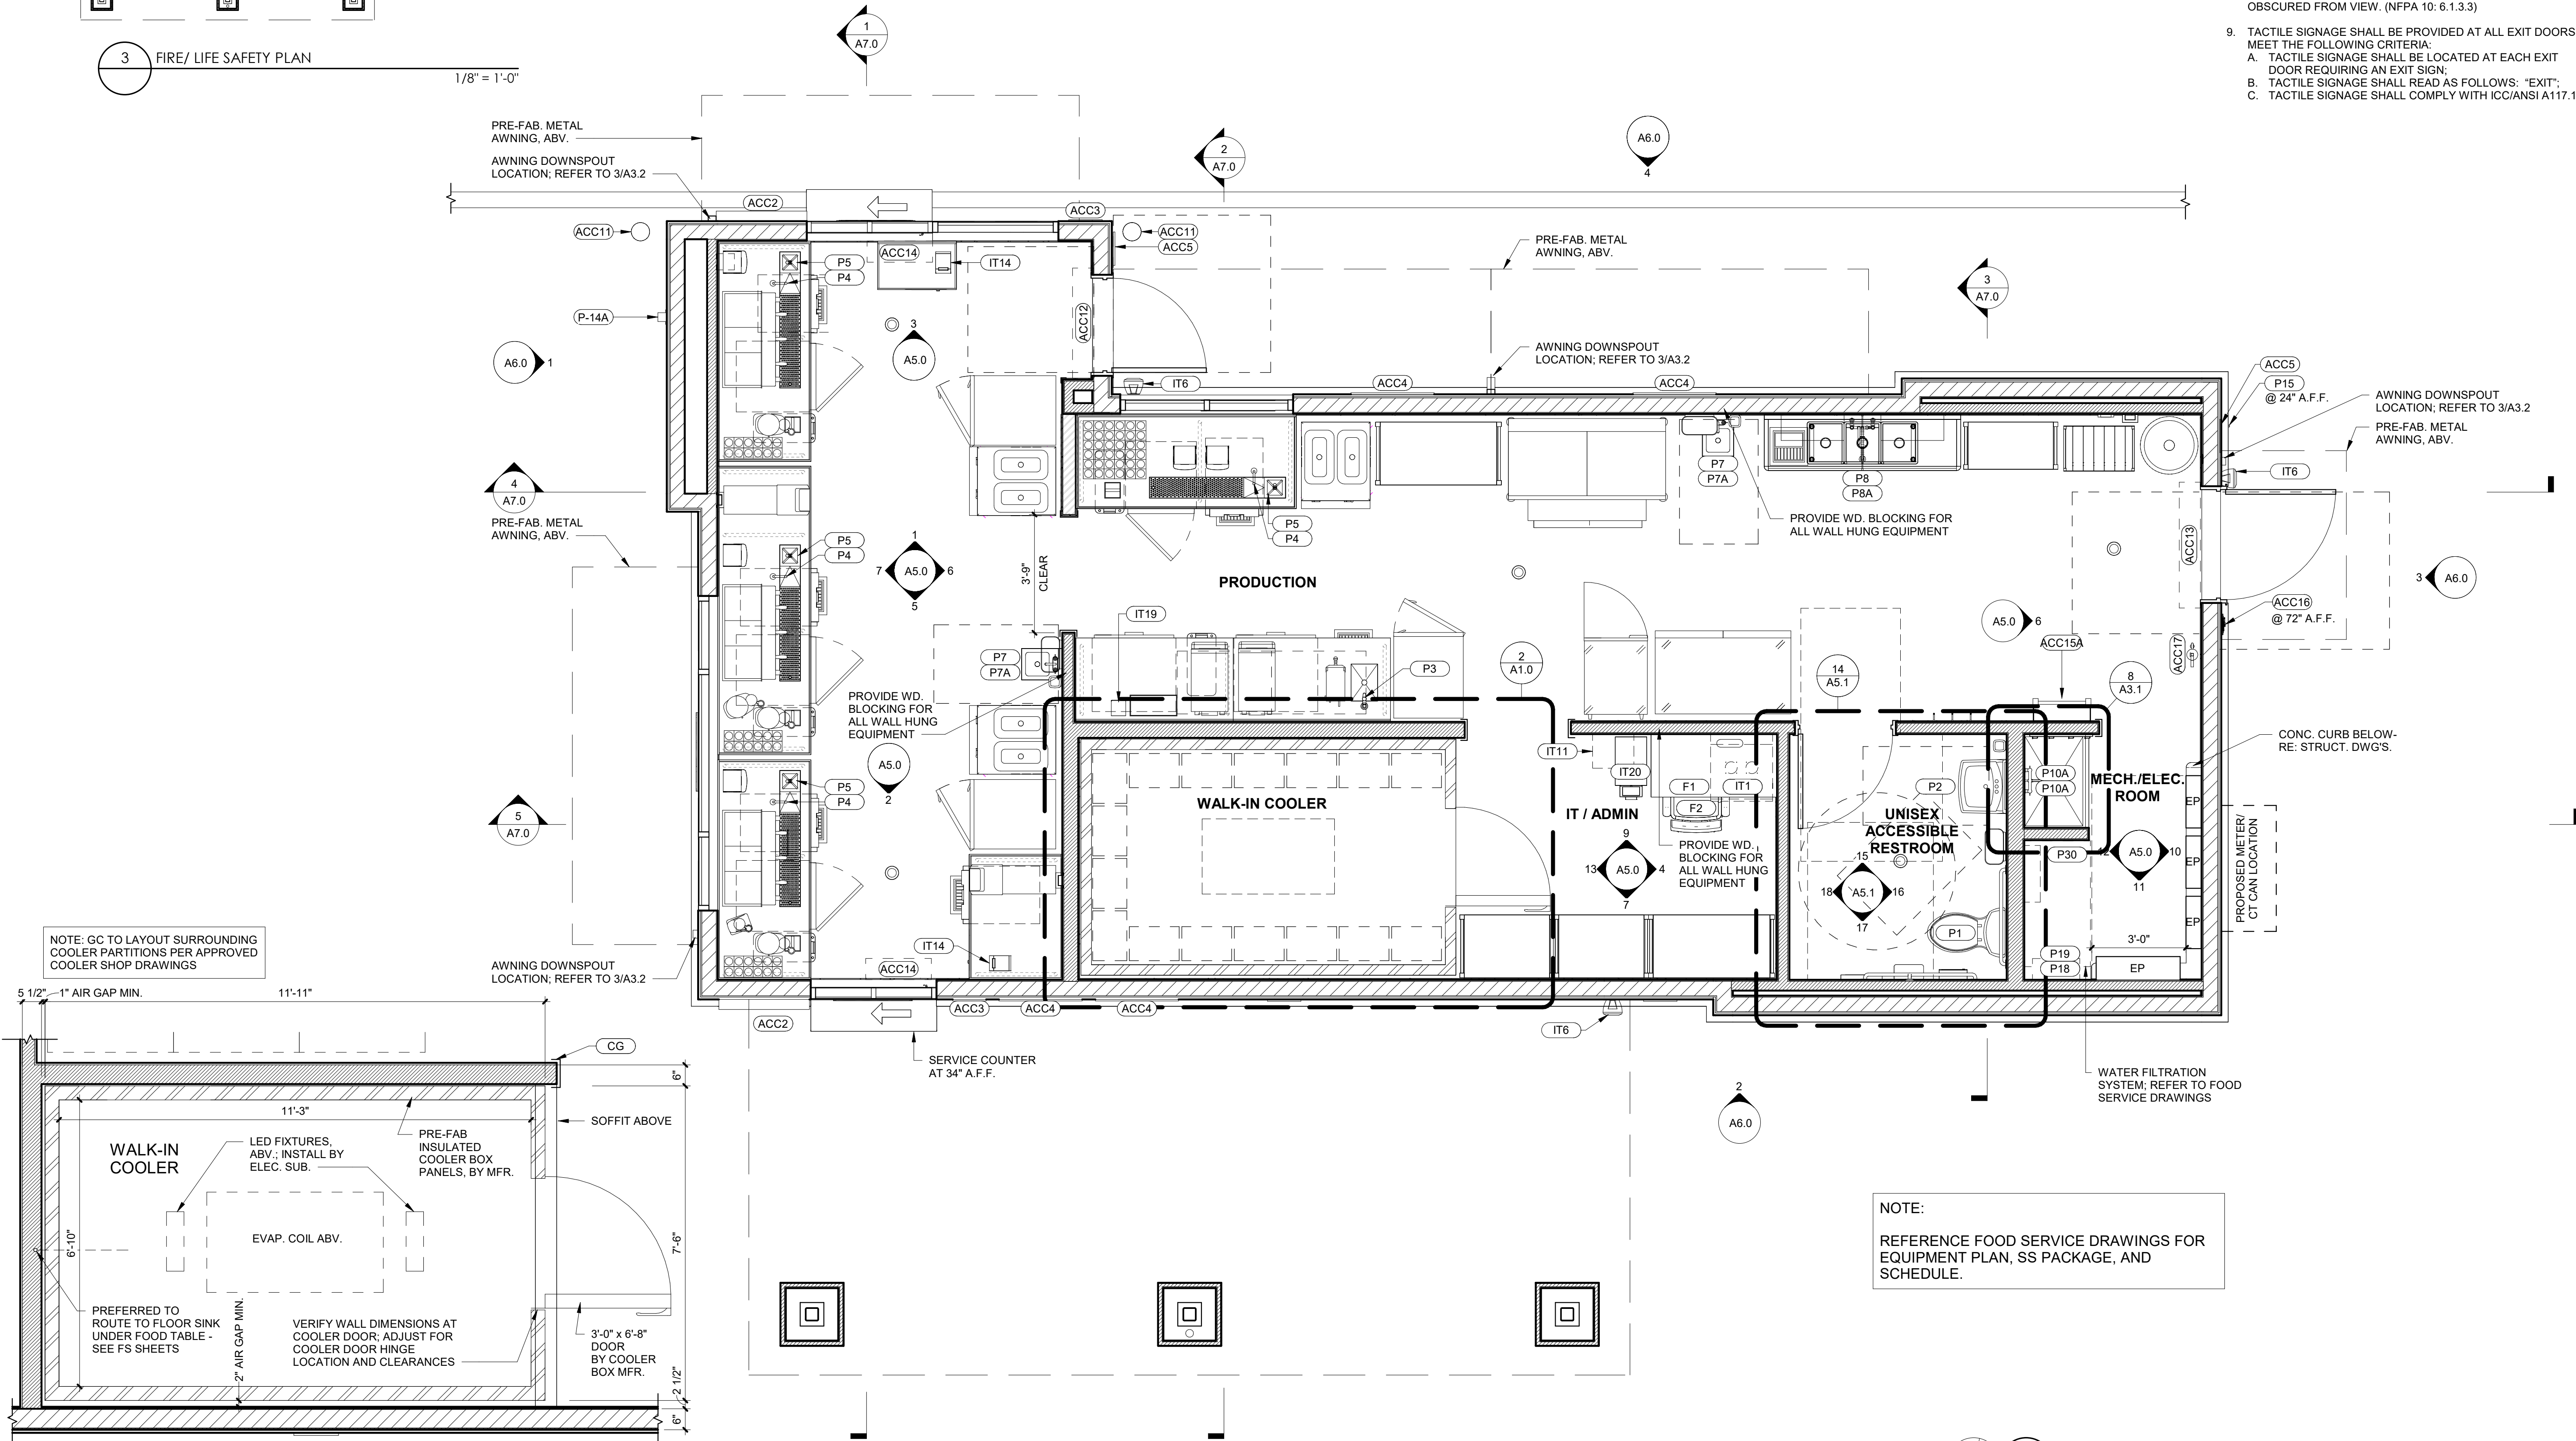

2 ENLARGED COOLER PLAN
1/2" = 1'-0"

COOLER GENERAL NOTES:

1. COOLER INSULATION VALUES FOR WALLS, CEILING, AND DOORS SHALL BE MIN. R-25
2. AUTOMATIC DOOR CLOSERS SHALL BE PROVIDED THAT FULLY CLOSE WALK-IN DOORS THAT HAVE BEEN CLOSED TO WITHIN 1 INCH OF FULL CLOSURE
3. DOORWAYS SHALL HAVE STRIP DOORS, CURTAINS, SPRING-HINGED DOORS OR OTHER METHOD OF MINIMIZING INFILTRATION WHEN DOORS ARE OPEN

GENERAL NOTES:

1. THIS DRAWING IS FOR EQUIPMENT LAYOUT PURPOSES ONLY. PLEASE SEE FLOOR PLAN FOR FULLY DIMENSIONED PARTITION LOCATIONS AND ASSEMBLIES.
2. NOTE: PLEASE SEE SHEET G1.0, COVER SHEET, FOR CODE SUMMARY, BUILDING DATA AND EXIT ACCESS REQUIREMENTS.
3. G.C. TO VERIFY ALL DIMENSIONS IN THE FIELD BEFORE COMMENCING CONSTRUCTION.
4. ALL FIRE EXTINGUISHERS SHALL BE **STATE OF LOUISIANA** CERTIFIED. ALL FIRE EXTINGUISHERS SHALL BE PROPERLY MOUNTED AT THE HEIGHT REQUIREMENTS OF NO HIGHER THAN 4'-6" A.F.F. TO THE TOP OF THE EXTINGUISHER AND AT LEAST 6" FROM FLOOR TO THE BOTTOM OF EXTINGUISHER. (NFPA 10: 6.1.3.8)
5. ALL PROPERLY MOUNTED FIRE EXTINGUISHERS SHALL NOT EXCEED 75' OF TRAVEL DISTANCE APART. (NFPA 1: 6.1)
6. FIRE EXTINGUISHERS SHALL BE CONSPICUOUSLY LOCATED WHERE THEY ARE READILY ACCESSIBLE AND IMMEDIATELY AVAILABLE IN THE EVENT OF FIRE. (NFPA 10: 6.1.3)
7. FIRE EXTINGUISHERS SHALL BE LOCATED ALONG NORMAL PATHS OF TRAVEL, INCLUDING EXITS FROM AREAS. (NFPA 10: 6.1.3)
8. FIRE EXTINGUISHERS SHALL NOT BE OBSTRUCTED OR OBSCURED FROM VIEW. (NFPA 10: 6.1.3.3)
9. TACTILE SIGNAGE SHALL BE PROVIDED AT ALL EXIT DOORS TO MEET THE FOLLOWING CRITERIA:
A. TACTILE SIGNAGE SHALL BE LOCATED AT EACH EXIT DOOR REQUIRING AN EXIT SIGN.
B. TACTILE SIGNAGE SHALL READ AS FOLLOWS: "EXIT".
C. TACTILE SIGNAGE SHALL COMPLY WITH ICC/ANSI A117.1



ARCHITECT
CORALIC, LLC
9700 MACKENZIE ROAD, STE. 222
ST. LOUIS, MO 63125


TJ 314.578.4953
EDIN@CORALICARCHITECTURE.COM

STRUCTURAL ENGINEER
KREHER ENGINEERING, INC.
208 N. MAIN STREET,
COLUMBIA, IL 62236

TJ 618.281.8505
NDREYER@KREHERENGINEERING.COM

MEP ENGINEER
CASE ENGINEERING, INC.
796 MERUS CT.
FENTON, MO 63026

TJ 636.349.1600
MCASE@CASEENGINEERINGINC.COM

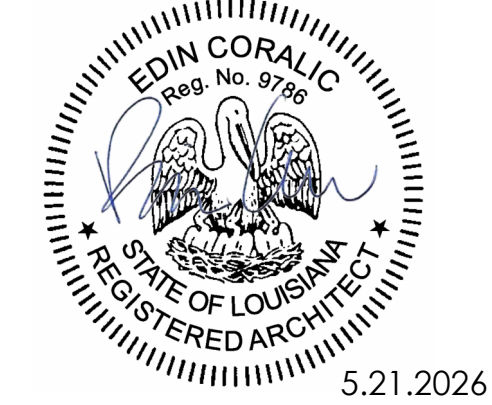

Project No: LA0701
Dutch Bros Coffee - New Freestanding Store
1804 MACARTHUR DRIVE,
ALEXANDRIA, LA 71301
For: Dutch Bros Coffee
1930 W. Rio Salado Parkway
Tempe, AZ 85281

ISSUED FOR PERMIT

5.21.2026

REV:	DATE:	DESCRIPTION:


SHEET NAME:

EQUIPMENT/
ENLARGED COOLER/
FIRE LIFE SAFETY PLAN

SHEET NUMBER:

A1.0

© 2025 DB Franchising USA, LLC

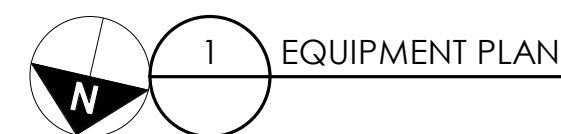

EQUIPMENT PLAN

3/8" = 1'-0"

ANNIHILATOR A1

The name DUTCH BROS. and all associated logos, distinctive designs, content, information, and other materials featured, contained herein, and made available by Dutch Bros., including but not limited to, the "look and feel" of the establishments and products, all text, images, colors, configurations, graphics, designs, illustrations, photographs, and pictures (collectively, the "Materials") are owned by and/or licensed by DB Franchising USA, LLC and are protected by copyright, trademark, trade dress, patent, and/or other intellectual property rights and unfair competition laws under the United States and foreign laws.

BUILDING ACCESSORIES - ANNIHILATOR-A1								
EQUIPMENT INFORMATION								
ID TAG	EQUIPMENT DESCRIPTION	PROVIDED BY	INSTALLED BY	QUANTITY	MANUFACTURER	MODEL NUMBER	COLOR/ OPTIONS	REMARKS
HOUSE								
ACC1	"OPEN" SIGN	DBC/SIGNAGE VENDOR	DBC/SIGNAGE VENDOR	3	SIGNAGE VENDOR	TBD	PER MFR.	CENTER ON WINDOWS, ON SWITCHED OUTLET, REFERENCE ELEVATIONS
ACC2	ILLUMINATED MENU BOARDS	DBC/SIGNAGE VENDOR	DBC/SIGNAGE VENDOR	2	SIGNAGE VENDOR	TBD	PER MFR.	COORD. W/ ARCHITECTURAL ELEVATIONS
ACC3	11"x17" SNAP FRAME	DBC/SIGNAGE VENDOR	DBC/SIGNAGE VENDOR	2	SIGNAGE VENDOR	TBD	PER MFR.	COORD. W/ ARCHITECTURAL ELEVATIONS
ACC4	30"x40" SNAP FRAME	DBC/SIGNAGE VENDOR	DBC/SIGNAGE VENDOR	4	CUSTOM	TBD	PER MFR.	COORD. W/ ARCHITECTURAL ELEVATIONS
ACC5	11"x17" SNAP FRAME	DB	DB	4	CUSTOM	TBD	PER MFR.	
ACC11	BOLLARD COVER	DBC		2	IDEAL SHIELD	7" COVER	BLUE W/ LOGO	
ACC12	42" WALL MOUNTED AIR CURTAIN	GC	GC	1	QUIKSERV	SANITATION CERTIFIED LOW PROFILE 7-42"	WHITE	QUIKSERV AIR CURTAIN, 42", MOUNT 2" ABOVE DOOR FRAME
ACC13	48" WALL MOUNTED AIR CURTAIN	GC	GC	1	QUIKSERV	SANITATION CERTIFIED LOW PROFILE 7-48"	WHITE	QUIKSERV AIR CURTAIN, 48", MOUNT 2" ABOVE DOOR FRAME
ACC14	25" AIR CURTAIN - SERVICE WINDOW	GC	GC	2	QUIKSERV	QSK1025AA-BK	BLACK	QUIKSERV AIR CURTAIN, 25" MOUNT DIRECTLY ABOVE SERVICE WINDOW PER MFR. RECOMMENDATIONS
ACC15A	FIXED ROOF ACCESS LADDER	GC	GC	1	TRI-ARC	WLFS0116	GRAY	STEEL, 15' LADDER W/ 16 STEPS, TOP EXIT
ACC15B	ROOF HATCH	GC	GC	1	BILCO	SINGLE LEAF SCUTTLE TYPE S-20	RED OXIDE PRIME FINISH, PAINT PT-1	
ACC15C	LADDER SAFETY POST	GC	GC	1	BILCO	LADDERUP LU-1	YELLOW	YELLOW POWDER COATED STEEL LADDER SAFETY POST
ACC16	KEY LOCK BOX	GC	GC	1	KNOX	KNOXBOX 3200	BLACK	
ACC17	FIRE EXTINGUISHER	GC	GC	1	ULINE	S-9873	RED	

IT SCHEDULE								
ID TAG	DESCRIPTION	PROVIDED BY	INSTALLED BY	QUANTITY	MANUFACTURER	MODEL	REMARKS	
IT1	LOW VOLTAGE RACK		GC	1	TRIPP LITE	SRW-18US-DP	PROVIDE BLOCKING & MOUNT TOP OF UNIT 3" BELOW SUSP. CEILING; REQUIRES TECH RACK FAN KIT	
	TECH RACK FAN KIT	DBC	GC	1	-	-	-	
	BACK-UP BATTERY	DBC	GC	1	APC	SC 450VA	PLACED INSIDE THE LOW VOLTAGE RACK	
	RACK SHELF	DBC	GC	2	PANDUIT	-	-	
	SURGE PROTECTOR	DBC	GC	1	WATTBOX	LIGHTED SURGE PROTECTOR	-	
IT2	AUDIO EQUIPMENT	DBC	GC	-	TBD	TBD	LOCATED IN LOW VOLTAGE RACK	
IT3	IT EQUIPMENT	DBC	GC	-	TBD	TBD	LOCATED IN LOW VOLTAGE RACK	
IT4	AMP	DBC	GC	2	JBL	NVMA1240-0-US	(1) AMP FOR INTERIOR SPEAKERS (1) AMP FOR EXTERIOR SPEAKERS	
IT5	SPEAKER - CEILING MOUNTED	DBC	GC	2	JBL	CONTROL 24CT-IN-CEILING	SEE PLAN FOR LOCATION	
IT6	SPEAKER - EXTERIOR MOUNTED	DBC	GC	3	JBL	CONTROL 25-1-WH	SEE PLAN FOR LOCATION	
IT7	IPAD 10.2"	DBC	GC	6	APPLE	IPAD 10.2"	IPAD 10.2" REQUIRE SCREEN PROTECTOR (2/PK)	
IT8A	IPAD MINI	DBC	GC	11	APPLE	IPAD MINI	-	
IT9	IPAD ADJUSTABLE ARM WALL MOUNT	DBC	GC	5	THE JOY FACTORY	-	-	
IT9A	IPAD CLAMP MOUNT	DBC	GC	2	THE JOY FACTORY	-	-	
IT9B	IPAD MAGNETIC MOUNT	DBC	GC	3	THE JOY FACTORY	-	-	
IT10	IPAD TABLET MOUNT	DBC	GC	5	MAGCONNECT	UNIVERSAL TABLET MODULE	-	
IT11	IPAD CHARGING CABINET	DBC	GC	1	LUXOR 8	TABLET WALL/DESK CHARGING STATION	8 OUTLET HORIZONTAL POWER CHARGING STRIP W/ PADDED INTERIOR AND RUBBER-COATED DIVIDERS AND 10' CORD	
IT12	3.5MM TO 2-MALE RCA ADAPTER	DBC	GC	1	-	-	-	
IT13	POS SYSTEM	DBC	GC	1	-	-	-	
IT14	RECEIPT PRINTER	DBC	GC	2	EPSON	OMNILINK TM-T88VII	-	
IT15	5- CAT-5E CABLE	DBC	GC	1	-	-	-	
IT16	PAYPAL READER BUNDLE	DBC	GC	6	-	-	PAYPAL READER BUNDLE - CHIP & TAP W/ CHARGING STATION	
IT17	SECURITY MONITOR	DBC	GC	1	TBD	TBD	VERIFY LOCATION W/ DBC	
IT18	OUTDOOR AP	DBC	GC	1	CISCO - MERAKI	MR74	VERIFY FINAL LOCATION W/ LOW VOLTAGE VENDOR	
IT19	LABEL PRINTER	DBC	GC	1	EPSON	OMNILINK TM-L100	LOCATED AT FOOD WARMING TABLE	
IT20	SAFE	MFR. TECH.	MFR TECH.	1	LOOMIS	TITAN DUAL-STD BLACK	PROVIDE DEDICATED RECEPACLE; INSTALLED BY LOOMIS TECHNICIAN	

LIGHTING SCHEDULE				
CONTRACTOR TO PROVIDE UNLESS NOTED OTHERWISE				
SUBSTITUTIONS ARE NOT ALLOWED AND VALUE ENGINEERING WILL NOT BE CONSIDERED. NO EXPCEPTIONS.				
ID TAG	FIXTURE DESCRIPTION	MANUFACTURER	MODEL	REMARKS
L2	GRID LED, 2'x4', ACRYLIC LENS	ARCHIPELAGO	LBLP24 MXP2	2X4 FLAT PANEL, LAY-IN GRID CEILING, FROSTED LENS; LED 30W, 3900LM, 3500K
L2E	GRID LED, 2'x4', ACRYLIC LENS	ARCHIPELAGO	LBLP24 MXP2 EM08	2X4 FLAT PANEL, LAY-IN GRID CEILING, FROSTED LENS, LED 30W, 3900LM, 3500K, W/ 8W EMERGENCY BATTERY PACK
L4	EXTERIOR SCONCE W/ BLUE FILTER	LIGMAN	UMT-31416-DBNA / 14/14W-N-W40-02-120/227V	14/14W; NARROW BEAM; 40W, 4000K, DARK GRAY, 120/227V; TO BE USED AT CANOPY COLUMNS ONLY W/ BLUE FILTER; VERIFY BEAM DIRECTIONS W/ OWNER, BOT. OF FIXTURE AT 8'-0" A.F.F.
L5	LED STRIP LIGHTING @ PARAPET 2	LEKTRON	LASER, 120-227 VAC, 24 VDC (PHILLIPS ADVANCE), 1.50W/ FT., DIMMABLE	BLUE LED STRIP LIGHTING AT PERIMETER OF PARAPET 2, REMOTE DRIVER INDOOR/ OUTDOOR RATED; LOCATE INSIDE OF BUILDING IN ACCESSIBLE LOCATION; USE TRANSFORMER SIZES PER RUNS/ WIRING GROUPS. MAX. RUN LENGTH IS 48'-0"
L6	WALL PACK	RAB	SLIM22-S-30/E, MV, NON-DIM	EXTERIOR DECORATIVE WALLPACK, APPROX. 15.5-32.8W, 2199-4833LM, 5000K, W/ EMERGENCY BACK UP; NO MOTION SENSOR OR PHOTOCELL
L7	LED STRIP LIGHTING @ AWNINGS	SELF ELECTRONICS	CROWN-7040K110-S-SSP, MV, 0-10V, DIM	6' WET LOCATION LINKABLE CUSTOM BATTEN STRIP, LED, HIGH-OUTPUT, 60W, 6300LM, 4000K, INTEGRAL DRIVER, AWNING MOUNTED AT 10'-6"; 1 ROW PER AWNING, ANGLED TO WASH WALL
L9	FRAMED CANOPY SOFFIT LIGHTS	DMF	DRD5S-4-R-07-9-30 / DRDH-N-JO-KH, MV, 120V, NON DIM	USED ONLY FOR APPLICATIONS REQUIRING SURFACE CEILING MOUNTED LIGHTS; RECESSED OCTAGONAL 2" HT. J-BOX HOUSING W/ SURFACE DOWNLIGHT; 4.75" DIAMETER, 9/16" DEEP, WHITE, LED, 750LM, 3000K, WET LISTED SITE POLE HEAD, LED, 205W, 23000LM, (OR 156W, 19000LM, IF LOWER WATTAGE REQUIRED), 4000K, DARK BRONZE, TYPE IV DISTRIBUTION, W/ 17'-6" POLE (VERIFY FOR EACH SITE), 4" SQUARE STRAIGHT 11GA STEEL, INCLUDES ANCHOR BOLTS, DARK BRONZE, BOLTS 12" BOLT CIRCLE 3/4" DIA. x 30" LONG. VERIFY PER LOCAL REQUIREMENTS PRIOR TO ORDERING - POLE LENGTH, WATTAGE/ LUMENS, KELVIN LIGHT TEMPERATURE, TYPE DISTRIBUTION, MOUNTING CONFIGURATION - SINGLE/DOUBLE AND COLOR; HEAD BRACKET HOLES ARE FACTORY PRE-DRILLED GIVEN AVAILABLE LEAD TIME, CUT AND DRILL IN FIELD IF REQUIRE SHORTENED, VERIFY HEIGHT AND COLOR WHEN ORDERING
PL	POLE LIGHTING - SINGLE	NLS		NV-1-T4-64LSP-1-40K-UNV-ASA-BRZ OR T4-48, IF 156W NEEDED. ADD "FSIR-100" FOR CALIFORNIA (<24") OR WHERE MOTION SENSORS REQUIRED PER CODE OR SIMPLY DESIRED. ADD HSS IF HOUSE SIDE SHIELD IS REQUIRED. POLE IS NLS SSP17-45-11G-9BC-SGL-BRZ-3430-CL, MV
PL2	POLE LIGHTING - DOUBLE	NLS		SAME AS TYPE P - 2 HEADS @ 180 DEGREES
PL4	POLE LIGHTING - QUAD	NLS		SAME AS TYPE P - 4 HEADS @ 90 DEGREES
X	EXIT SIGN	BEST		EZXT EU2RWEM, MV, NON DIM, 4W
CONT	SUPPLIED BY EC	-	-	CONTROLS, PANEL BASED CIRCUITING WITH TIMER CONTROL, PC CONTROL AND SENSORS WHERE REQUIRED BY CODE
PURCHASING: THE ABOVE LIGHTING MATERIAL IS TO BE PURCHASED AS A "LIGHTING PACKAGE" FROM DUTCH BROS COFFEE'S NATIONAL ACCOUNTS FROM THE REQUIRED LIGHTING VENDORS LISTED BELOW; MADE AVAILABLE TO FRANCHISEES AND THEIR CONTRACTORS AT ESTABLISHED DISCOUNTED PRICING, USED FROM NEGOTIATED STOCK INVENTORIED PRODUCT COMMITTED TO, AND OBLIGATED FOR USE BY DUTCH BROS COFFEE. FOR QUOTATION, ORDER PLACEMENT AND DELIVERY. IF ANYTHING OTHER THAT ABOVE IS INSTALLED WITHOUT EXPRESSED WRITTEN CONSENT BY DUTCH BROS COFFEE CORPORATE OFFICE AND THE FRANCHISEE, CONTRACTOR WILL BE REQUIRED TO REMOVE IT AND REPLACE IT WITH THE ABOVE.				
REQUIRED LIGHTING VENDORS, REFERENCE VENDOR REGION - SEE G0.1				

PLUMBING SCHEDULE						
CONTRACTOR TO PROVIDE UNLESS NOTED OTHERWISE						
ID TAG	DESCRIPTION	PROVIDED BY	INSTALLED BY	MANUFACTURER	MODEL	REMARKS
ACCESSIBLE RESTROOM						
P1	LAVATORY TOILET	GC	GC	KOHLER	K-3619 CIMARRON	COLOR: WHITE; NOTE: FLUSH CONTROLS LOCATED ON OPEN SIDE OF W.C.
P2	LAVATORY SINK	GC	GC	KOHLER	K-2032	
P2A	LAVATORY SINK FAUCET	GC	GC	DELTA	501LF-HGMHDF	
HOUSE						
P3	GLASS FILLER	KES	GC	FISHER	59099	
P4	HOT AND COLD WATER DISPENSER	GC	GC	INSINKERATOR	HC1300	
P5	RAPID RINSE STATION	GC	GC	BLENDETEC	JRE-610	
P7	HAND SINK	KES	GC	BK RESOURCES	BKHS-D-SS-SS	PROVIDED W/ SPLASH GUARDS BOTH SIDES; PROVIDE NON-FILTERED WATER CONNECTIONS.
P7A	HAND SINK FAUCET	KES	GC	FISHER	53872	PROVIDED W/ SPLASH GUARDS BOTH SIDES; PROVIDE NON-FILTERED WATER CONNECTIONS.
P8	3-COMP SINK	KES	KES	BK RESOURCES	BKS-3-15-14-15TS	1.5" DRAIN; TIE ALL DRAINS TOGETHER AND ROUTE TO NEAREST FLOOR SINK. LEVEL FRONT TO BACK AND SIDE TO SIDE AND CAULK WALL WITH CLEAR SILICONE. PROVIDE STRAINERS AND NON-FILTERED WATER CONNECTIONS.
P8A	3-COMP SINK FAUCET	KES	KES	FISHER	34371	
P10	MOP SINK	GC	GC	ZURN	Z1996-36	COLOR: WHITE; 10" WALLS, 3" DRAIN. MOP HANGER ABOVE
P10A	MOP SINK FAUCET	GC	GC	FIAT	830-AA	
P11	PVC FLOOR SINK	GC	GC	ZURN (BASIS OF DESIGN)	FS12-Y	14"x14"x6" DEEP SQUARE, PVC BODY; SANI-LOC DOME STRAINER, ASME A112.6.7
P12	FLOOR DRAIN	GC	GC	ZURN (BASIS OF DESIGN)	EZ-5	5" ROUND FLOOR DRAIN.
P13	GREASE INTERCEPTOR	GC	GC	SCHIER (BASIS OF DESIGN)	SEE PLUMBING PLANS	SEE PLUMBING PLANS
P14	ROOF DRAIN	GC	GC	ZURN (BASIS OF DESIGN)	Z165	COMBINATION MAIN AND OVERFLOW ROOF DRAIN
P15	WALL HYDRANT - BLDG	GC	GC	WATTS	HY-420	6" NON-FREEZE WALL HYDRANT, MOUNT AT 24" A.F.F AT REAR ELEVATION.
P16	YARD HYDRANT - TRASH ENCLOSURE	GC	GC	WATTS	HY-800	FROST PROOF, 2FT, BURY DEPTH MIN.
P17	RECIRCULATION PUMP	GC	GC	TACO	0010	
P18	BOOSTER PUMP	GC	GC	GRUNDFOS	CMBE 10-54 I-U-C-E-D-G	
P19	BACKFLOW PREVENTER	GC	GC	WATTS	LF009	MOUNT ABOVE FLOOR SINK; ROUTE RELIEF PIPES TO DISCHARGE INDIRECTLY TO FLOOR SINK
P20	TRENCH DRAIN	GC	GC	ZURN	Z883-E1-RFSC-DB	
P30	WATER FILTRATION SYSTEM	DBC	GC	PROJECT LOCATION SPECIFIC	PROJECT LOCATION SPECIFIC	FOR PROJECT SPECIFIC WATER FILTRATION SYSTEM, REFERENCE WATER FILATRATION VENDOR CONTACT.

RESTROOM ACCESSORIES						
PA3	SOAP DISPENSER	DBC	GC	TORK	466100	
PA5	PAPER TOWEL DISPENSER	DBC	GC	TORK	461002	
PA51	ADA GRAB BAR	GC	GC	BOBRICK	B-5806	
PA52	MIRROR	GC	GC	BOBRICK	B-165-1836	MOUNTED W/ BOTTOM OF REFLECTIVE SURFACE AT 40" MAX. A.F.F.
PA62	TOILET PAPER DISPENSER	DBC	GC	TORK	59TR	
PA64	SANITARY NAPKIN DISPOSAL	GC	GC	BOBRICK	B-254	
PA65	TOILET SEAT COVER DISPENSER	DBC	GC	BOBRICK	B-221	
PA66	COAT HOOK	GC	GC	BOBRICK	B-212	

FURNITURE SCHEDULE							
ID TAG	DESCRIPTION	PROVIDED BY	INSTALLED BY	QTY.	MFR.	MODEL	REMARKS
OFFICE/ADMIN							
F1	SOLID SURFACE MANAGERS' DESK	GC	GC	1	TBD	TBD	PROVIDE 3 1/2" GROMMET
F2	MANAGER'S CHAIR	DBC	GC	1	TBD	TBD	
F3	FILE CABINET	DBC	GC	1	ULINE	H-7005GR	MOBILE PEDESTAL FILE - 3 DRAWER, LIGHT GRAY
SITE FURNITURE							
F10	WASTE CABINET	FURNITURE VENDOR	GC	TBD	FURNITURE VENDOR	SINGLE 1 STREAM	
						SINGLE 1 STREAM w/ CANOPY	
						FLIP TOP SINGLE 1 STREAM	
						FLIP TOP SINGLE 1 STREAM w/ CANOPY	
						FLIP TOP SINGLE 2 STREAM	
						FLIP TOP SINGLE 1 STREAM w/ CANOPY	
F11	48" SQUARE OUTDOOR TABLE	FURNITURE VENDOR	GC	TBD	FURNITURE VENDOR	SPACE SAVER 1 STREAM	
						SPACE SAVER 1 STREAM w/ CANOPY	
						FLIP TOP SPACE SAVER 1 STREAM	
						FLIP TOP SPACE SAVER 1 STREAM w/ CANOPY	
F12	RECTANGLE OUTDOOR TABLE	FURNITURE VENDOR	GC	TBD	FURNITURE VENDOR	-	
F13	OUTDOOR BENCHES	FURNITURE VENDOR	GC	TBD	FURNITURE VENDOR	-	
F14	OUTDOOR PARK BENCH	FURNITURE VENDOR	GC	TBD	FURNITURE VENDOR	-	
F15	BIKE POST	FURNITURE VENDOR	GC	TBD	FURNITURE VENDOR	STANDARD	
F15A	TOOLED BIKE POST	FURNITURE VENDOR	GC	TBD	FURNITURE VENDOR	TOOLED	



ARCHITECT
CORALIC, LLC
9700 MACKENZIE ROAD, STE. 222
ST. LOUIS, MO 63125
TJ 314.578.4953
EDIN@CORALICARCHITECTURE.COM

STRUCTURAL ENGINEER
KREHER ENGINEERING, INC.
208 N. MAIN STREET,
COLUMBIA, IL 62236
TJ 618.281.8505
NDREYER@KREHERENGINEERING.COM

MEP ENGINEER
CASE ENGINEERING, INC.
796 MERUS CT.
FENTON, MO 63026
TJ 636.349.1600
MCASE@CASEENGINEERINGINC.COM



5.21.2026

Project No: LA0701
Dutch Bros Coffee - New Freestanding Store
1804 MACARTHUR DRIVE,
ALEXANDRIA, LA 71301
For: Dutch Bros Coffee
1930 W. Rio Salado Parkway
Tempe, AZ 85281

ANNIHILATOR A1

ISSUED FOR PERMIT

5.21.2026

REV:	DATE:	DESCRIPTION:


SHEET NAME:

BUILDING/IT/
LIGHTING/ PLUMBING/
TABLE SCHEDULES

SHEET NUMBER:

A1.1

© 2025 DB Franchising USA, LLC

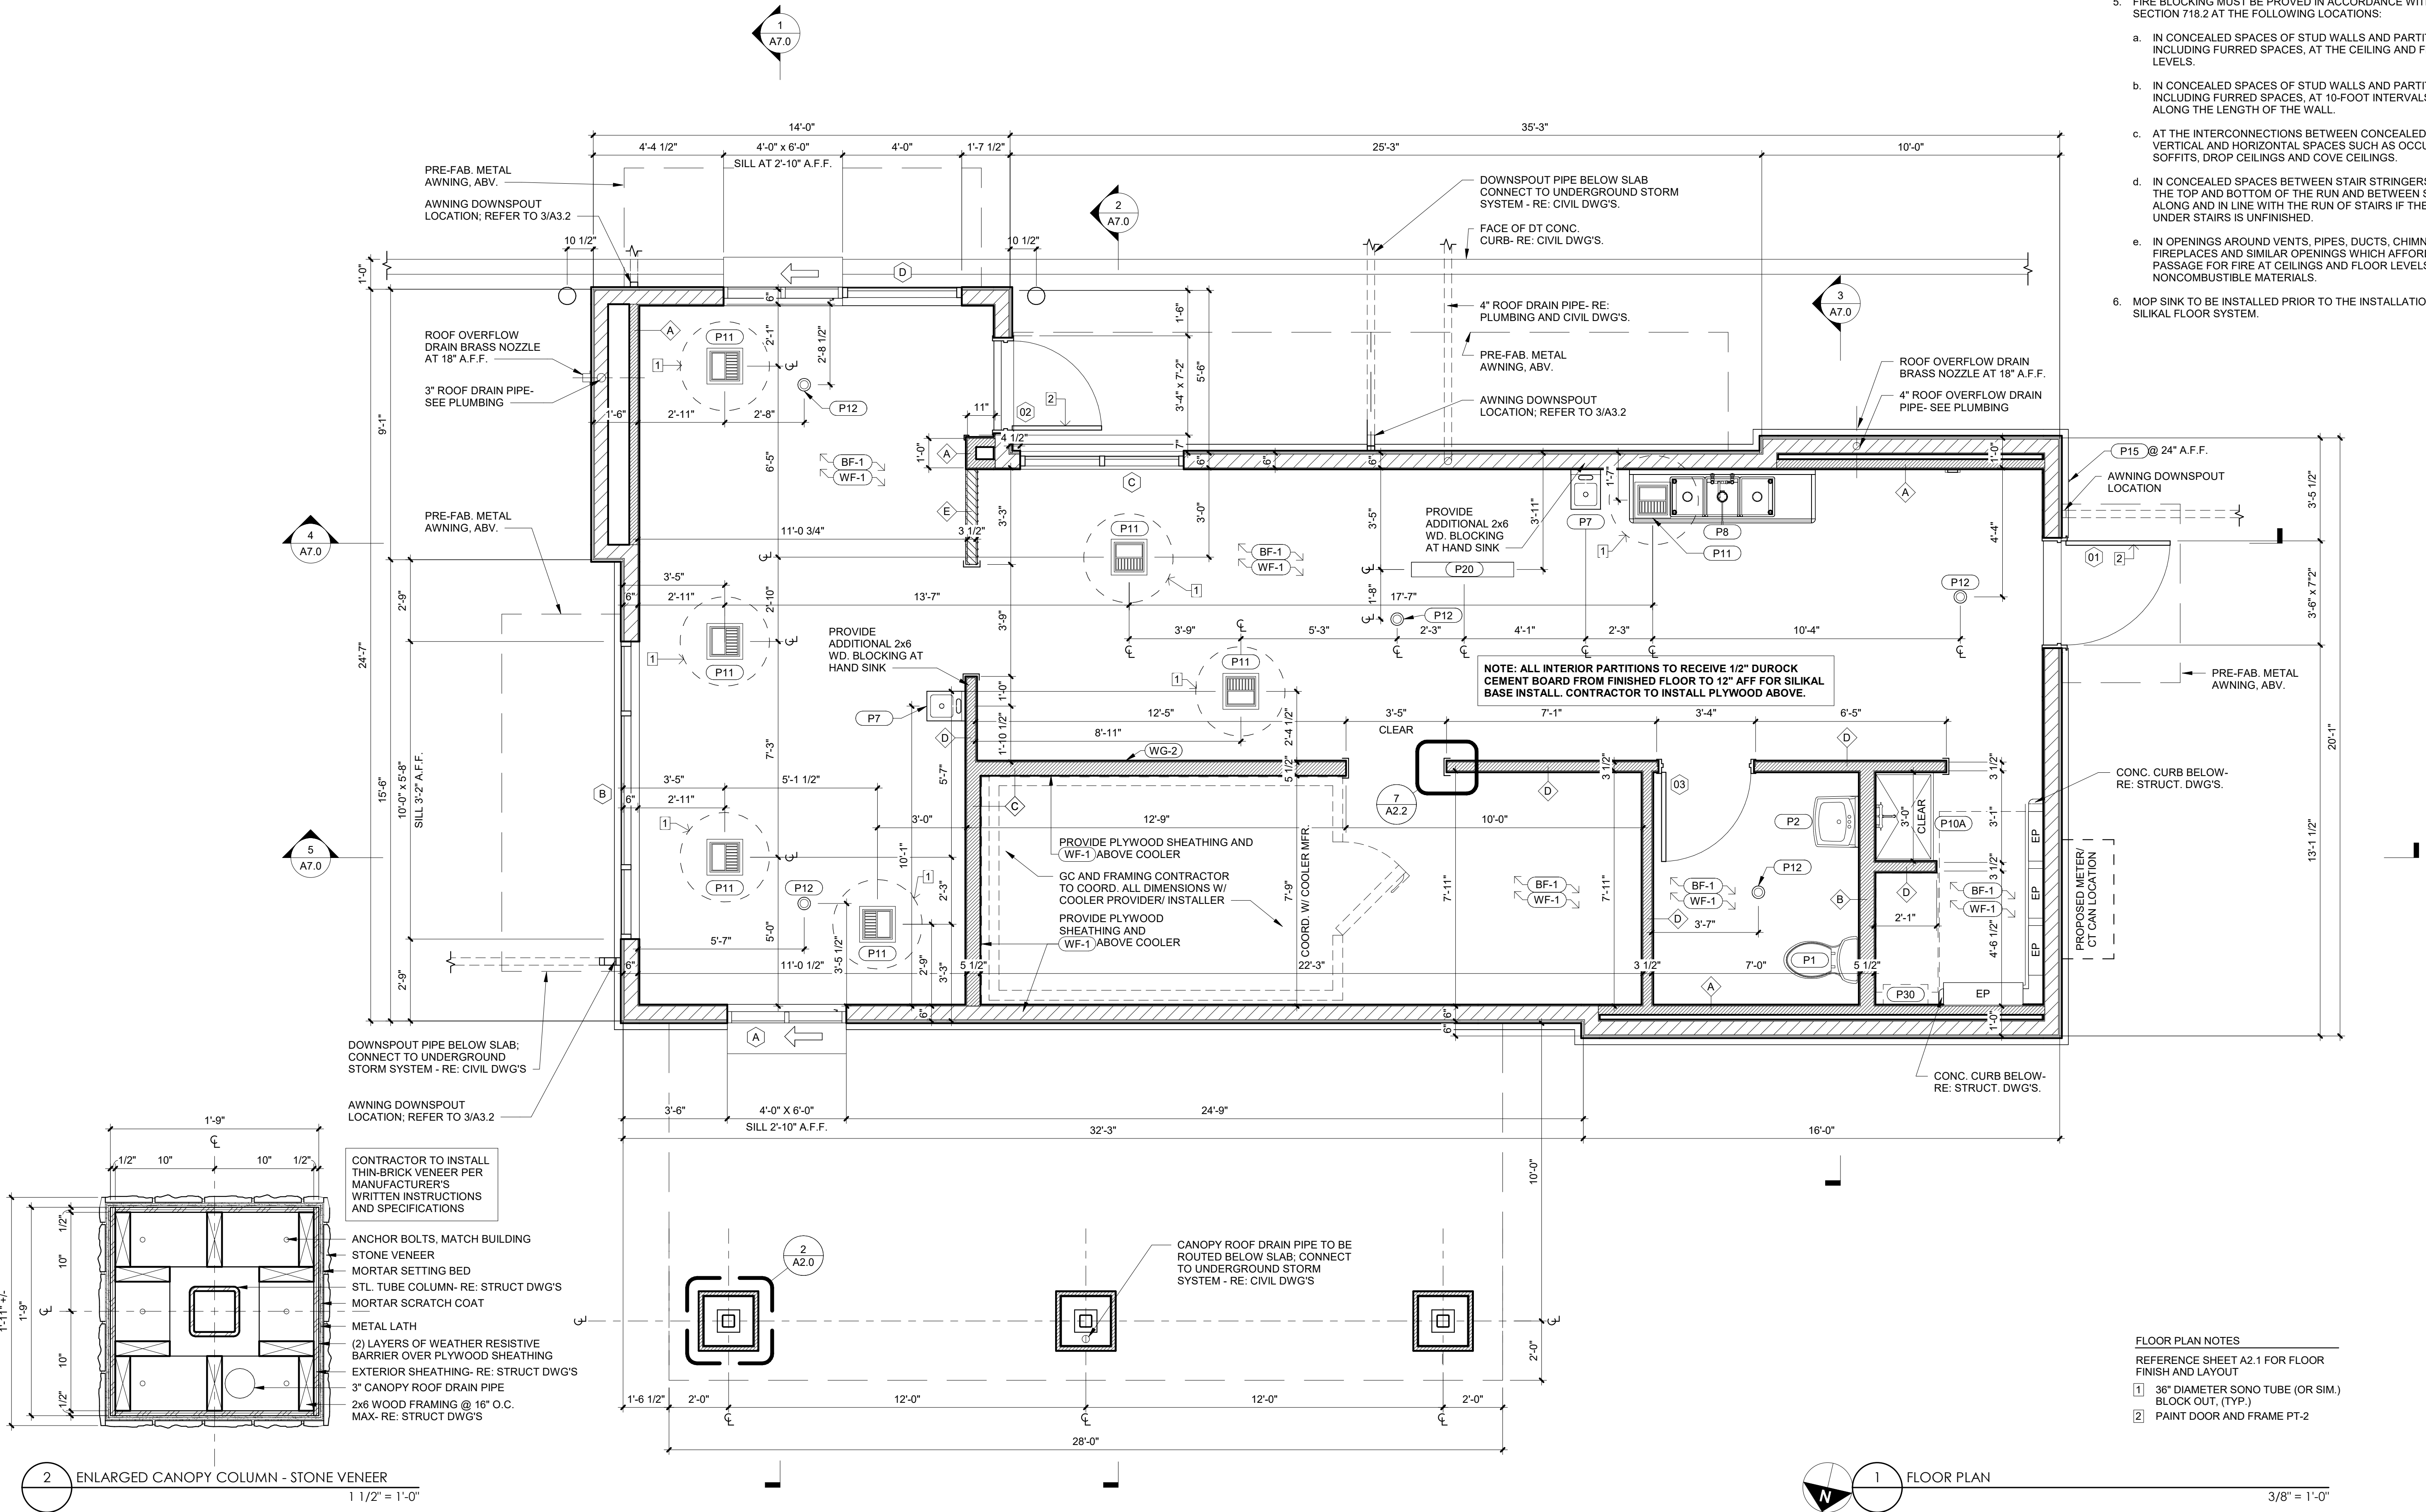

ARCHITECT
CORALIC, LLC
9700 MACKENZIE ROAD, STE. 222
ST. LOUIS, MO 63125
TJ 314.578.4953
EDIN@CORALICARCHITECTURE.COM

STRUCTURAL ENGINEER
KREHER ENGINEERING, INC.
208 N. MAIN STREET,
COLUMBIA, IL 62236
TJ 618.281.8505
NDREYER@KREHERENGINEERING.COM

MEP ENGINEER
CASE ENGINEERING, INC.
796 MERUS CT.
FENTON, MO 63026
TJ 636.349.1600
MCASE@CASEENGINEERINGINC.COM



Project No: LA0701
Dutch Bros Coffee - New Freestanding Store
1804 MACARTHUR DRIVE,
ALEXANDRIA, LA 71301
For: Dutch Bros Coffee
1930 W. Rio Salado Parkway
Tempe, AZ 85281

ANNIHILATOR A1

ISSUED FOR PERMIT

5.21.2026

REV:	DATE:	DESCRIPTION:

SHEET NAME:

FLOOR PLAN

SHEET NUMBER:

A2.0

"The name DUTCH-BROS. and all associated logos, distinctive designs, content, information, and other materials featured, displayed, contained herein, and made available by Dutch Bros., including but not limited to, the "look and feel" of the establishments and products, all text, images, colors, configurations, graphics, designs, illustrations, photographs, and pictures (collectively, the "Materials") are owned by and/or licensed by DB Franchising USA, LLC and are protected by copyright, trademark, trade dress, patent, and/or other intellectual property rights and under competition laws under the United States and foreign laws."

PARTITION KEY:


- NEW FULL HEIGHT INTERIOR PARTITION
- NEW EXTERIOR WALL CONSTRUCTION
- NEW PRE-FAB WALK-IN COOLER
- NEW LOW WALL

FLOOR FINISH KEY:

- FLOOR FINISH TEXTURED

FINISH SCHEDULE

TAG	FIN. DESCRIPTION	MFR.	MODEL	REMARKS
FLOOR				
FF-1	FLOOR FINISH - TEXTURED	SILIKAL	61 CQ DECORATIVE QUARTZ FLOORING - BLEND NO. 4	PRODUCTION AREA TEXTURED FINISH
FINISH SUBSTRATE	WATERPROOFING	SILIKAL	MOISTURE VAPOR TREATMENT - RE42	AS NEEDED
	PRIMING	SILIKAL	SATURATING PRIMER / SILIKAL COAT RU380	-
	TOPPING	SILIKAL	R61 QUARTZ - SILIKAL R61 RESIN AND FILLER	1/4" THICKNESS
	TOP COAT	SILIKAL	R71 COLORLESS SILIKAL TOPCOAT RESIN	-
BASE				
BF-1	WALL BASE - COVE	SILIKAL	61 CQ DECORATIVE QUARTZ - BLEND NO.4	SANITARY COVE & OUTSIDE CORNERS, INSIDE CORNERS TO BE FIELD MITERED
WALL				
WF-1	(FRP) FIBER REINFORCED PANEL	MARLITE	S 100G - 4'x10' PANELS	COLOR: WHITE; PROVIDE ALL NECESSARY TRIM PIECES
GUARDS				
CG	CORNER GUARD	STAINLESS STEEL VENDOR	CUSTOM - STAINLESS STEEL	U-SHAPED - AT WALL ENDS; SEE STAINLESS SHOPS
WG-1	WALL GUARD	STAINLESS STEEL VENDOR	CUSTOM - STAINLESS STEEL	48" WIDE, WRAP FROM SERVICE WINDOW SILL TO TOP OF COVE BASE, BRUSHED FINISH
WG-2	WALL GUARD	STAINLESS STEEL VENDOR	CUSTOM - STAINLESS STEEL	30"x60"; BRUSHED FINISH
WC-1	WALL CAP	SOLID SURFACE	GC	SOLID SURFACE CAP AT LOW WALL, 45" LONG, BRUSHED FINISH
WC-2	SOLID SURFACE WALL CAP	TBD	TBD	-
CEILING				
CLG-1	VINYL FACED ACT	USG	3270 - 2X4 SHEETROCK BRAND LAY-IN CEILING PANEL	FLAT WHITE, SMOOTH
PAINT				
PT-1	BLDG DB LIGHT GRAY	SHERWIN-WILLIAMS	PRODUCT: A89W00153	COLOR: 8656-12046-BLDG DB LIGHT GRAY
PT-2	BLDG DB DARK GRAY	SHERWIN-WILLIAMS	PRODUCT: A89T00154	COLOR: 8656-11295-BLDG DB DARK GRAY
PT-3	BLDG DB BLUE	SHERWIN-WILLIAMS	PRODUCT: A89T00154	COLOR: 8656-12045-BLDG DB BLUE

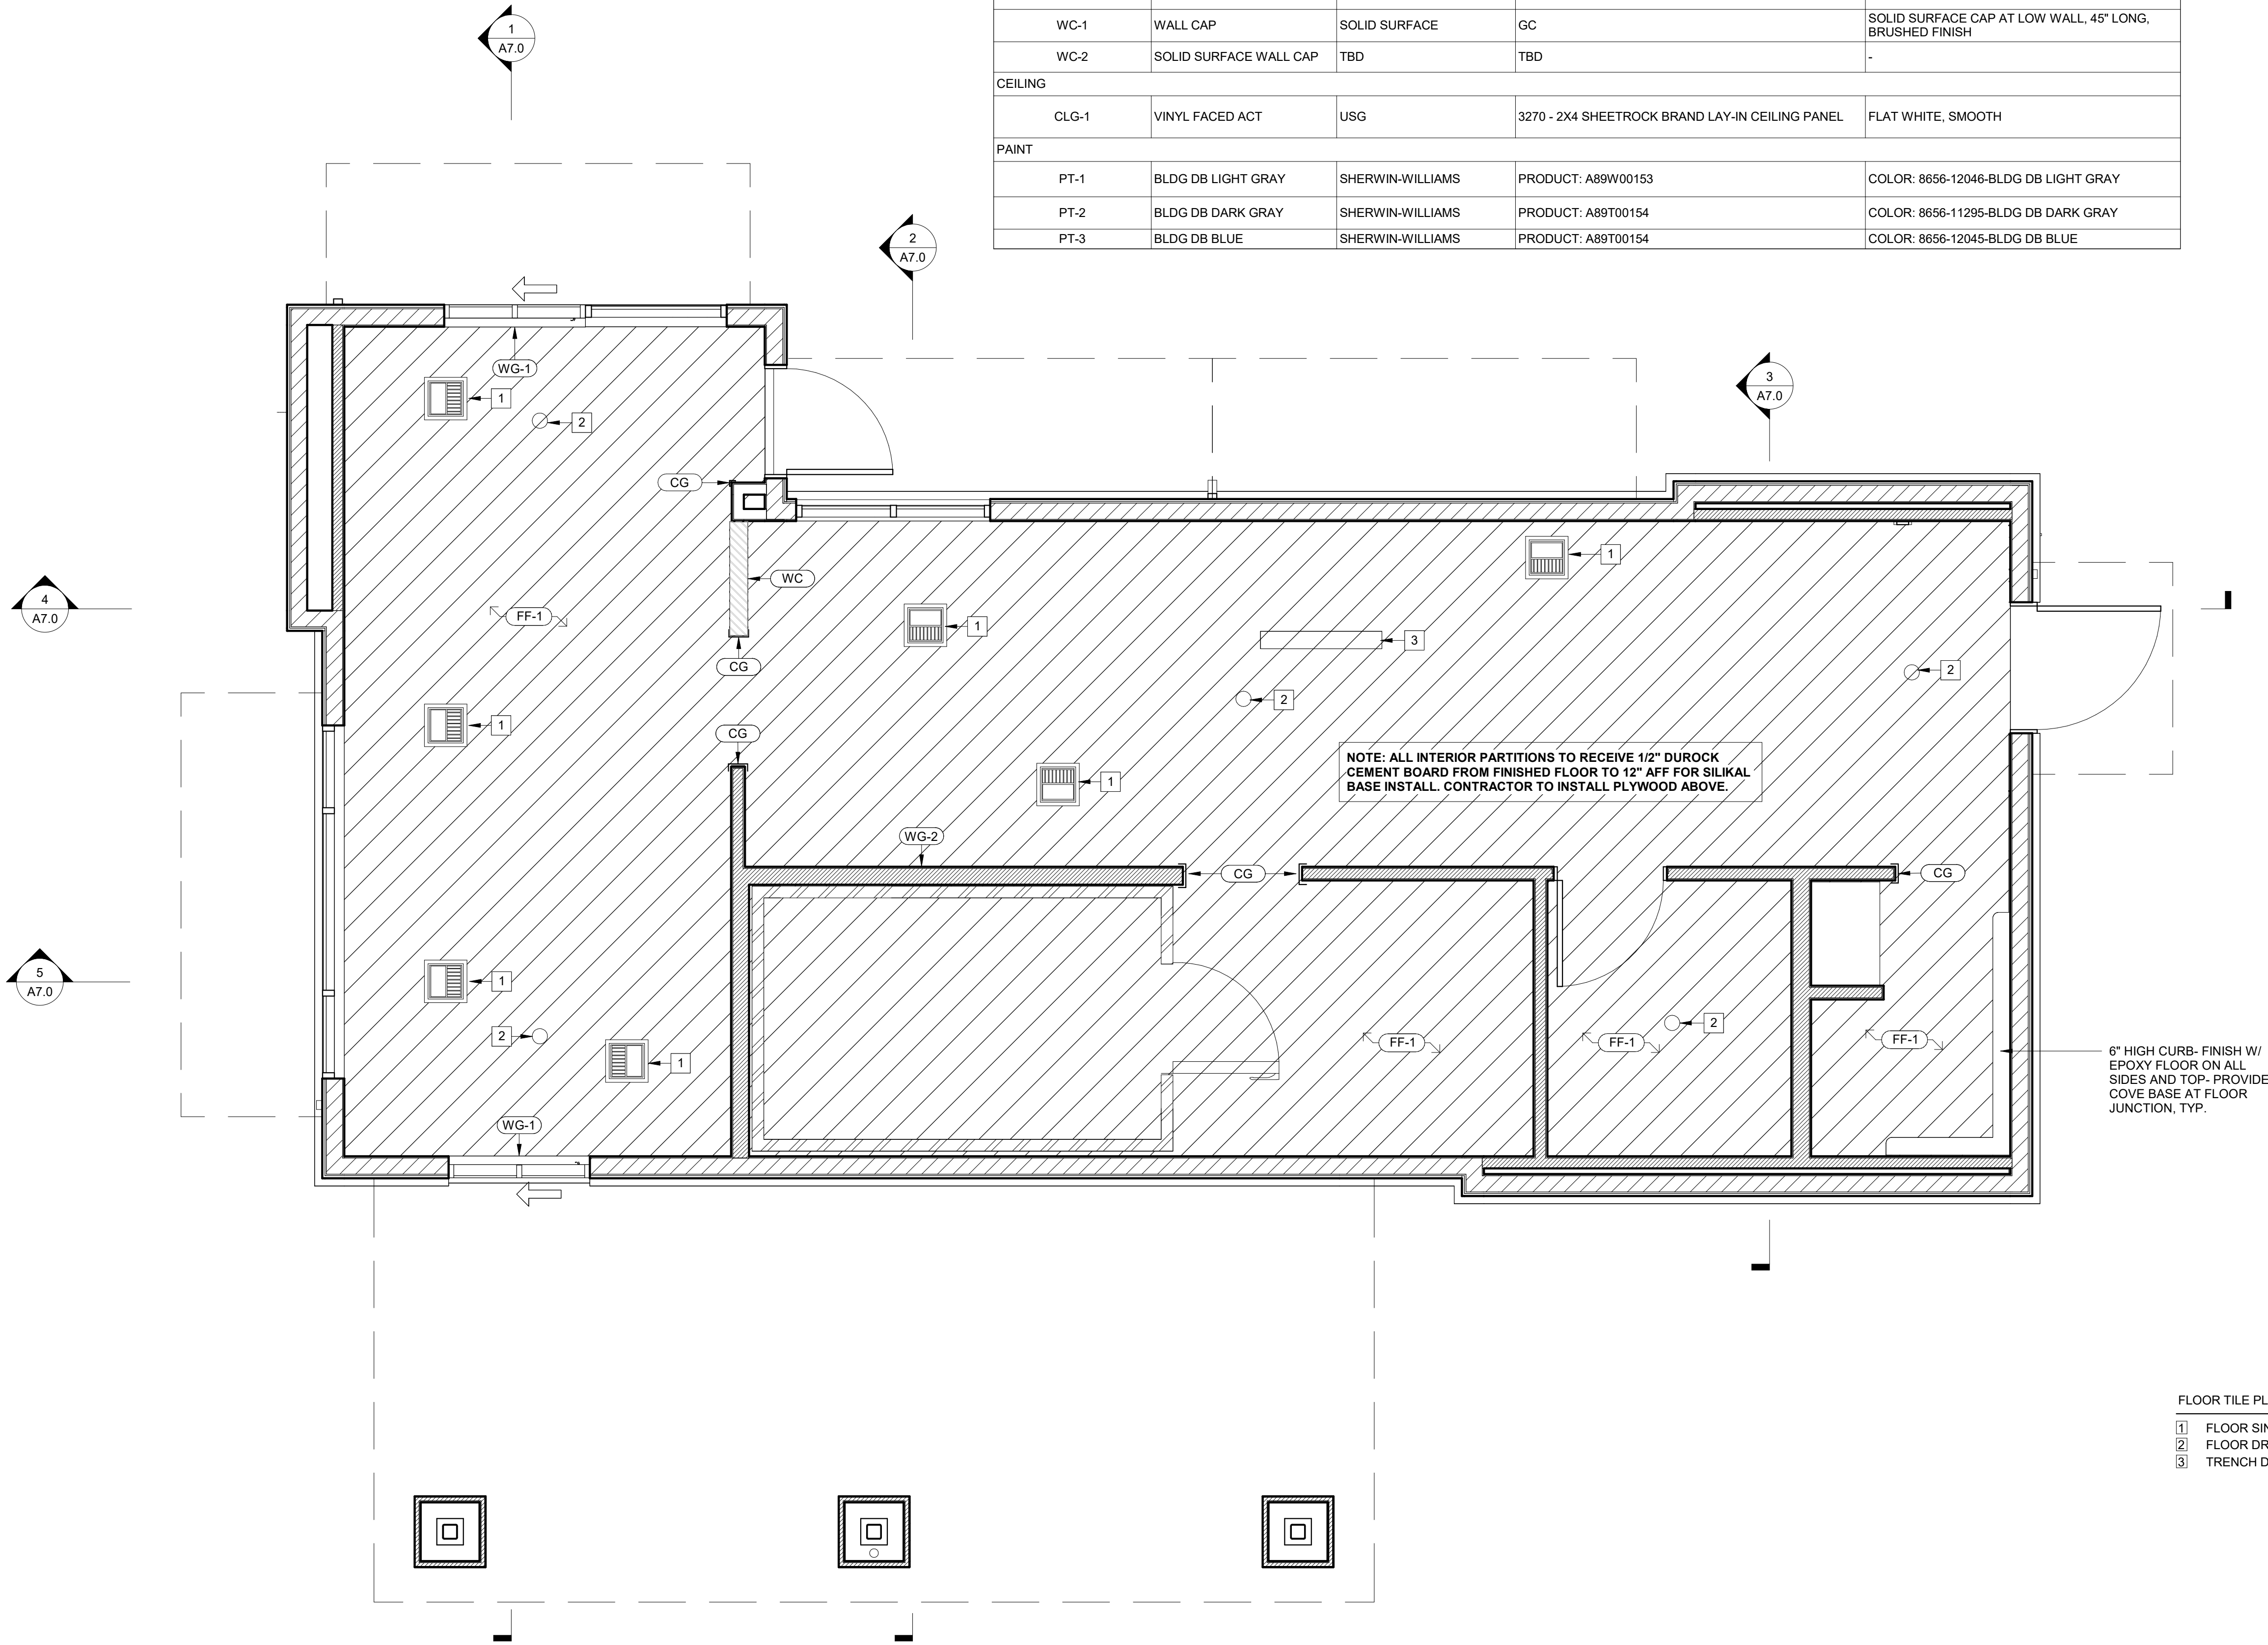

- FLOOR TILE PLAN NOTES
- 1

FLOOR SINK, TYP.
- 2

FLOOR DRAIN
- 3

TRENCH DRAIN



ARCHITECT
CORALIC, LLC
9700 MACKENZIE ROAD, STE. 222
ST. LOUIS, MO 63125

TJ 314.578.4953
EDIN@CORALICARCHITECTURE.COM

STRUCTURAL ENGINEER
KREHER ENGINEERING, INC.
208 N. MAIN STREET,
COLUMBIA, IL 62236

TJ 618.281.8505
NDREYER@KREHERENGINEERING.COM

MEP ENGINEER
CASE ENGINEERING, INC.
796 MERUS CT.
FENTON, MO 63026

TJ 636.349.1600
MCASE@CASEENGINEERINGINC.COM



Project No: LA0701
Dutch Bros Coffee - New Freestanding Store
1804 MACARTHUR DRIVE,
ALEXANDRIA, LA 71301
For: Dutch Bros Coffee
1930 W. Rio Salado Parkway
Tempe, AZ 85281


ISSUED FOR PERMIT
5.21.2026

REV:	DATE:	DESCRIPTION:
SHEET NAME:		

FLOOR FINISH PLAN
SHEET NUMBER:


A2.1

© 2025 DB Franchising USA, LLC

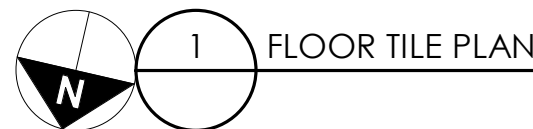

3/8" = 1'-0"

"The name DUTCH-BROS. and all associated logos, distinctive designs, content, information, and other materials featured, displayed, contained herein, and made available by Dutch Bros., including but not limited to, the "look and feel" of the establishments and products, all text, images, colors, configurations, graphics, designs, illustrations, photographs, and pictures (collectively, the "Materials") are owned by and/or licensed by DB Franchising USA, LLC and are protected by copyright, trademark, trade dress, patent, and/or other intellectual property rights and under competition laws under the United States and foreign laws."

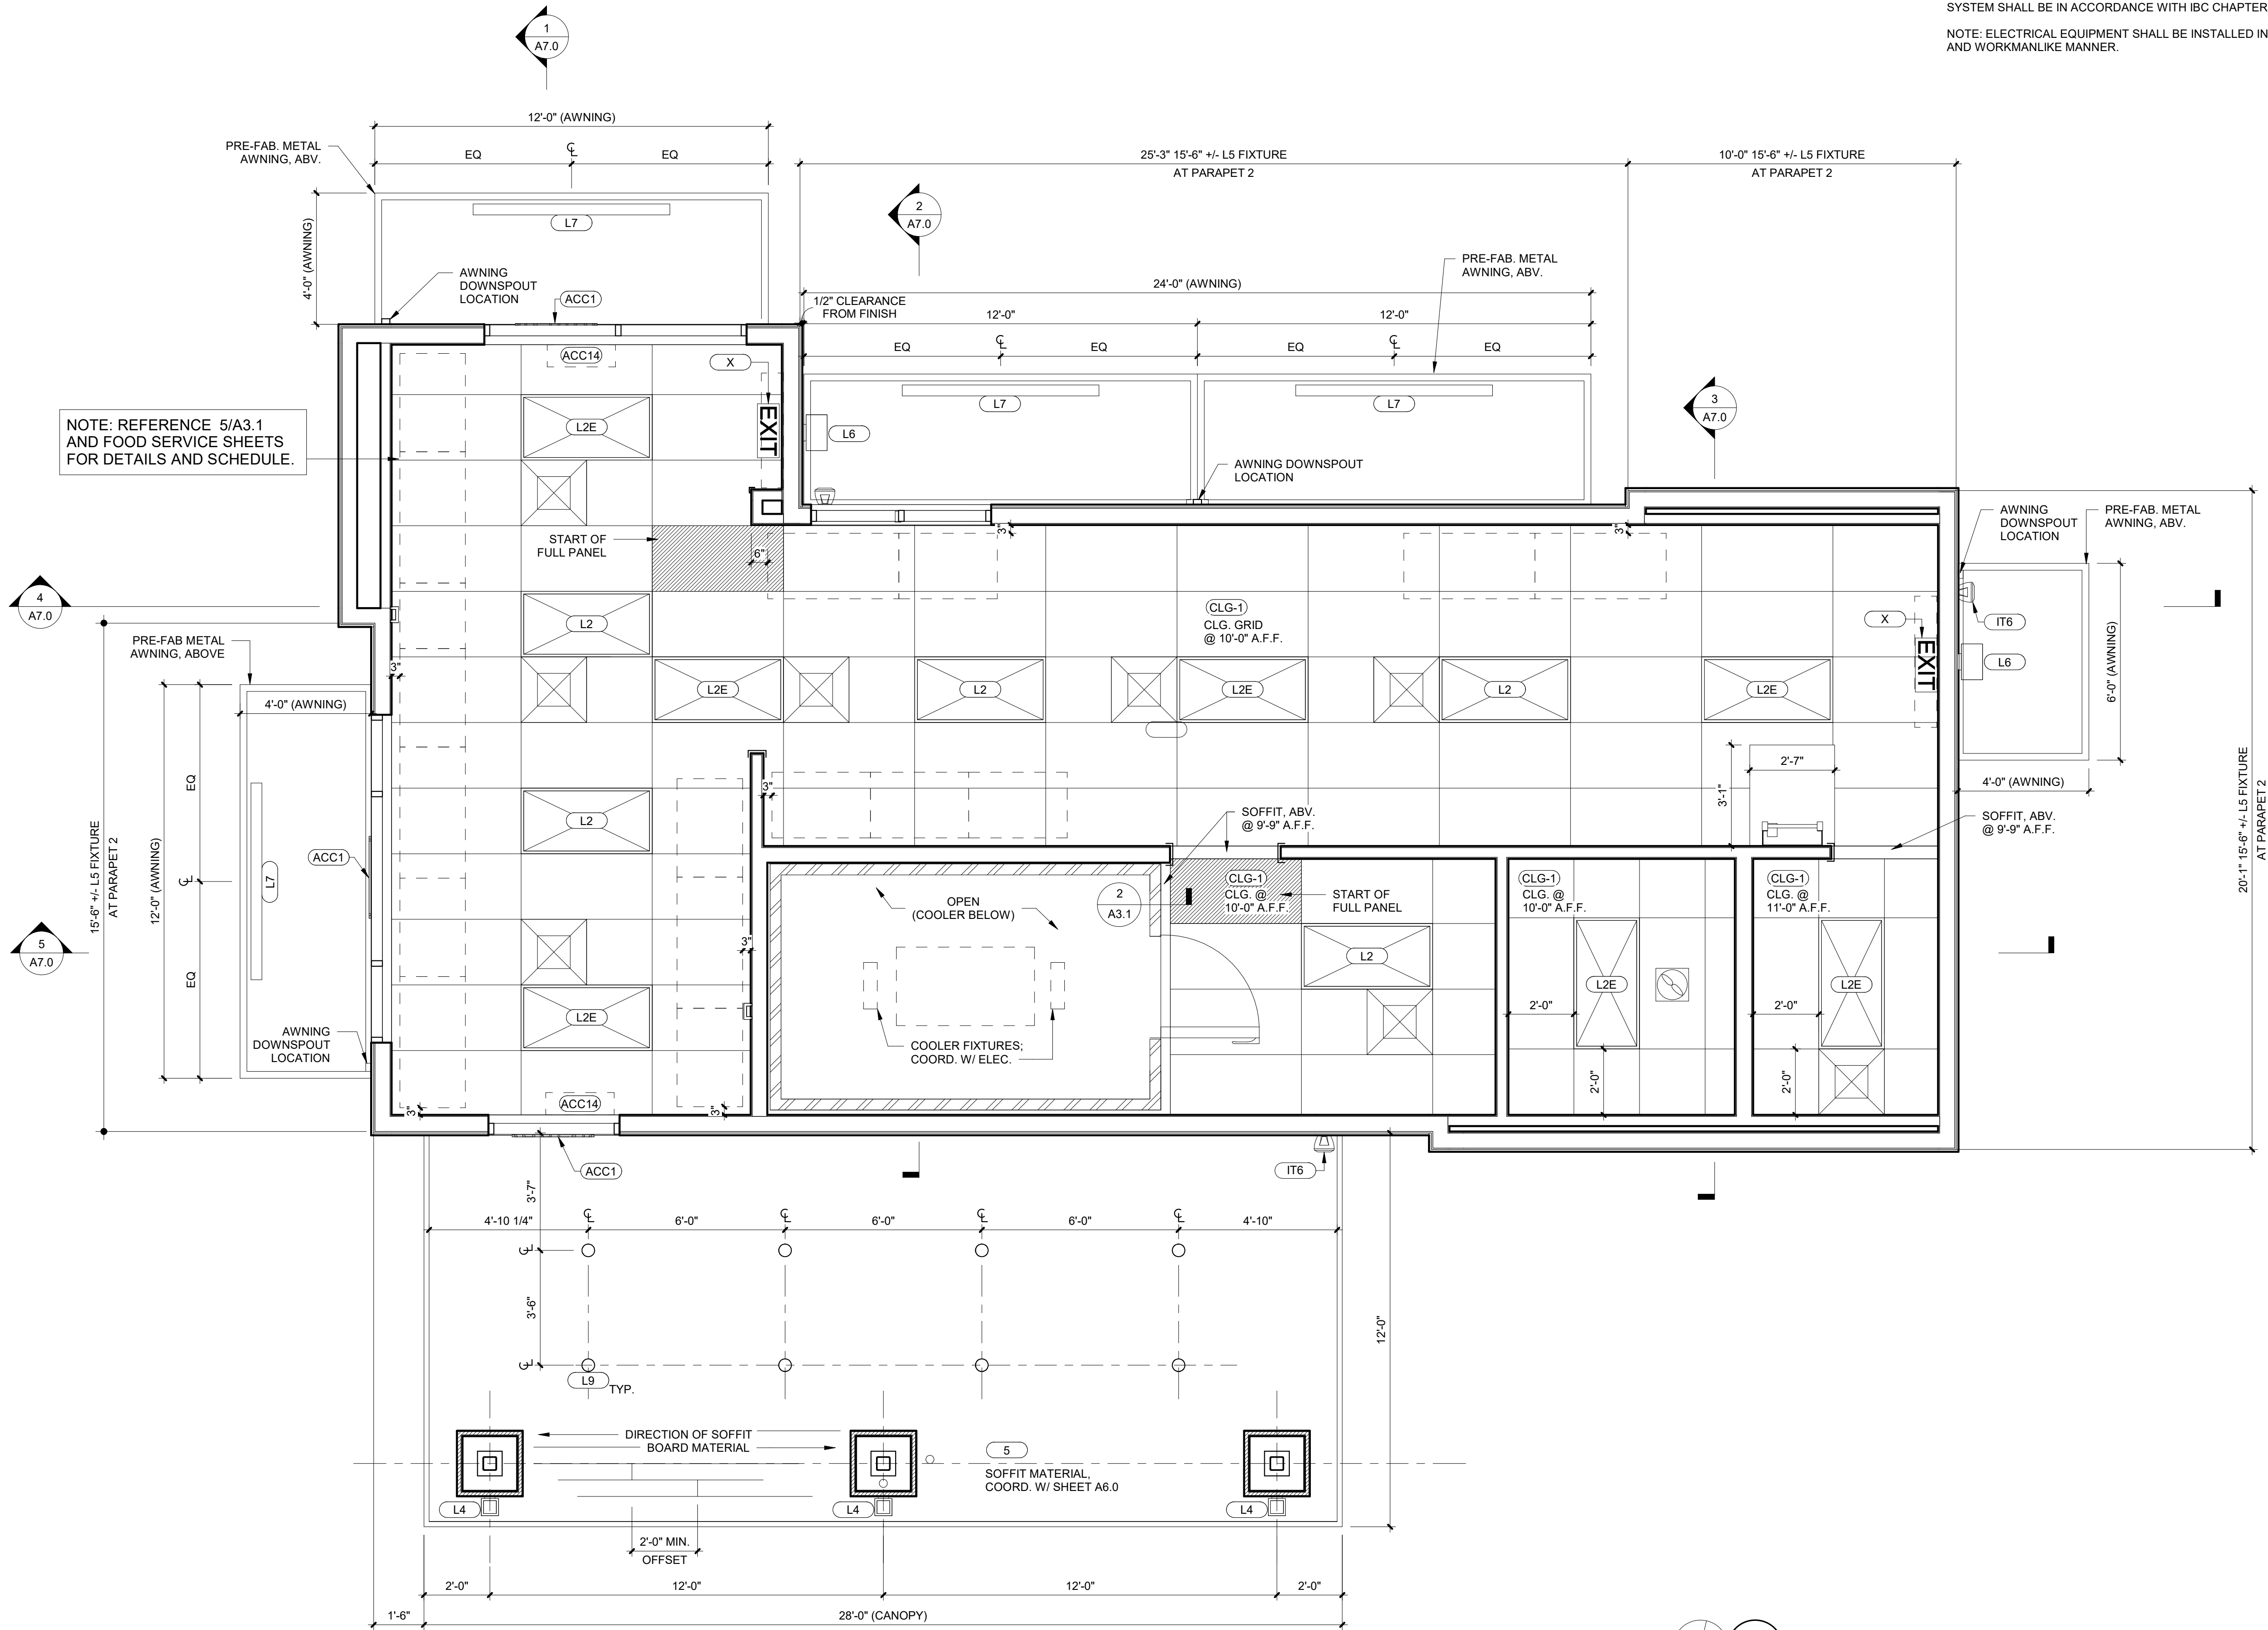

GENERAL NOTES:

1. SEISMIC DESIGN CATEGORY FOR ACOUSTICAL CEILING IS CLASS B. ALL REQUIREMENTS MUST BE MET.
2. REFER TO ELECTRICAL LIGHTING PLAN FOR FIXTURE SPECIFICATIONS.
3. CONTRACTOR TO SET CONTROL POINTS FOR LAYOUT.

NOTE:

PER IBC 1011.6.2 THE FACE OF AN EXIT SIGN ILLUMINATED FROM AN EXTERNAL SOURCE SHALL HAVE AN INTENSITY OF NOT LESS THAN 5 FOOTCANDLES (54 LUX).


PER IBC 1011.6.3 EXIT SIGNS SHALL BE ILLUMINATED AT ALL TIMES. TO ENSURE CONTINUED ILLUMINATION FOR A DURATION OF NOT LESS THAN 90 MINUTES IN CASE OF PRIMARY POWER LOSS, THE SIGN ILLUMINATION MEANS SHALL BE CONNECTED TO AN EMERGENCY POWER SYSTEM PROVIDED FROM STORAGE BATTERIES... THE INSTALLATION OF THE EMERGENCY POWER SYSTEM SHALL BE IN ACCORDANCE WITH IBC CHAPTER 10.

NOTE: ELECTRICAL EQUIPMENT SHALL BE INSTALLED IN A NEAT AND WORKMANLIKE MANNER.

ARCHITECT
CORALIC, LLC
9700 MACKENZIE ROAD, STE. 222
ST. LOUIS, MO 63125
TJ 314.578.4953
EDIN@CORALICARCHITECTURE.COM

STRUCTURAL ENGINEER
KREHER ENGINEERING, INC.
208 N. MAIN STREET,
COLUMBIA, IL 62236
TJ 618.281.8505
NDREYER@KREHERENGINEERING.COM

MEP ENGINEER
CASE ENGINEERING, INC.
796 MERUS CT.
FENTON, MO 63026
TJ 636.349.1600
MCASE@CASEENGINEERINGINC.COM

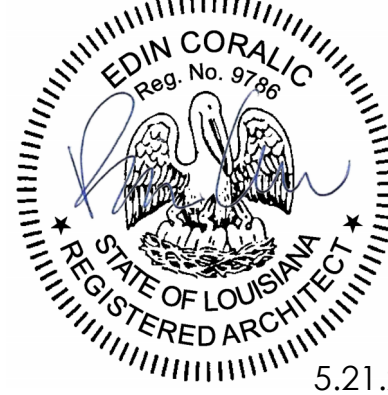

Project No: LA0701
Dutch Bros Coffee - New Freestanding Store
1804 MACARTHUR DRIVE,
ALEXANDRIA, LA 71301
For: Dutch Bros Coffee
1930 W. Rio Salado Parkway
Tempe, AZ 85281

ISSUED FOR PERMIT

5.21.2026

REV:	DATE:	DESCRIPTION:

SHEET NAME:


REFLECTED CEILING
PLAN

SHEET NUMBER:


A3.0

© 2025 DB Franchising USA, LLC


The name DUTCH BROS. and all associated logos, distinctive designs, content, information, and other materials featured, displayed, contained herein, and made available by Dutch Bros., including but not limited to, the "hook and leaf" of the establishments and products, all text, images, colors, configurations, graphics, designs, illustrations, photographs, and pictures (collectively, the "Materials") are owned by and/or licensed by DB Franchising USA, LLC and are protected by copyright, trademark, trade dress, patent, and/or other intellectual property rights and unfair competition laws under the United States and foreign laws.

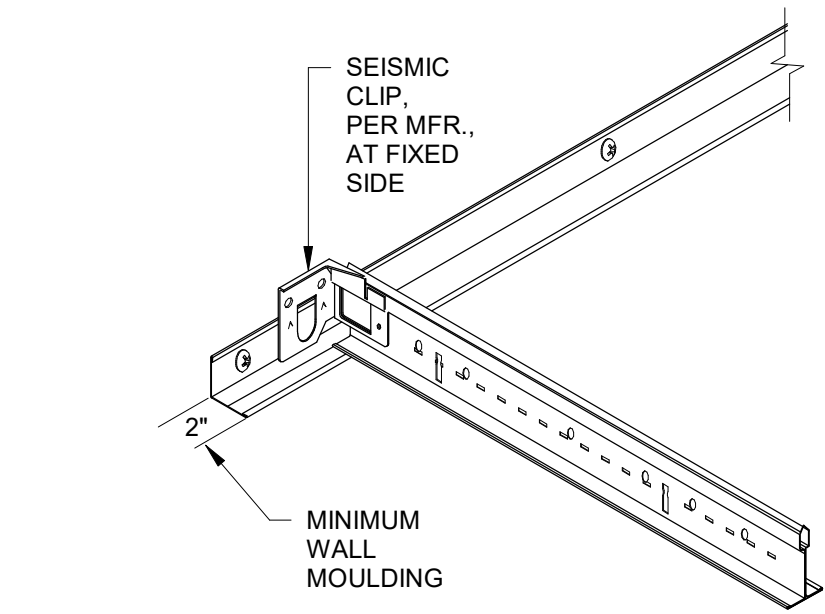


4 TYP. GRID BRACING 3" = 1'-0"

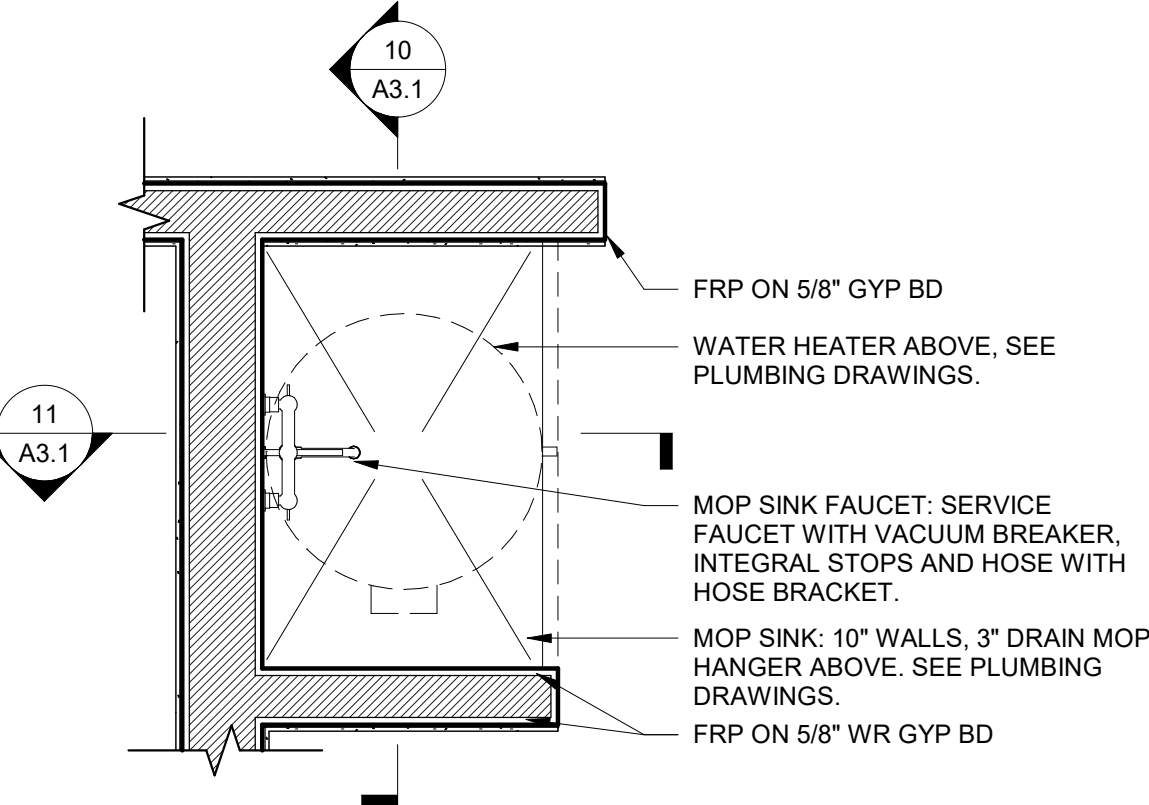


8 TYPICAL WATER HEATER SUPPORT 3/4" = 1'-0"

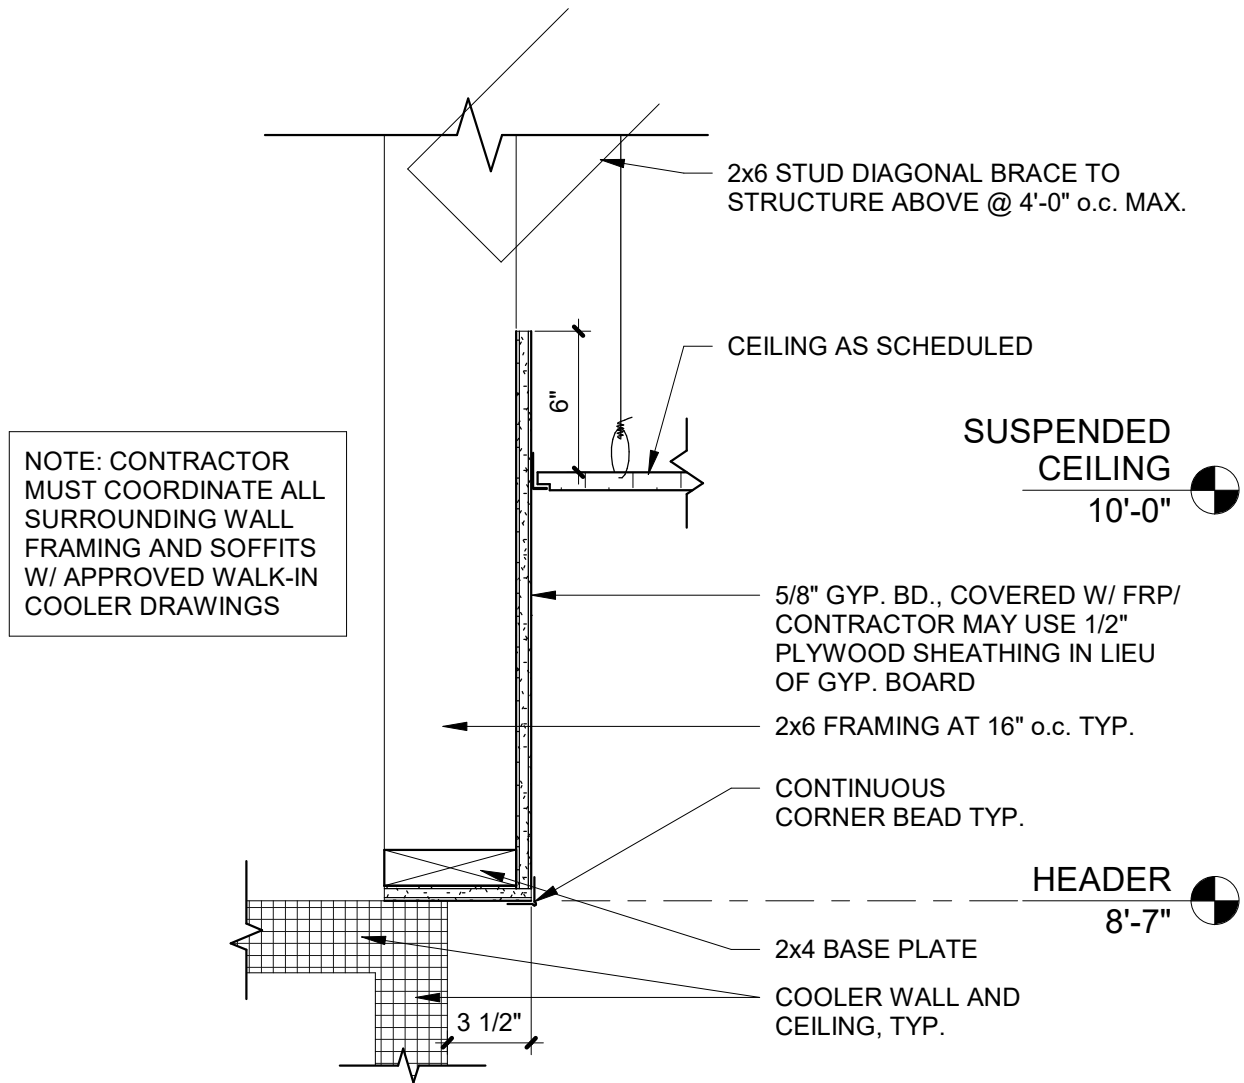


12 RCP DETAIL - GYP HEADER COOLER 1 1/2" = 1'-0"

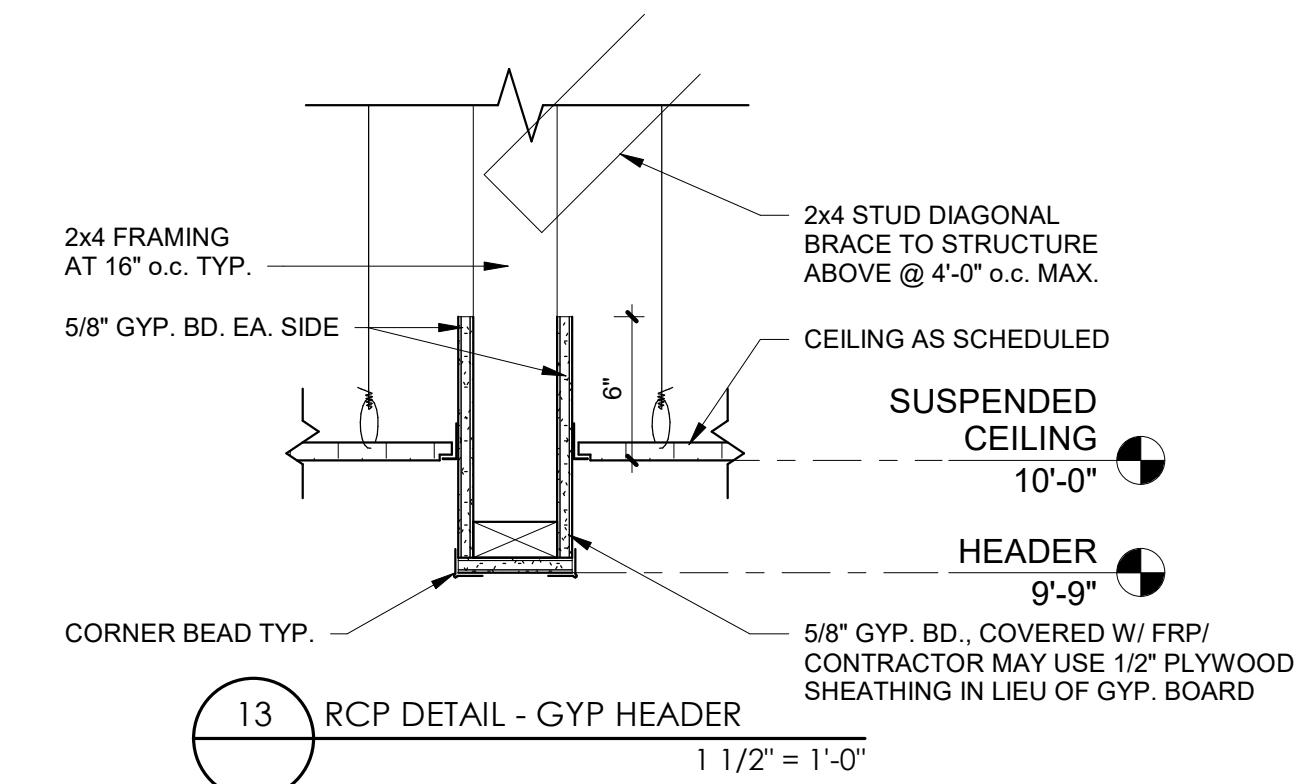


13 RCP DETAIL - GYP HEADER 1 1/2" = 1'-0"

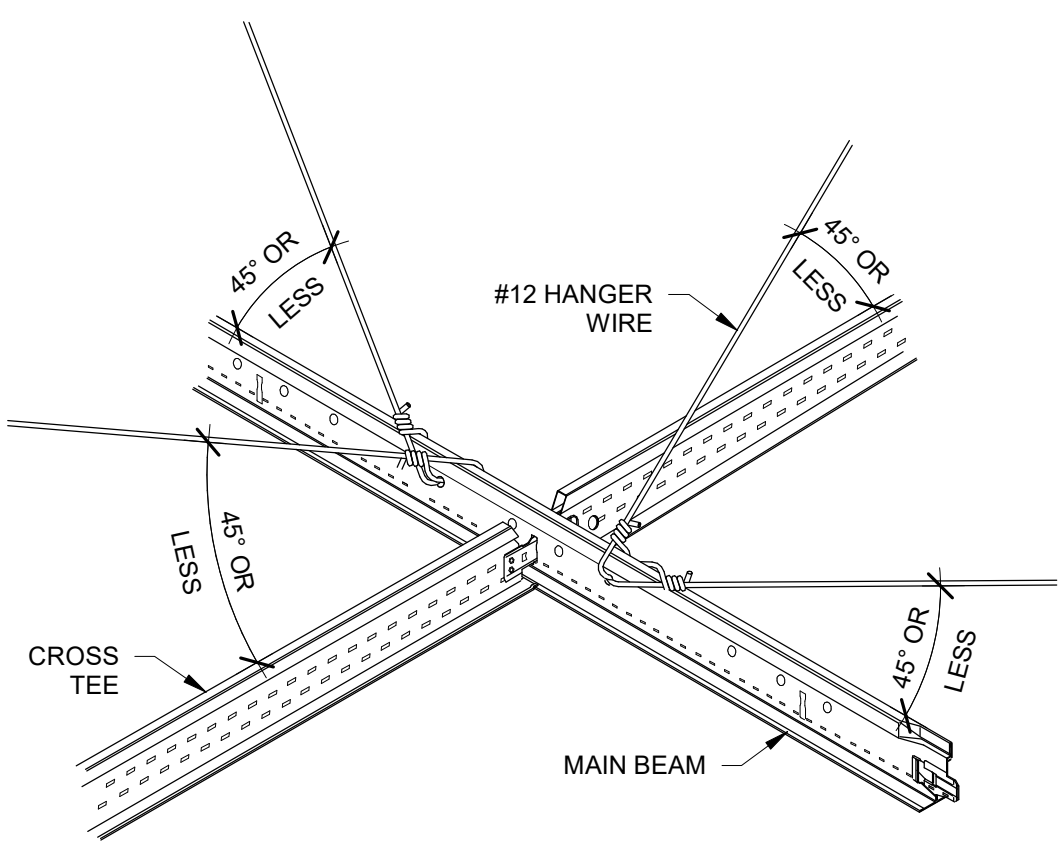


3 TYP. SPLAY WIRE BRACING 3" = 1'-0"

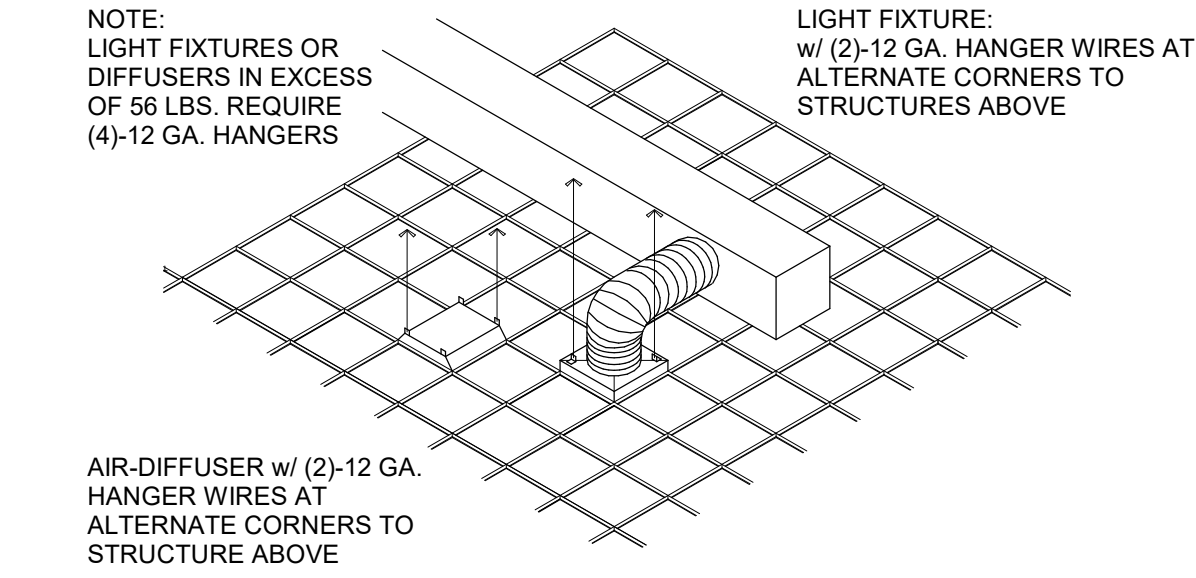


7 TYP. FIXTURE HANGER WIRES 1 1/2" = 1'-0"

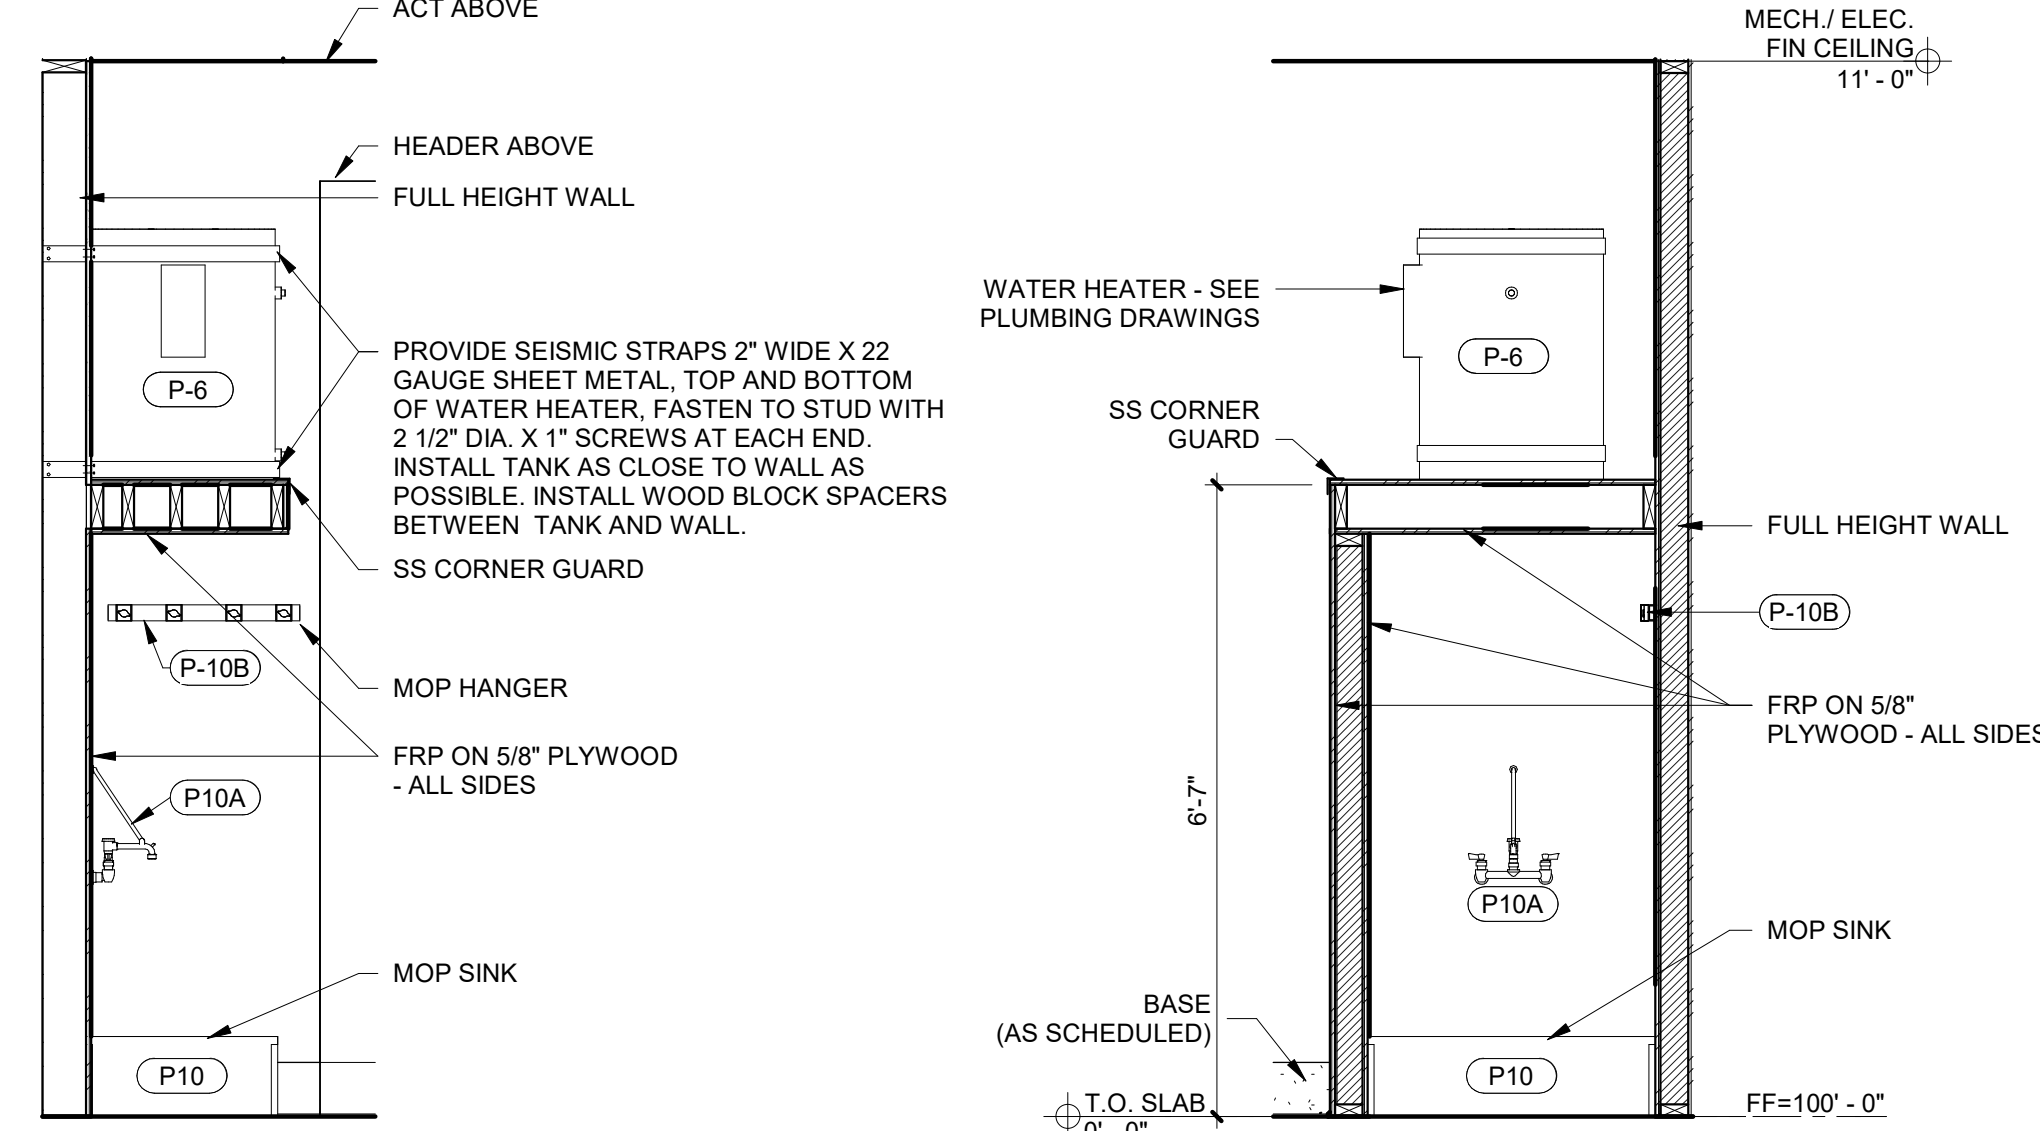


11 TYPICAL WATER HEATER SUPPORT 1/2" = 1'-0"

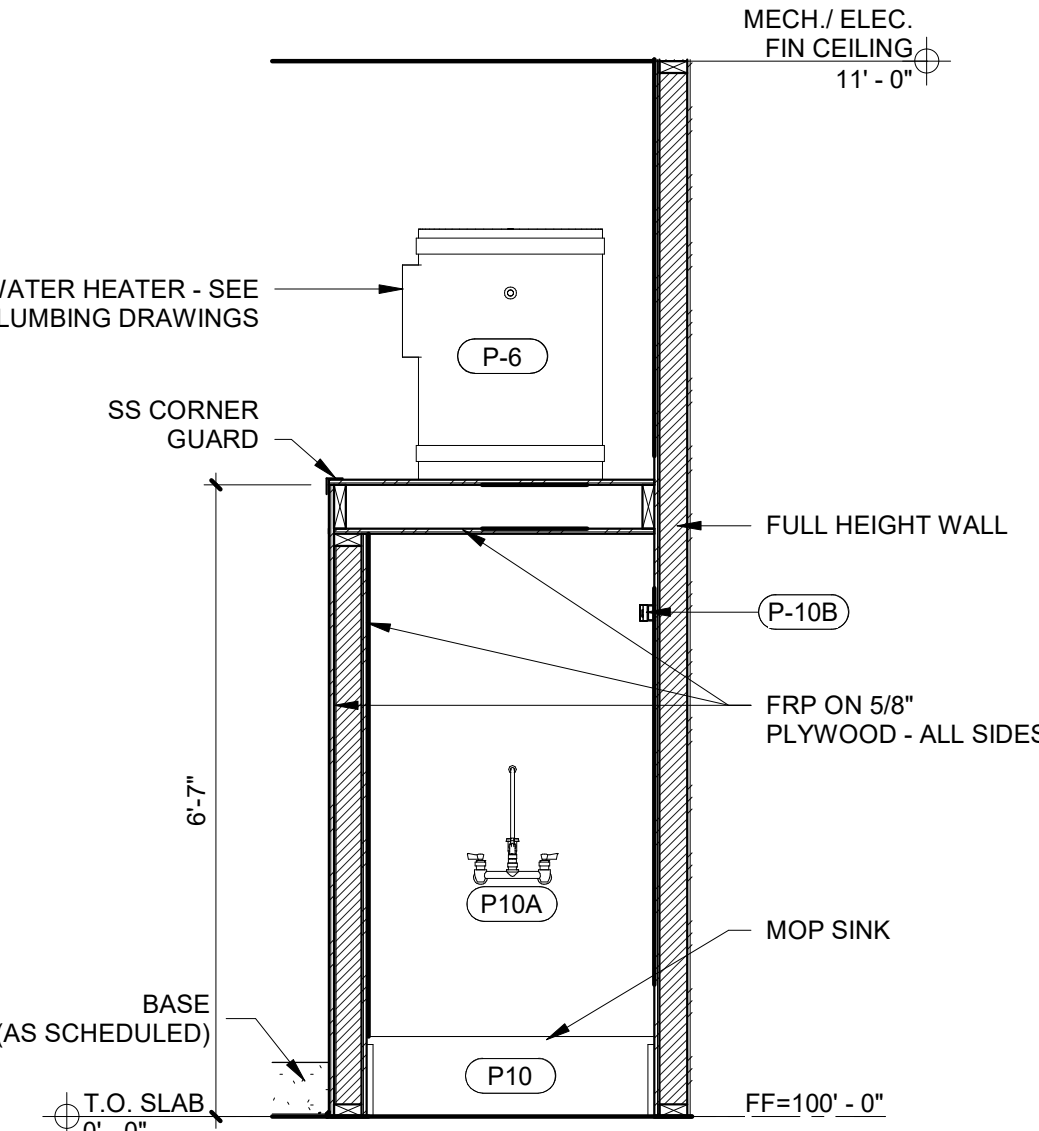


10 TYPICAL WATER HEATER SUPPORT 1/2" = 1'-0"

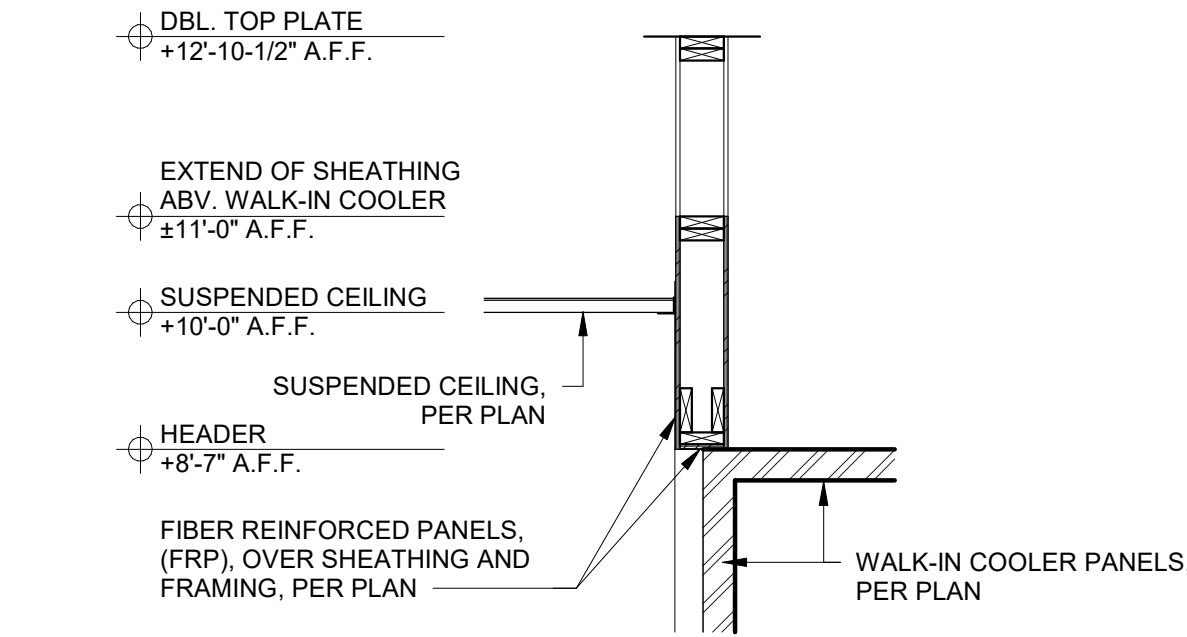

2 WALK-IN COOLER HEADER DETAIL 1/2" = 1'-0"

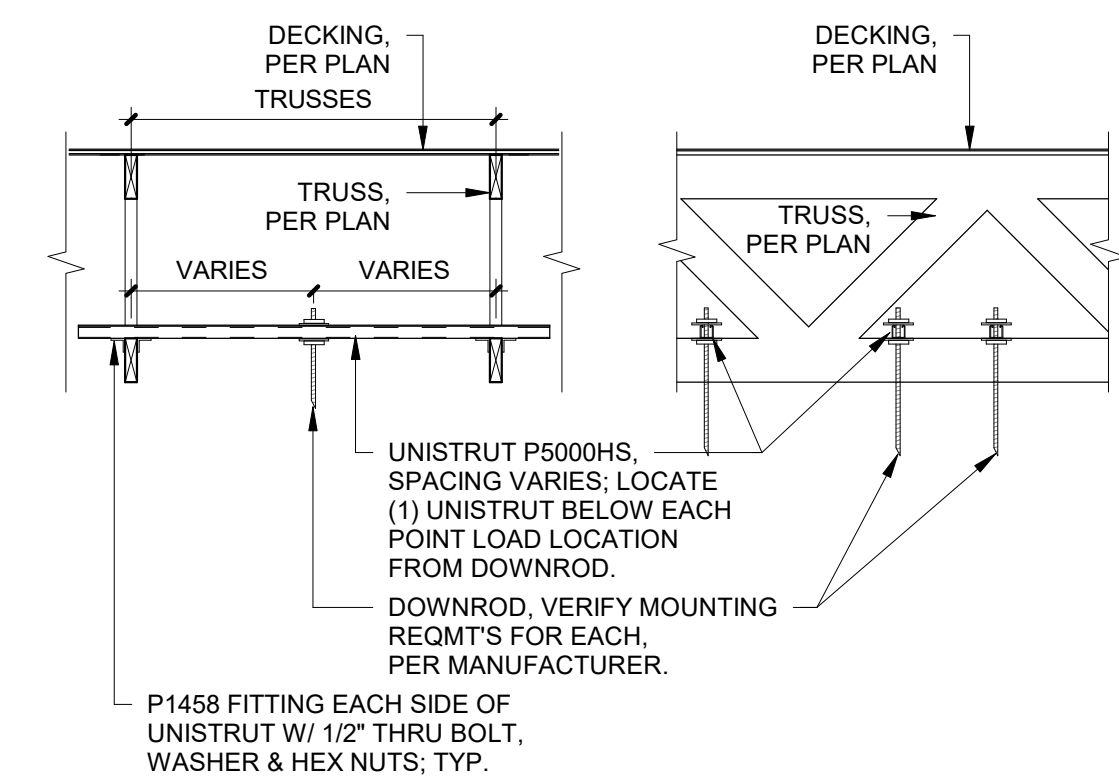


6 TYP. HANGING SHELF BRACING DETAIL 1/2" = 1'-0"

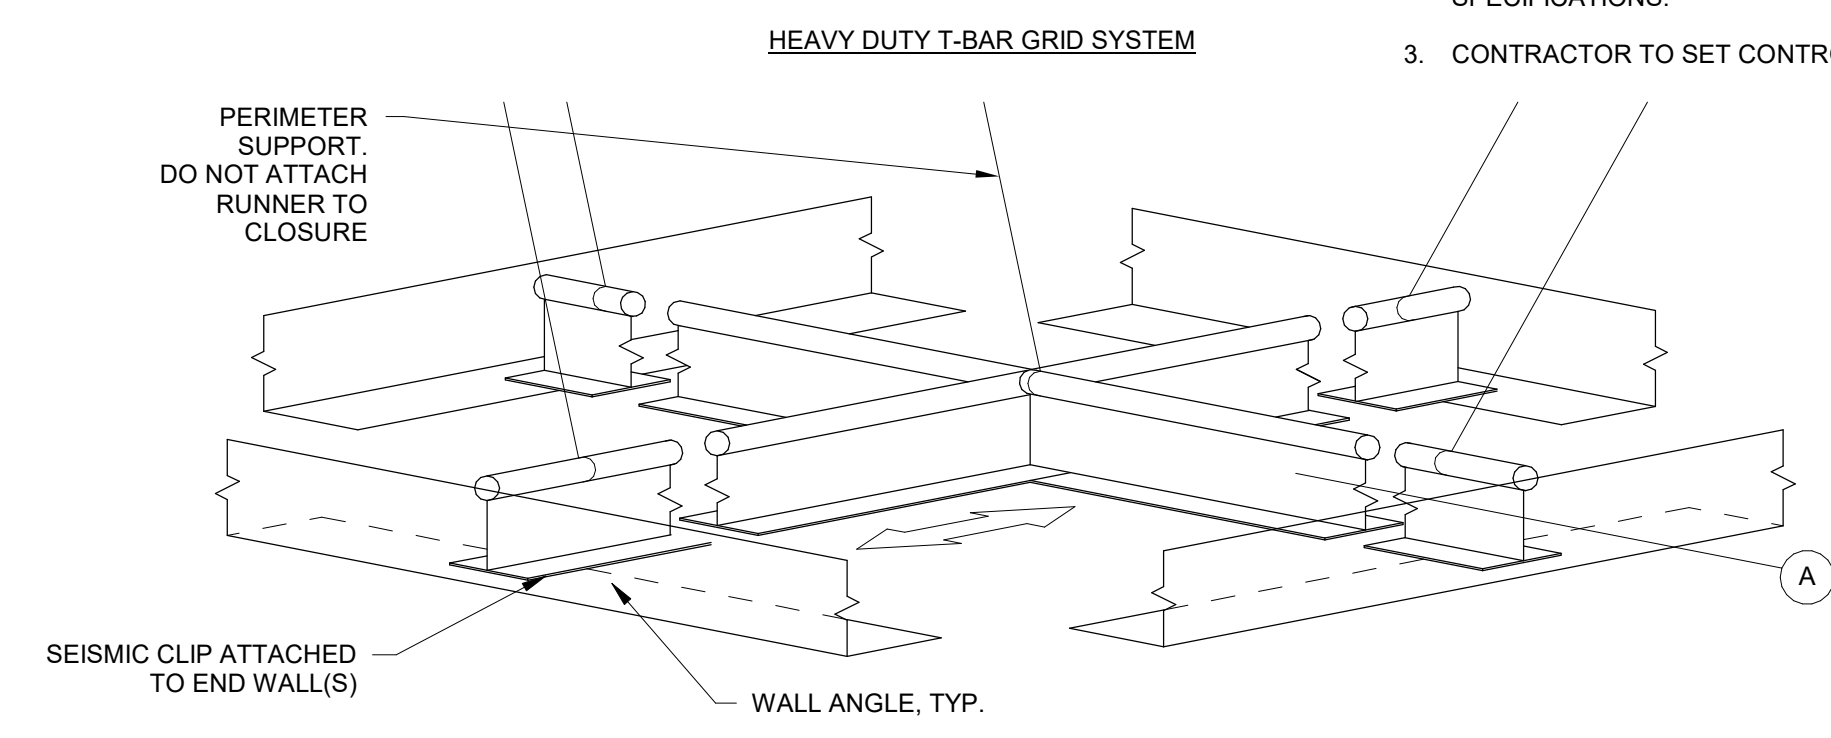


CODE COMPLIANCE: 2021 IBC 808 & 1613, ASCE 7-16, ASTM C635, ASTM C636, ASTM E 580/ E 580M & CISCA
SEISMIC USE GROUP: III
SEISMIC DESIGN CATEGORY: D - ADDITIONAL PROVISIONS ASTM E580
INTERSECTION TEST STRENGTH: 100 LBS. TENSION W/ 5' OFFSET
60 LBS. COMPRESSION

- INSTALL PER ASTM C635 & ASTM C636
- CEILING TO BE INSTALLED BY CISCA RECOMMENDATIONS FOR CATEGORY "D"
- GRID MUST NOT BE ATTACHED TO WALL MOLDING
- ENDS OF MAIN BEAMS AND CROSS TEES MUST BE TIED TOGETHER TO PREVENT THEIR SPREADING
- MINIMUM 3/4" CLEARANCE ON ALL SIDES
- SAFETY WIRES REQUIRED ON LIGHT FIXTURES

9 SUSPENDED ACOUSTICAL PANEL CEILING - TYP 3" = 1'-0"

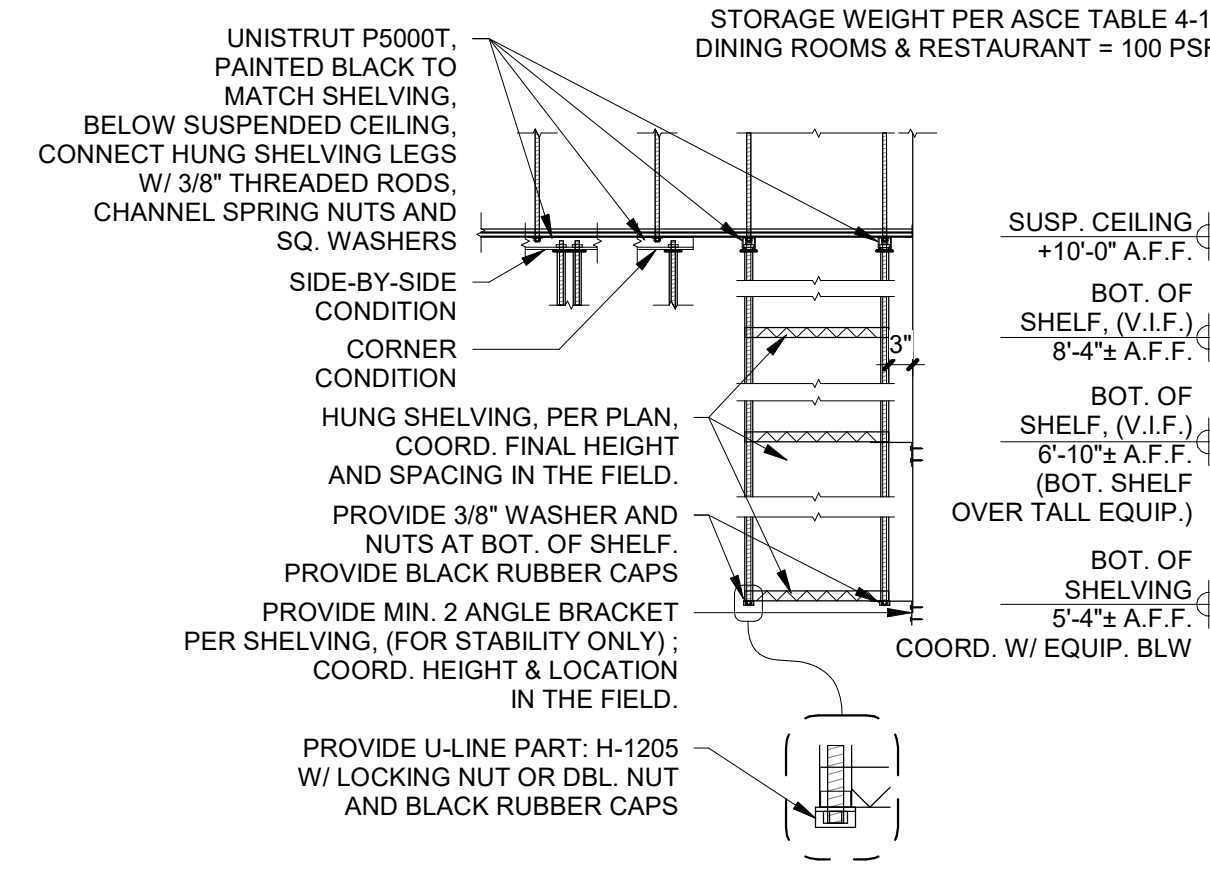

5 TYP. HANGING SHELF DETAIL 1/2" = 1'-0"

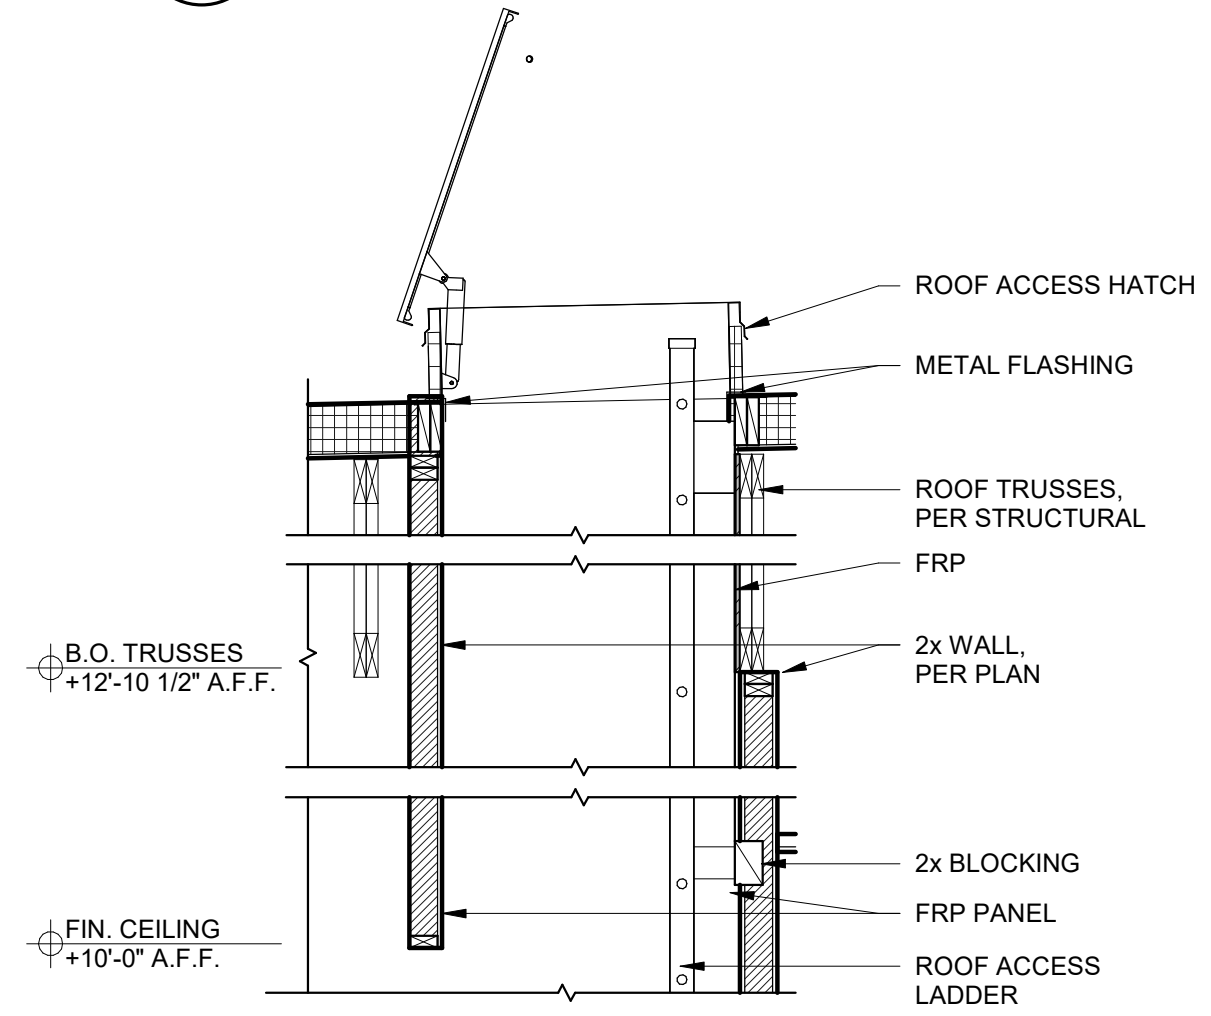

1 ROOF ACCESS HATCH DETAIL 1/2" = 1'-0"


GENERAL NOTES:

- SEISMIC DESIGN CATEGORY FOR ACOUSTICAL CEILING IS CLASS B. ALL REQUIREMENTS MUST BE MET.
- REFER TO ELECTRICAL LIGHTING PLAN FOR FIXTURE SPECIFICATIONS.
- CONTRACTOR TO SET CONTROL POINTS FOR LAYOUT.



ARCHITECT
CORALIC, LLC
9700 MACKENZIE ROAD, STE. 222
ST. LOUIS, MO 63125
TJ 314.578.4953
EDIN@CORALICARCHITECTURE.COM
STRUCTURAL ENGINEER
KREHER ENGINEERING, INC.
208 N. MAIN STREET,
COLUMBIA, IL 62236
TJ 618.281.8505
NDREYER@KREHERENGINEERING.COM

MEP ENGINEER
CASE ENGINEERING, INC.
796 MERUS CT.
FENTON, MO 63026
TJ 636.349.1600
MCASE@CASEENGINEERINGINC.COM

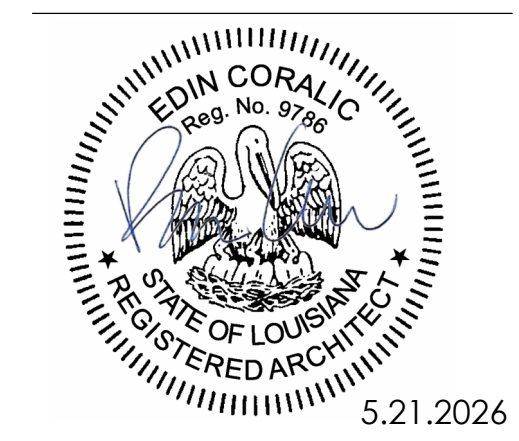

5.21.2026

Project No: LA0701

Dutch Bros Coffee - New Freestanding Store
1804 MACARTHUR DRIVE,
ALEXANDRIA, LA 71301
For: Dutch Bros Coffee
1930 W. Rio Salado Parkway
Tempe, AZ 85281

ISSUED FOR PERMIT

5.21.2026

REV:	DATE:	DESCRIPTION:

SHEET NAME:

CEILING DETAILS














SHEET NUMBER:

A3.1


© 2025 DB Franchising USA, LLC

ANNIHILATOR A1

The name DUTCH-BROS. and all associated logos, distinctive designs, content, information, and other materials featured, contained herein, and made available by Dutch Bros., including but not limited to, the "look and feel" of the establishments and products, all text, images, colors, configurations, graphics, designs, illustrations, photographs, and pictures (collectively, the "Materials") are owned by and/or licensed by DB Franchising USA, LLC and are protected by copyright, trademark, trade dress, patent, and/or other intellectual property rights and unfair competition laws under the United States and foreign laws.

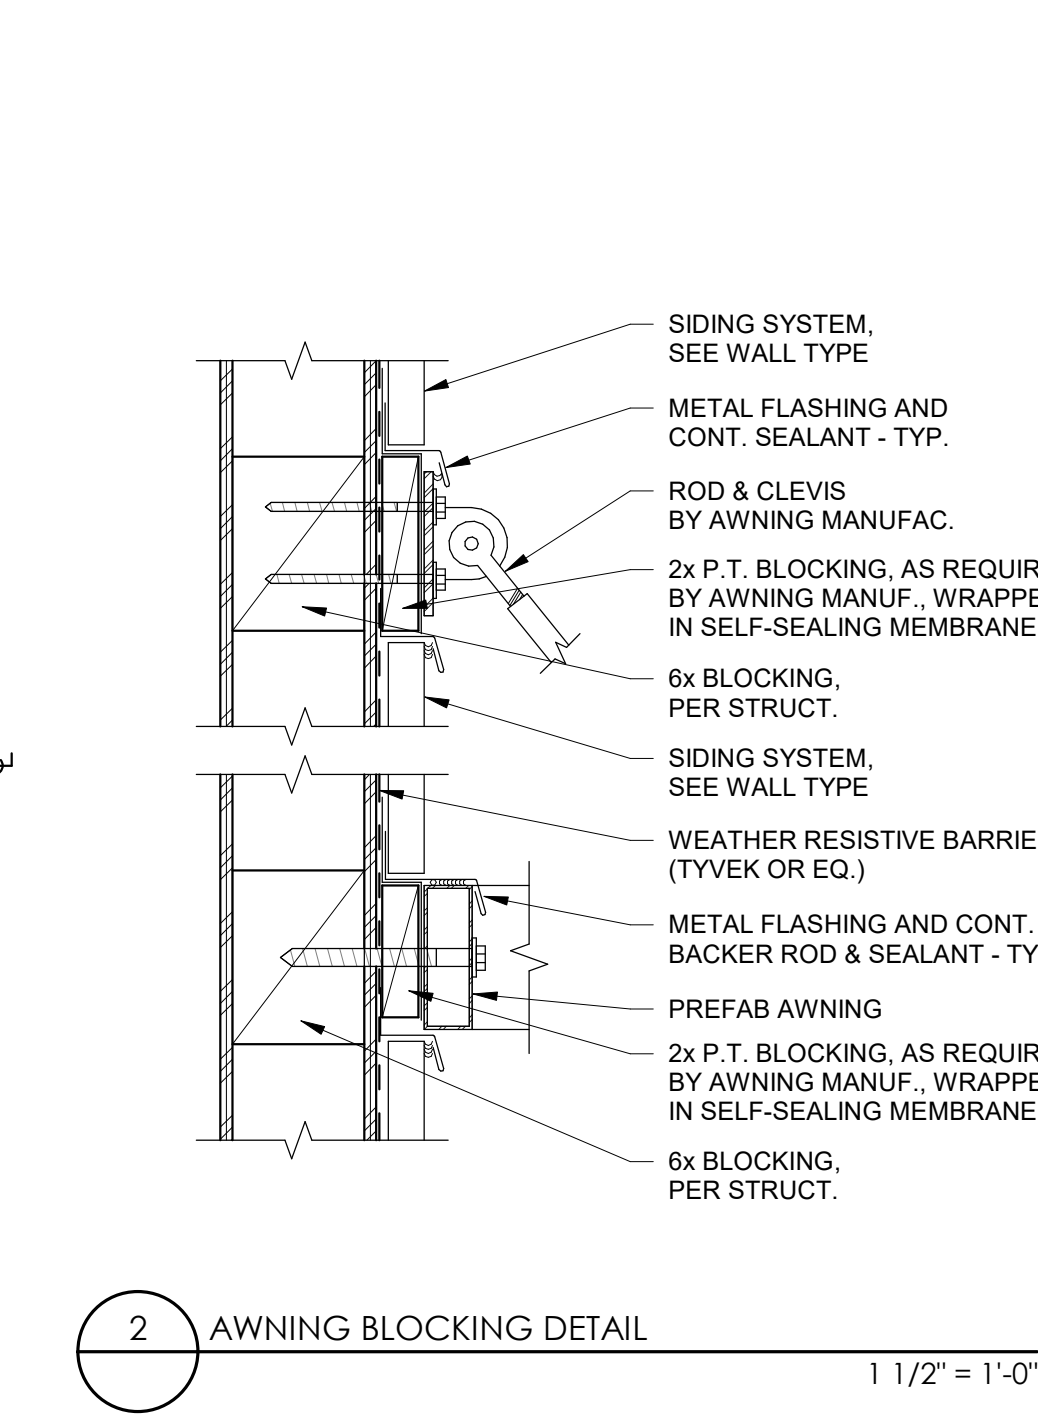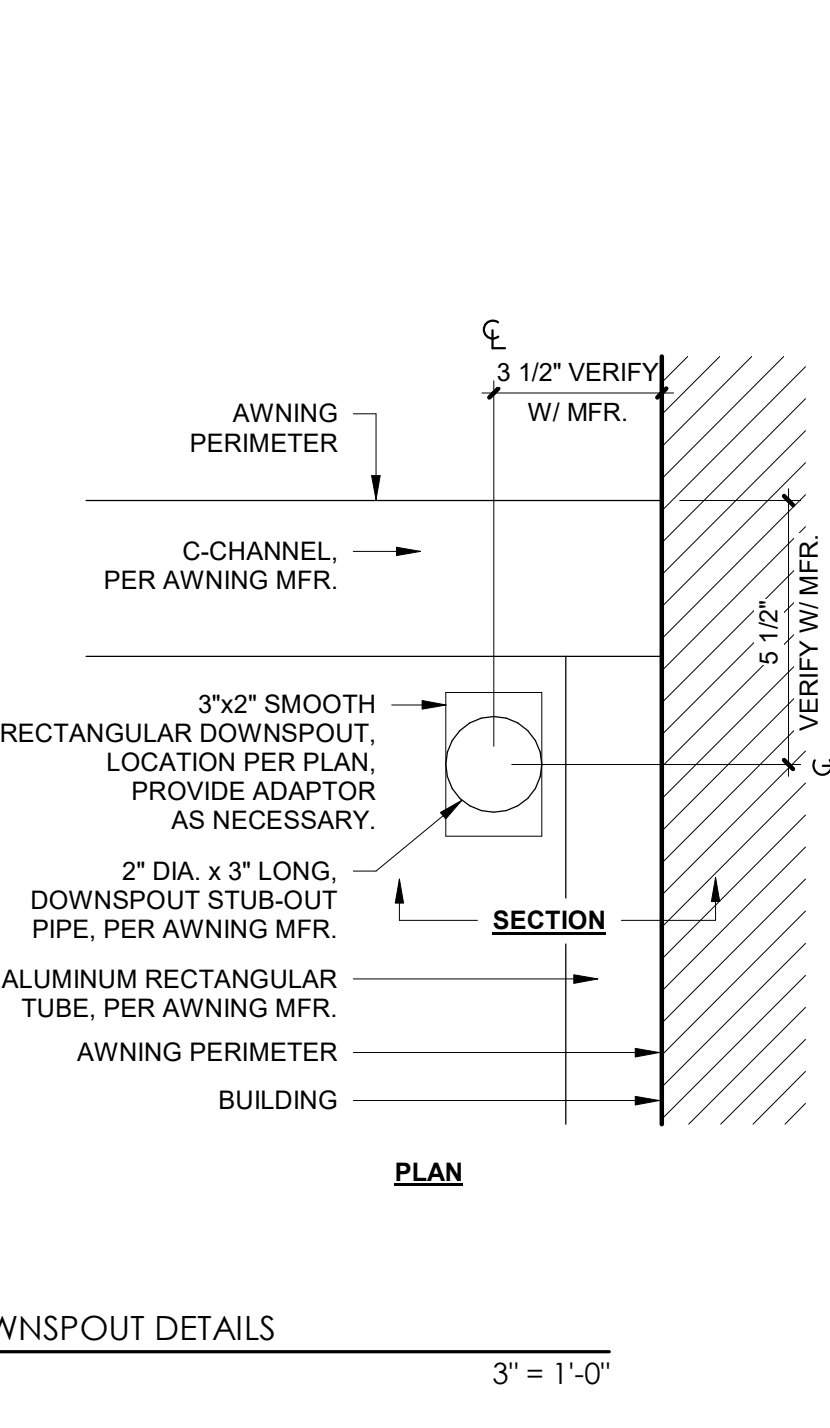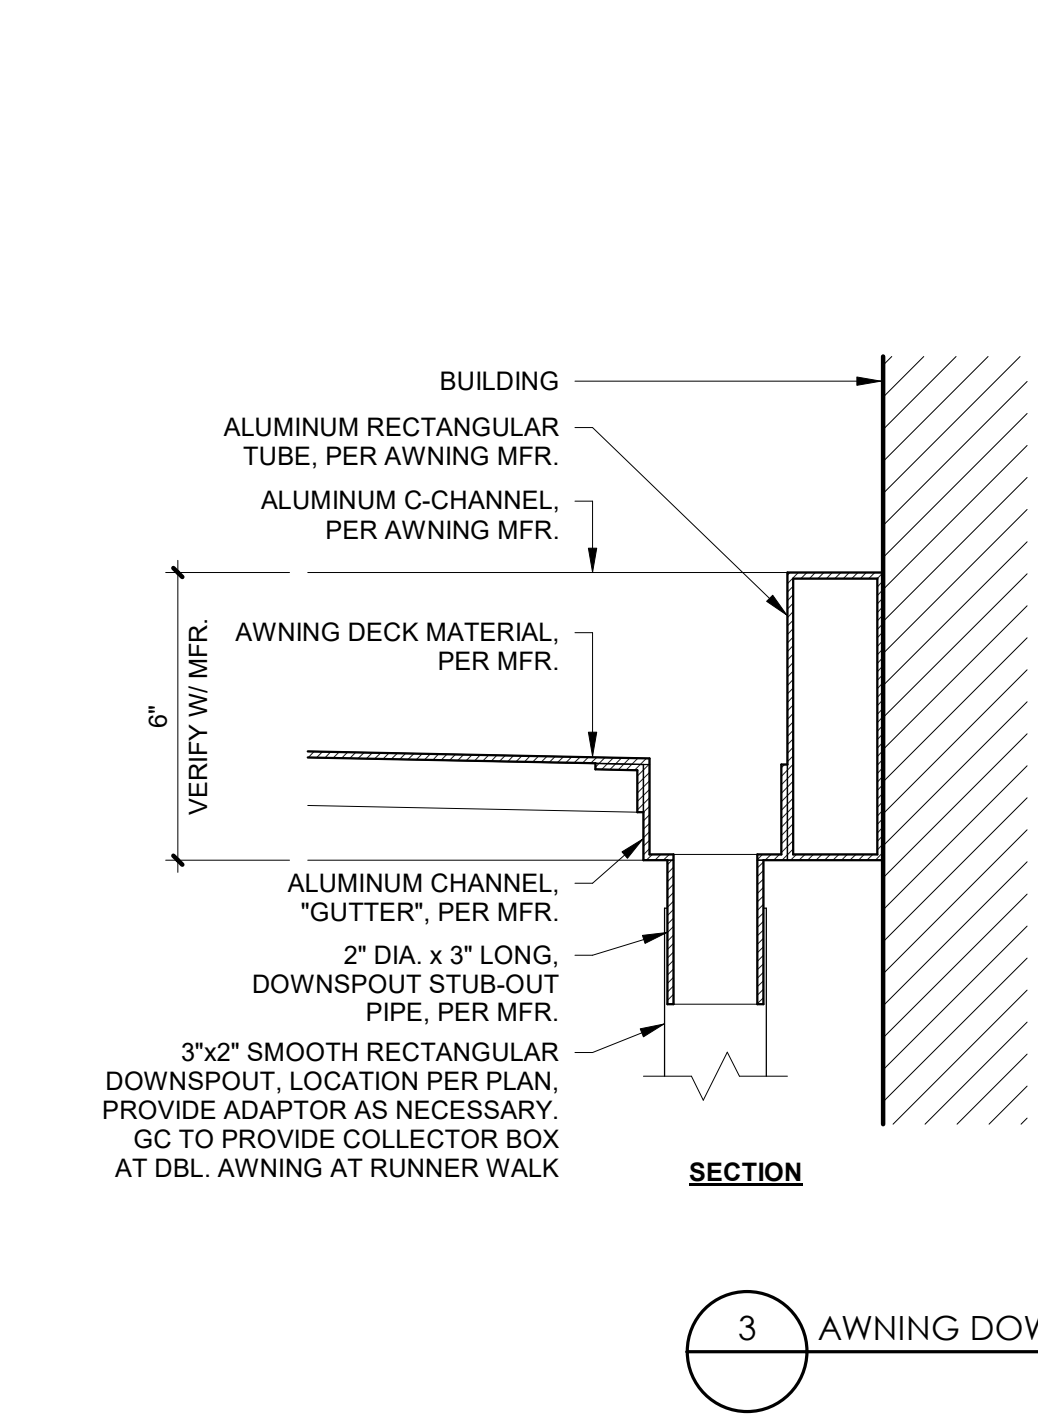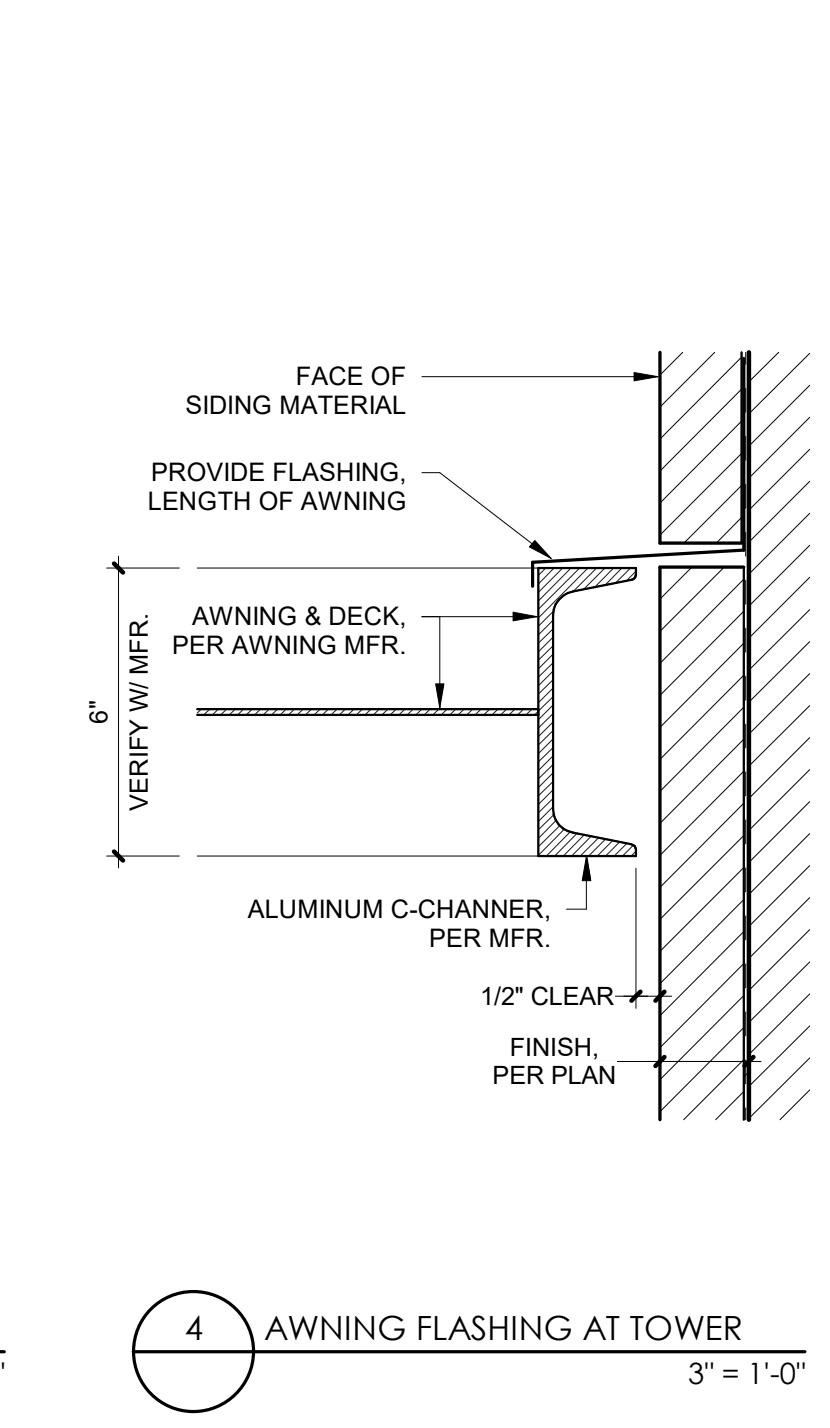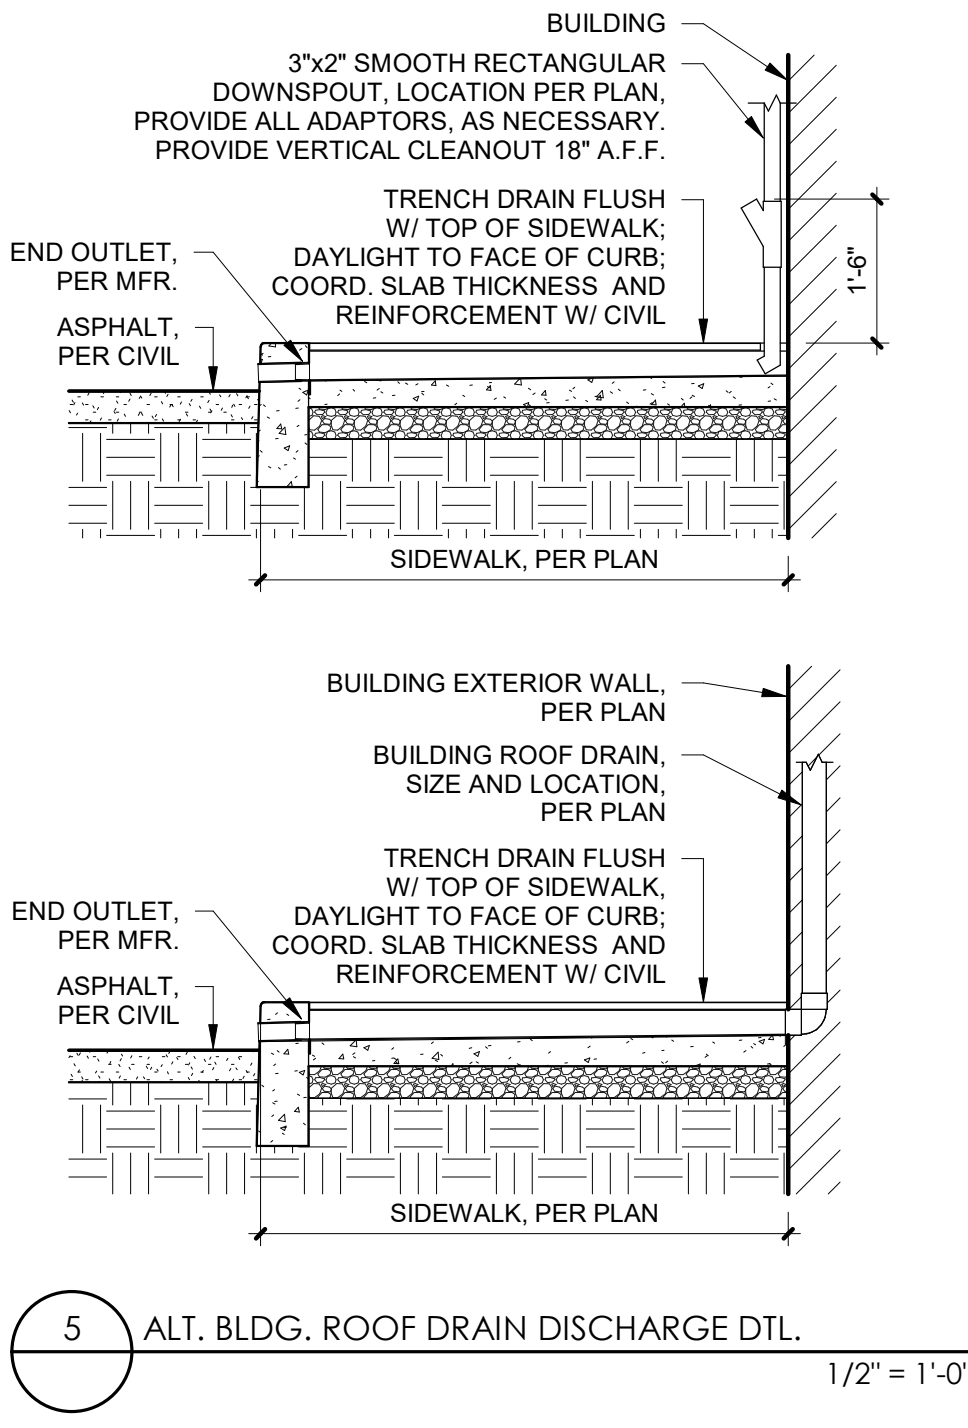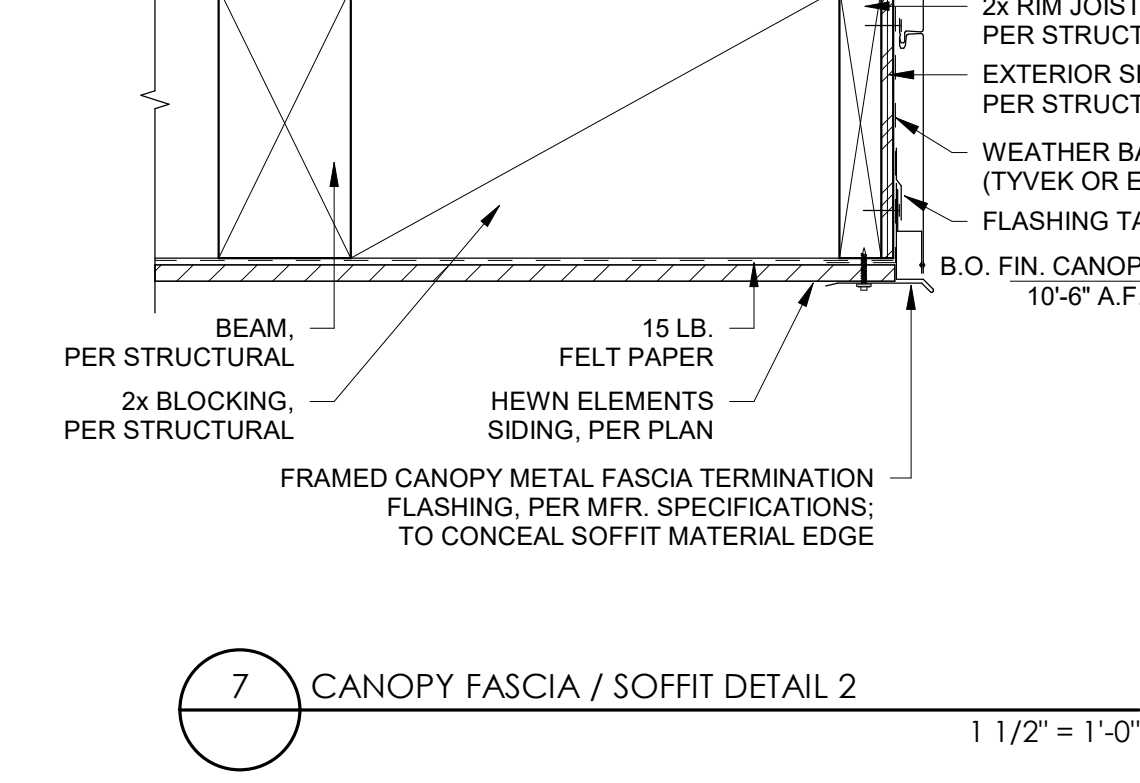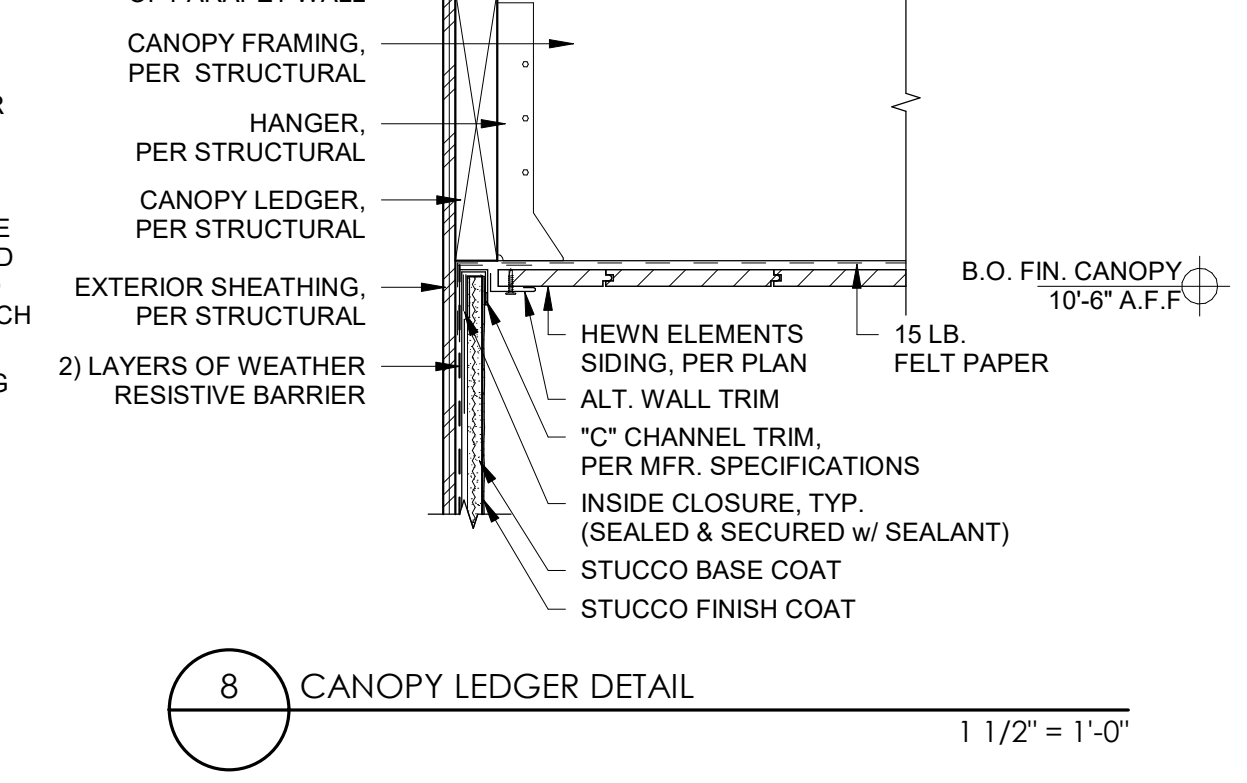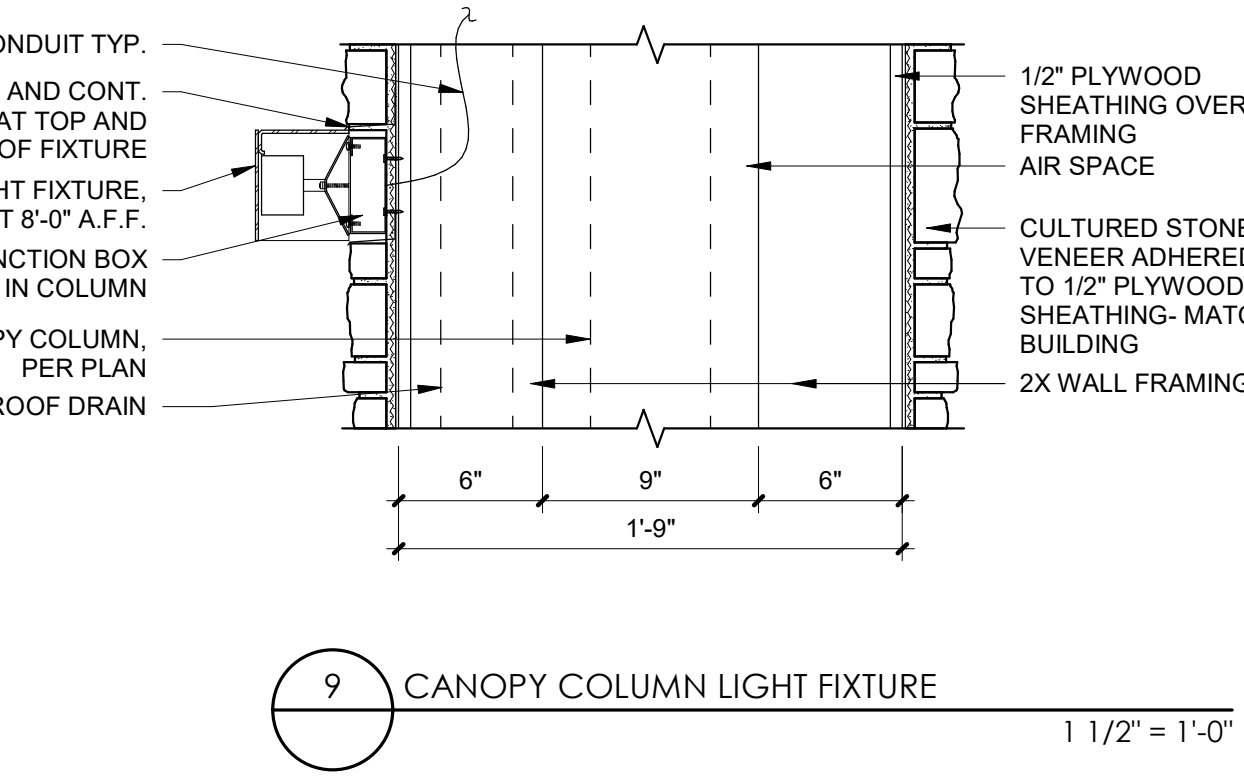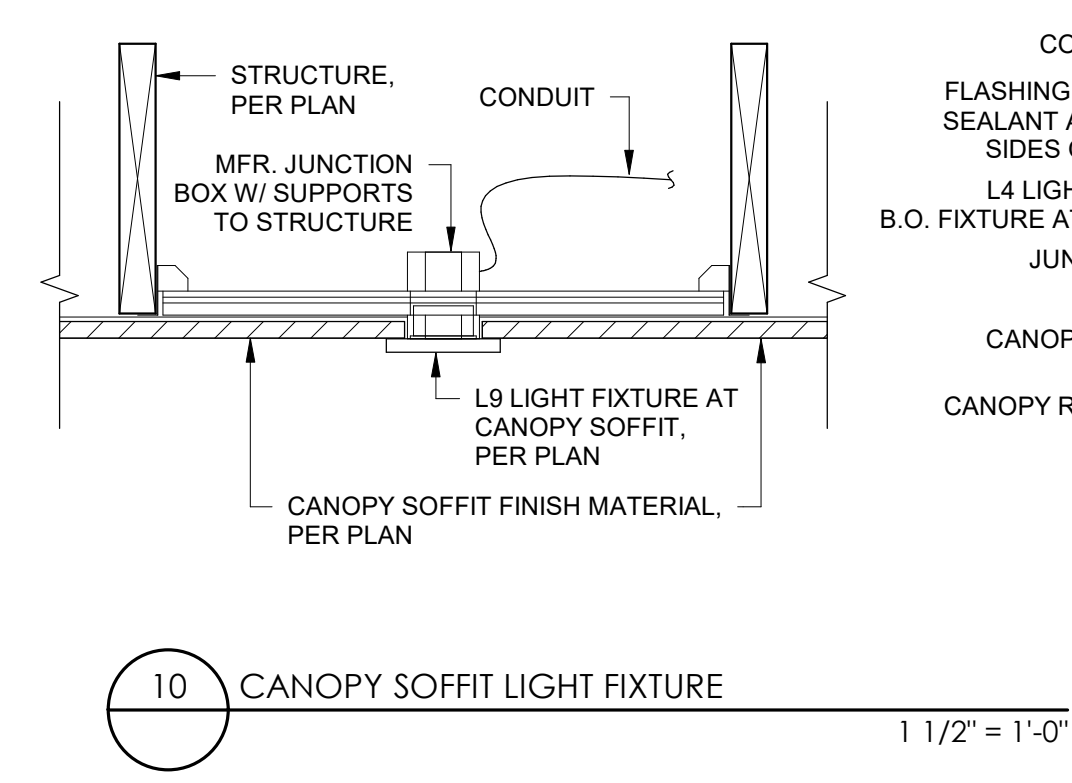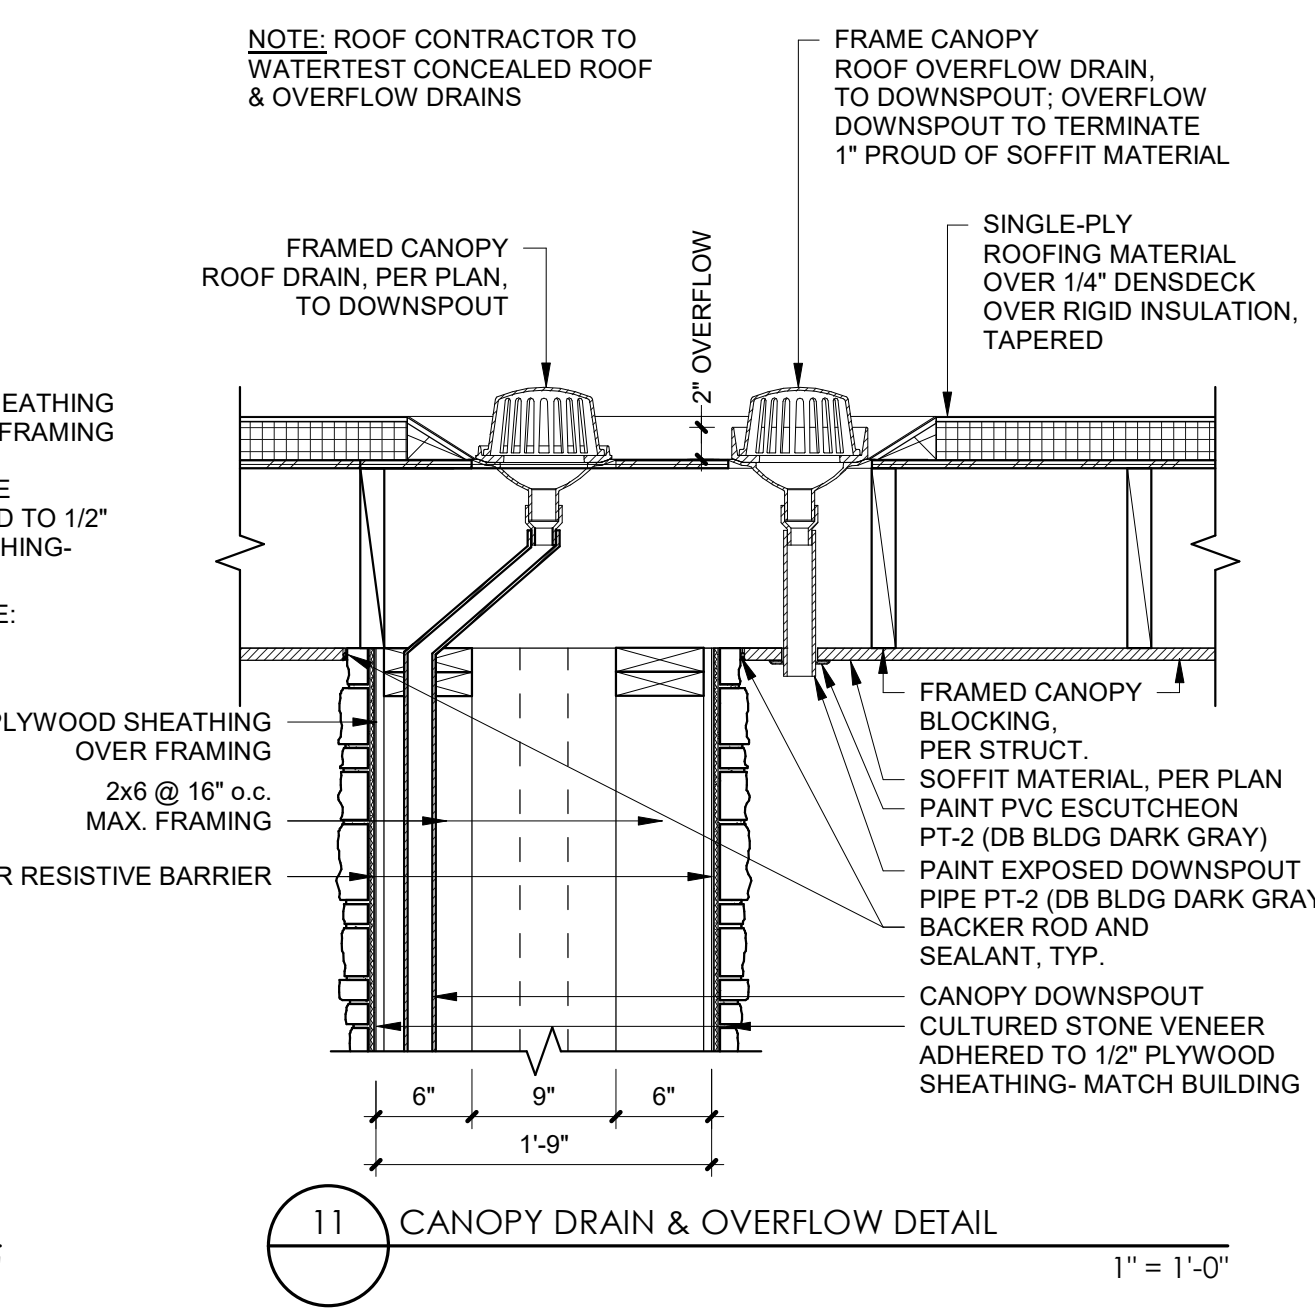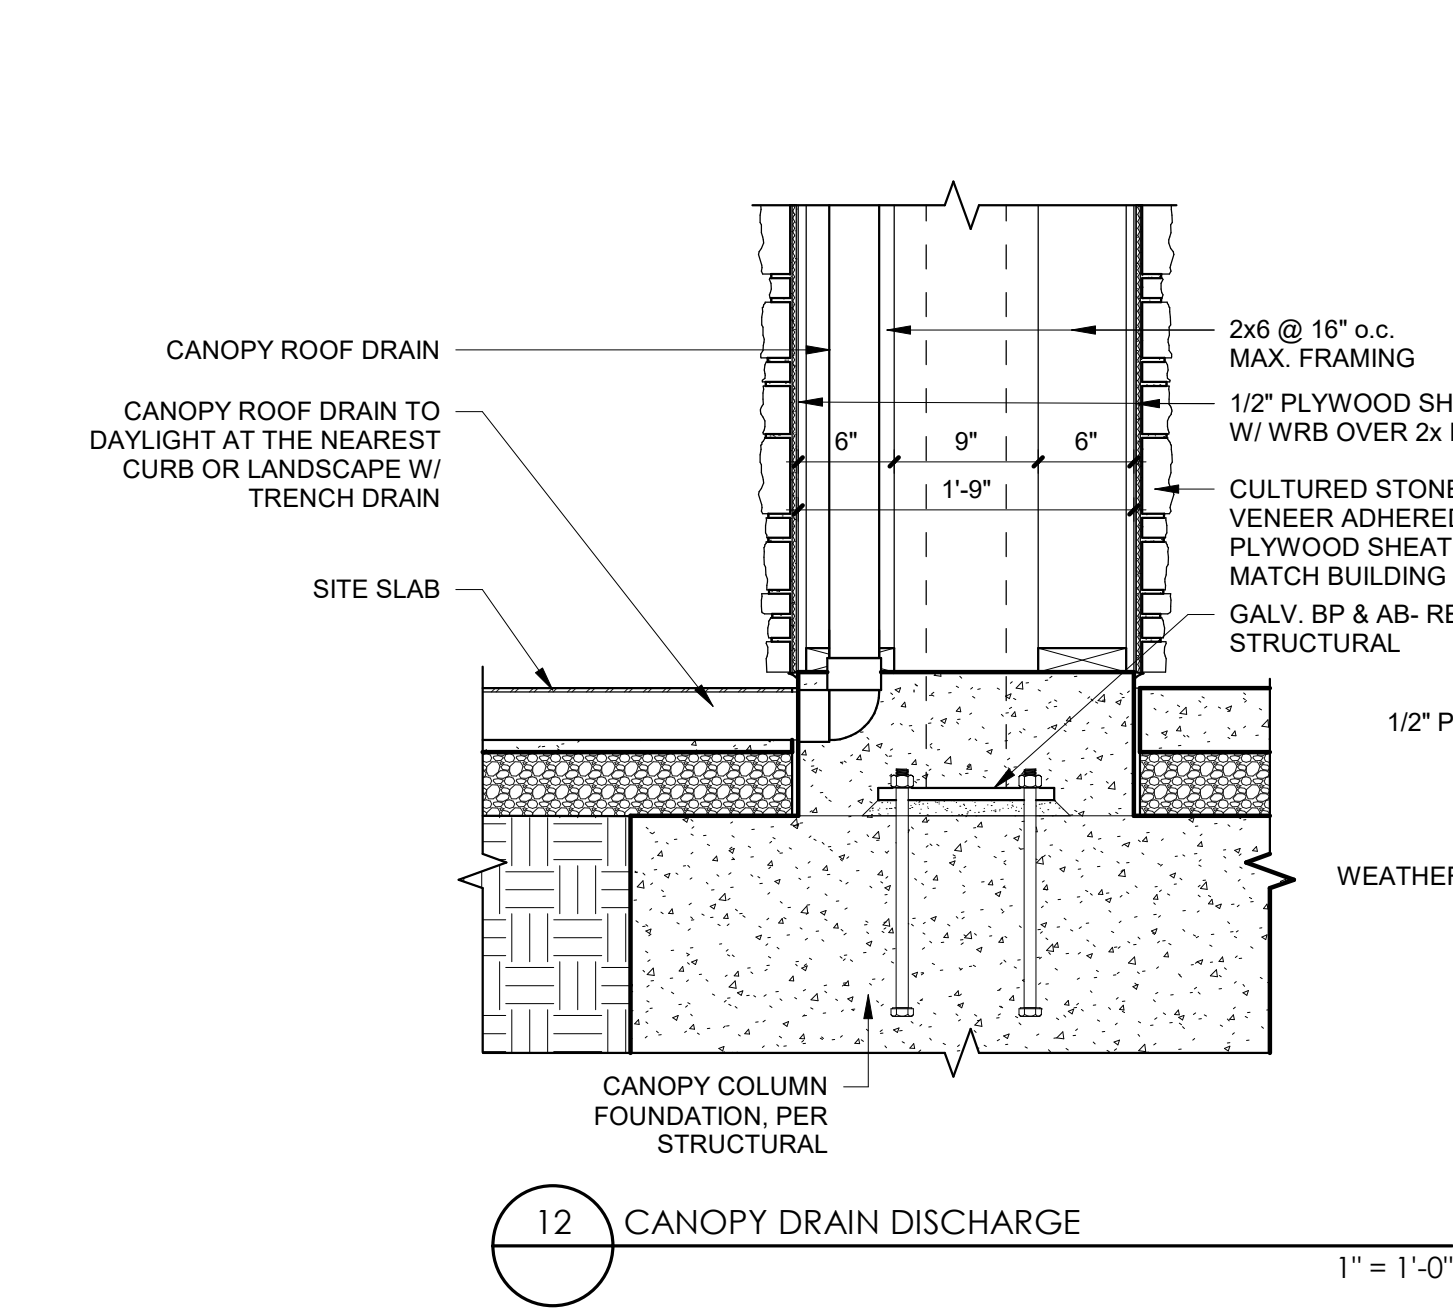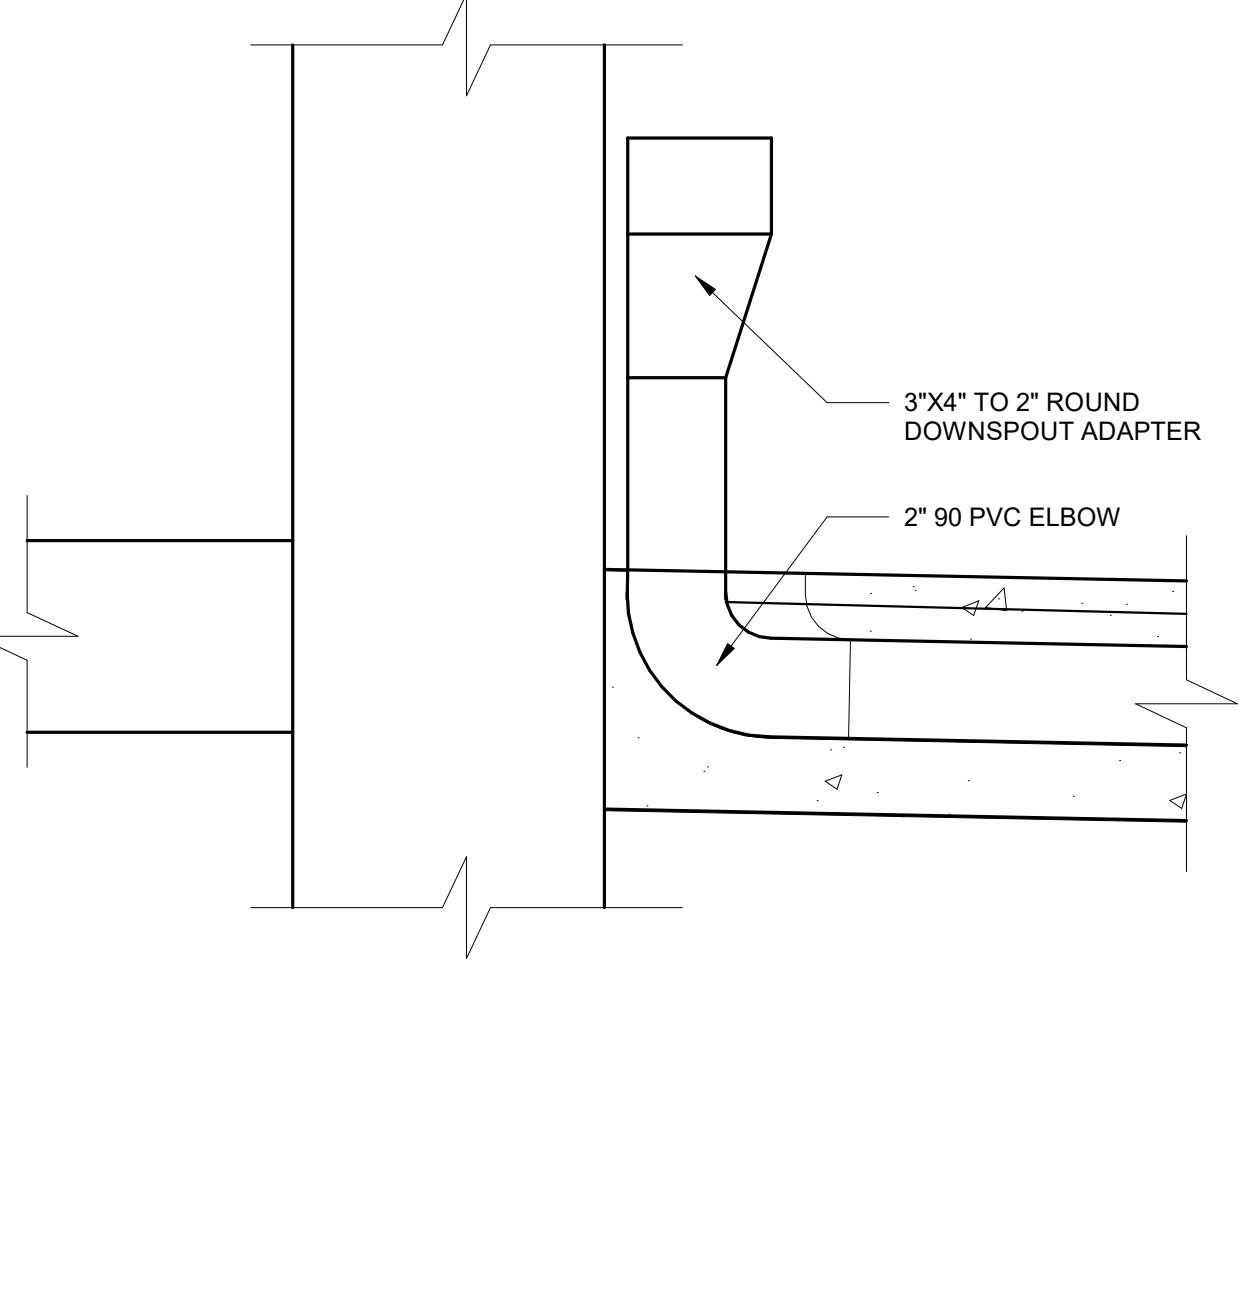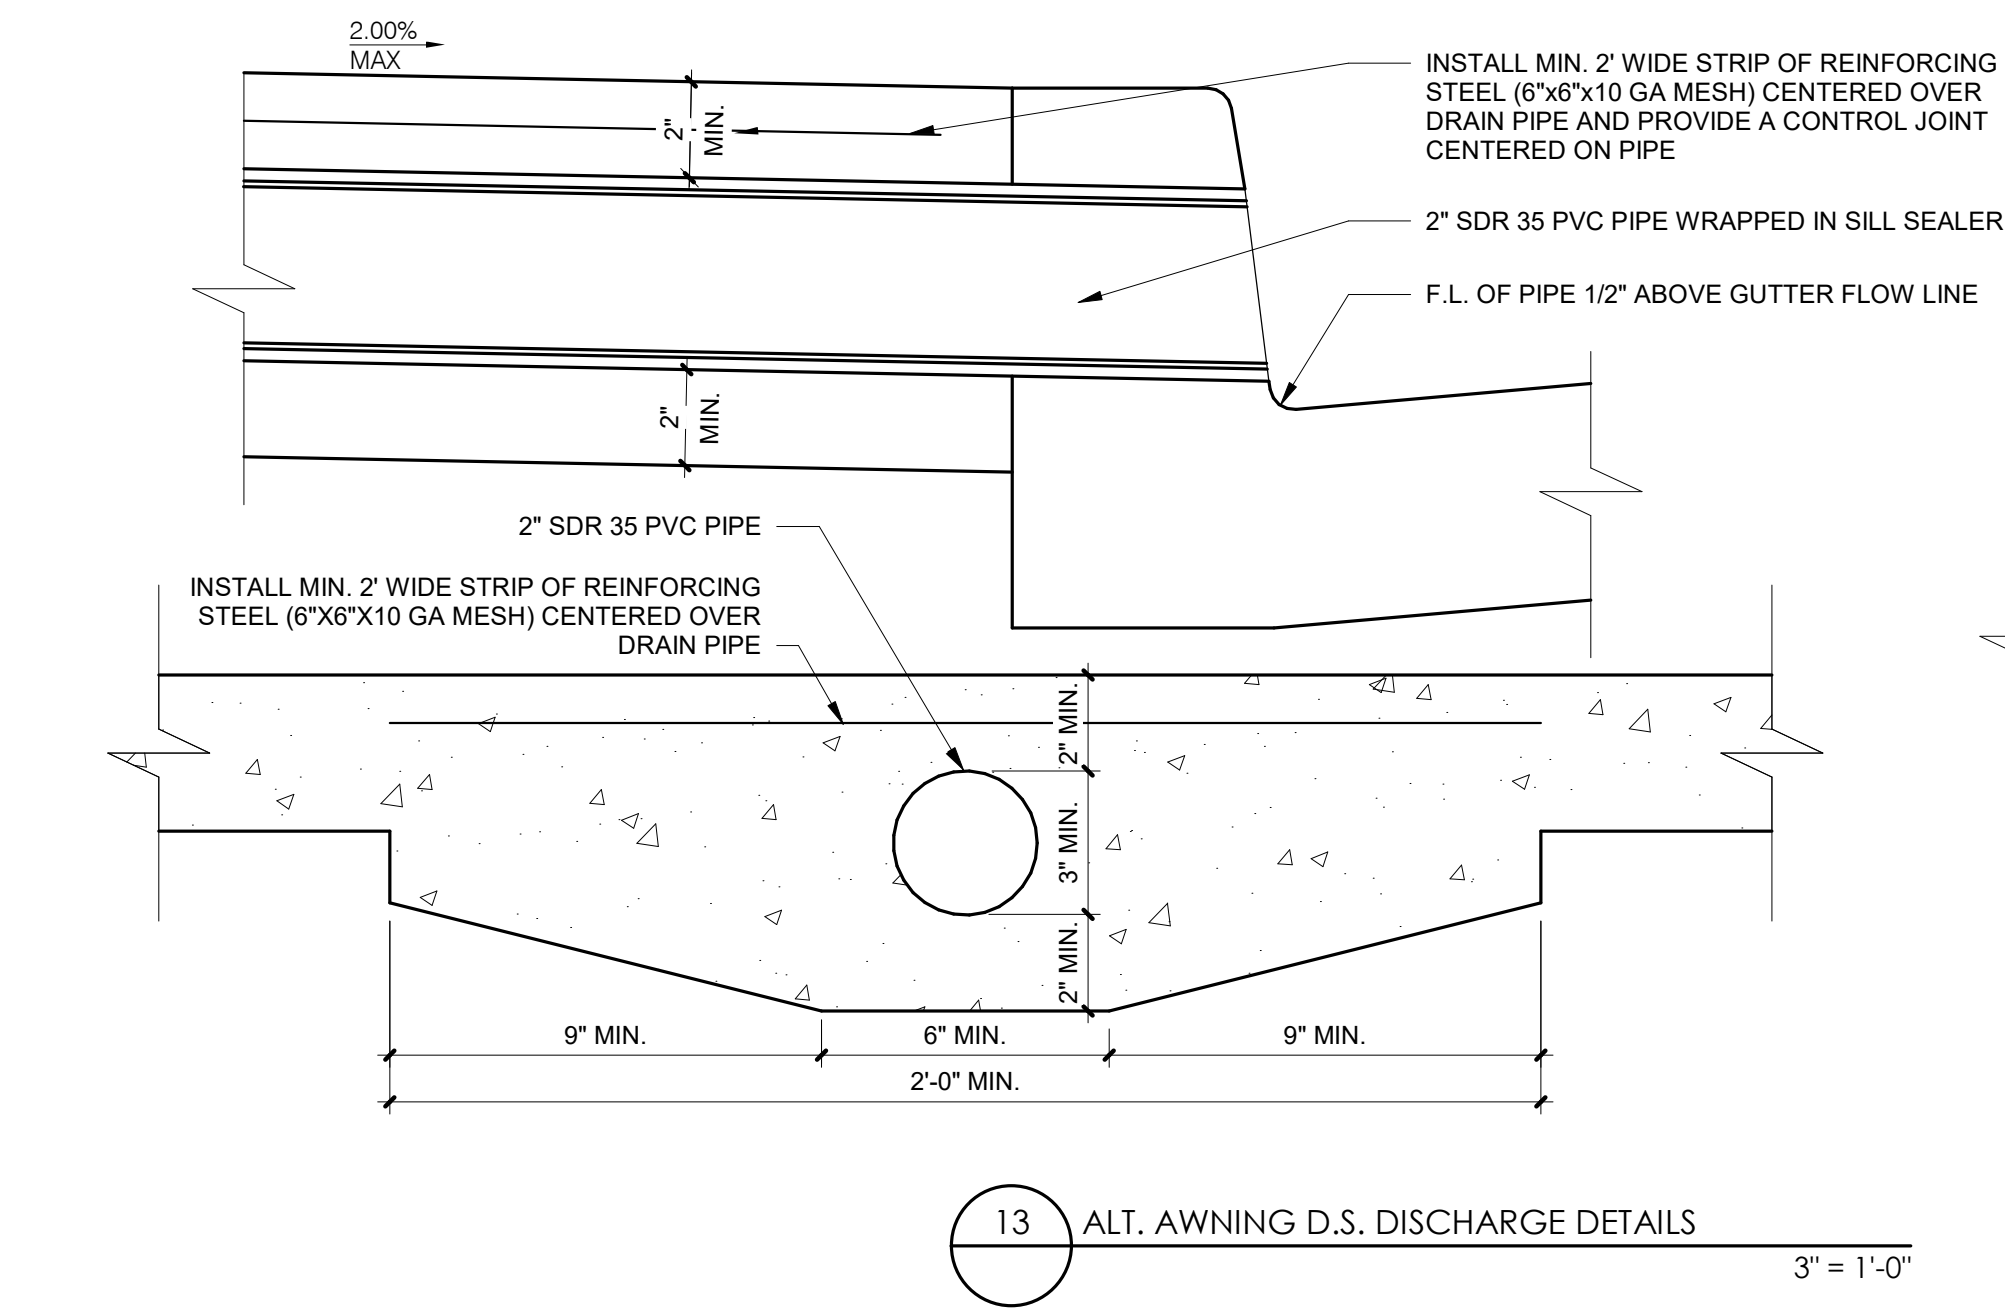

ARCHITECT
CORALIC, LLC
9700 MACKENZIE ROAD, STE. 222
ST. LOUIS, MO 63125
TJ 314.578.4953
EDIN@CORALICARCHITECTURE.COM
STRUCTURAL ENGINEER
KREHER ENGINEERING, INC.
208 N. MAIN STREET,
COLUMBIA, IL 62236
TJ 618.281.8505
NDREYER@KREHERENGINEERING.COM
MEP ENGINEER
CASE ENGINEERING, INC.
796 MERUS CT.
FENTON, MO 63026
TJ 636.349.1600
MCASE@CASEENGINEERINGINC.COM

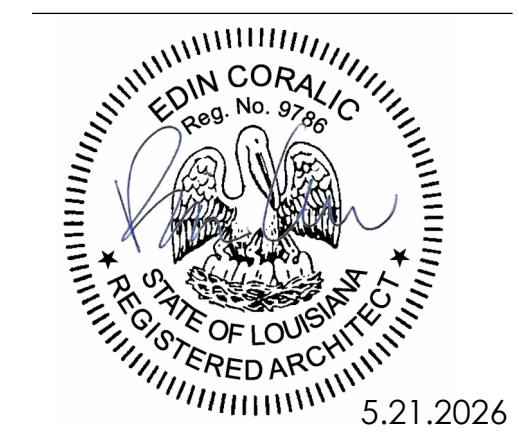

Project No: LA0701
Dutch Bros Coffee - New Freestanding Store
1804 MACARTHUR DRIVE,
ALEXANDRIA, LA 71301
For: Dutch Bros Coffee
1930 W. Rio Salado Parkway
Tempe, AZ 85281
ANNIHILATOR A1

ISSUED FOR PERMIT
5.21.2026








REV:	DATE:	DESCRIPTION:

SHEET NAME:
AWNING/ CANOPY DETAILS

SHEET NUMBER:
A3.2

© 2025 DB Franchising USA, LLC

"The name DUTCH-BROS. and all associated logos, distinctive designs, content, information, and other materials featured, displayed, contained herein, and made available by Dutch Bros., including but not limited to, the "hook and leaf" of the establishments and products, all text, images, colors, configurations, graphics, designs, illustrations, photographs, and pictures (collectively, the "Materials") are owned by and/or licensed by DB Franchising USA, LLC and are protected by copyright, trademark, trade dress, patent, and/or other intellectual property rights and unfair competition laws under the United States and foreign laws."

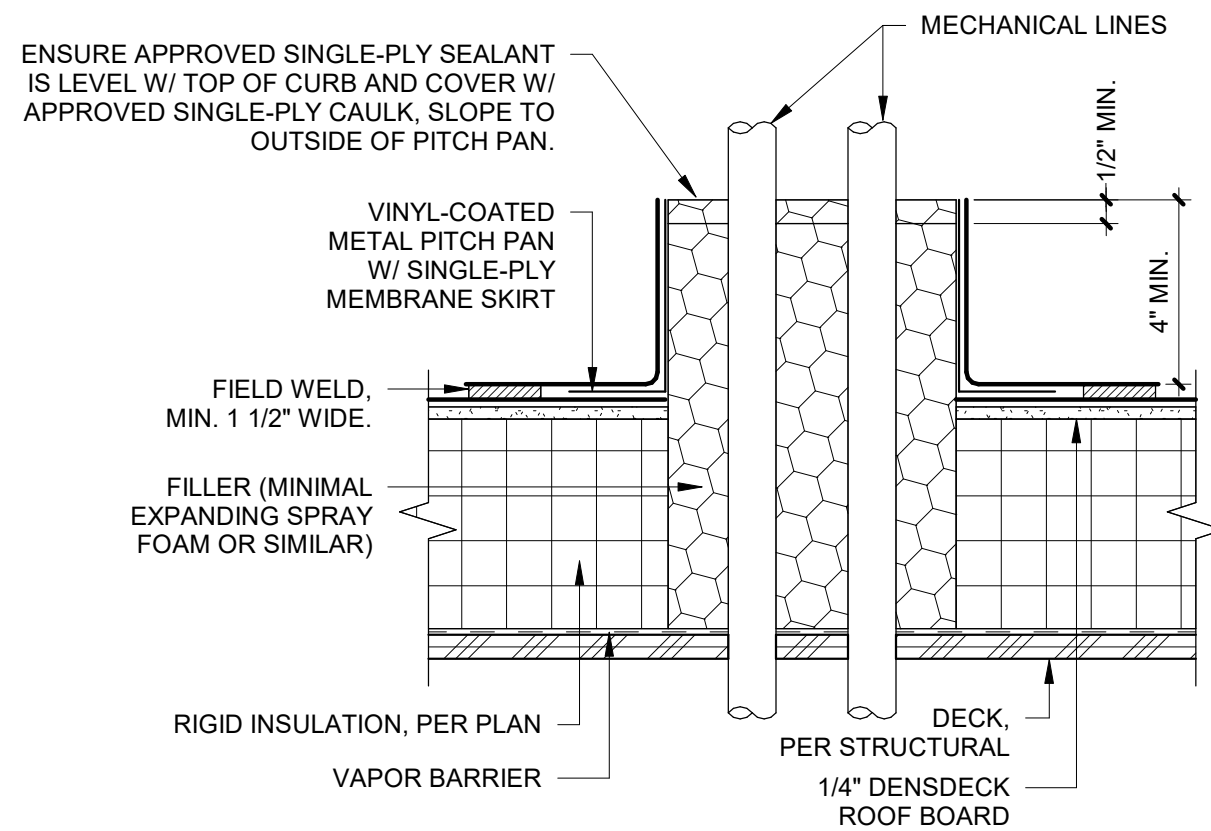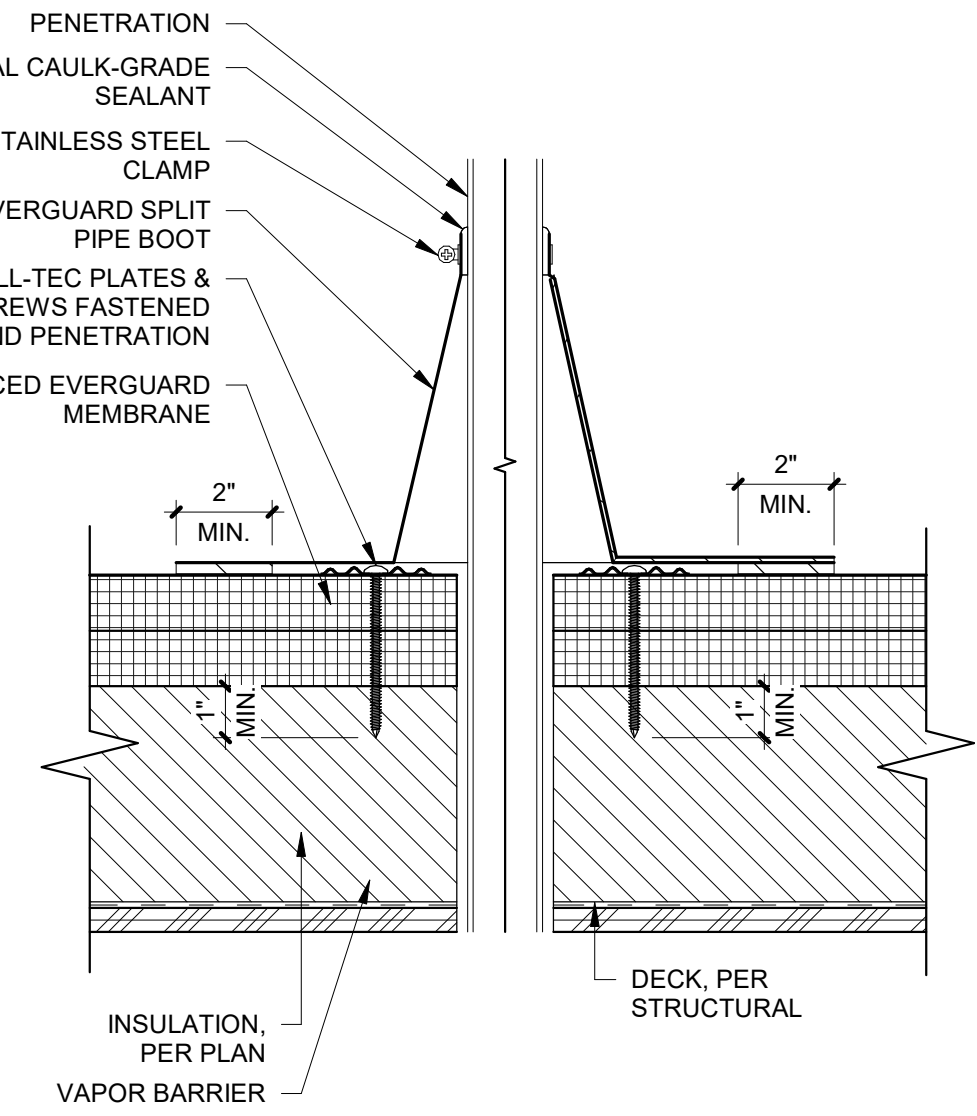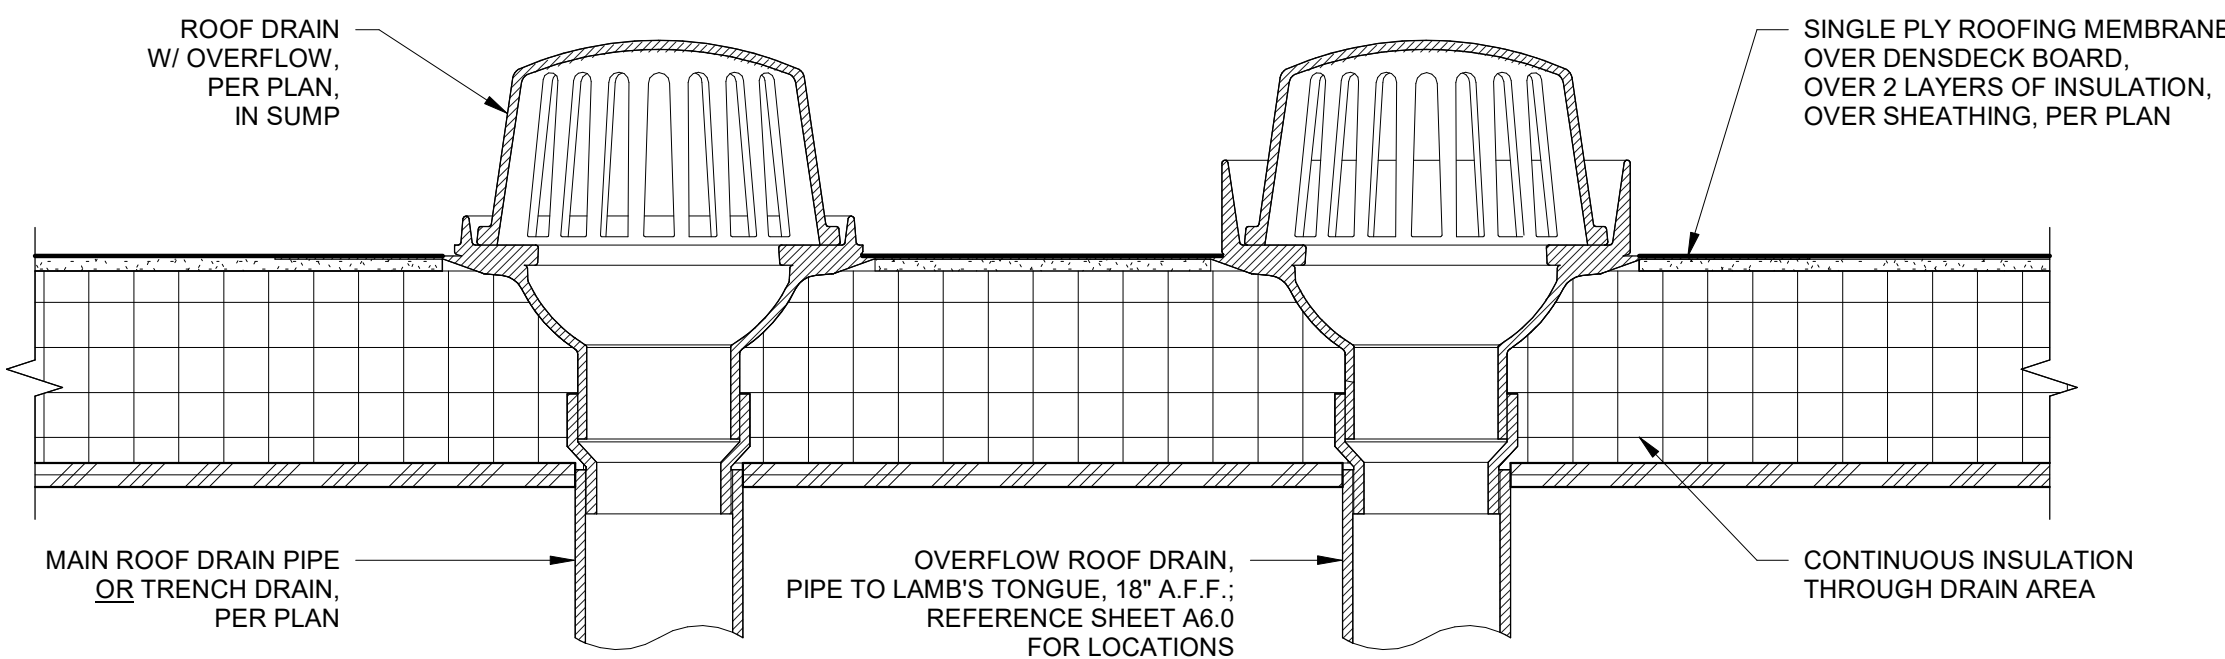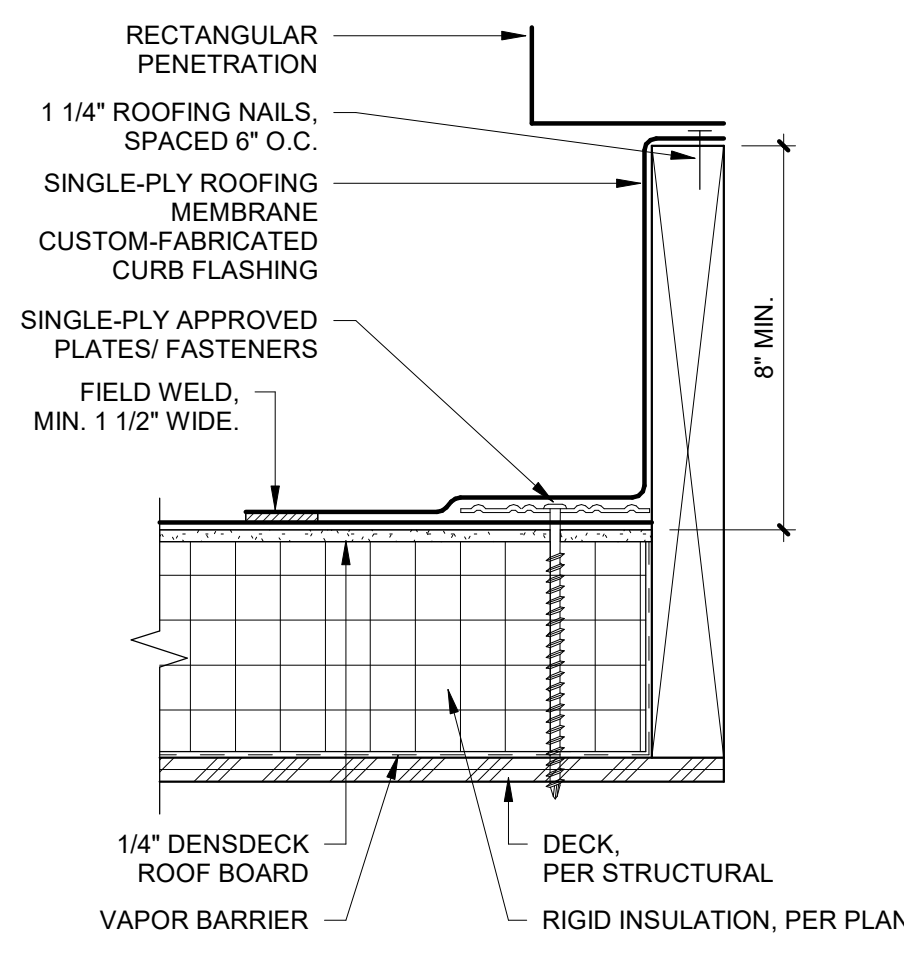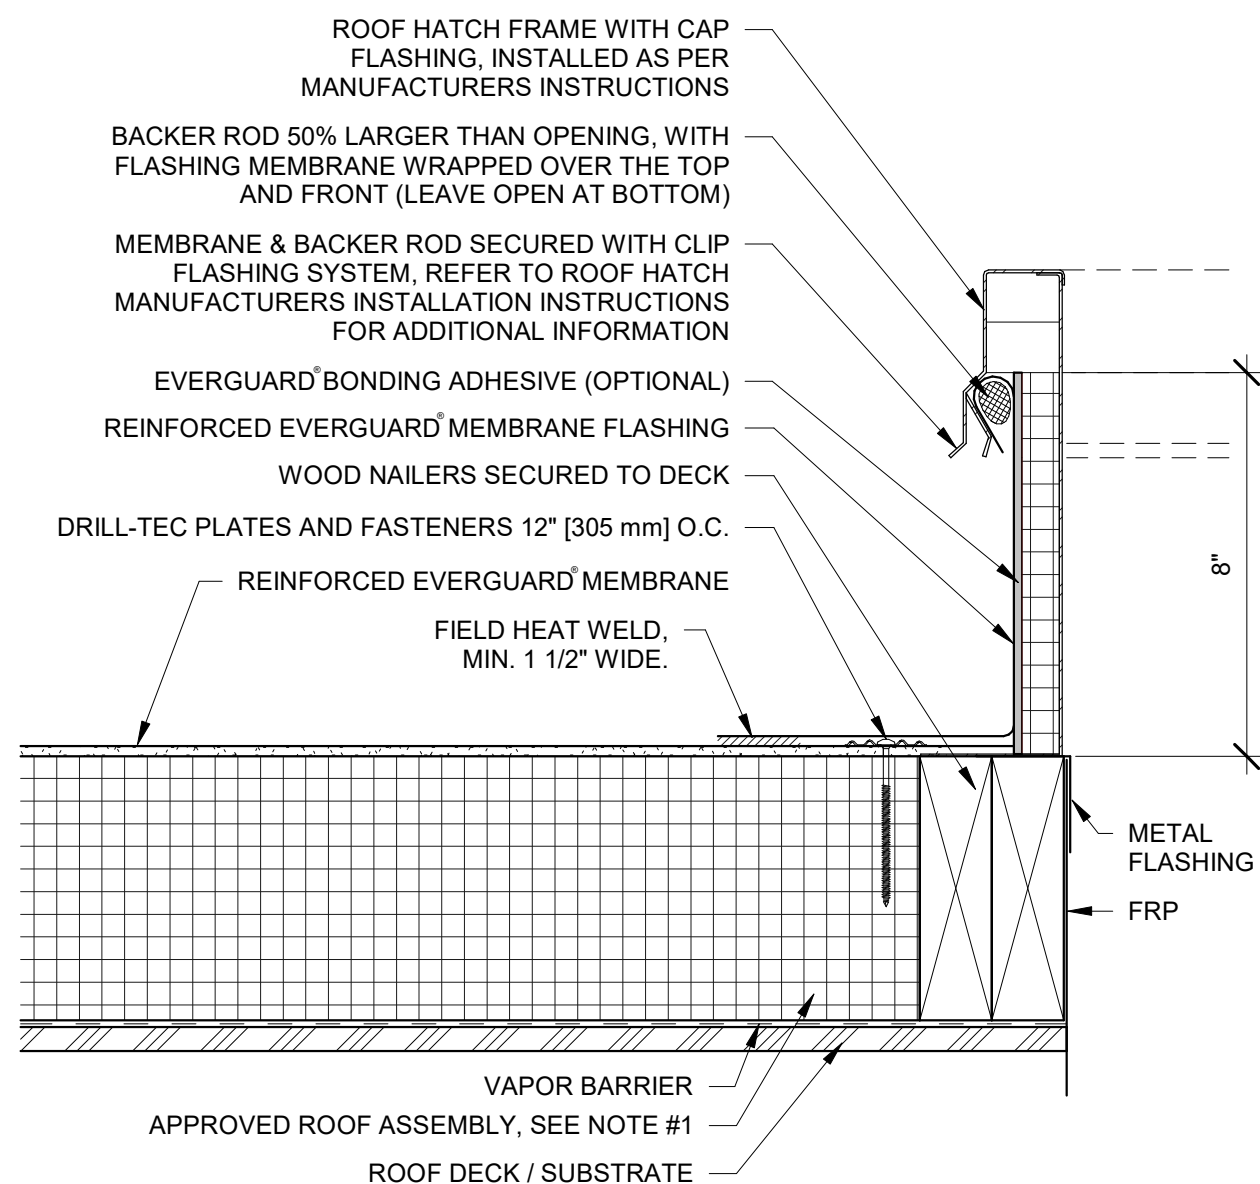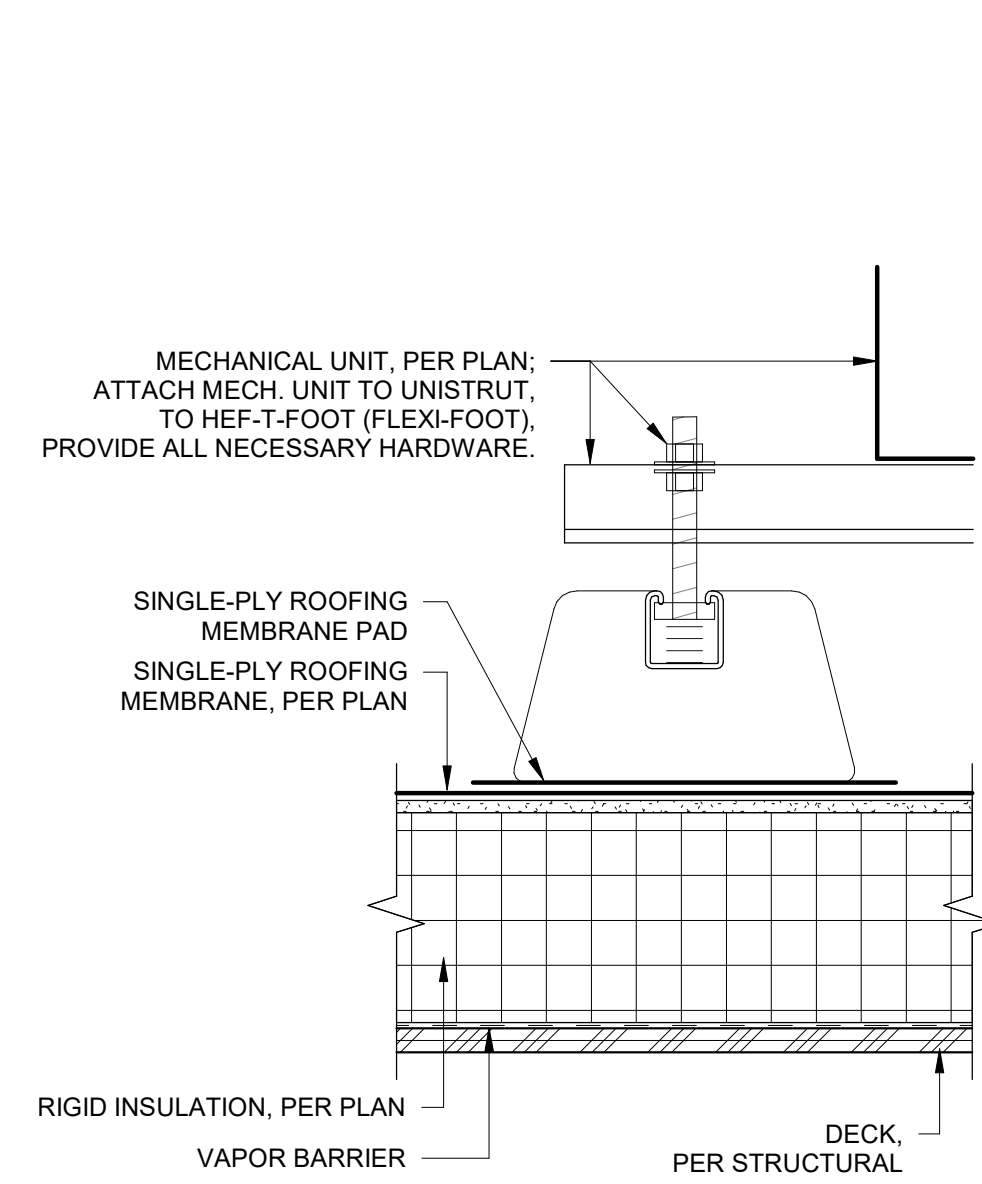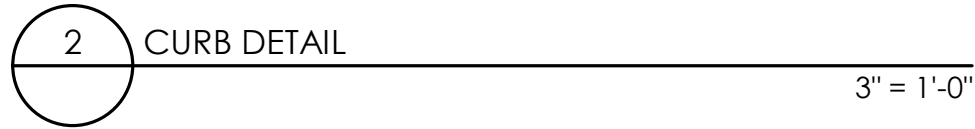

ARCHITECT
CORALIC, LLC
9700 MACKENZIE ROAD, STE. 222
ST. LOUIS, MO 63125

TJ 314.578.4953
EDIN@CORALICARCHITECTURE.COM

STRUCTURAL ENGINEER
KREHER ENGINEERING, INC.
208 N. MAIN STREET,
COLUMBIA, IL 62236

TJ 618.281.8505
NDREYER@KREHERENGINEERING.COM

MEP ENGINEER
CASE ENGINEERING, INC.
796 MERUS CT.
FENTON, MO 63026

TJ 636.349.1600
MCASE@CASEENGINEERINGINC.COM



ANNIHILATOR A1

Project No: LA0701
Dutch Bros Coffee - New Freestanding Store
1804 MACARTHUR DRIVE,
ALEXANDRIA, LA 71301
For: Dutch Bros Coffee
1930 W. Rio Salado Parkway
Tempe, AZ 85281

ISSUED FOR PERMIT

5.21.2026

REV:	DATE:	DESCRIPTION:














SHEET NAME:

ROOF DETAILS

SHEET NUMBER:

A4.1

"The name DUTCH-BROS. and all associated logos, distinctive designs, content, information, and other materials featured, displayed, contained herein, and made available by Dutch Bros., including but not limited to, the "look and feel" of the establishments and products, all text, images, colors, configurations, graphics, designs, illustrations, photographs, and pictures (collectively, the "Materials") are owned by and/or licensed by DB Franchising USA, LLC and are protected by copyright, trademark, trade dress, patent, and/or other intellectual property rights and under competition laws under the United States and foreign laws."

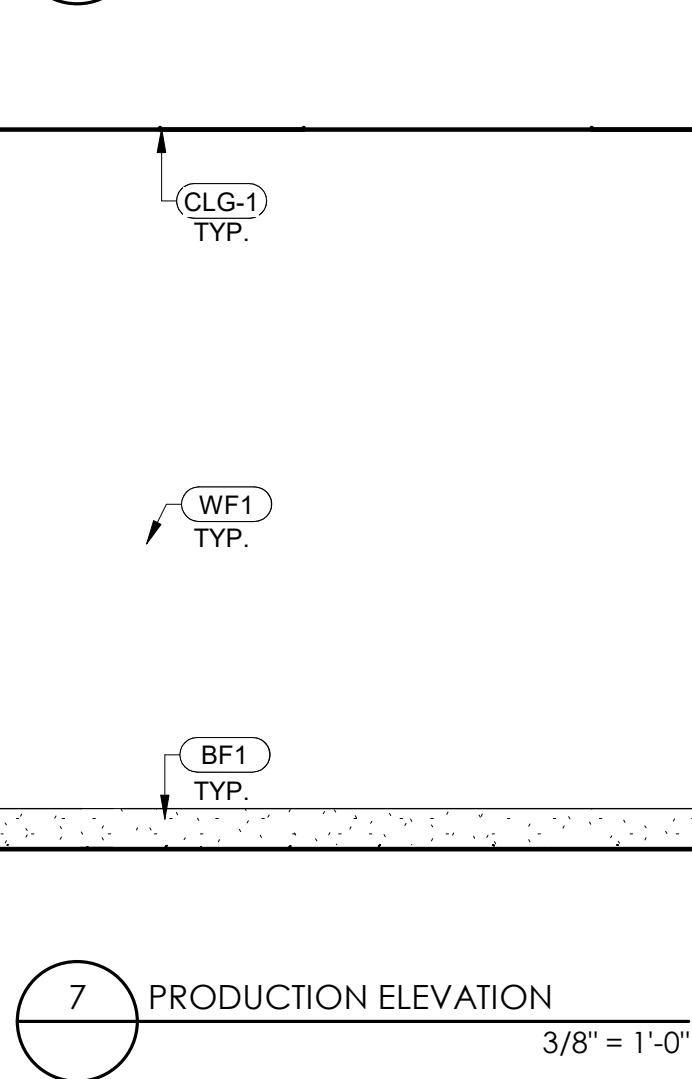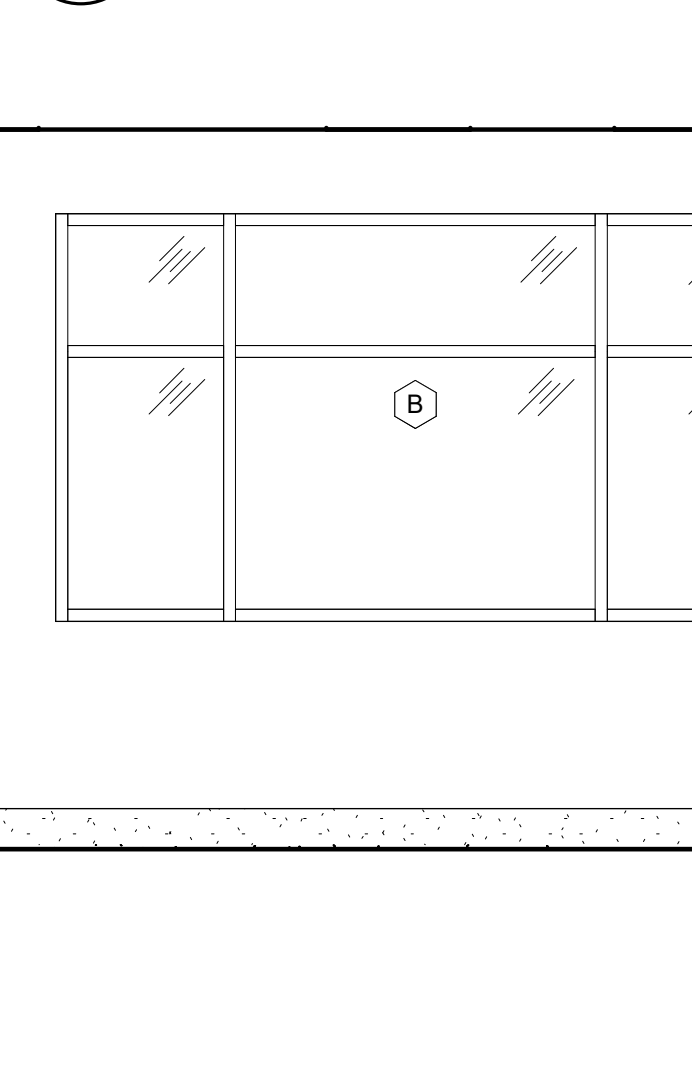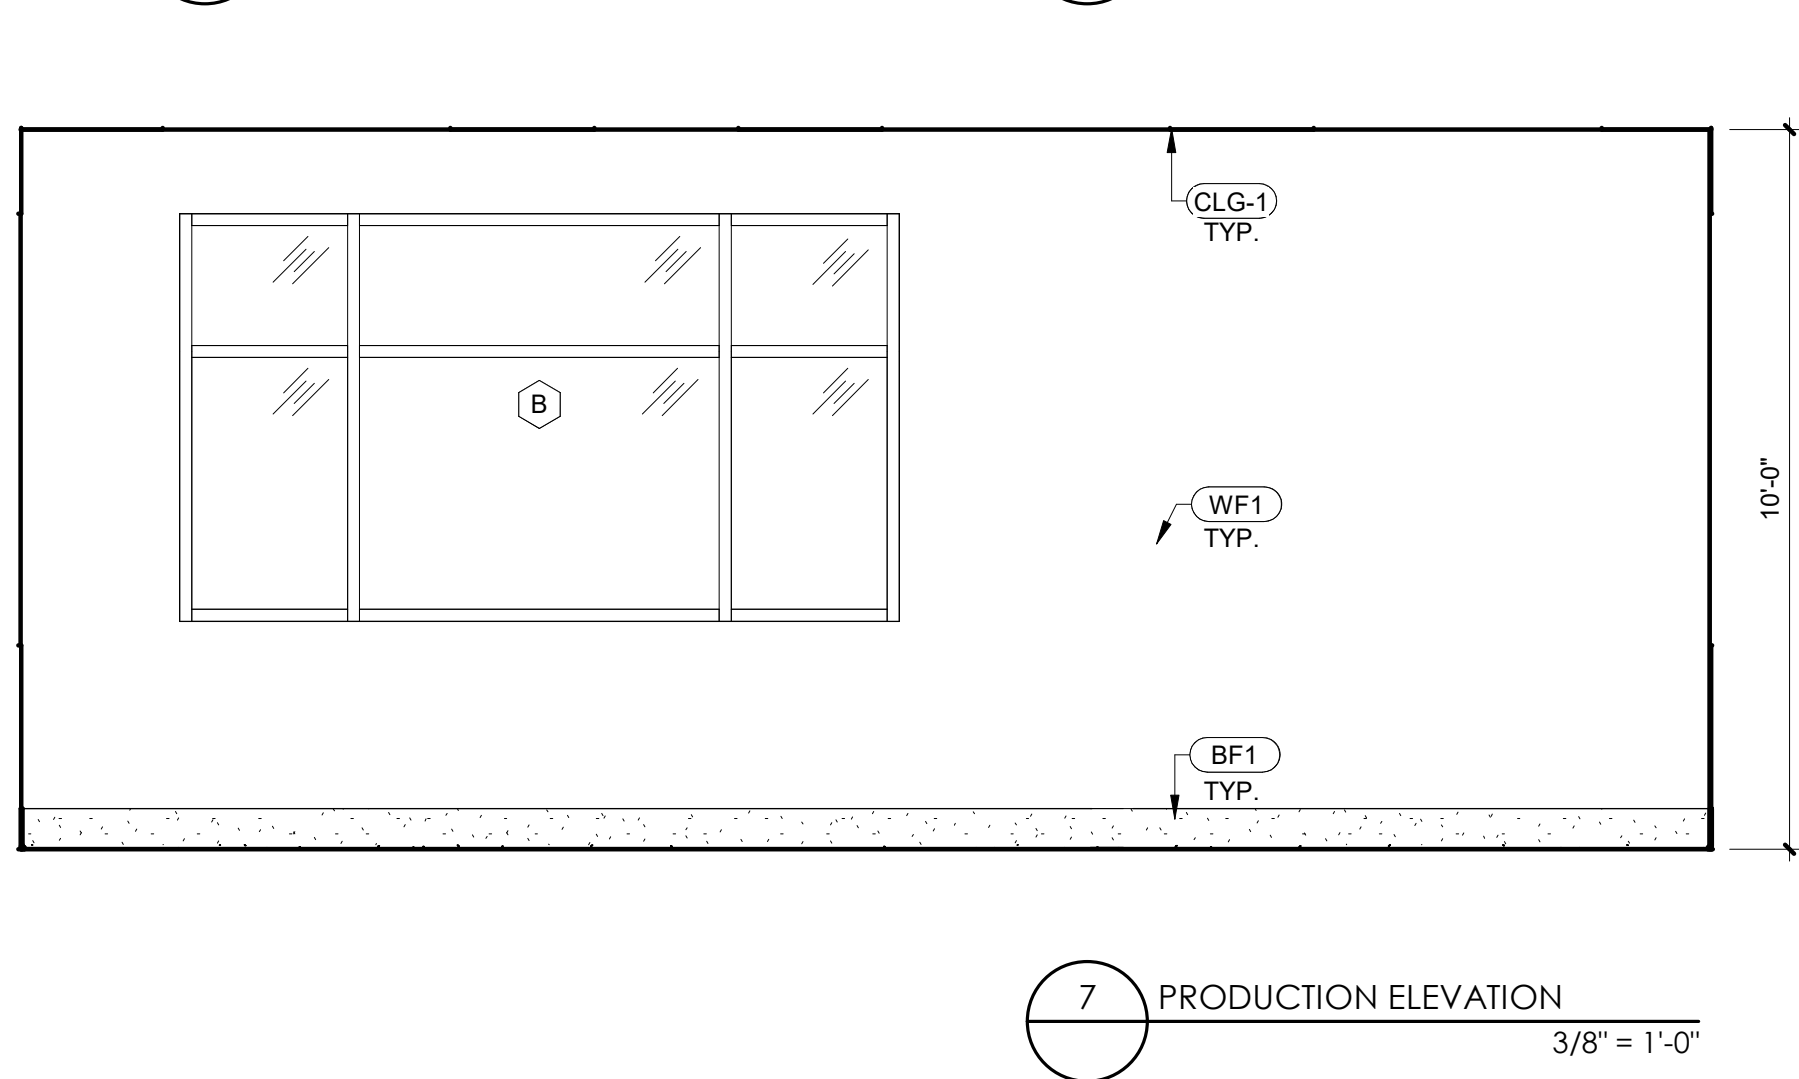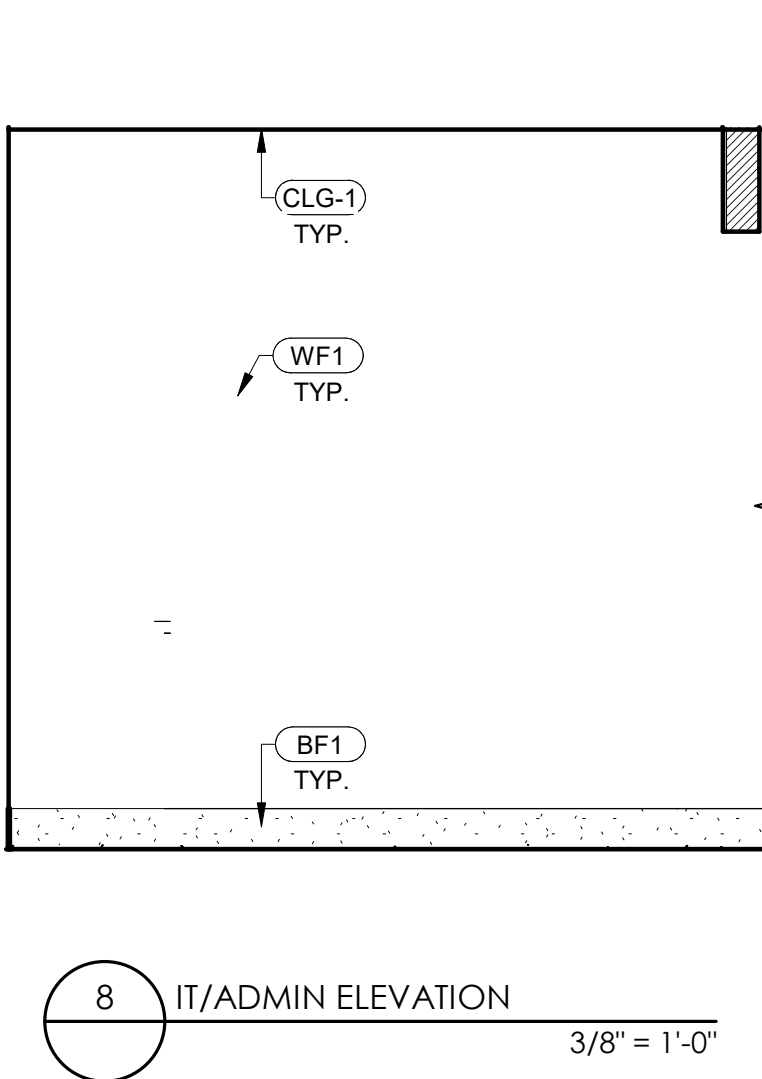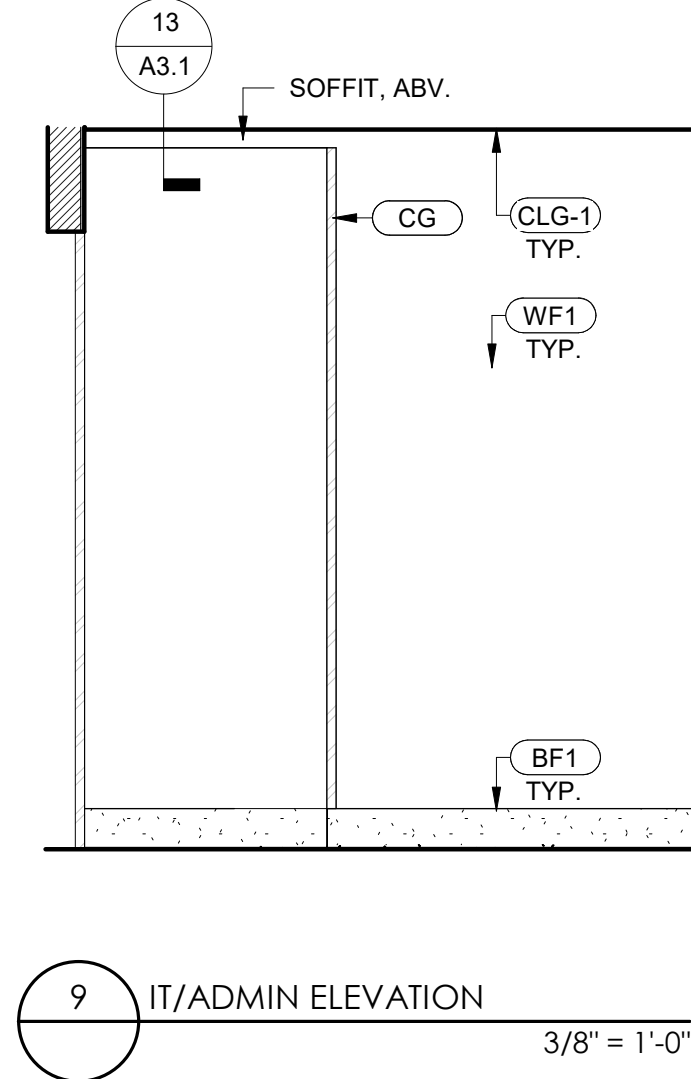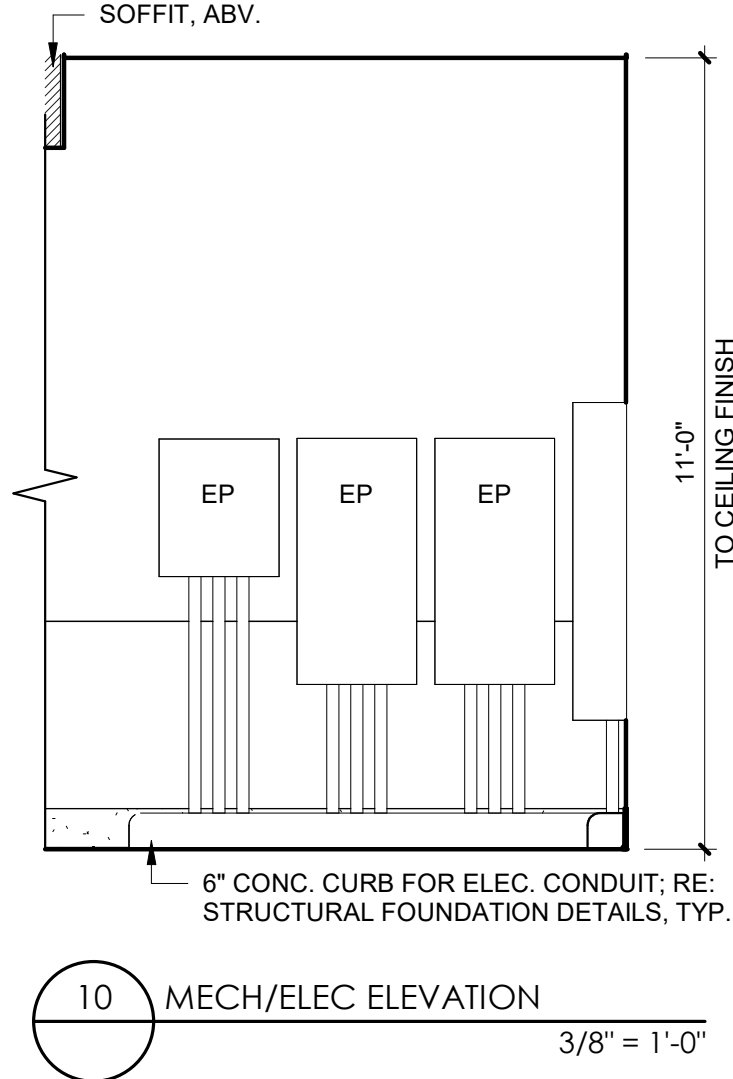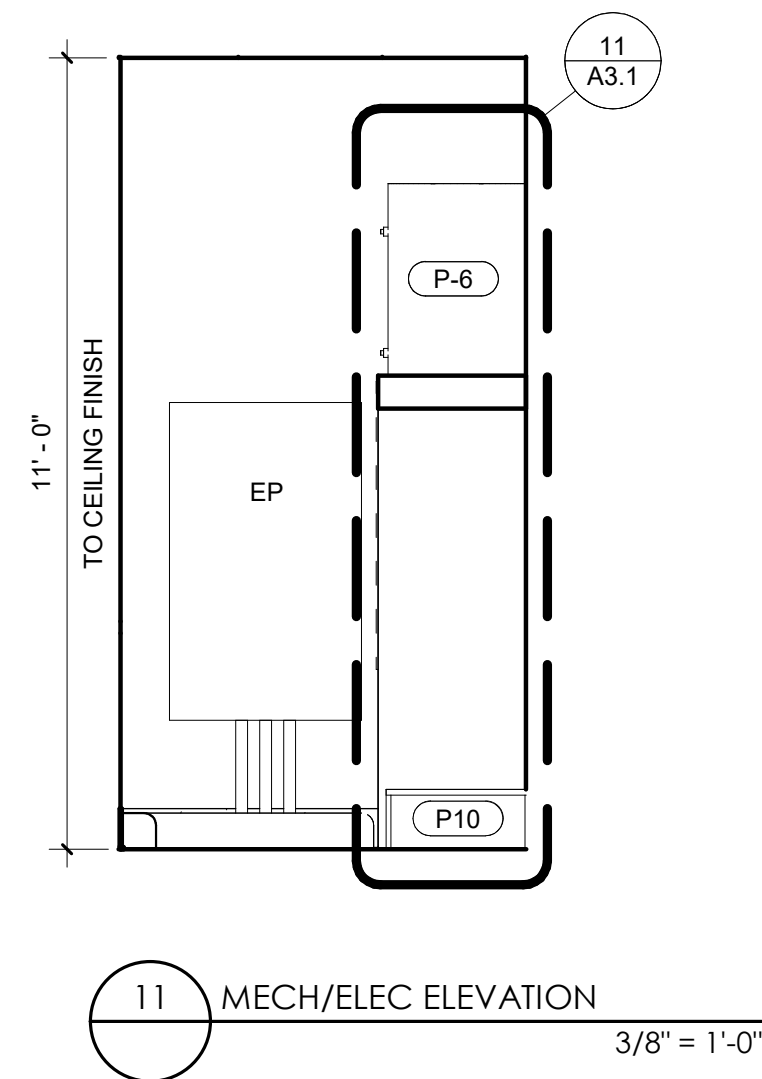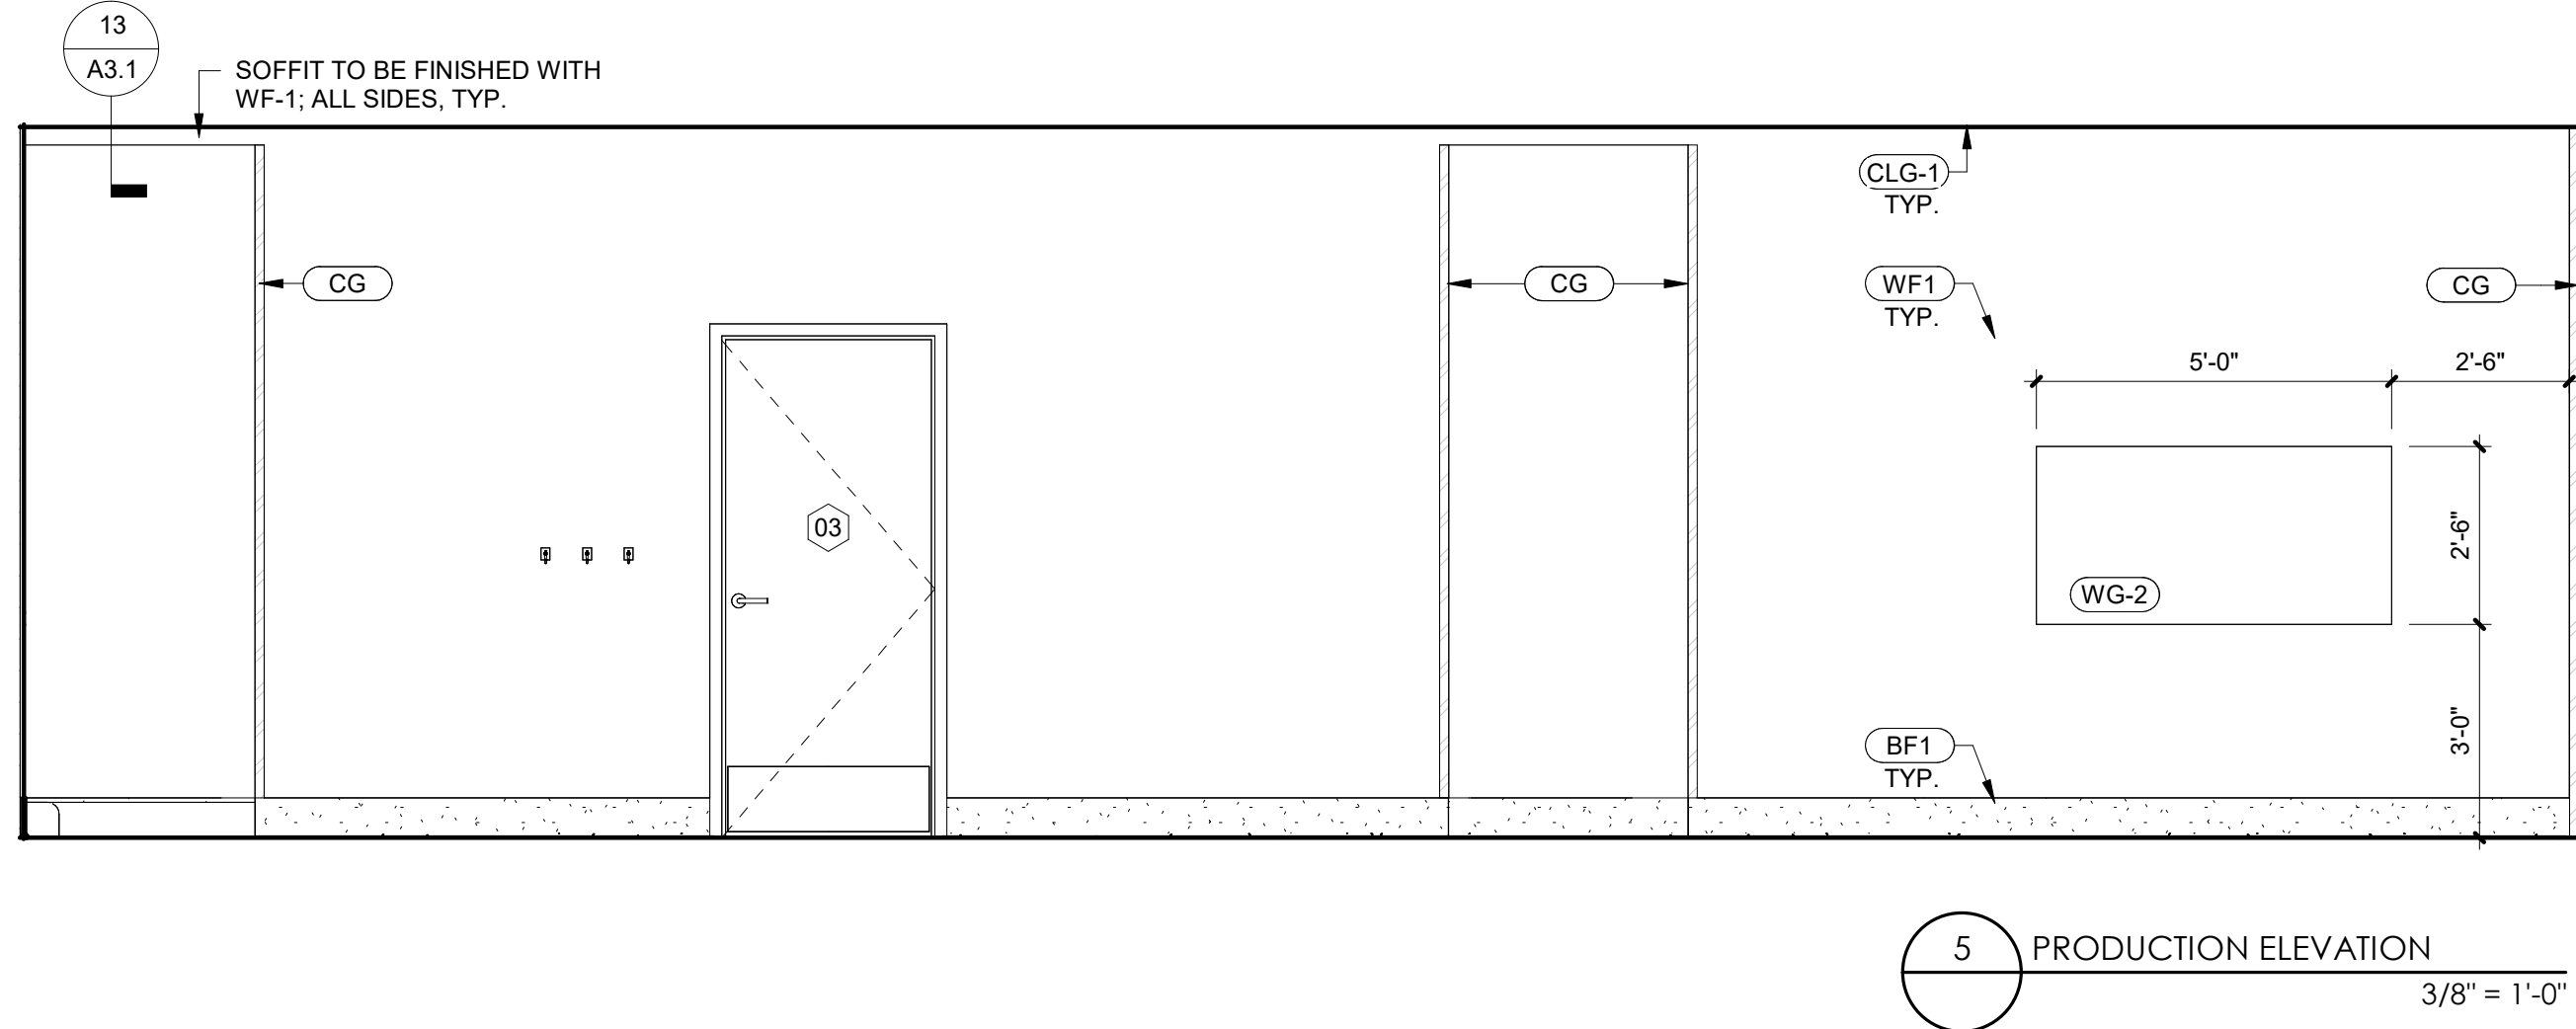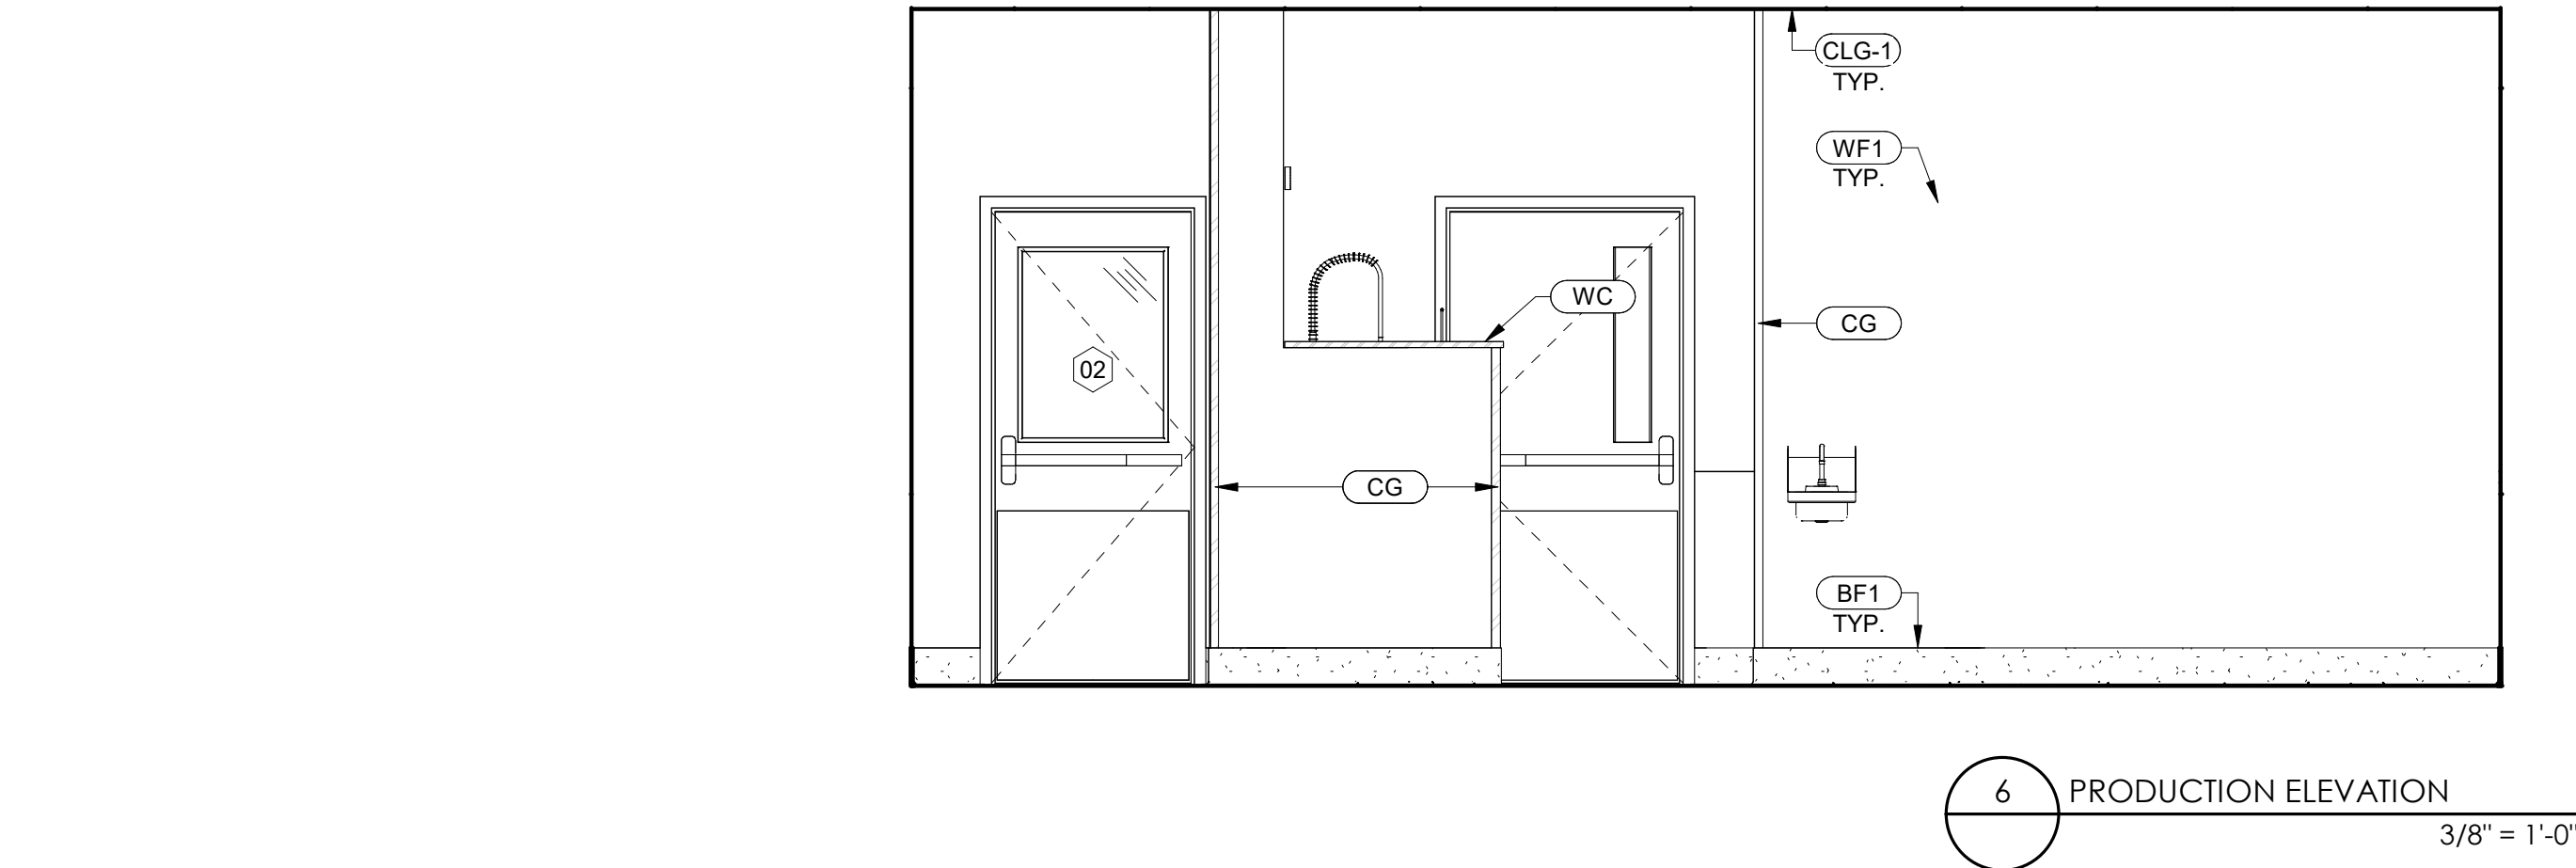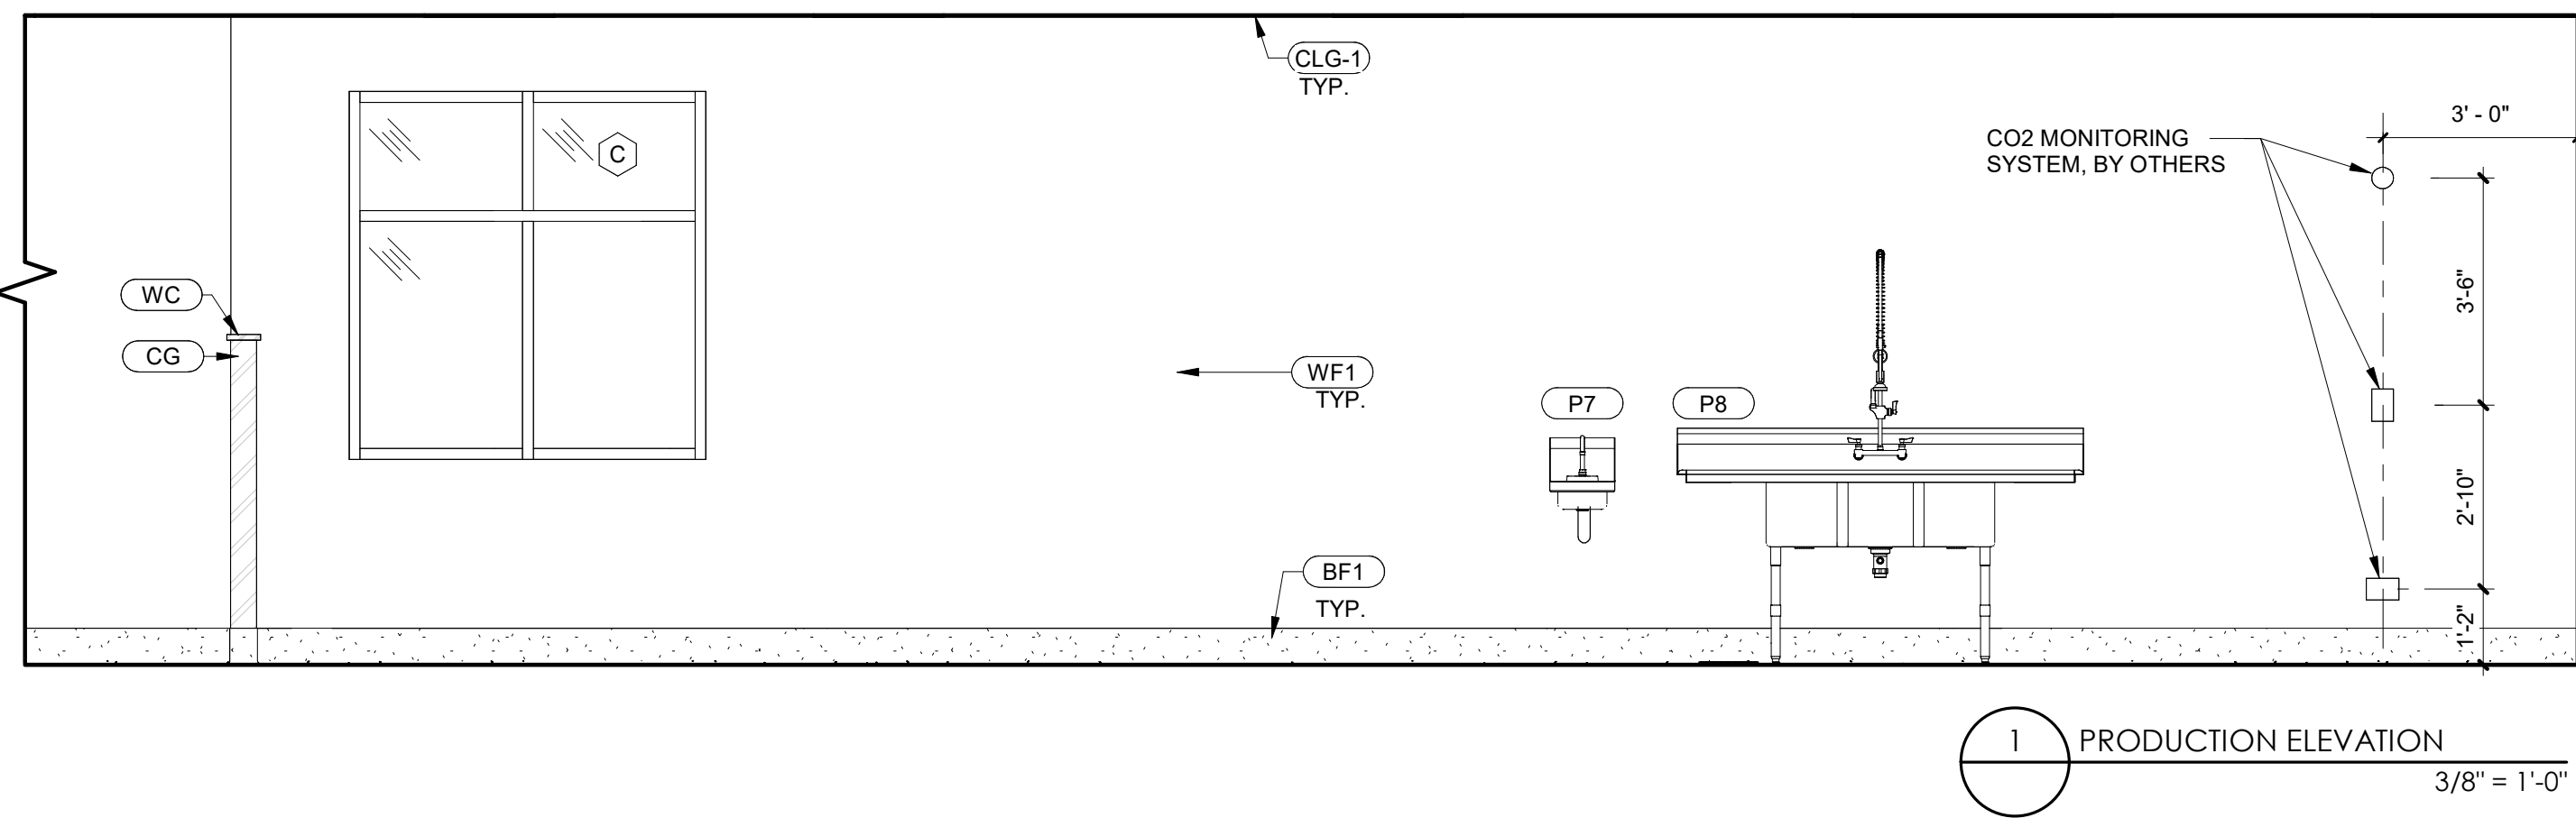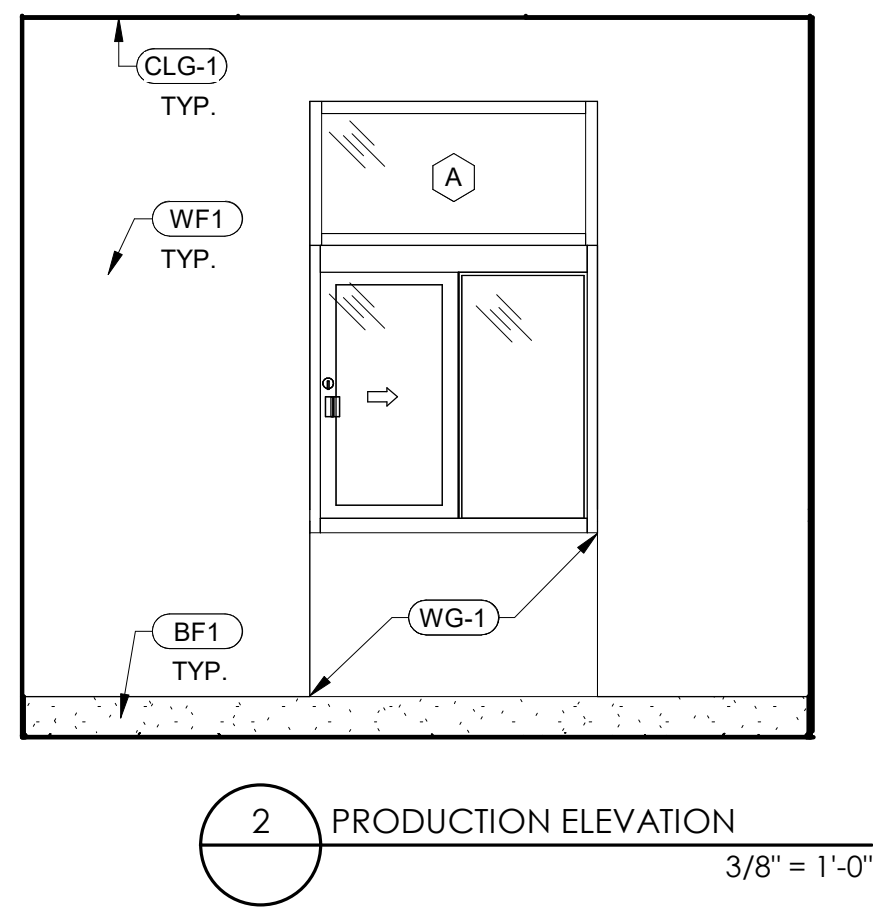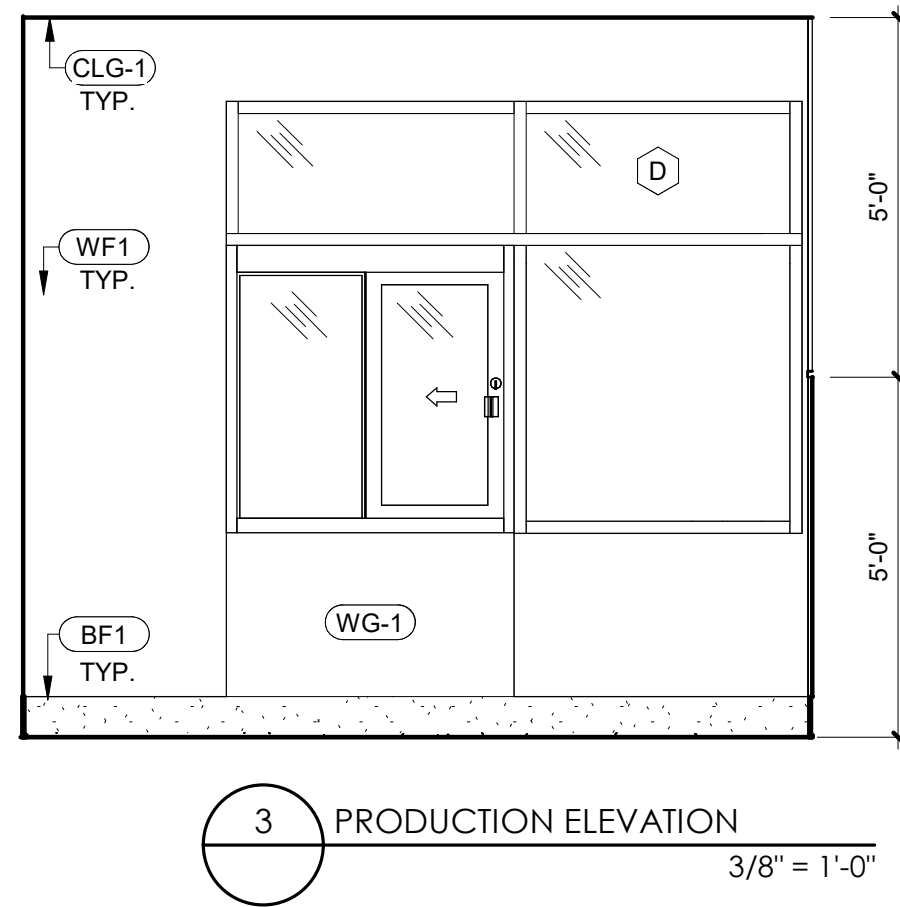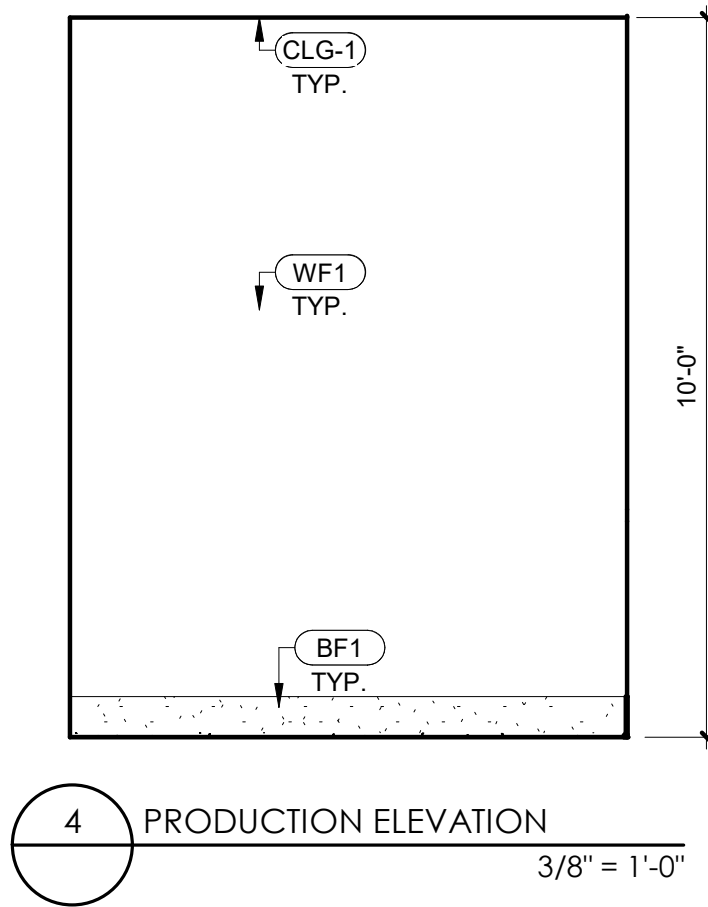

Project No: LA0701
Dutch Bros Coffee - New Freestanding Store
1804 MACARTHUR DRIVE,
ALEXANDRIA, LA 71301
For: Dutch Bros Coffee
1930 W. Rio Salado Parkway
Tempe, AZ 85281

ISSUED FOR PERMIT
5.21.2026

REV:	DATE:	DESCRIPTION:
SHEET NAME:		
INTERIOR ELEVATIONS		
SHEET NUMBER:		

A5.0

© 2025 DB Franchising USA, LLC



ARCHITECT
CORALIC, LLC
9700 MACKENZIE ROAD, STE. 222
ST. LOUIS, MO 63125
TJ 314.578.4953
EDIN@CORALICARCHITECTURE.COM



















STRUCTURAL ENGINEER
KREHER ENGINEERING, INC.
208 N. MAIN STREET,
COLUMBIA, IL 62236
TJ 618.281.8505
NDREYER@KREHERENGINEERING.COM

MEP ENGINEER
CASE ENGINEERING, INC.
796 MERUS CT.
FENTON, MO 63026
TJ 636.349.1600
MCASE@CASEENGINEERINGINC.COM



ANNIHILATOR A1

The name DUTCH-BROS. and all associated logos, distinctive designs, content, information, and other materials featured, displayed, contained herein, and made available by Dutch Bros., including but not limited to, the "hook and leaf" of the establishments and products, all text, images, colors, configurations, graphics, designs, illustrations, photographs, and pictures (collectively, the "Materials") are owned by and/or licensed by DB Franchising USA, LLC and are protected by copyright, trademark, trade dress, patent, and/or other intellectual property rights and under competition laws under the United States and foreign laws.

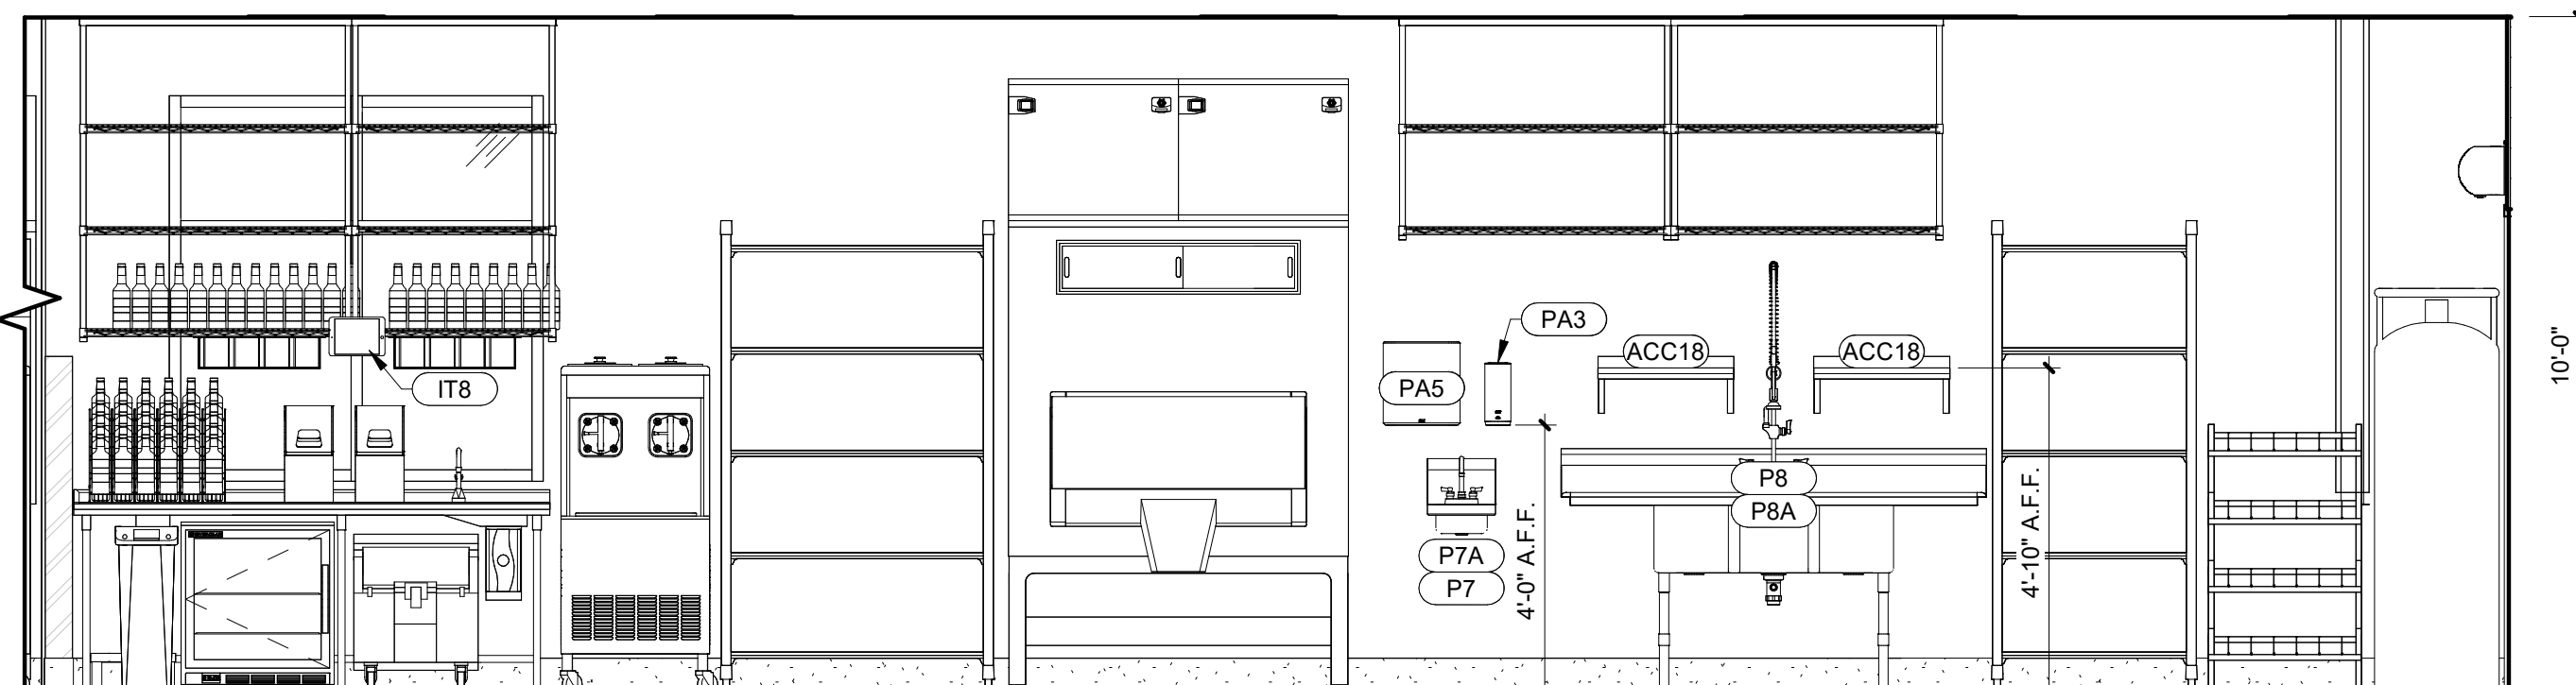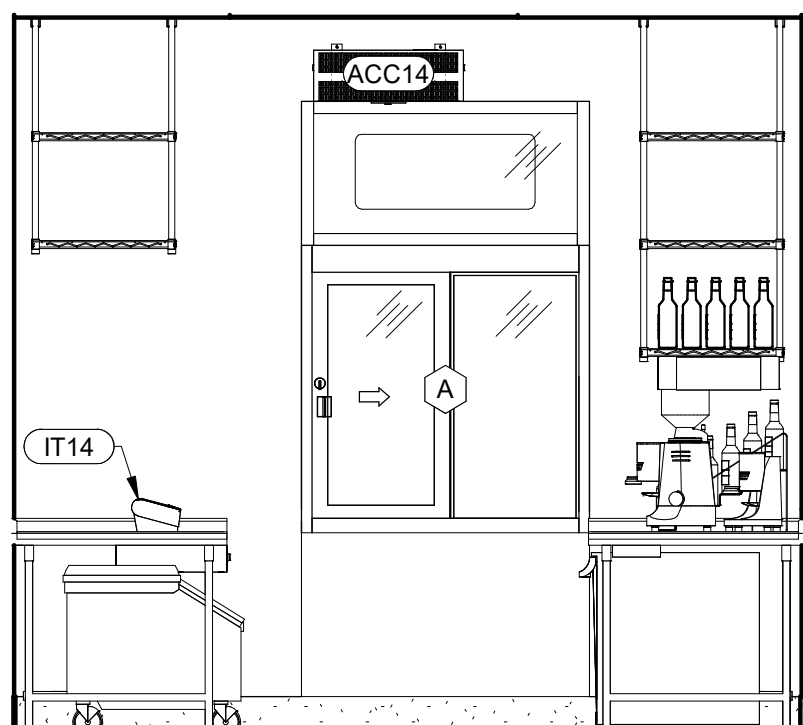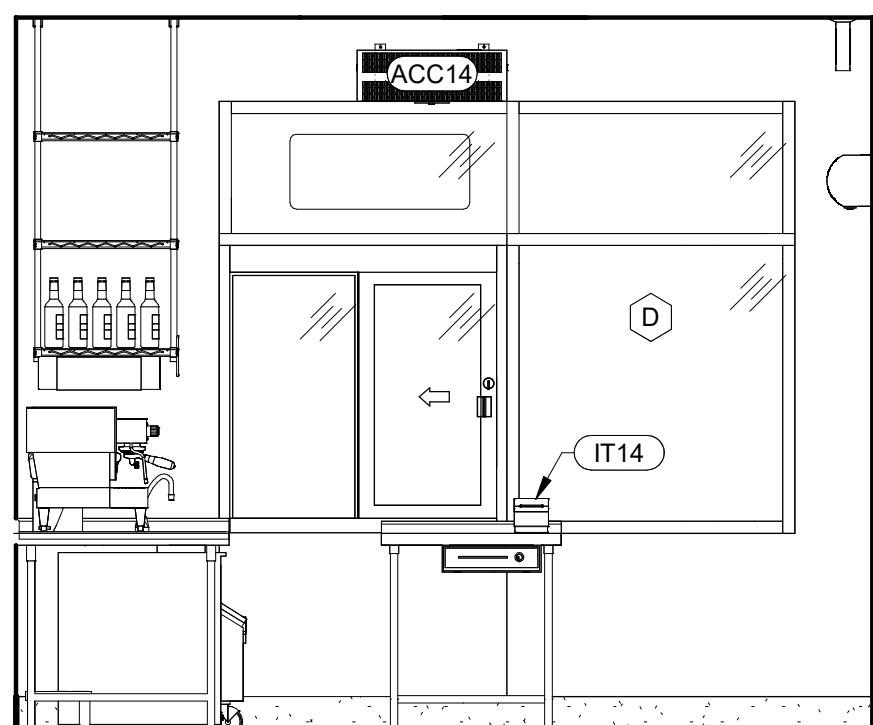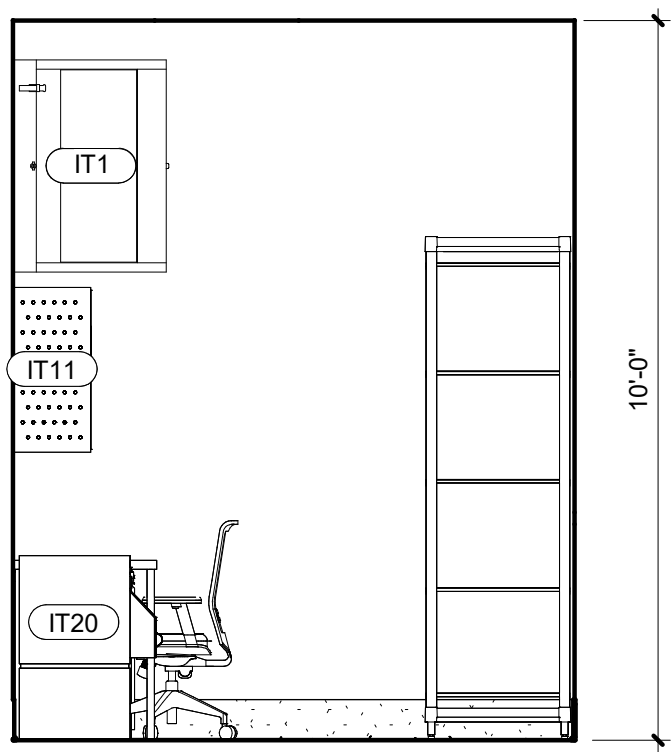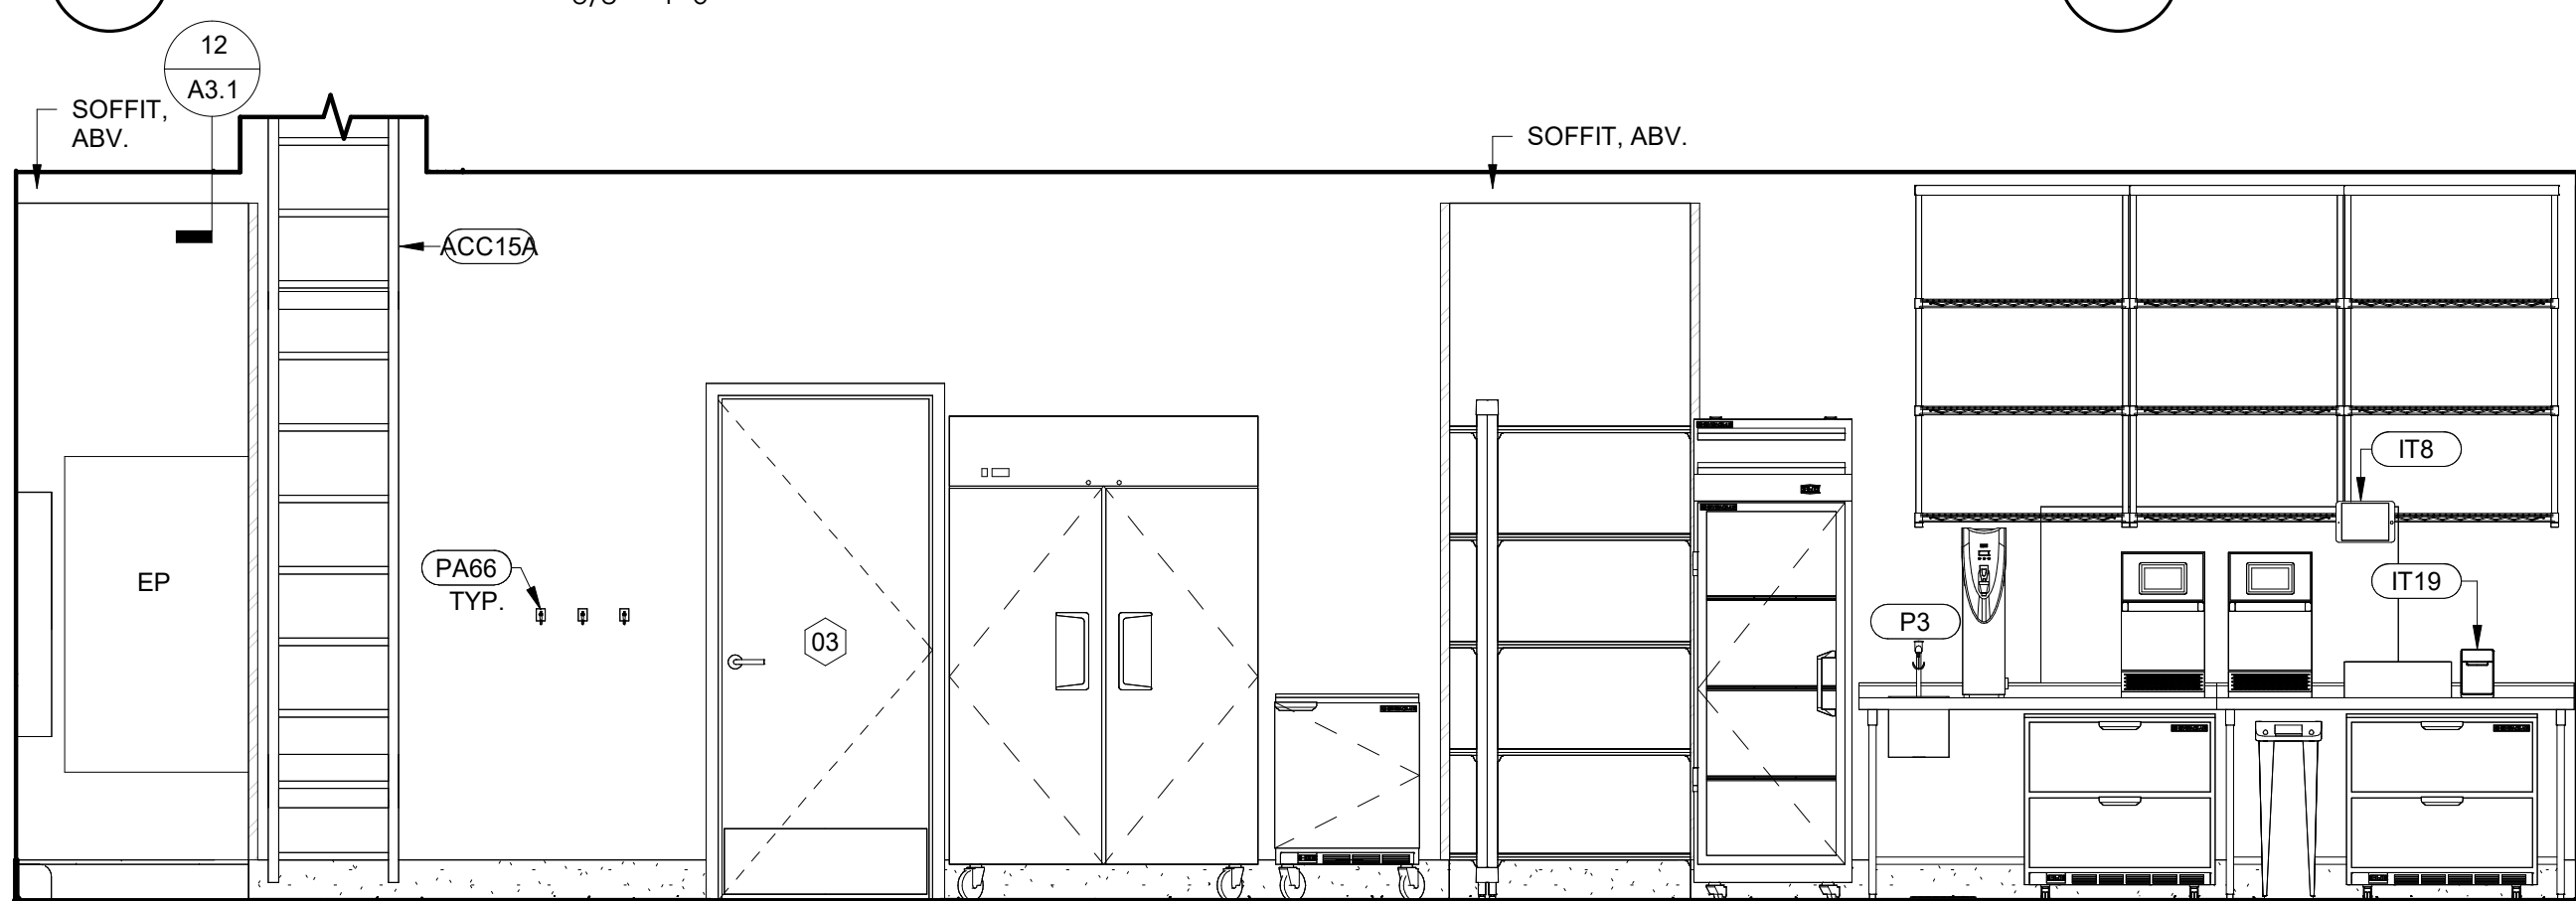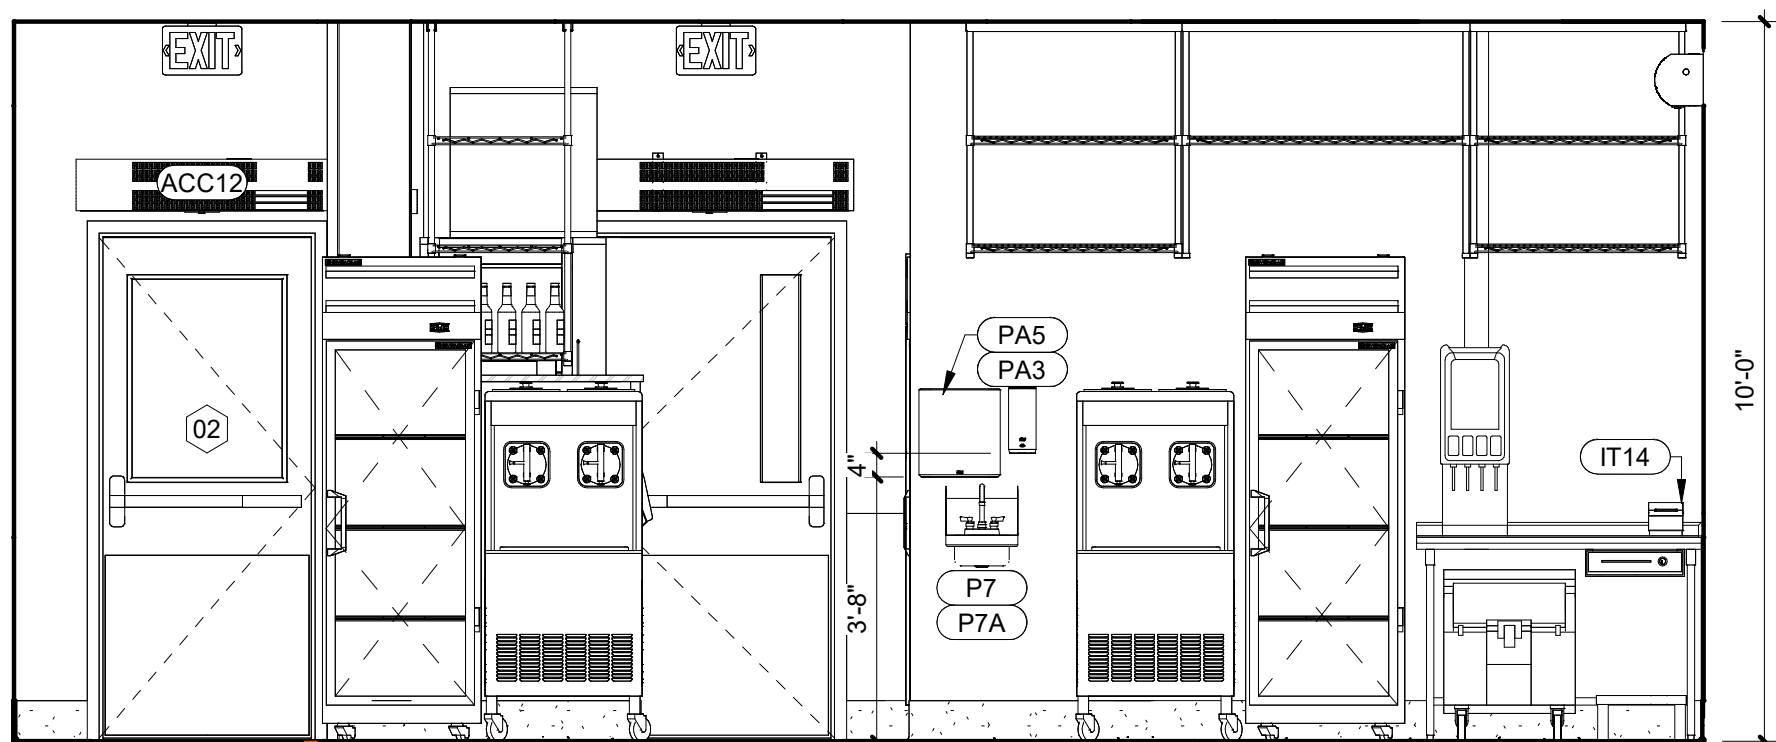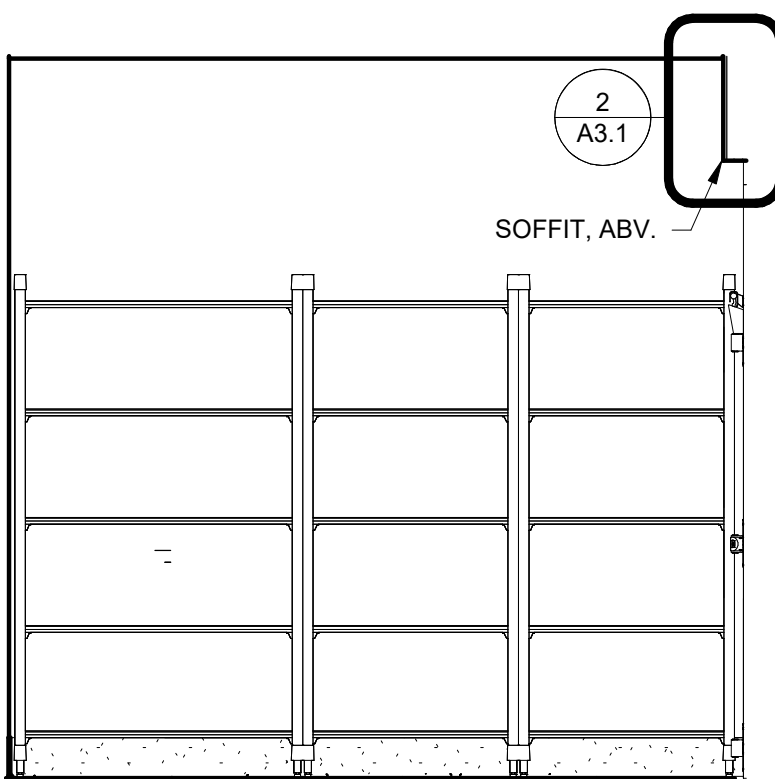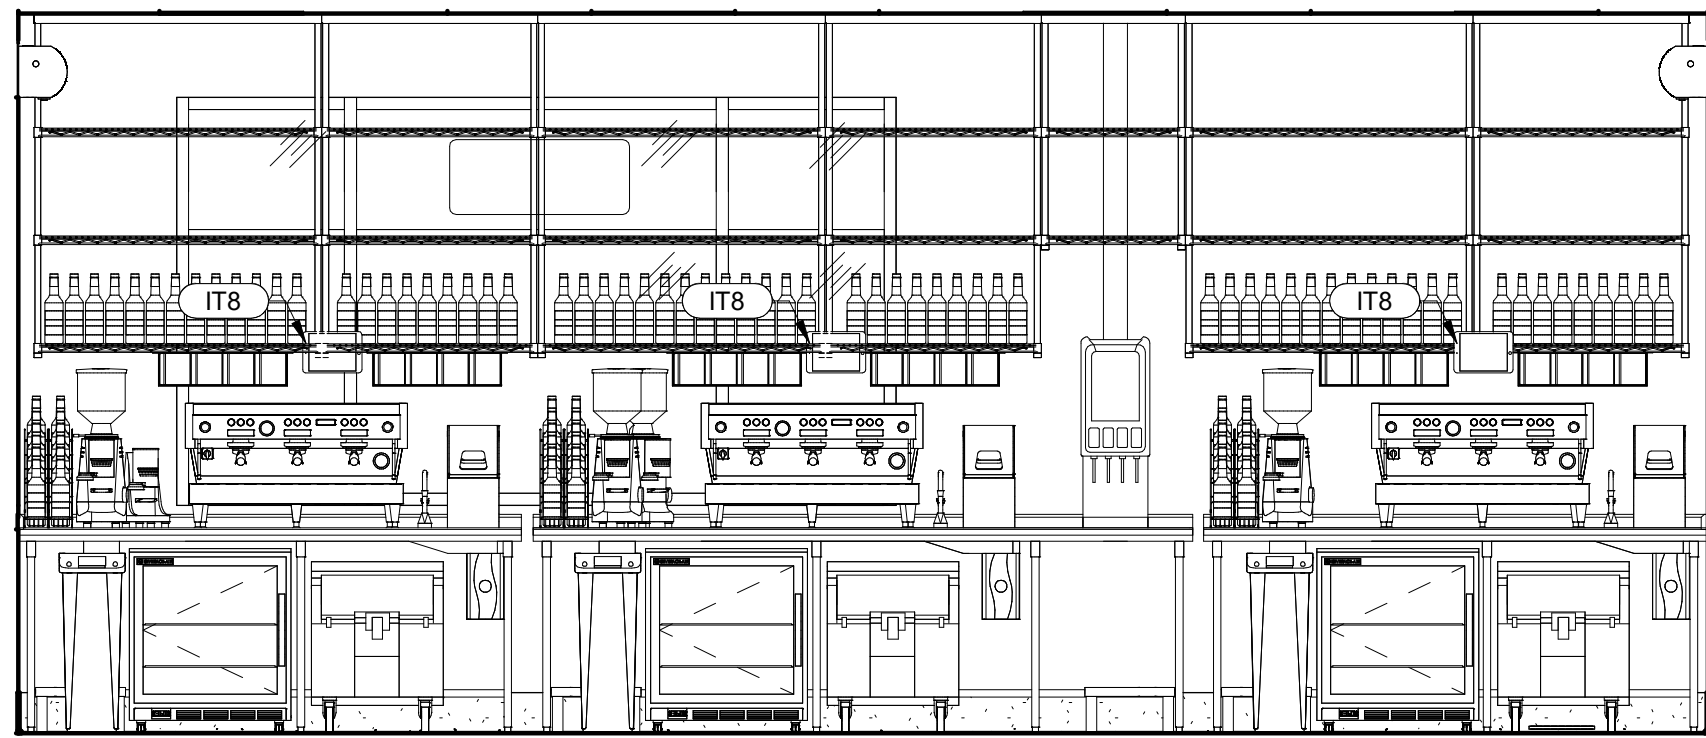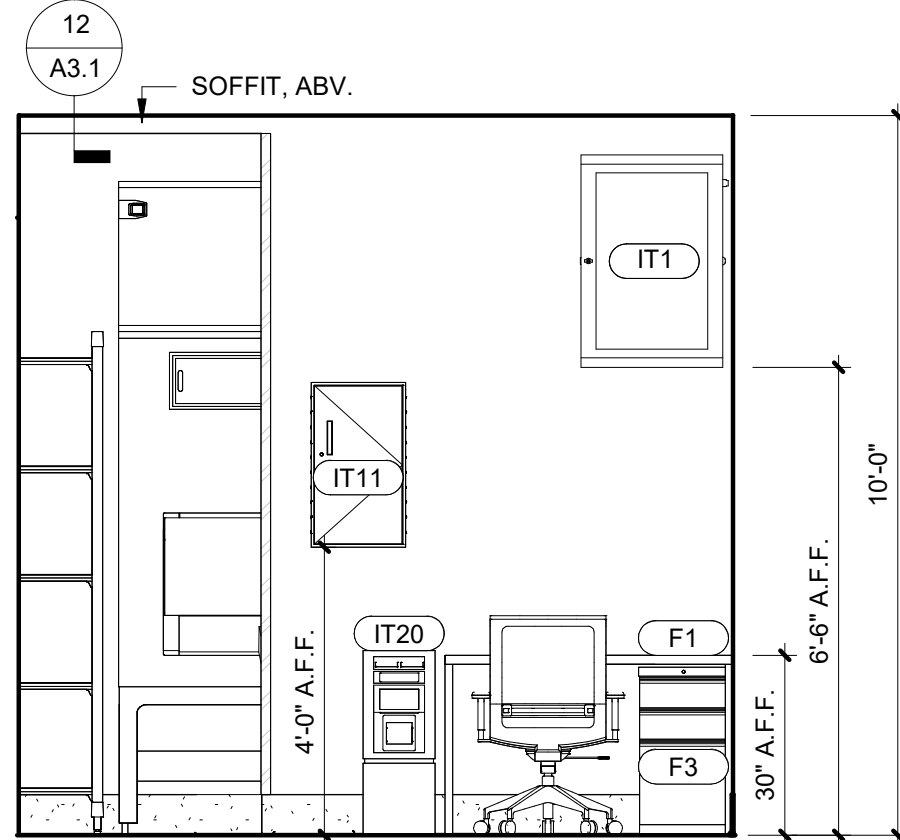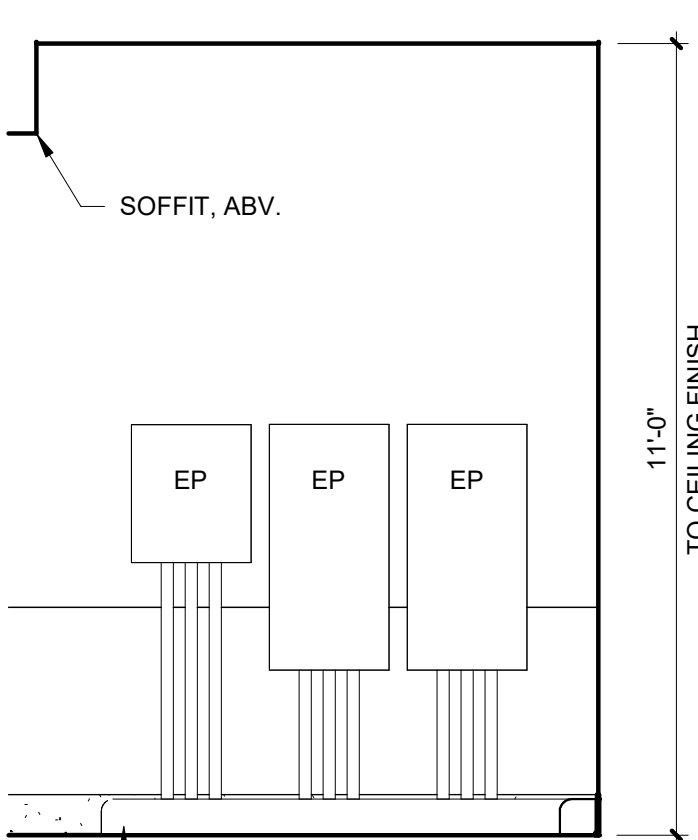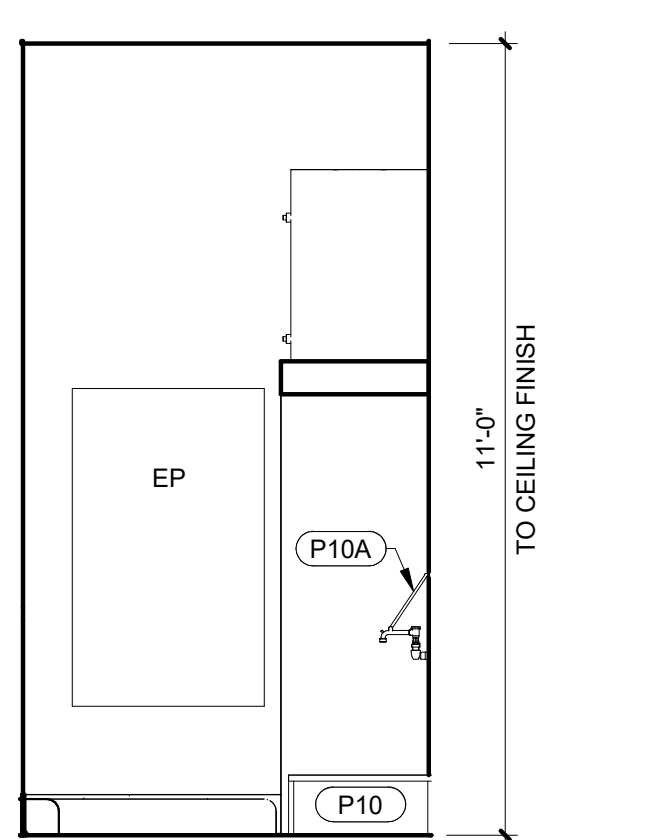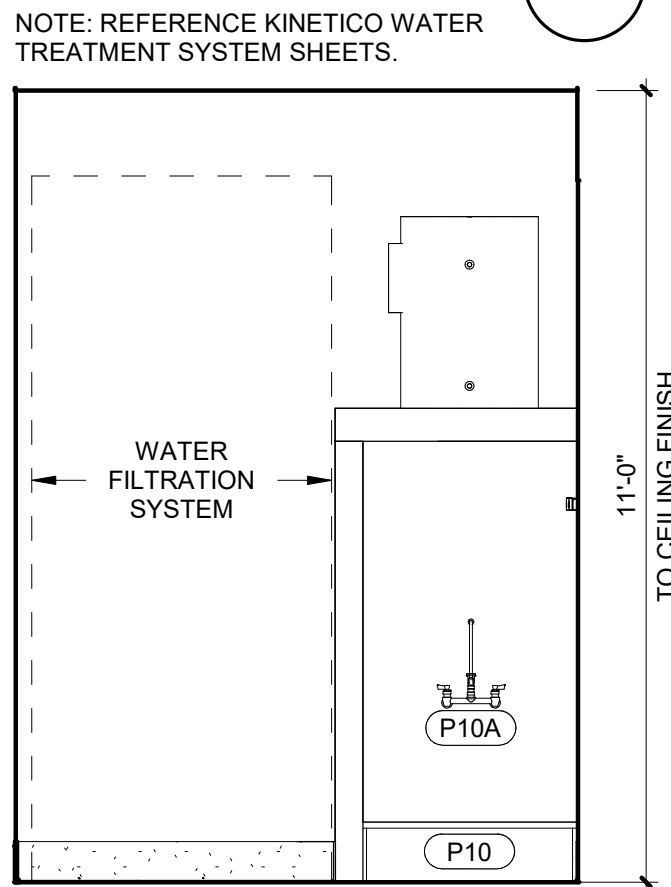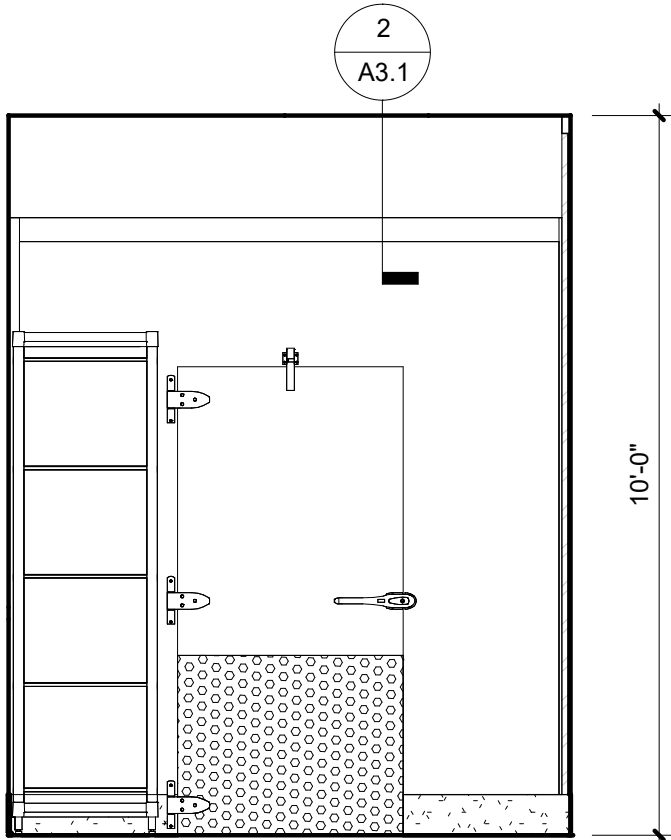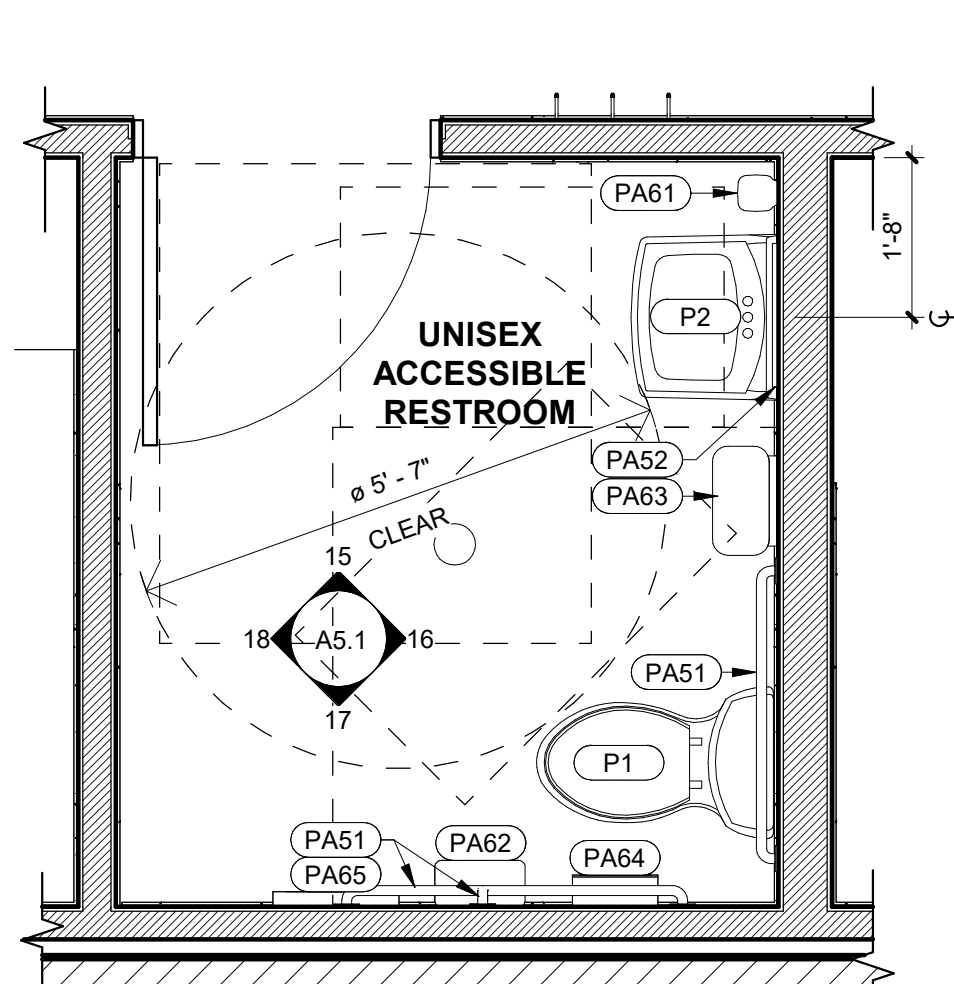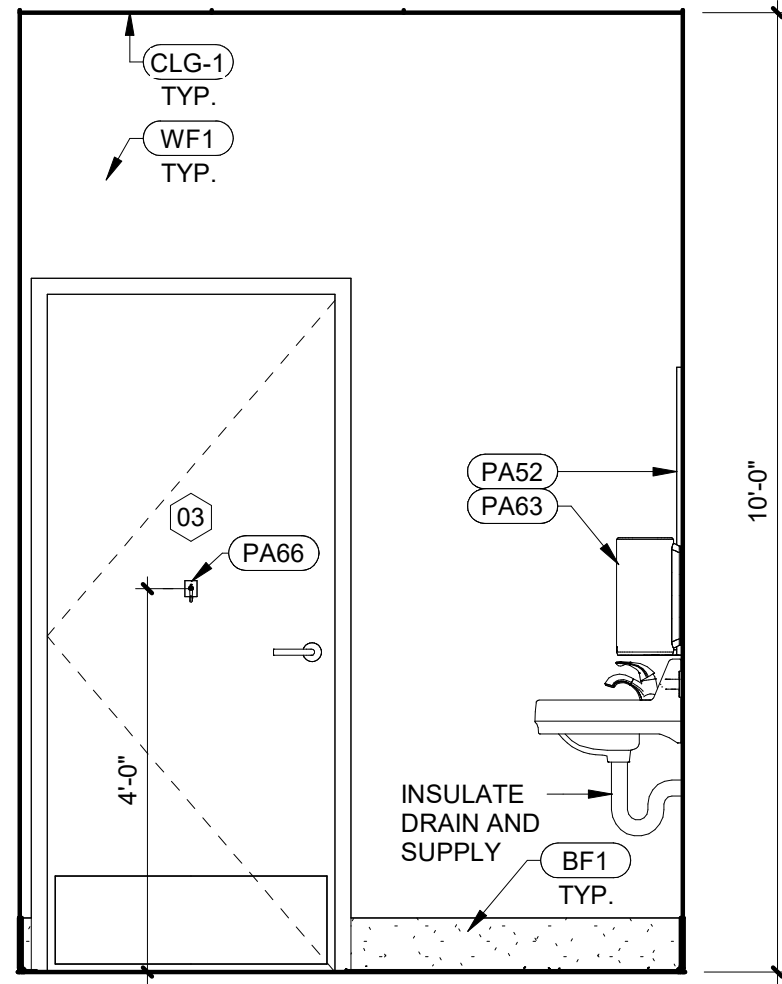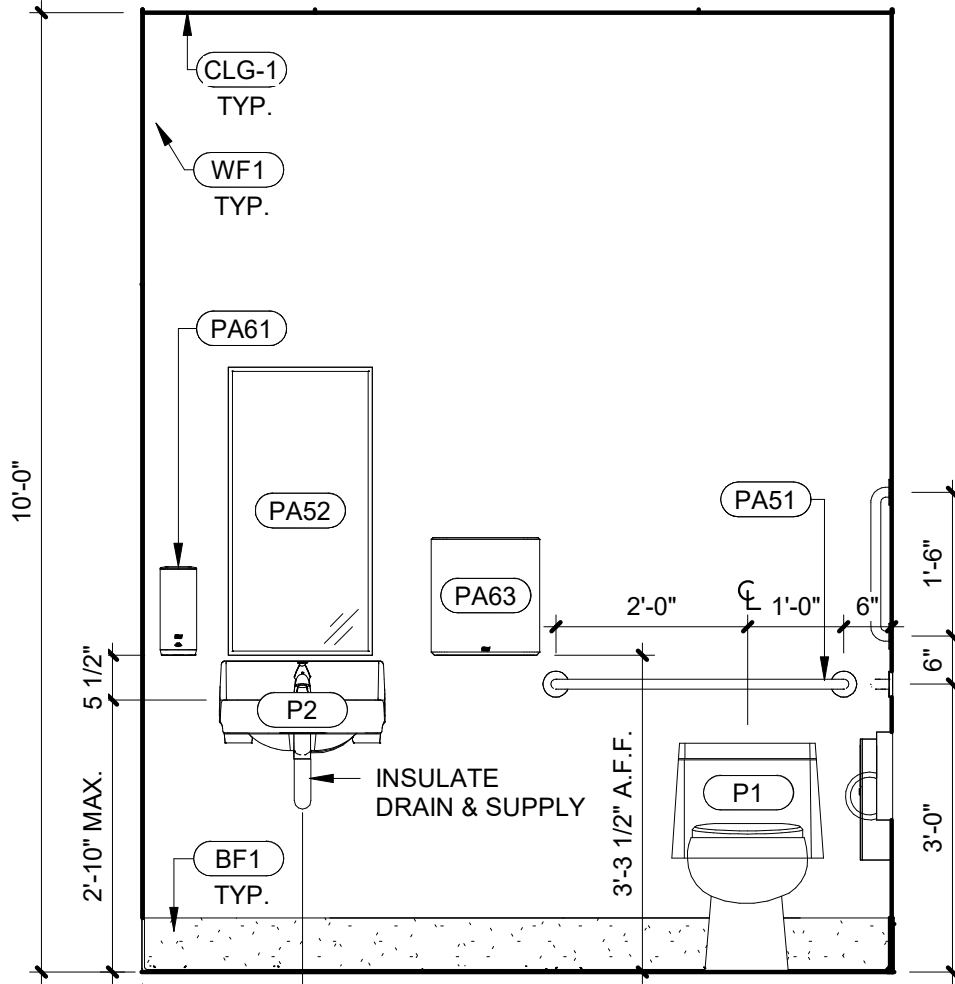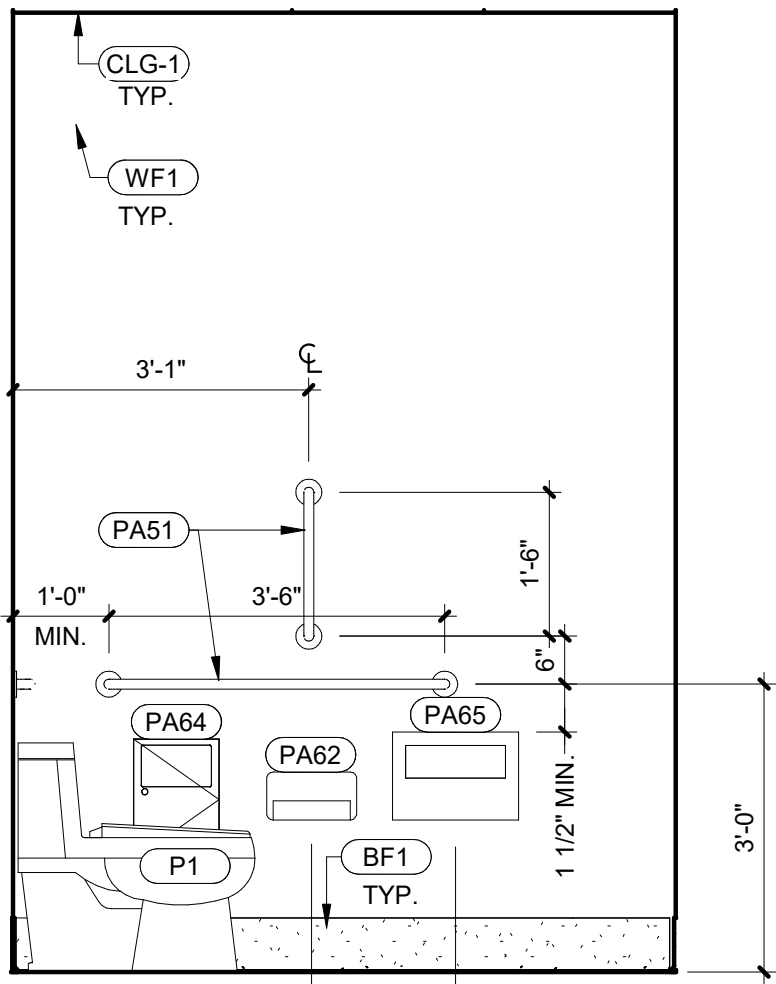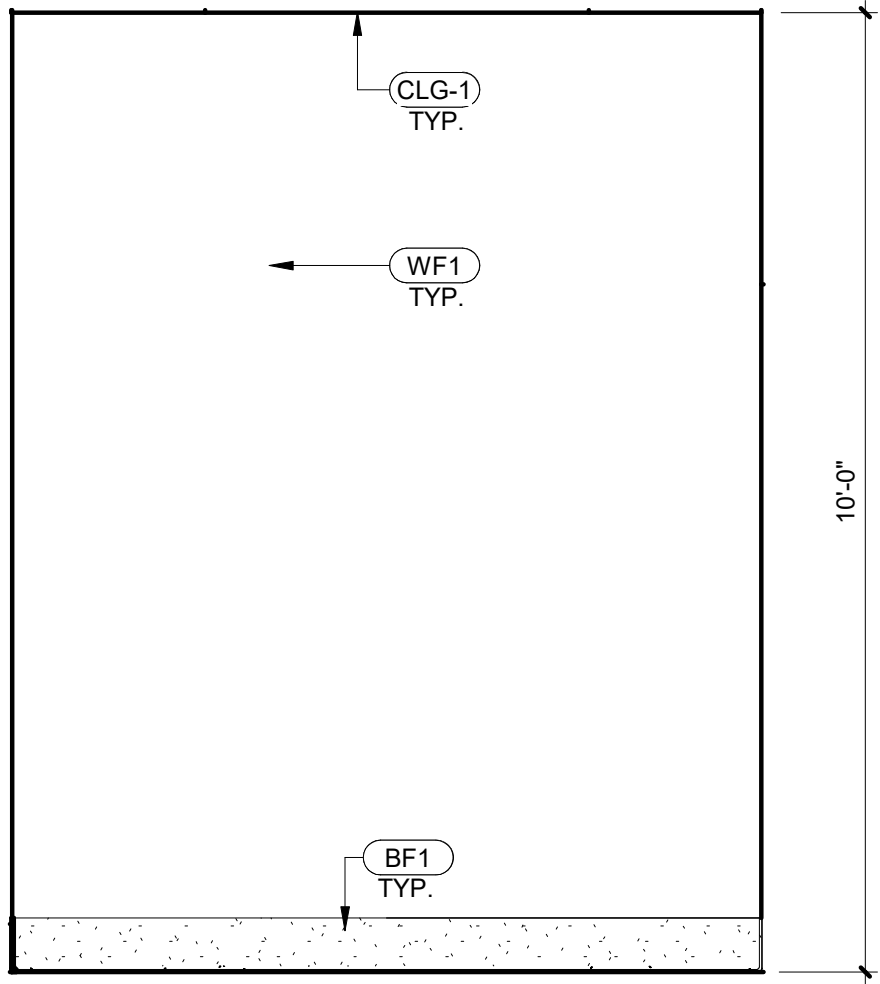

ARCHITECT
CORALIC, LLC
9700 MACKENZIE ROAD, STE. 222
ST. LOUIS, MO 63125
TJ 314.578.4953
EDIN@CORALICARCHITECTURE.COM
STRUCTURAL ENGINEER
KREHER ENGINEERING, INC.
208 N. MAIN STREET
COLUMBIA, IL 62236
TJ 618.281.8505
NDREYER@KREHERENGINEERING.COM
MEP ENGINEER
CASE ENGINEERING, INC.
796 MERUS CT.
FENTON, MO 63026
TJ 636.349.1600
MCASE@CASEENGINEERINGINC.COM



Project No: LA0701
Dutch Bros Coffee - New Freestanding Store
1804 MACARTHUR DRIVE,
ALEXANDRIA, LA 71301
For: Dutch Bros Coffee
1930 W. Rio Salado Parkway
Tempe, AZ 85281

ISSUED FOR PERMIT

5.21.2026

REV: DATE: DESCRIPTION:

SHEET NAME:

INTERIOR ELEVATIONS -
EQUIPMENT



SHEET NUMBER:

A5.1



© 2025 DB Franchising USA, LLC

ANNIHILATOR A1

The name DUTCH-BROS. and all associated logos, distinctive designs, content, information, and other materials featured, contained herein, and other intellectual property rights and unfair competition laws under the United States and foreign laws, are protected by copyright, trademark, trade dress, patent, and/or other intellectual property rights and unfair competition laws under the United States and foreign laws.

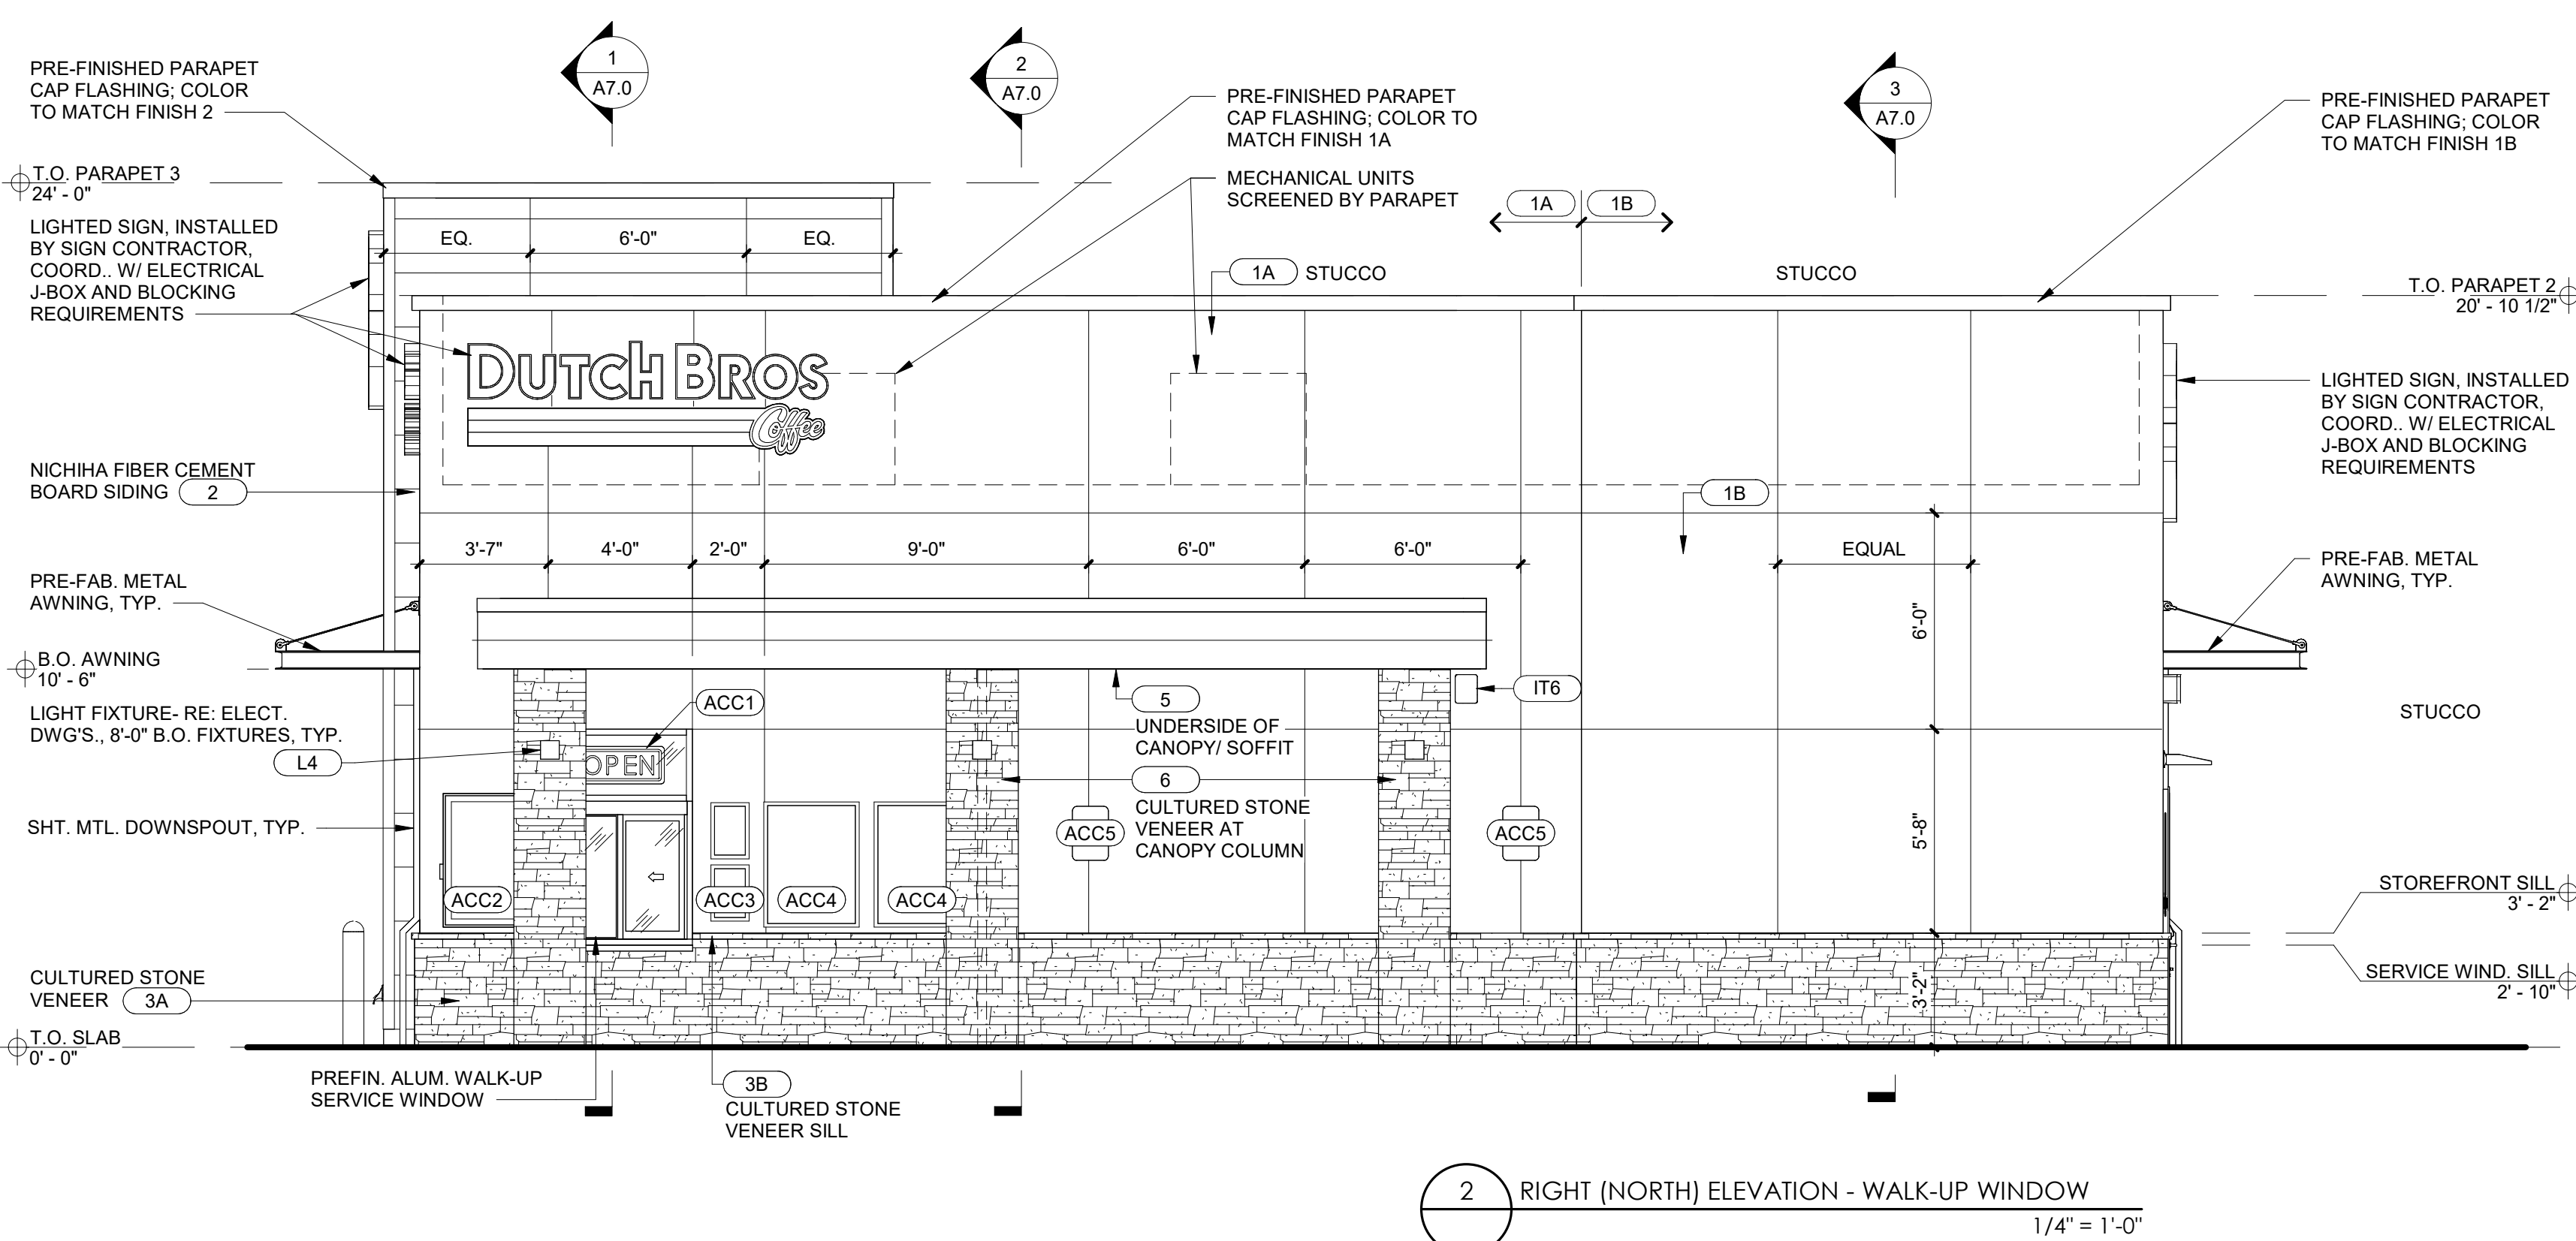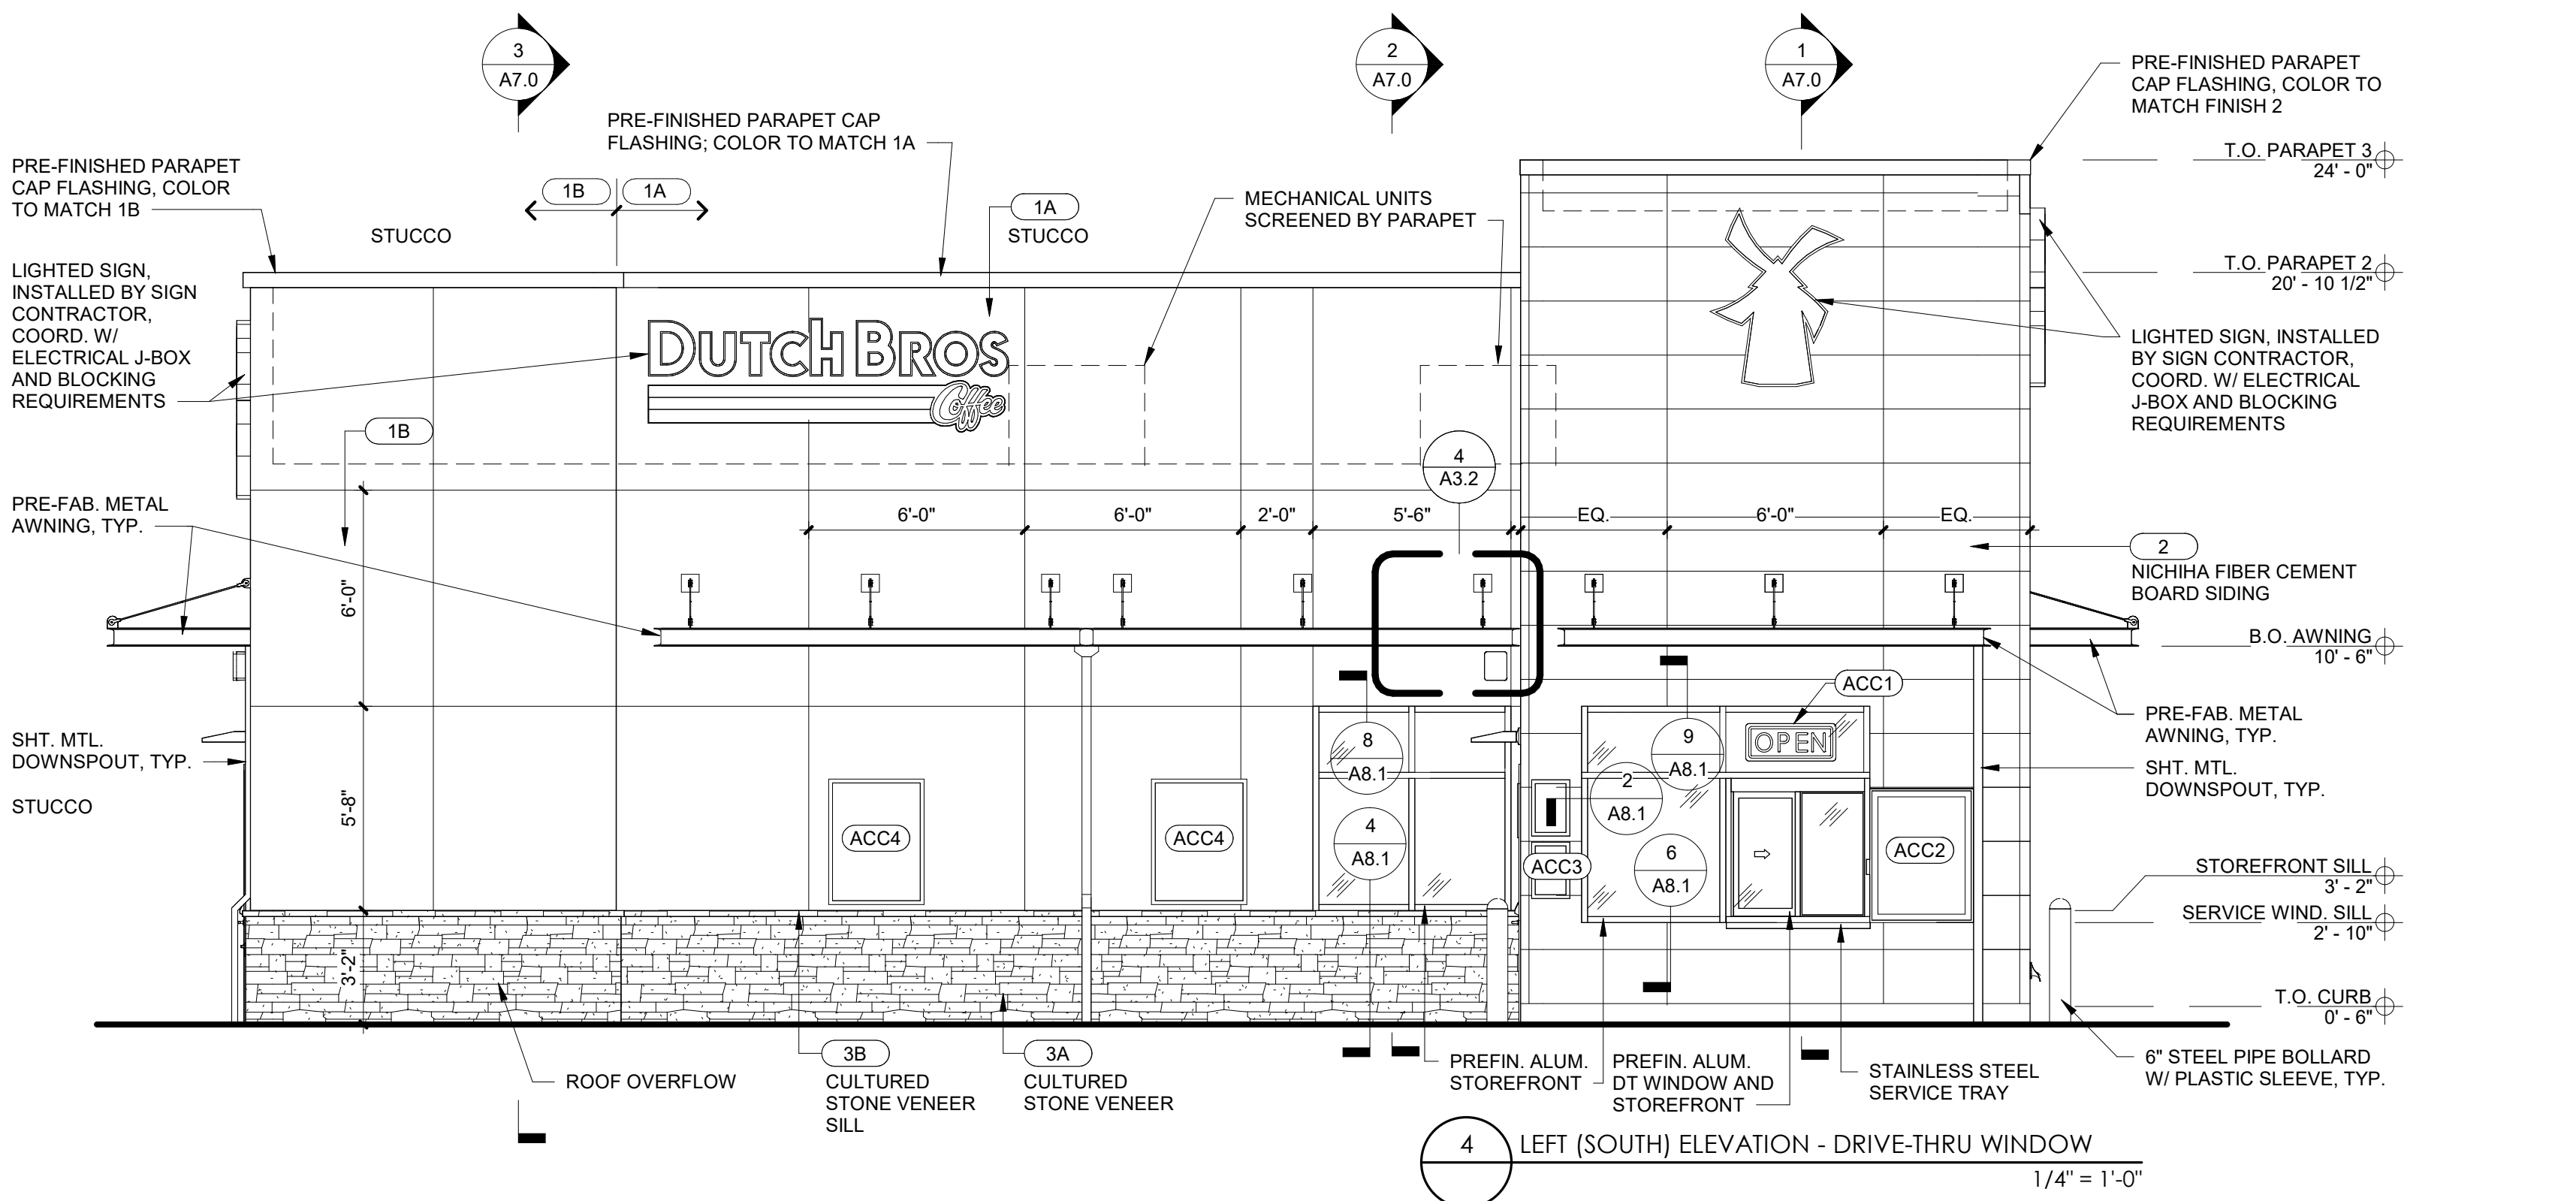

EXTERIOR FINISH SCHEDULE - PROTOTYPICAL w/ CANOPY				
NOTE: GC TO PROVIDE 3"x2" SMOOTH DOWNSPOUTS AND ALL NECESSARY ADAPTORS AT AWNING AND CANOPY LOCATION; COLOR: BLDG DB DARK GRAY				
ID TAG	MATERIAL	MANUFACTURER	MODEL	REMARKS
ZONE 1 (BODY)				
1A	STUCCO	DRYVIT	CCP-2 SYSTEM, SANDBEBBLE FINE E FINISH; REVEALS AS SHOWN	COLOR: BLDG DB DARK GRAY- PROVIDE 2) ADDITIONAL COATS OF SW DB DARK GRAY PAINT
1B	STUCCO	DRYVIT	CCP-2 SYSTEM, SANDBEBBLE FINE E FINISH; REVEALS AS SHOWN	COLOR: BLDG DB LIGHT GRAY- PROVIDE 2) ADDITIONAL COATS OF DB SW LIGHT GRAY PAINT
ZONE 2 (TOWER)				
2	FIBER CEMENT SIDING	NICHHA	ILLUMINATION: AWP 1818 W/ MATCHING PANEL CORNERS	COLOR: BLDG DB BLUE- PROVIDE 2) ADDITIONAL COATS OF SW DB BLUE PAINT
ZONE 3 (BASE)				
3A	STONE VENEER	ELDORADO STONE	CLIFFSTONE	NATIONWIDE COLORS - BANFF SPRINGS
3B	STONE VENEER	ELDORADO STONE	12x4x16, PEAK CAP	COLOR: TO MATCH - RIPPED, USE BOTH CUT PIECES
ZONE 4 (FRAMED CANOPY)				
4	FASCIA	WESTERN STATES METAL ROOFING	T-GROOVE, 10"	3 SIDES: COLOR: BLDG DB DARK GRAY
5	SOFFIT	HEWN ELEMENTS	NATURAL NORTHWESTERN SPRUCE	1x6, T&G, 1/8" REVEAL, SEALED
6	STONE VENEER	ELDORADO STONE	CLIFFSTONE	NATIONWIDE COLORS - BANFF SPRINGS

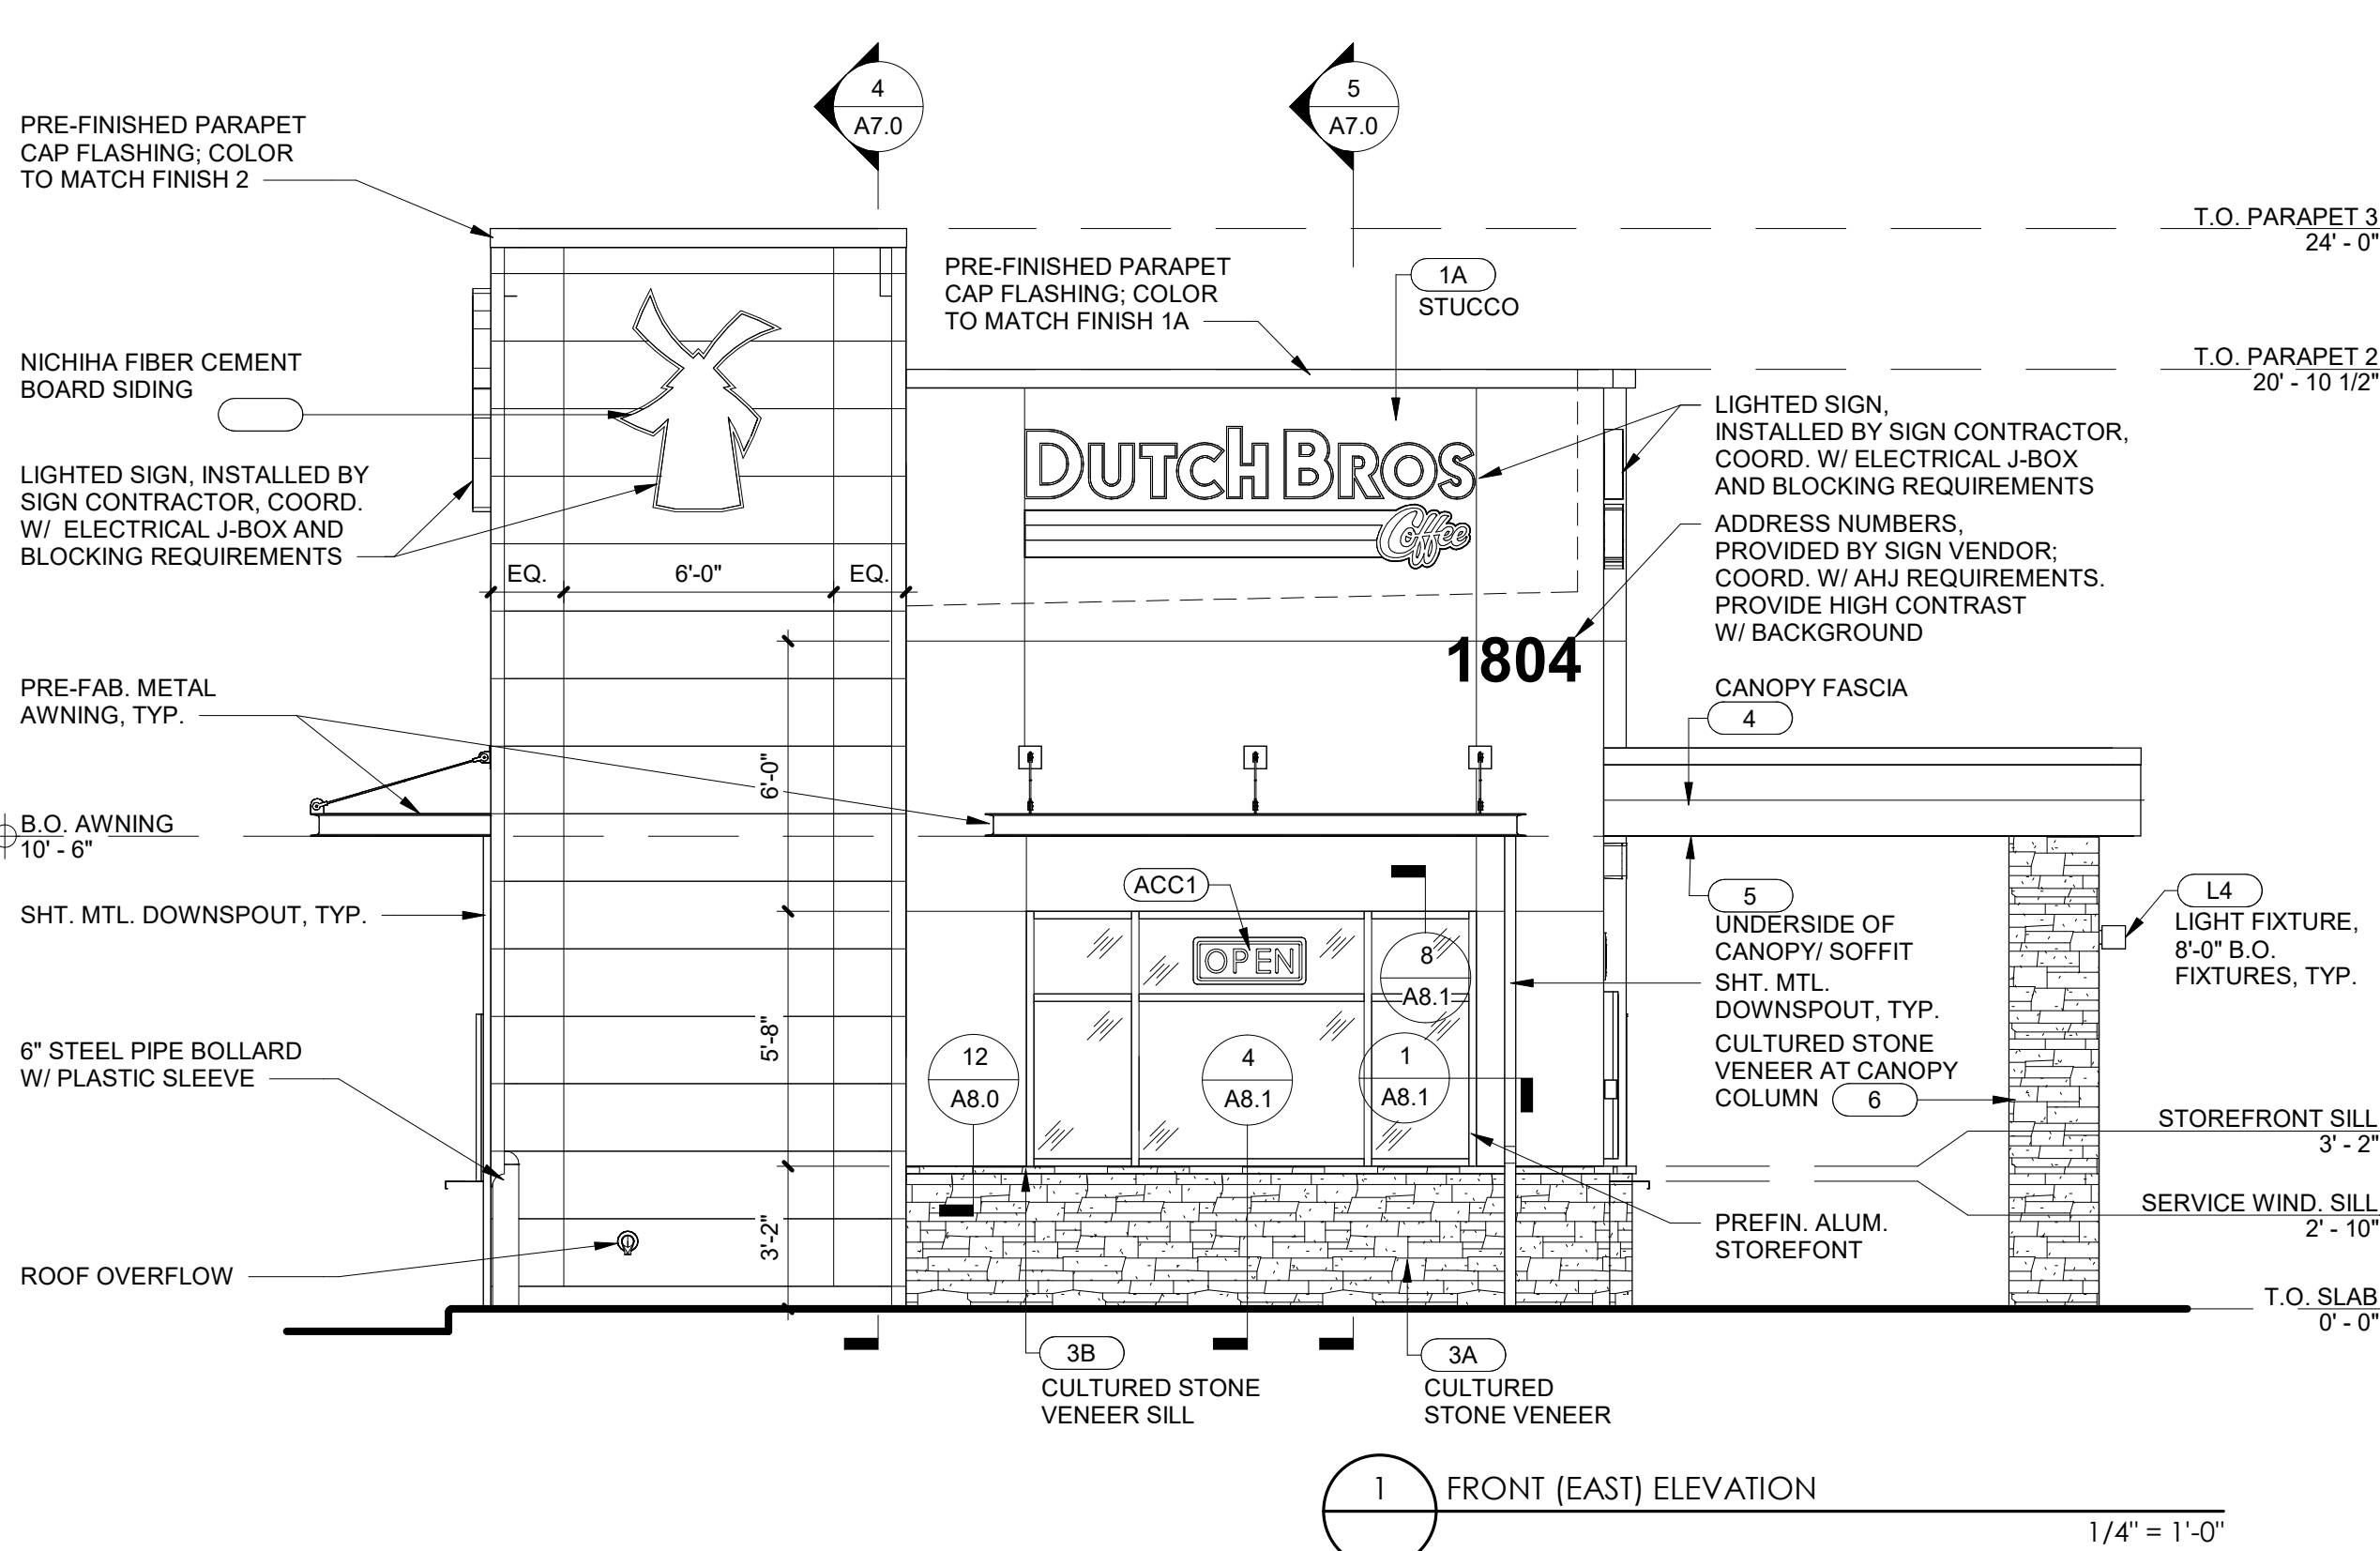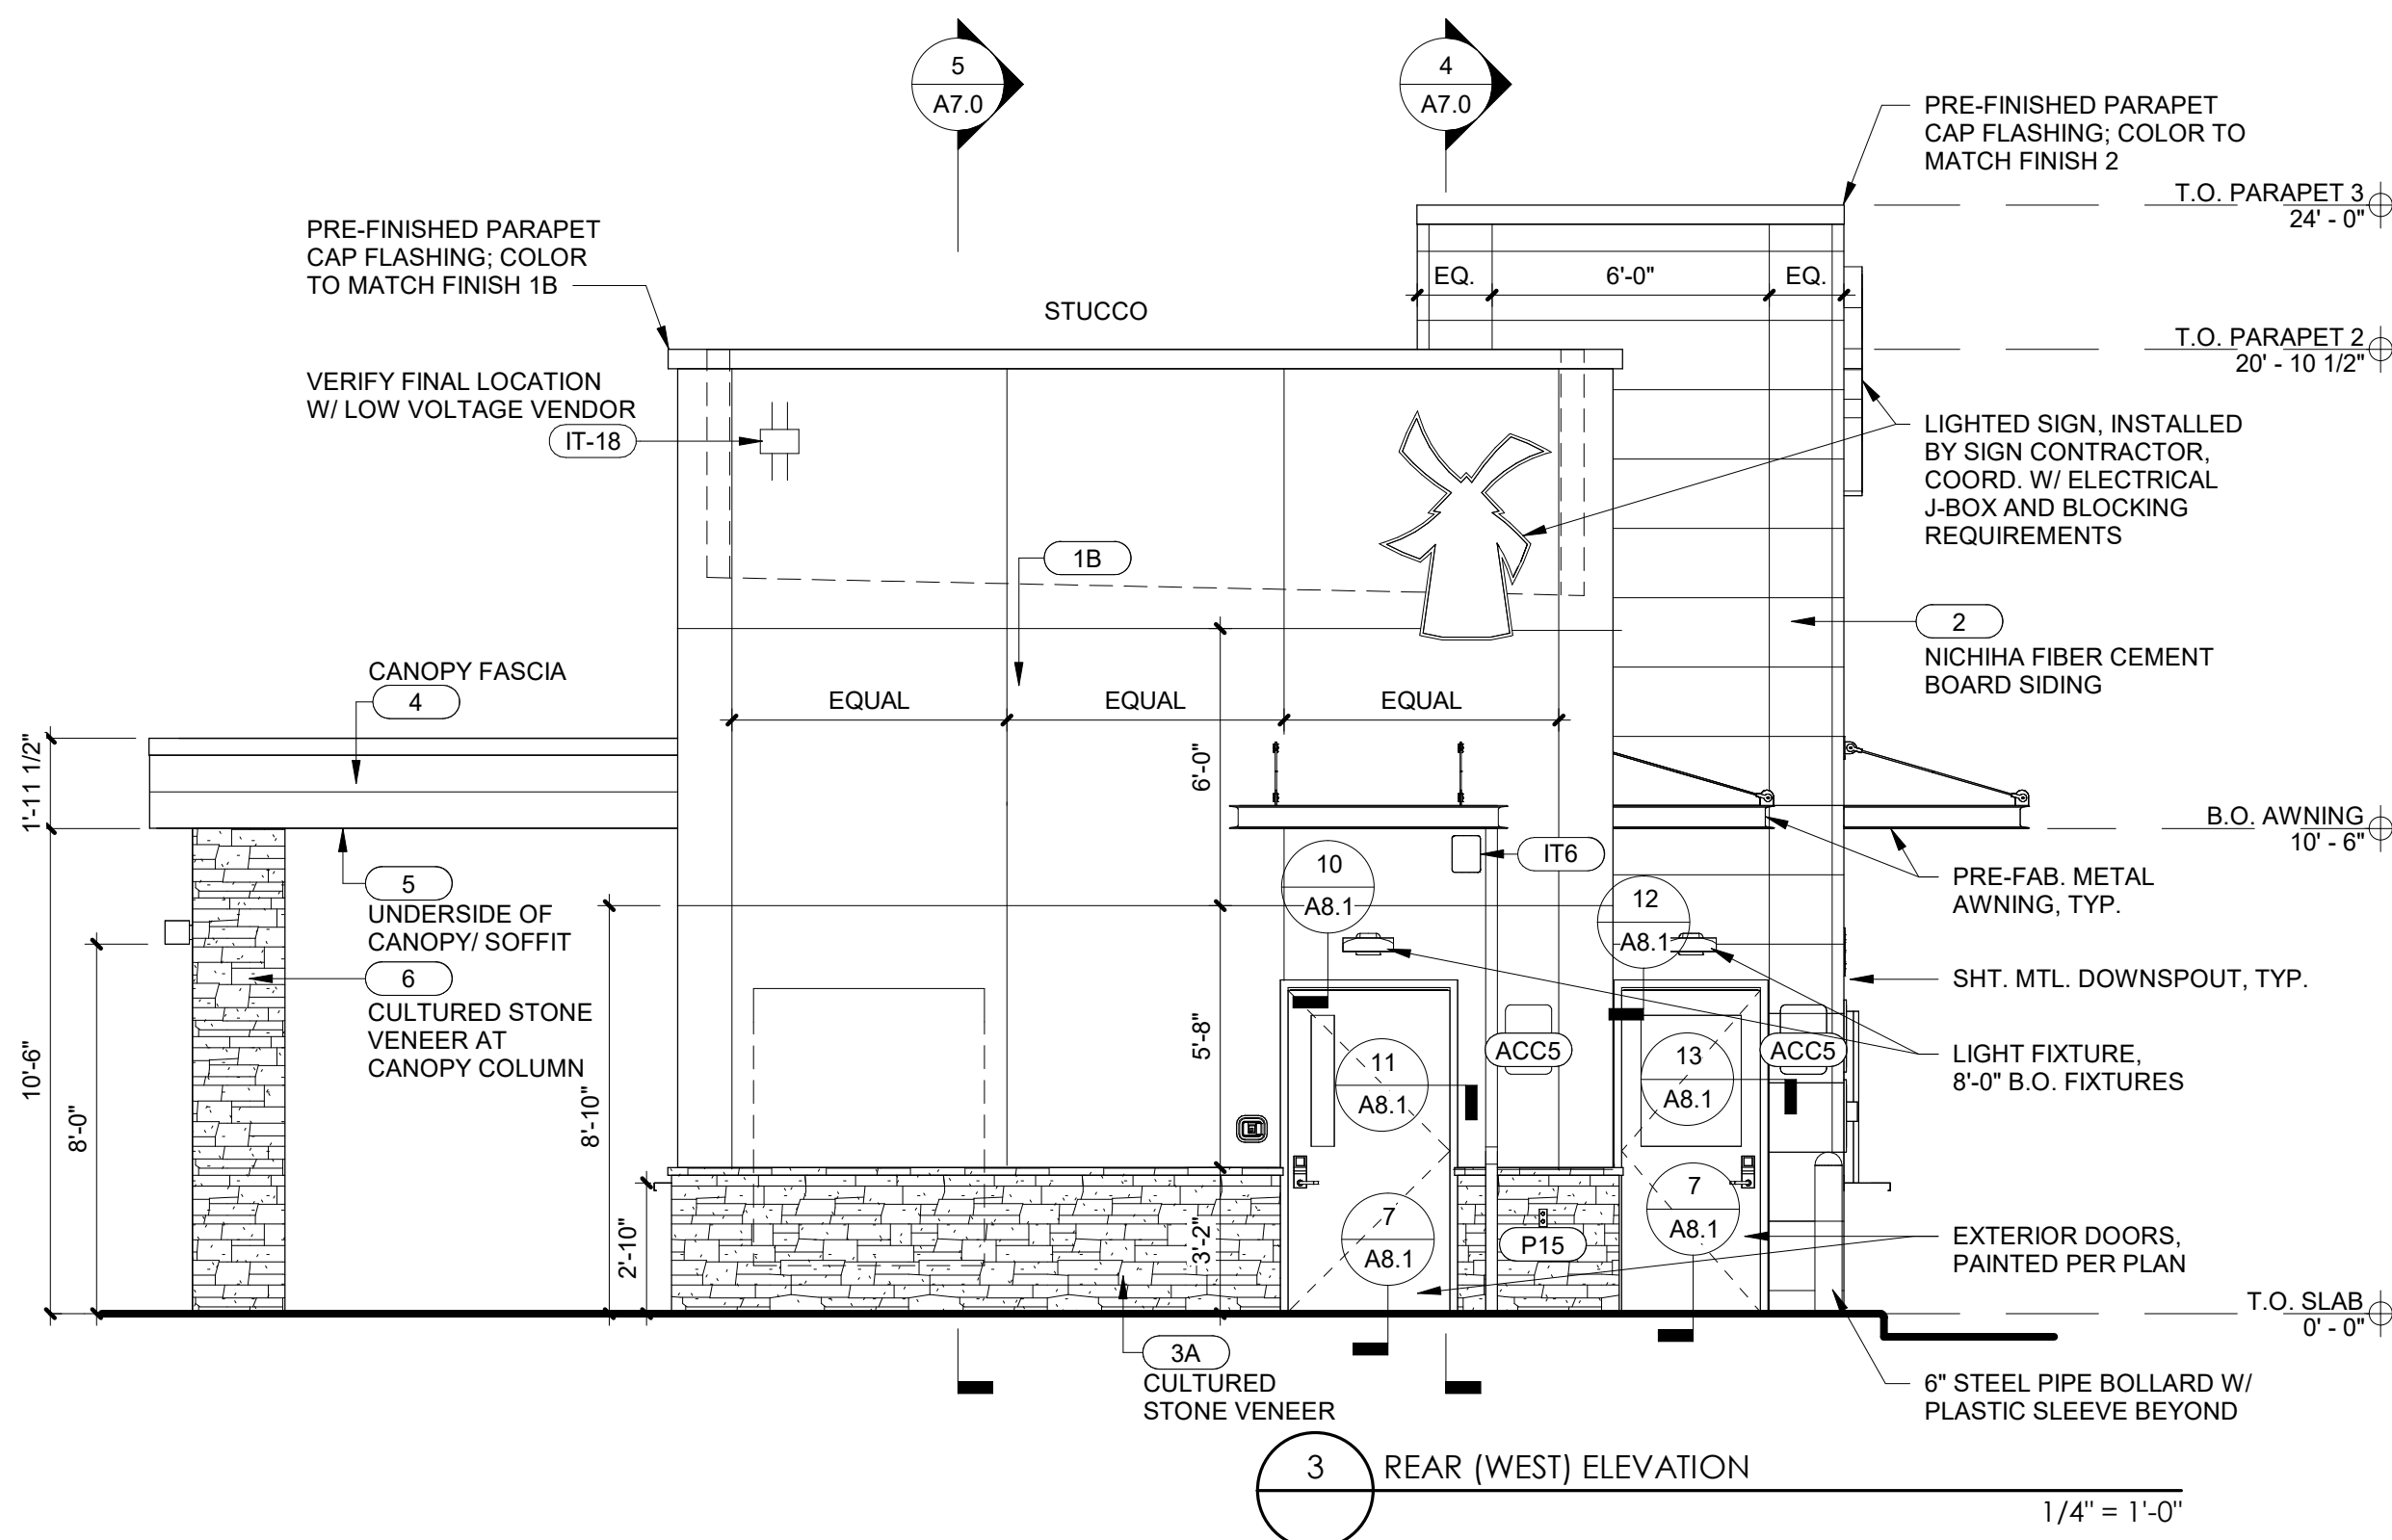

ARCHITECT
CORALIC, LLC
9700 MACKENZIE ROAD, STE. 222
ST. LOUIS, MO 63125

TJ 314.578.4953
EDIN@CORALICARCHITECTURE.COM

STRUCTURAL ENGINEER
KREHER ENGINEERING, INC.
201 N. MAIN STREET,
COLUMBIA, IL 62236

TJ 618.281.8505
NOREYER@KREHERENGINEERING.COM

MEP ENGINEER
CASE ENGINEERING, INC.
796 MERUS CT.
FENTON, MO 63026

TJ 636.349.1600
MCASEE@CASEENGINEERINGINC.COM



Project No: LA0701

Dutch Bros Coffee - New Freestanding Store
1804 MACARTHUR DRIVE,
ALEXANDRIA, LA 71301

For: Dutch Bros Coffee
1930 W. Rio Salado Parkway
Tempe, AZ 85282

ANNIH

ISSUED FOR PERMIT

5.21.2026

REV:	DATE:	DESCRIPTION:

SHEET NAME





BUILDING ELEVATIONS

SHEET NUMBER

A6.0

© 2025 DB Franchising USA, LLC

"The name DUTCHBROS. and all associated logos, distinctive designs, content, information, and other materials featured displayed, contained herein, and made available by Dutch Bros., including but not limited to, the "look and feel" of the establishments and products, all text, images, colors, configurations, graphics, designs, illustrations, photographs, and pictures (collectively, the "Materials") are owned by and/or licensed by DB Franchising USA, LLC and are protected by copyright, trademark, trade dress, patent, and/or other intellectual property rights and under competition laws under the United States and foreign laws."

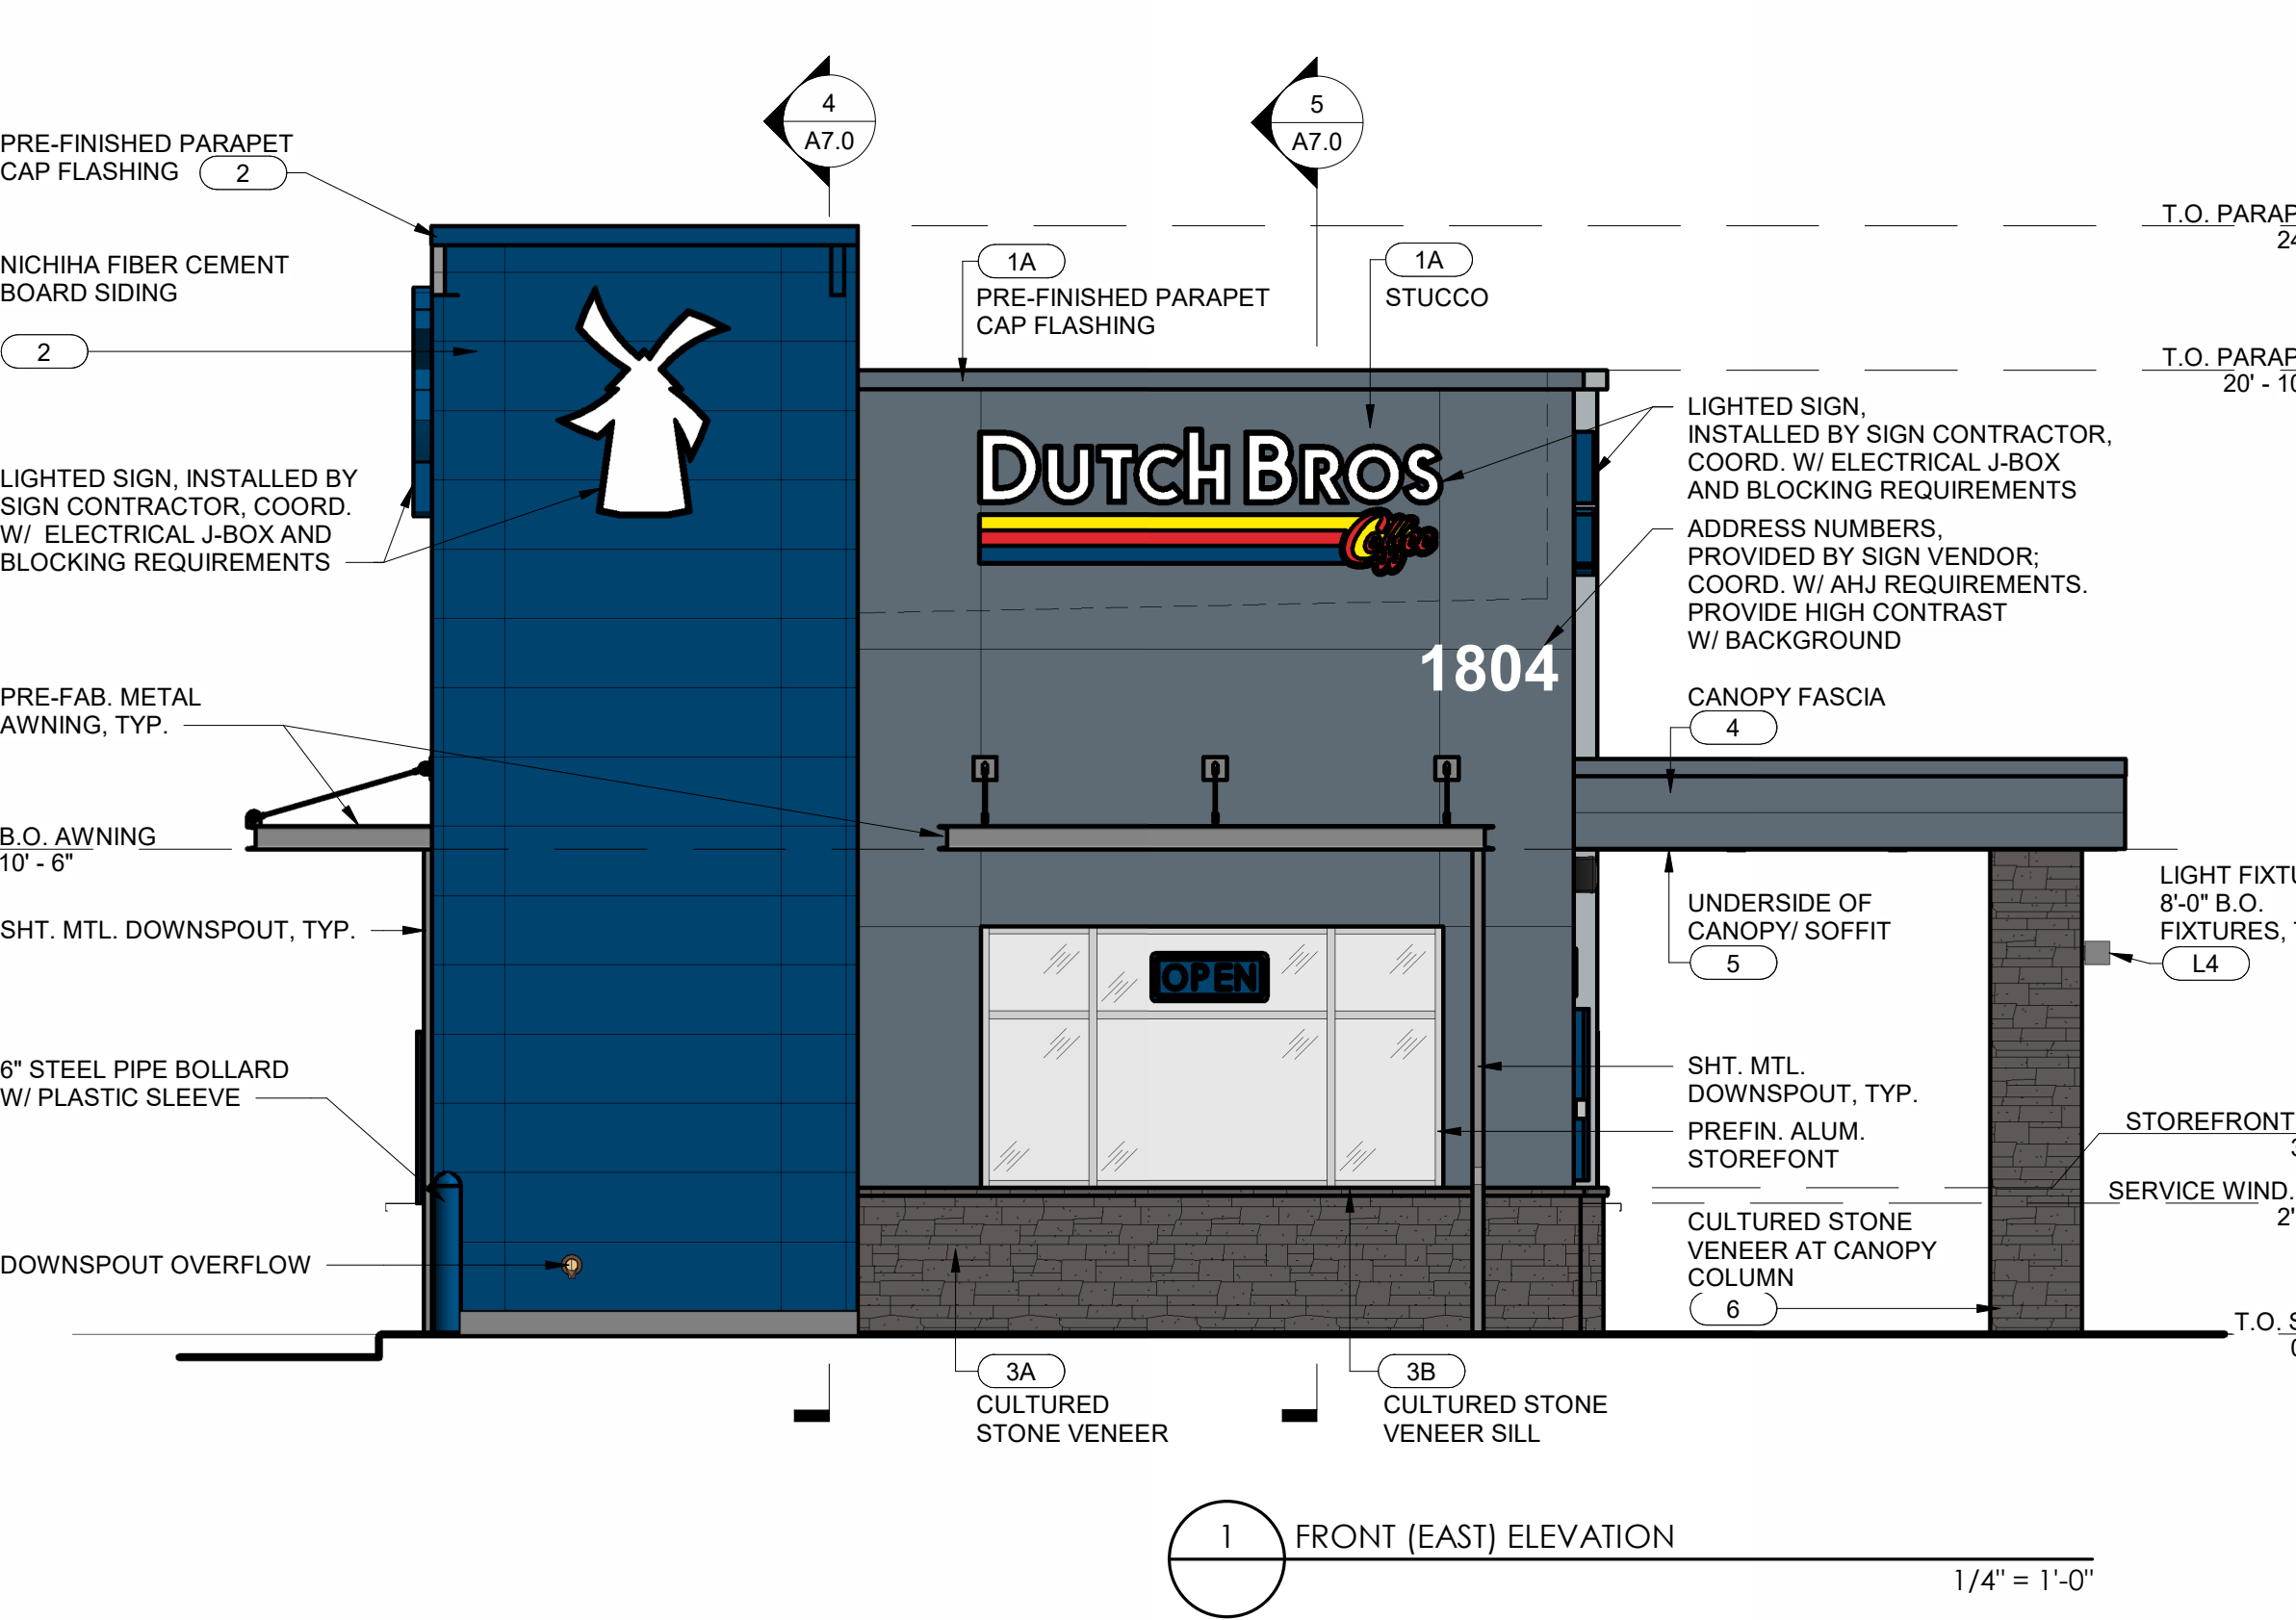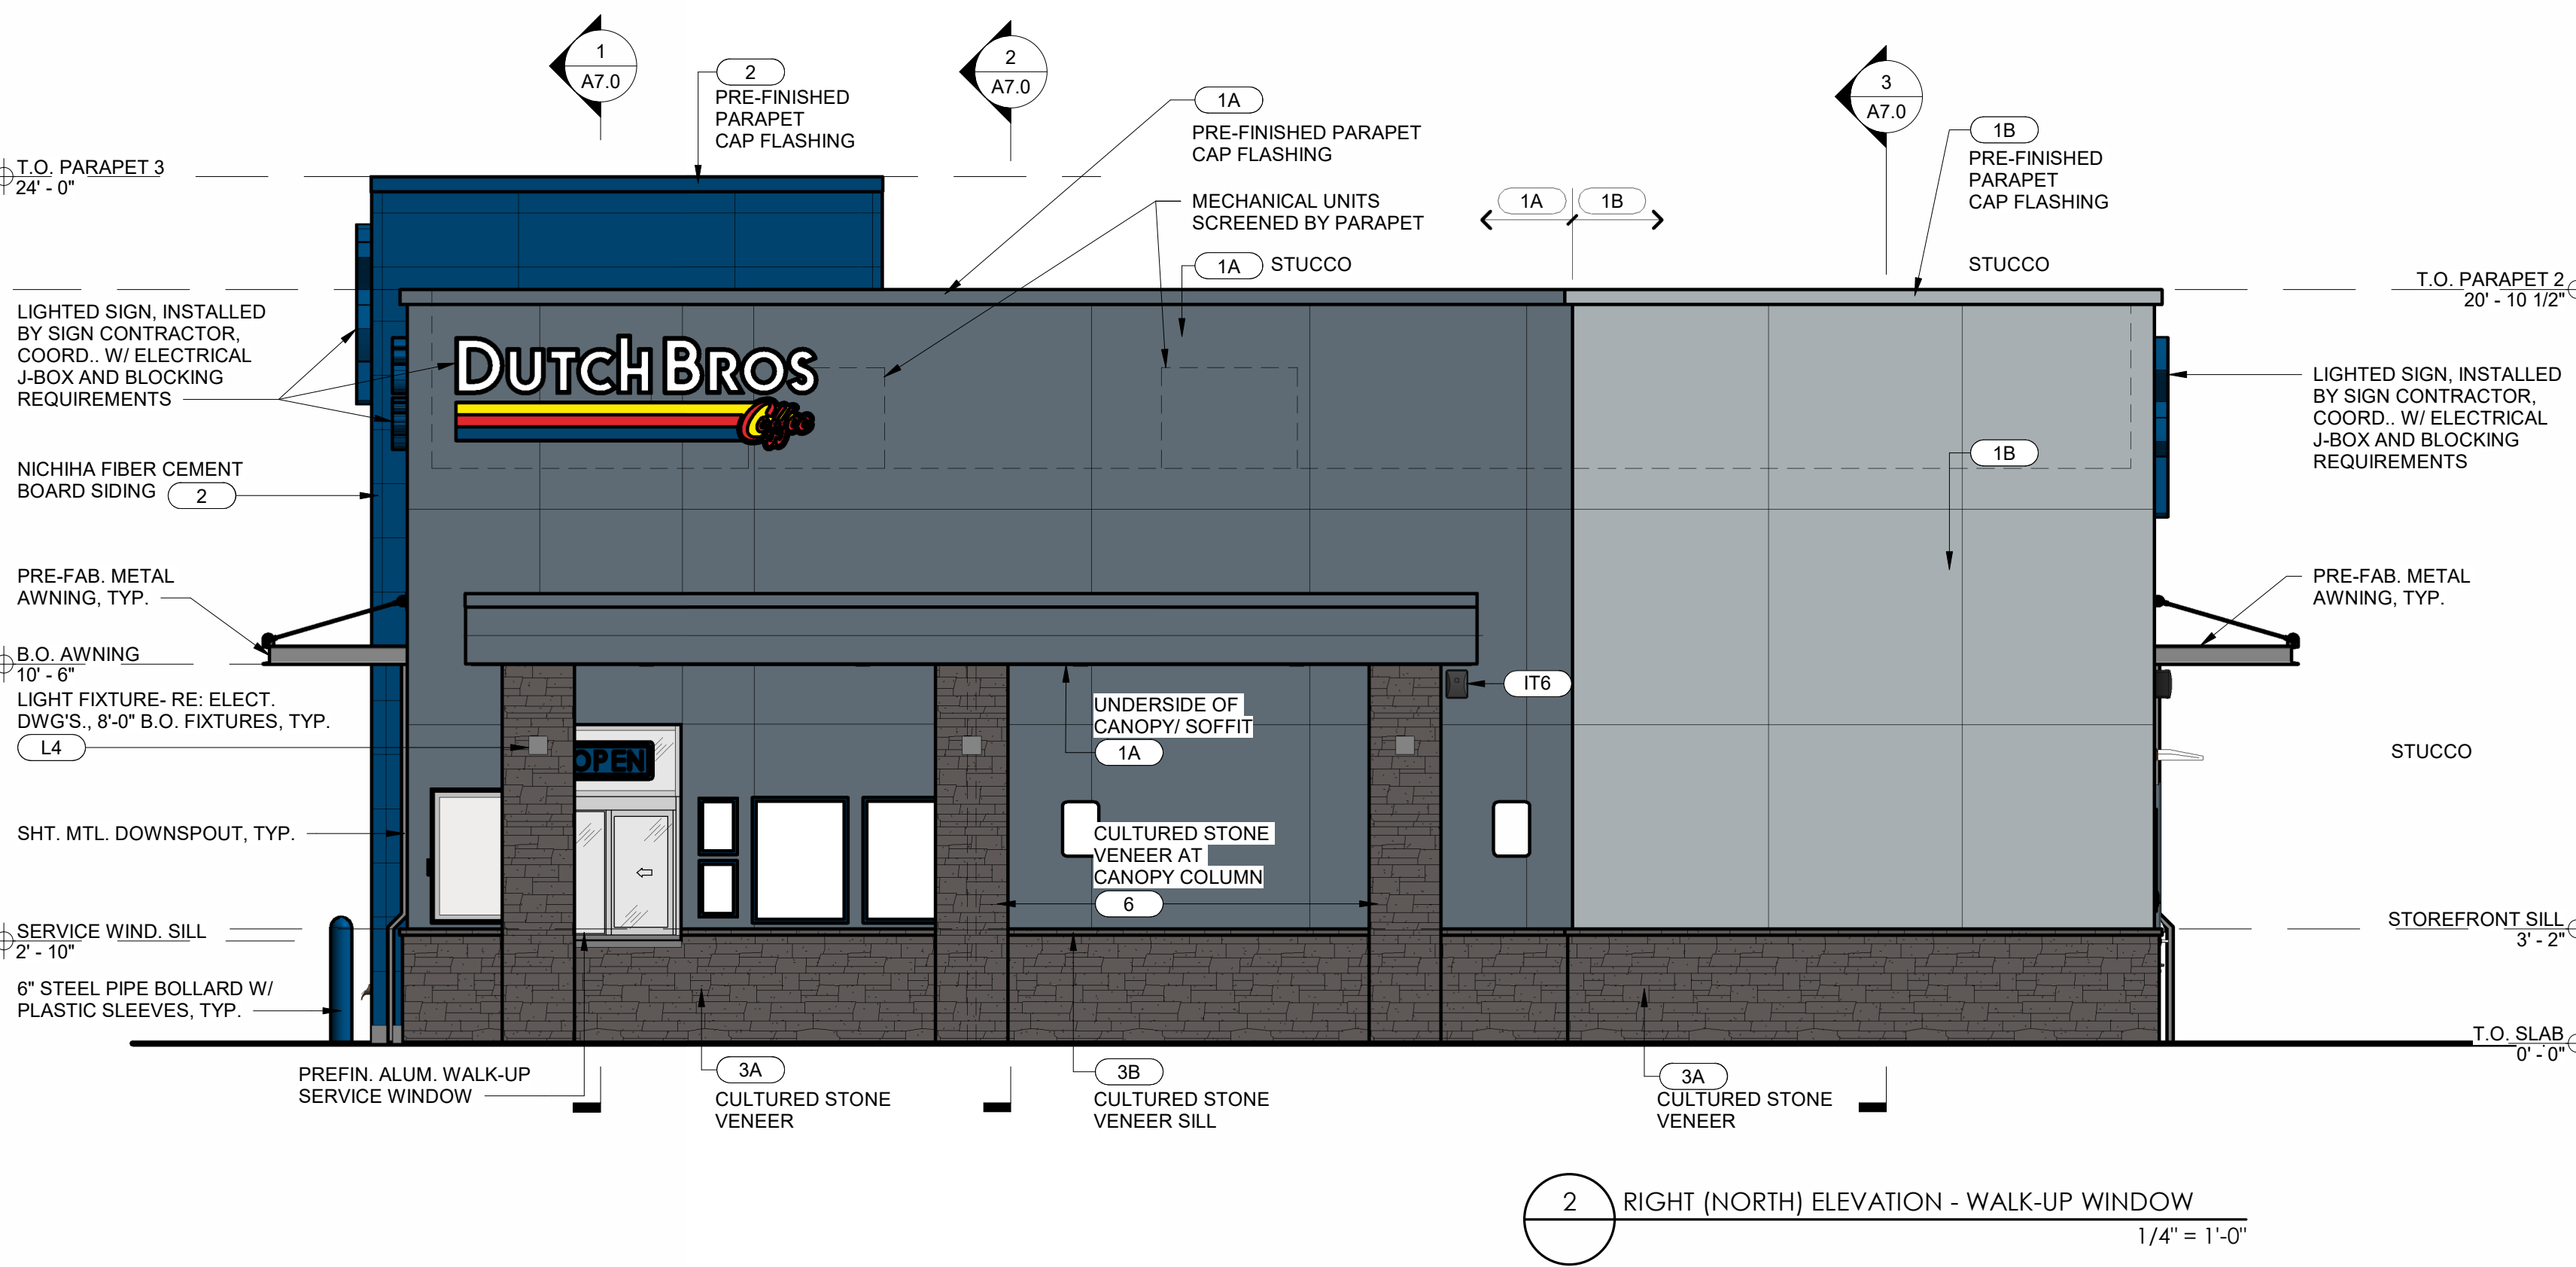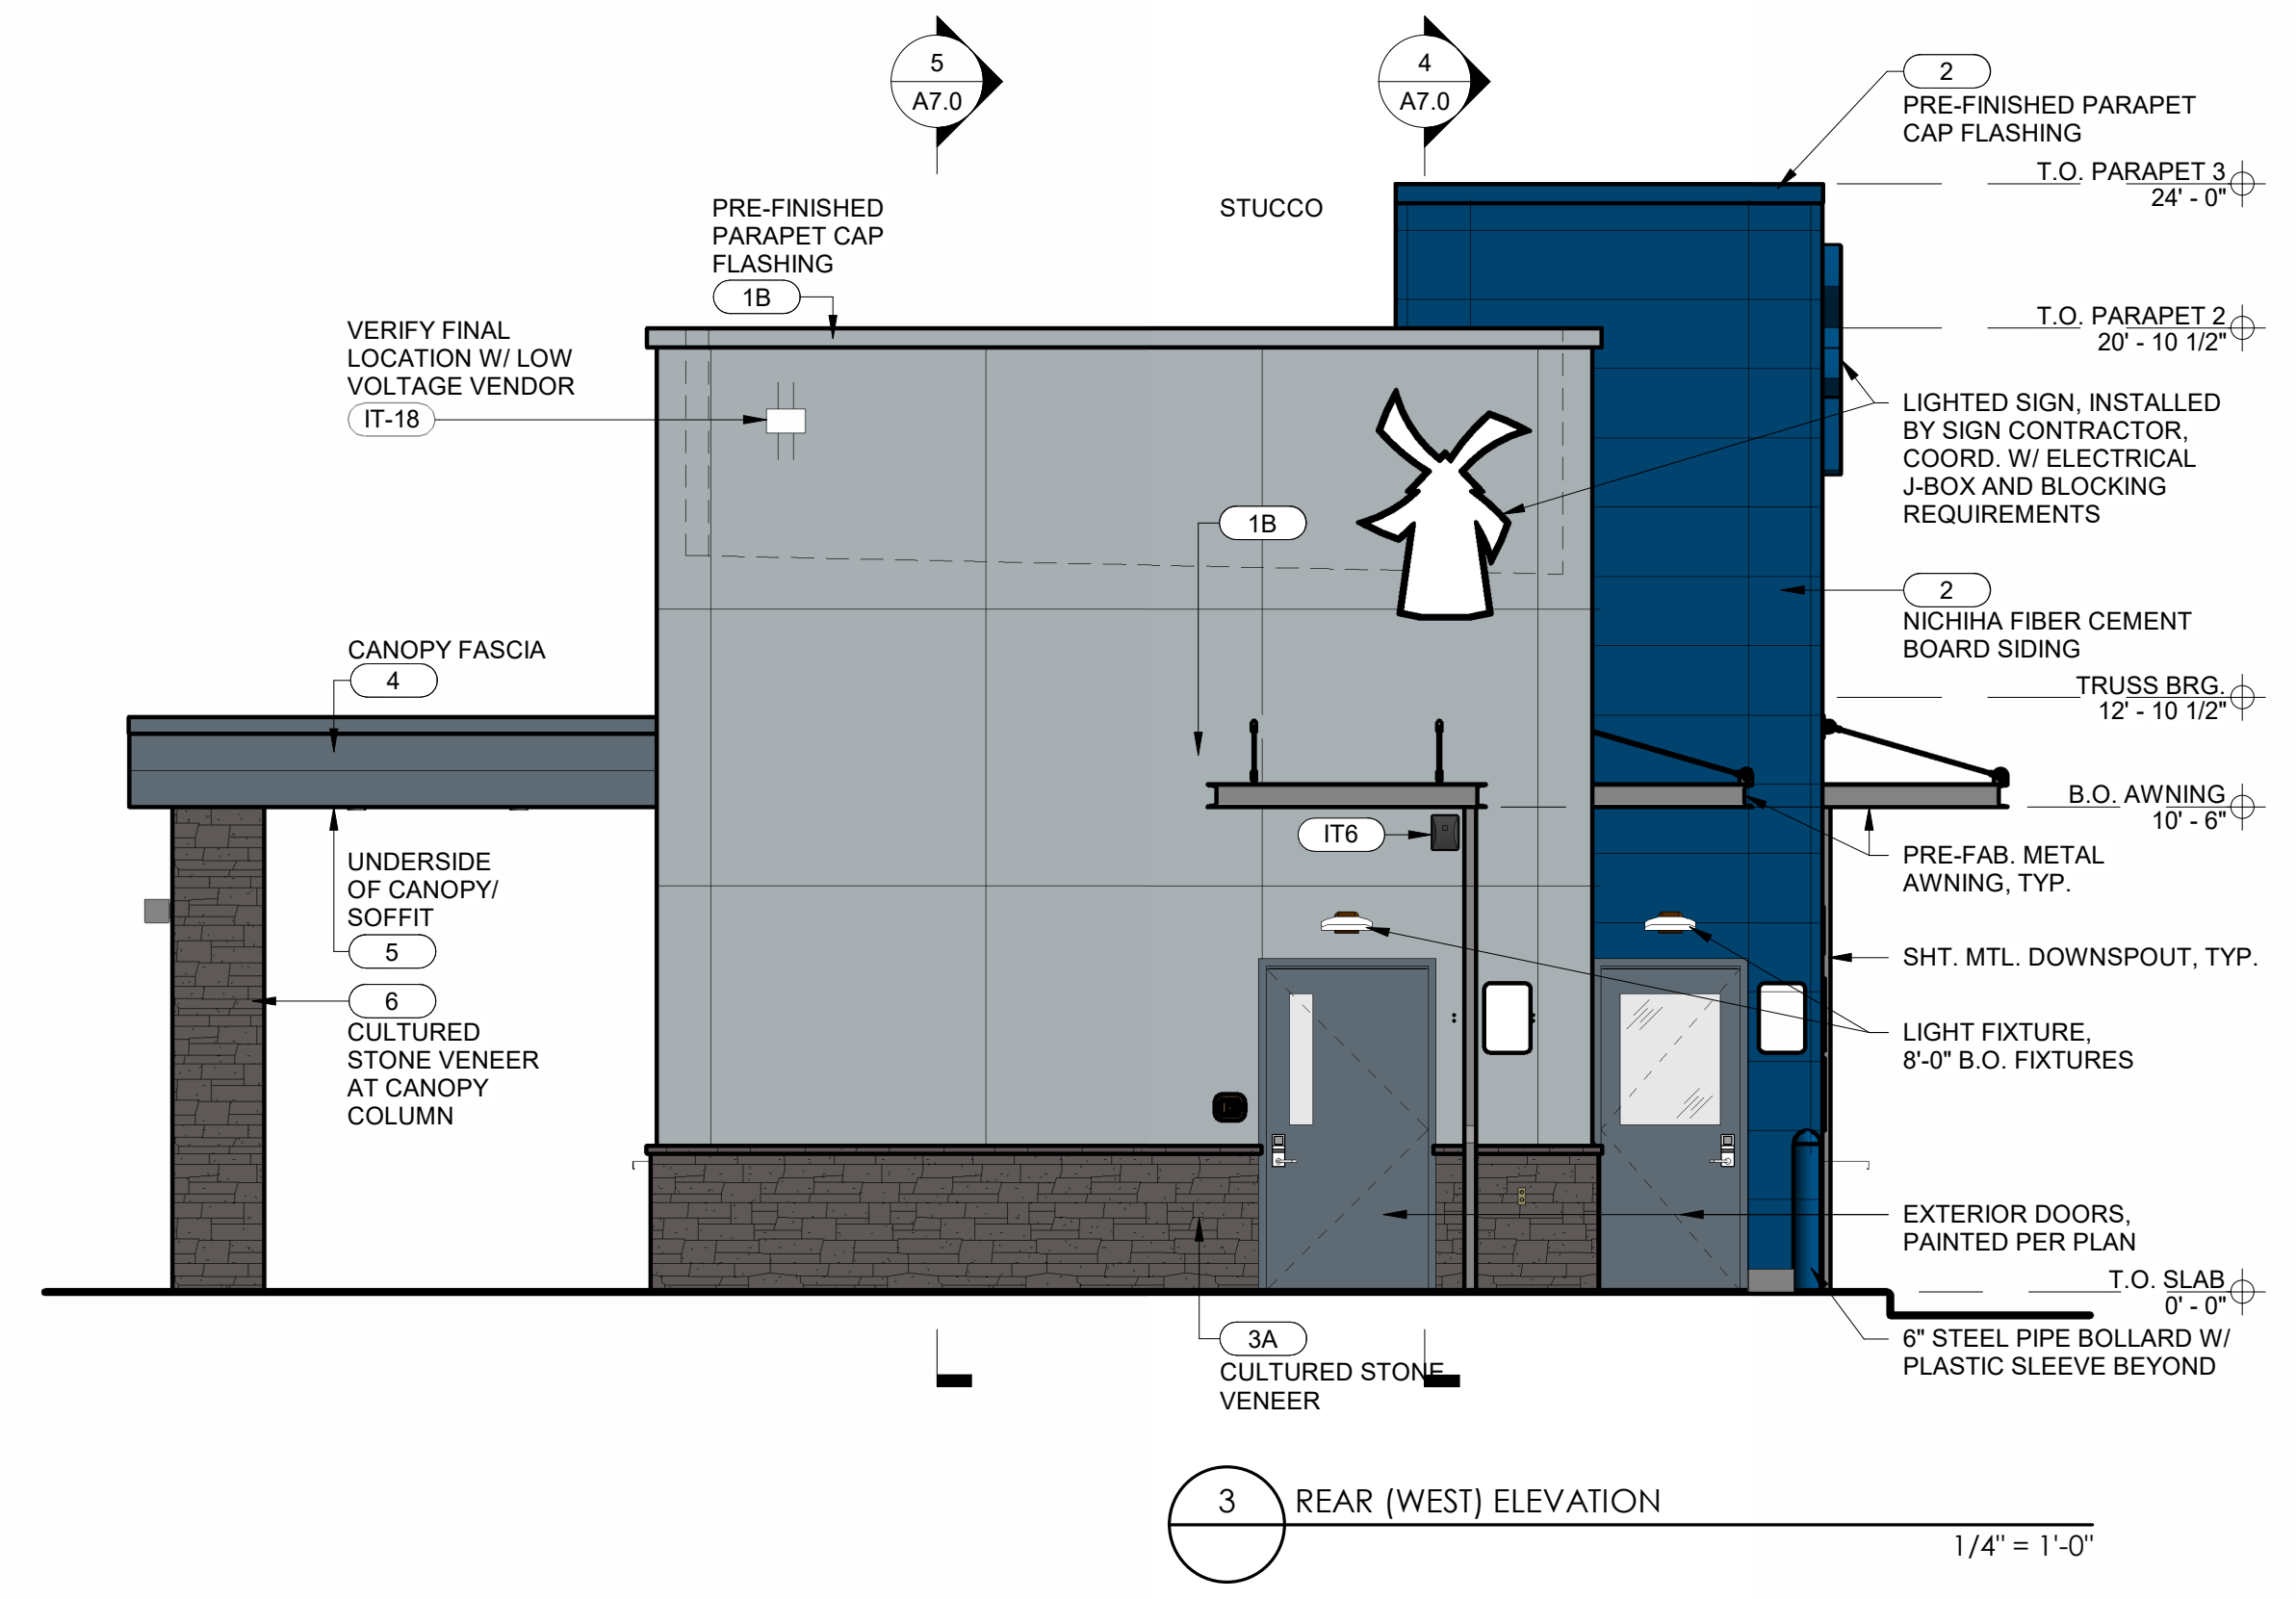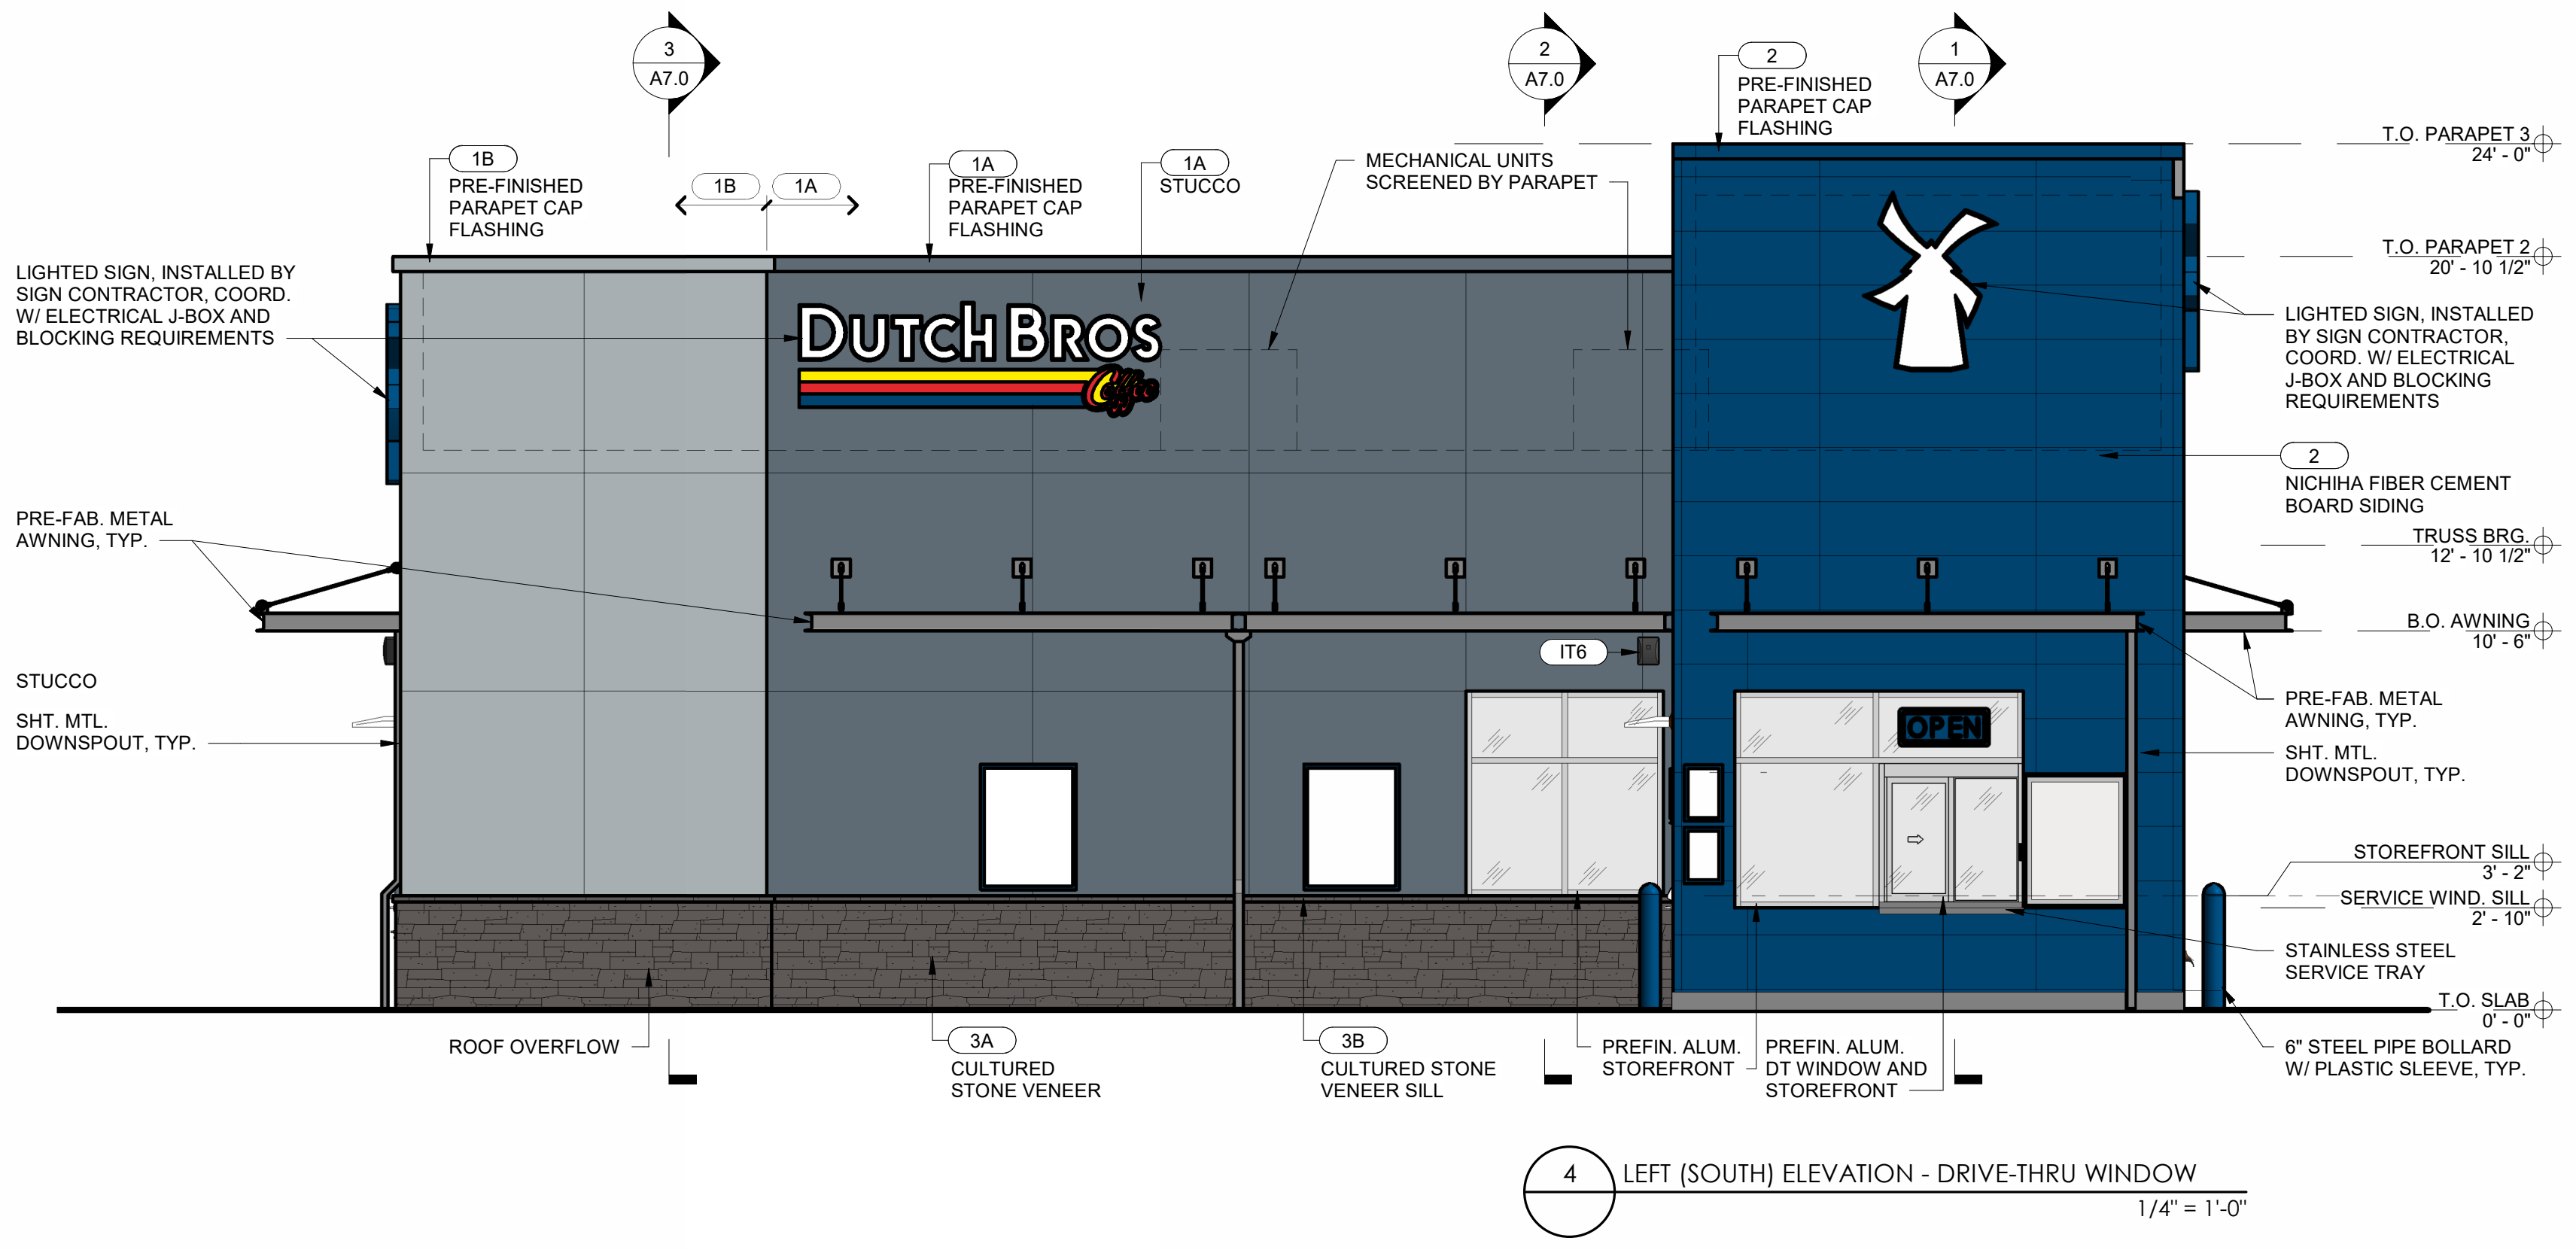

EXTERIOR FINISH SCHEDULE - PROTOTYPICAL W/ CANOPY				
NOTE: GC TO PROVIDE 3"x2" SMOOTH DOWNSPOUTS AND ALL NECESSARY ADAPTORS AT AWNING AND CANOPY LOCATION; COLOR: BLDG DB DARK GRAY				
ID TAG	MATERIAL	MANUFACTURER	MODEL	REMARKS
ZONE 1 (BODY)				
1A	STUCCO	DRYVIT	CCP-2 SYSTEM, SANDPEBBLE FINE E FINISH; REVEALS AS SHOWN	COLOR: BLDG DB DARK GRAY- PROVIDE 2) ADDITIONAL COATS OF SW DB DARK GRAY PAINT
1B	STUCCO	DRYVIT	CCP-2 SYSTEM, SANDPEBBLE FINE E FINISH; REVEALS AS SHOWN	COLOR: BLDG DB LIGHT GRAY- PROVIDE 2) ADDITIONAL COATS OF DB SW LIGHT GRAY PAINT
ZONE 2 (TOWER)				
2	FIBER CEMENT SIDING	NICHIHA	ILLUMINATION. AWP 1818 W/ MATCHING PANEL CORNERS	COLOR: BLDG DB BLUE- PROVIDE 2) ADDITIONAL COATS OF SW DB BLUE PAINT
ZONE 3 (BASE)				
3A	STONE VENEER	ELDORADO STONE	CLIFFSTONE	NATIONWIDE COLORS - BANFF SPRINGS
3B	STONE VENEER	ELDORADO STONE	12x4x16, PEAK CAP	COLOR: TO MATCH - RIPPED, USE BOTH CUT PIECES
ZONE 4 (FRAMED CANOPY)				
4	FASCIA	WESTERN STATES METAL ROOFING	T-GROOVE, 10"	3 SIDES; COLOR: BLDG DB DARK GRAY
5	SOFFIT	HEWN ELEMENTS	NATURAL NORTHWESTERN SPRUCE	1x6, T&G, 1/8" REVEAL, SEALED
6	STONE VENEER	ELDORADO STONE	CLIFFSTONE	NATIONWIDE COLORS - BANFF SPRINGS



ARCHITECT
CORALIC, LLC
9700 MACKENZIE ROAD, STE. 222
ST. LOUIS, MO 63125

TJ 314.578.4953
EDIN@CORALICARCHITECTURE.COM

STRUCTURAL ENGINEER
KREHER ENGINEERING, INC.
208 N. MAIN STREET,
COLUMBIA, IL 62236

TJ 618.281.8505
NDREYER@KREHERENGINEERING.COM

MEP ENGINEER
CASE ENGINEERING, INC.
796 MERUS CT.
FENTON, MO 63026

TJ 636.349.1600
MCASE@CASEENGINEERINGINC.COM



5.21.2026

Project No: LA0701
Dutch Bros Coffee - New Freestanding Store
1804 MACARTHUR DRIVE,
ALEXANDRIA, LA 71301
For: Dutch Bros Coffee
1930 W. Rio Salado Parkway
Tempe, AZ 85281

ISSUED FOR PERMIT

5.21.2026

REV:	DATE:	DESCRIPTION:





SHEET NAME:

BUILDING ELEVATIONS - COLOR

SHEET NUMBER:

ANNIHILATOR A1

The name DUTCH BROS. and all associated logos, distinctive designs, content, information, and other materials featured, contained herein, and made available by Dutch Bros., including but not limited to, the "look and feel" of the establishments and products, all text, images, colors, configurations, graphics, designs, illustrations, photographs, and pictures (collectively, the "Materials") are owned by and/or licensed by DB Franchising USA, LLC and are protected by copyright, trademark, trade dress, patent, and/or other intellectual property rights and unfair competition laws under the United States and foreign laws.

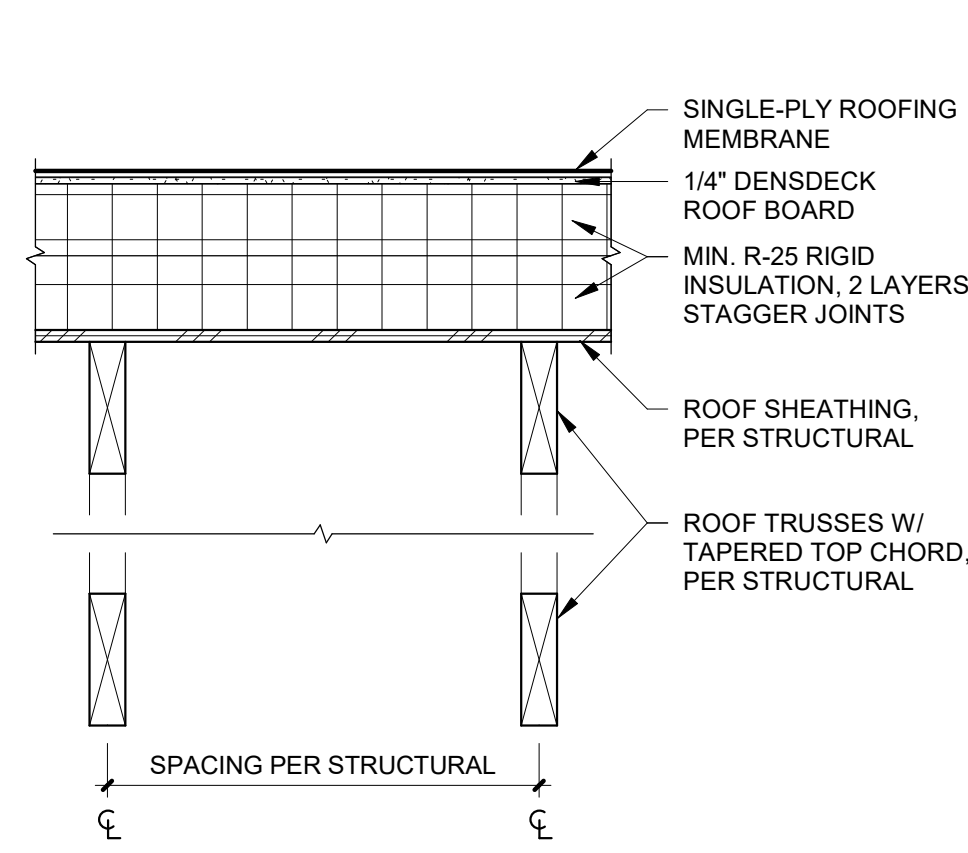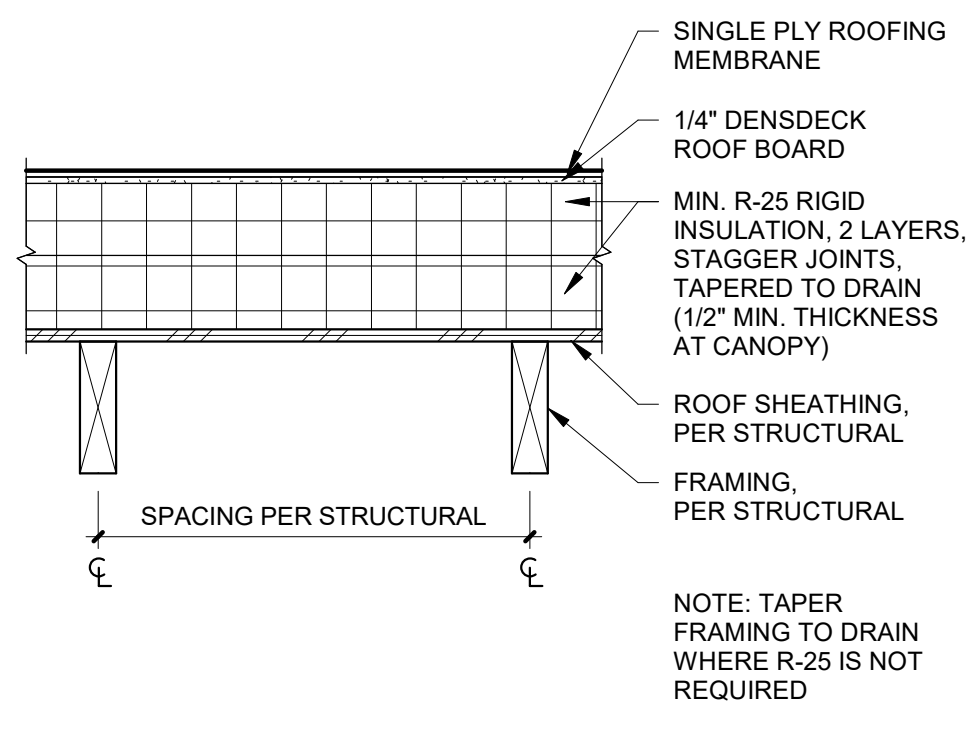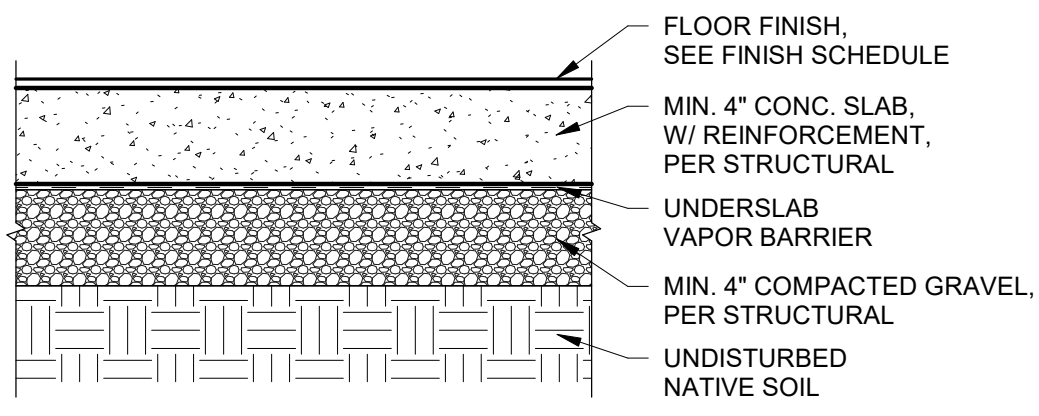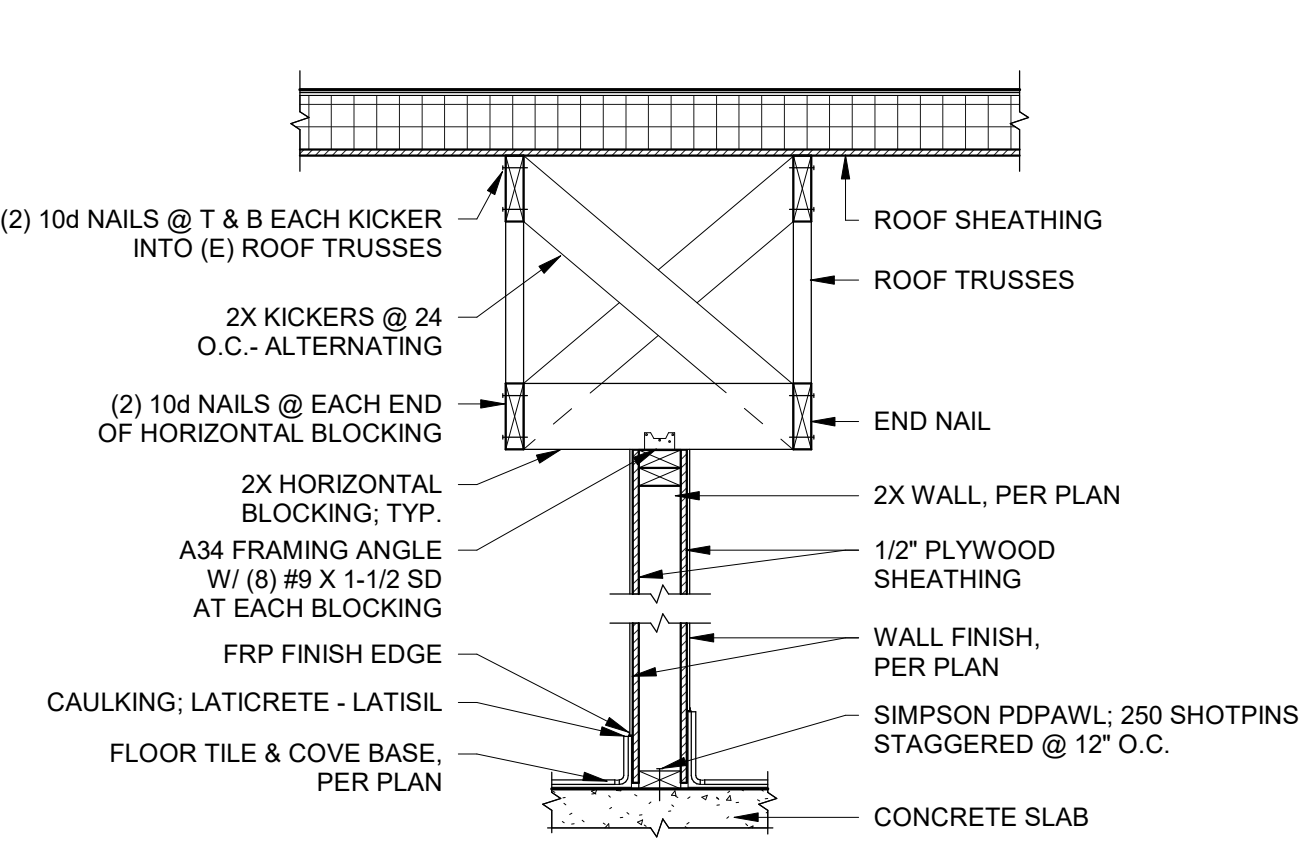

- GENERAL NOTES:**
- COORDINATE WITH STRUCTURAL DRAWINGS FOR SIZES, CONNECTION DETAILS OF WOOD FRAMING, POSTS, JOISTS, GIRDERS, WOOD DECKING AND OTHER STRUCTURAL COMPONENTS.
 - COORDINATE WITH STRUCTURAL DRAWINGS FOR REINFORCEMENT OF CONCRETE SLABS, FOOTINGS, FOUNDATIONS, AND WALL TYPES.
 - COORDINATE WINDOW TYPES WITH FLOOR PLANS AND FRAME TYPES. PROVIDE BITUMINOUS DAMPROOFING ON ALL EXTERIOR WALLS BELOW GRADE LEVEL AS INDICATED IN THE SPECIFICATIONS.
 - AIR BARRIER JOINTS AND SEAMS SHALL BE SEALED, INCLUDING SEALING TRANSITIONS IN PLACES AND CHANGES IN MATERIALS. THE JOINTS AND SEALS SHALL BE SECURELY INSTALLED IN OR ON THE JOINT FOR ITS ENTIRE LENGTH SO AS NOT TO DISLODGE, LOOSEN OR OTHERWISE IMPAIR ITS ABILITY TO RESIST POSITIVE AND NEGATIVE PRESSURE FROM WIND, STACK EFFECT AND MECHANICAL VENTILATION.
 - PENETRATIONS FOR THE AIR BARRIER SHALL BE CAULKED, GASKETED OR OTHERWISE SEALED IN A MANNER COMPATIBLE WITH THE CONSTRUCTION MATERIALS AND LOCATION.



ARCHITECT
CORALIC, LLC
9700 MACKENZIE ROAD, STE. 222
ST. LOUIS, MO 63125

TJ 314.578.4953
EDIN@CORALICARCHITECTURE.COM

STRUCTURAL ENGINEER
KREHER ENGINEERING, INC.
208 N. MAIN STREET,
COLUMBIA, IL 62236

TJ 618.281.8505
NDREYER@KREHERENGINEERING.COM

MEP ENGINEER
CASE ENGINEERING, INC.
796 MERUS CT.
FENTON, MO 63026


TJ 636.349.1600
MCASE@CASEENGINEERINGINC.COM

9 TOP/ BOTTOM OF WALL BRACING
3/4" = 1'-0"


8 BUILDING CONCRETE SLAB
1 1/2" = 1'-0"

7 ROOF ASSEMBLY - JOISTS
1 1/2" = 1'-0"


6 ROOF ASSEMBLY - TRUSSES
1 1/2" = 1'-0"

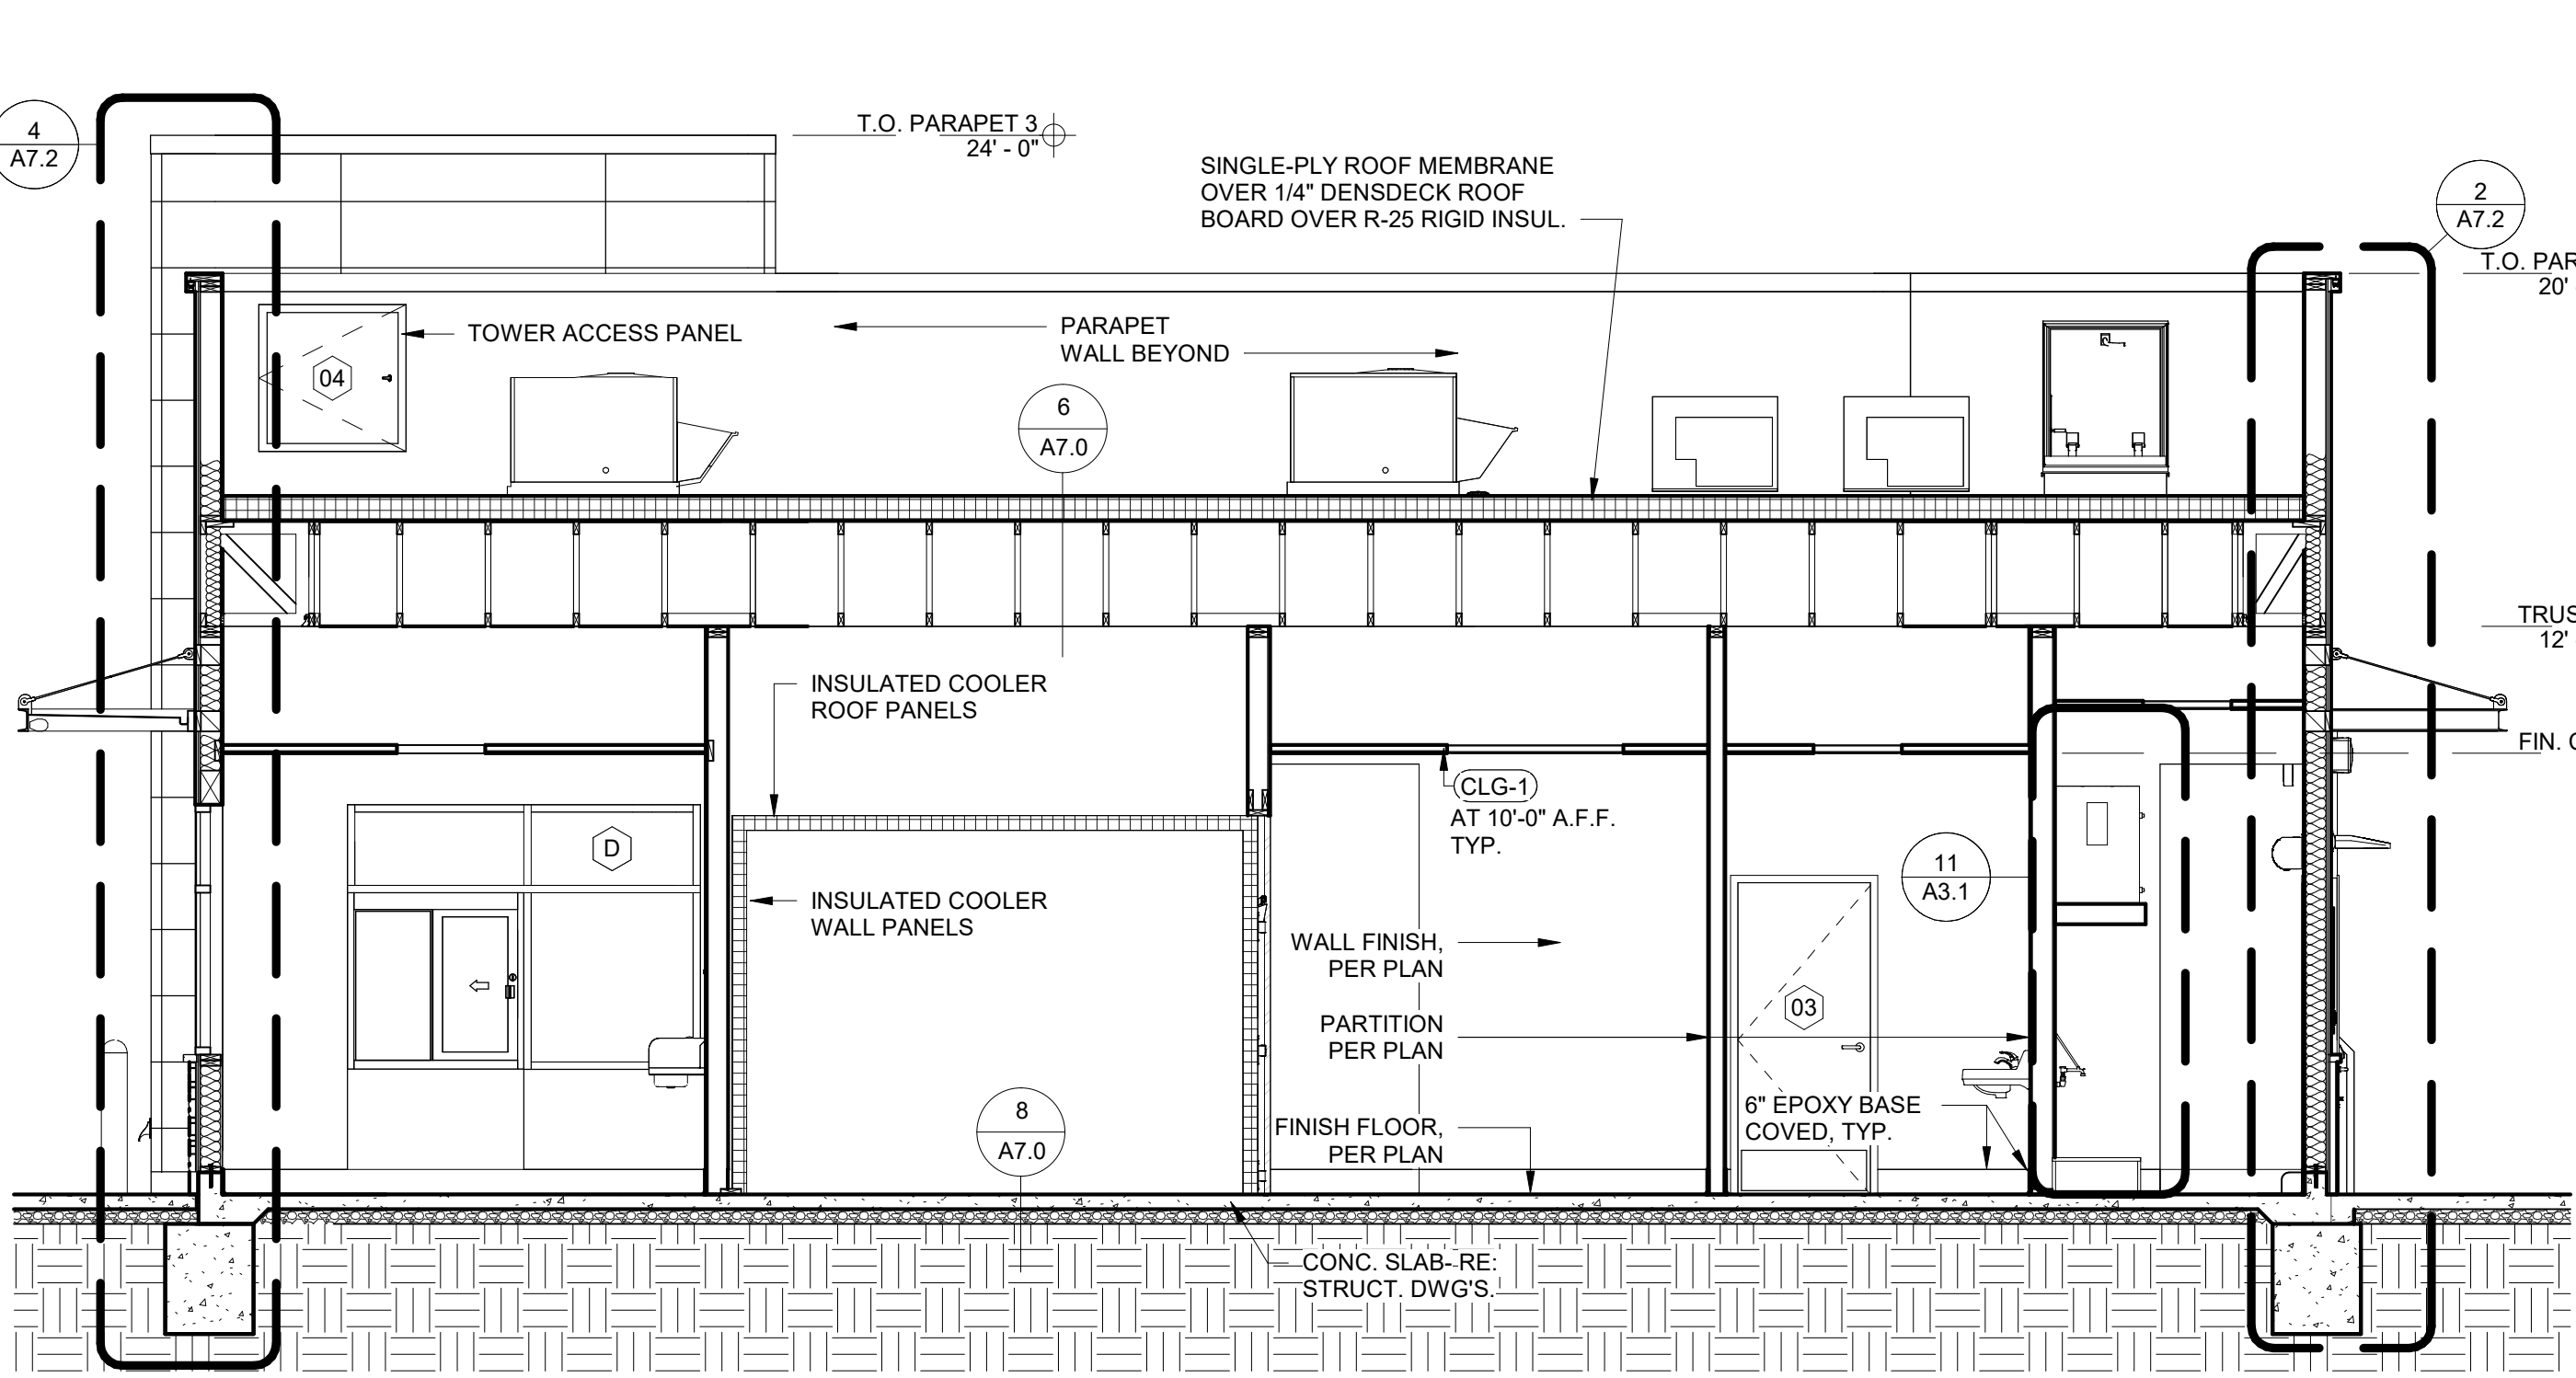


5 BUILDING SECTION 5
1/4" = 1'-0"

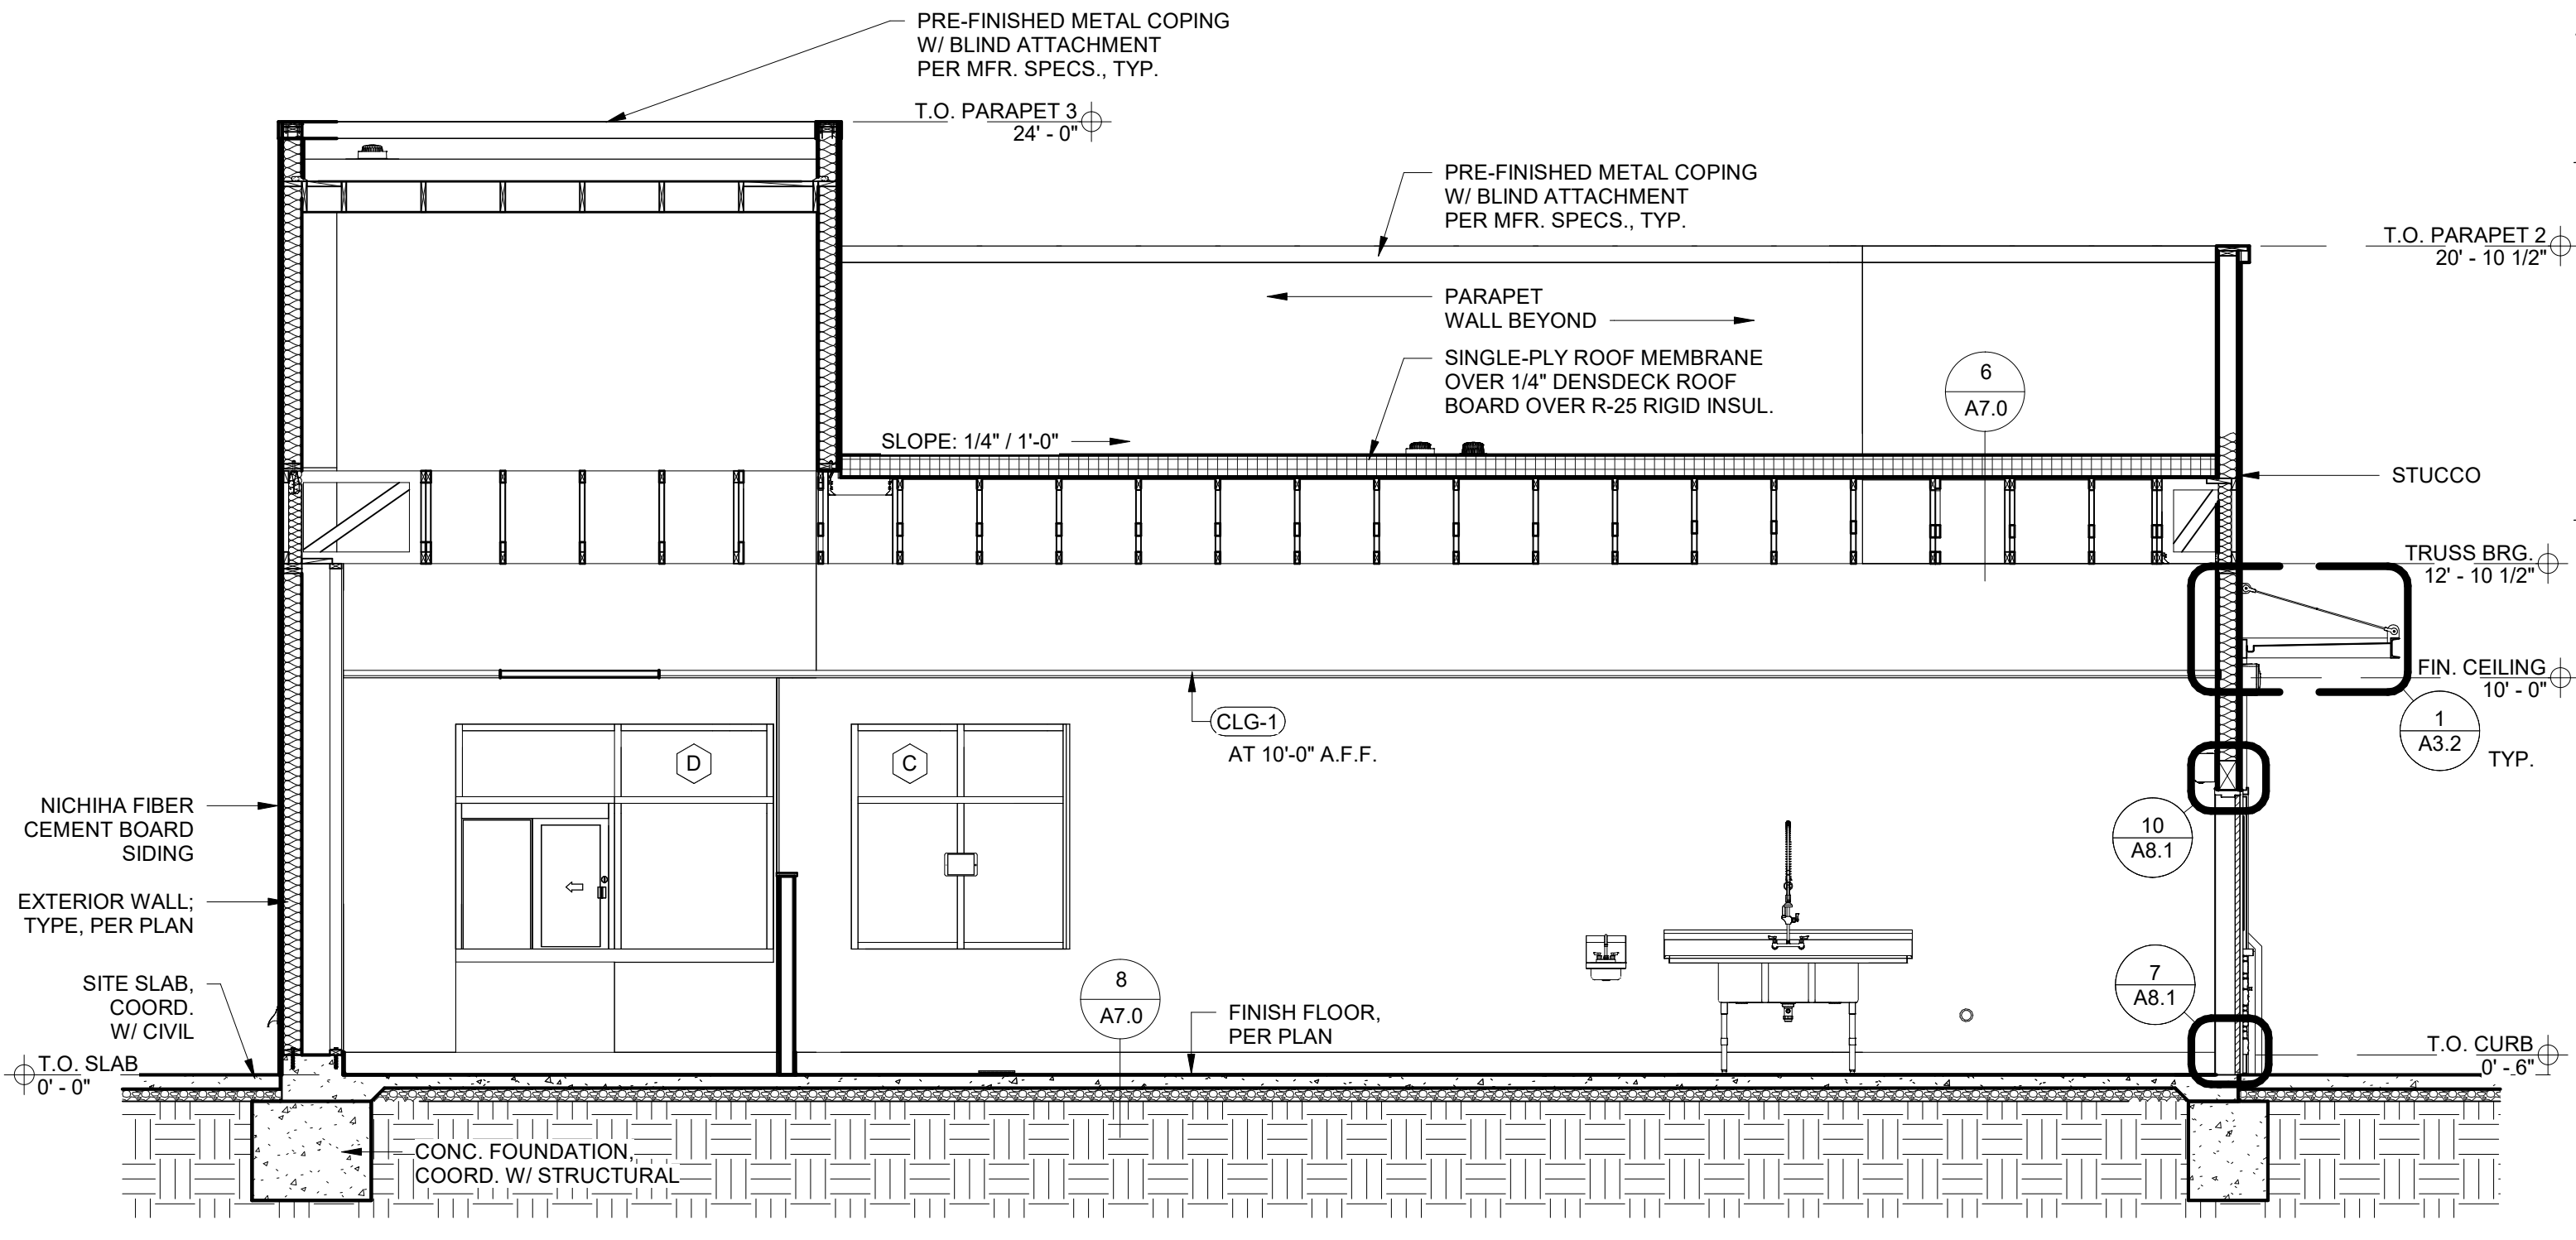


4 BUILDING SECTION 4
1/4" = 1'-0"

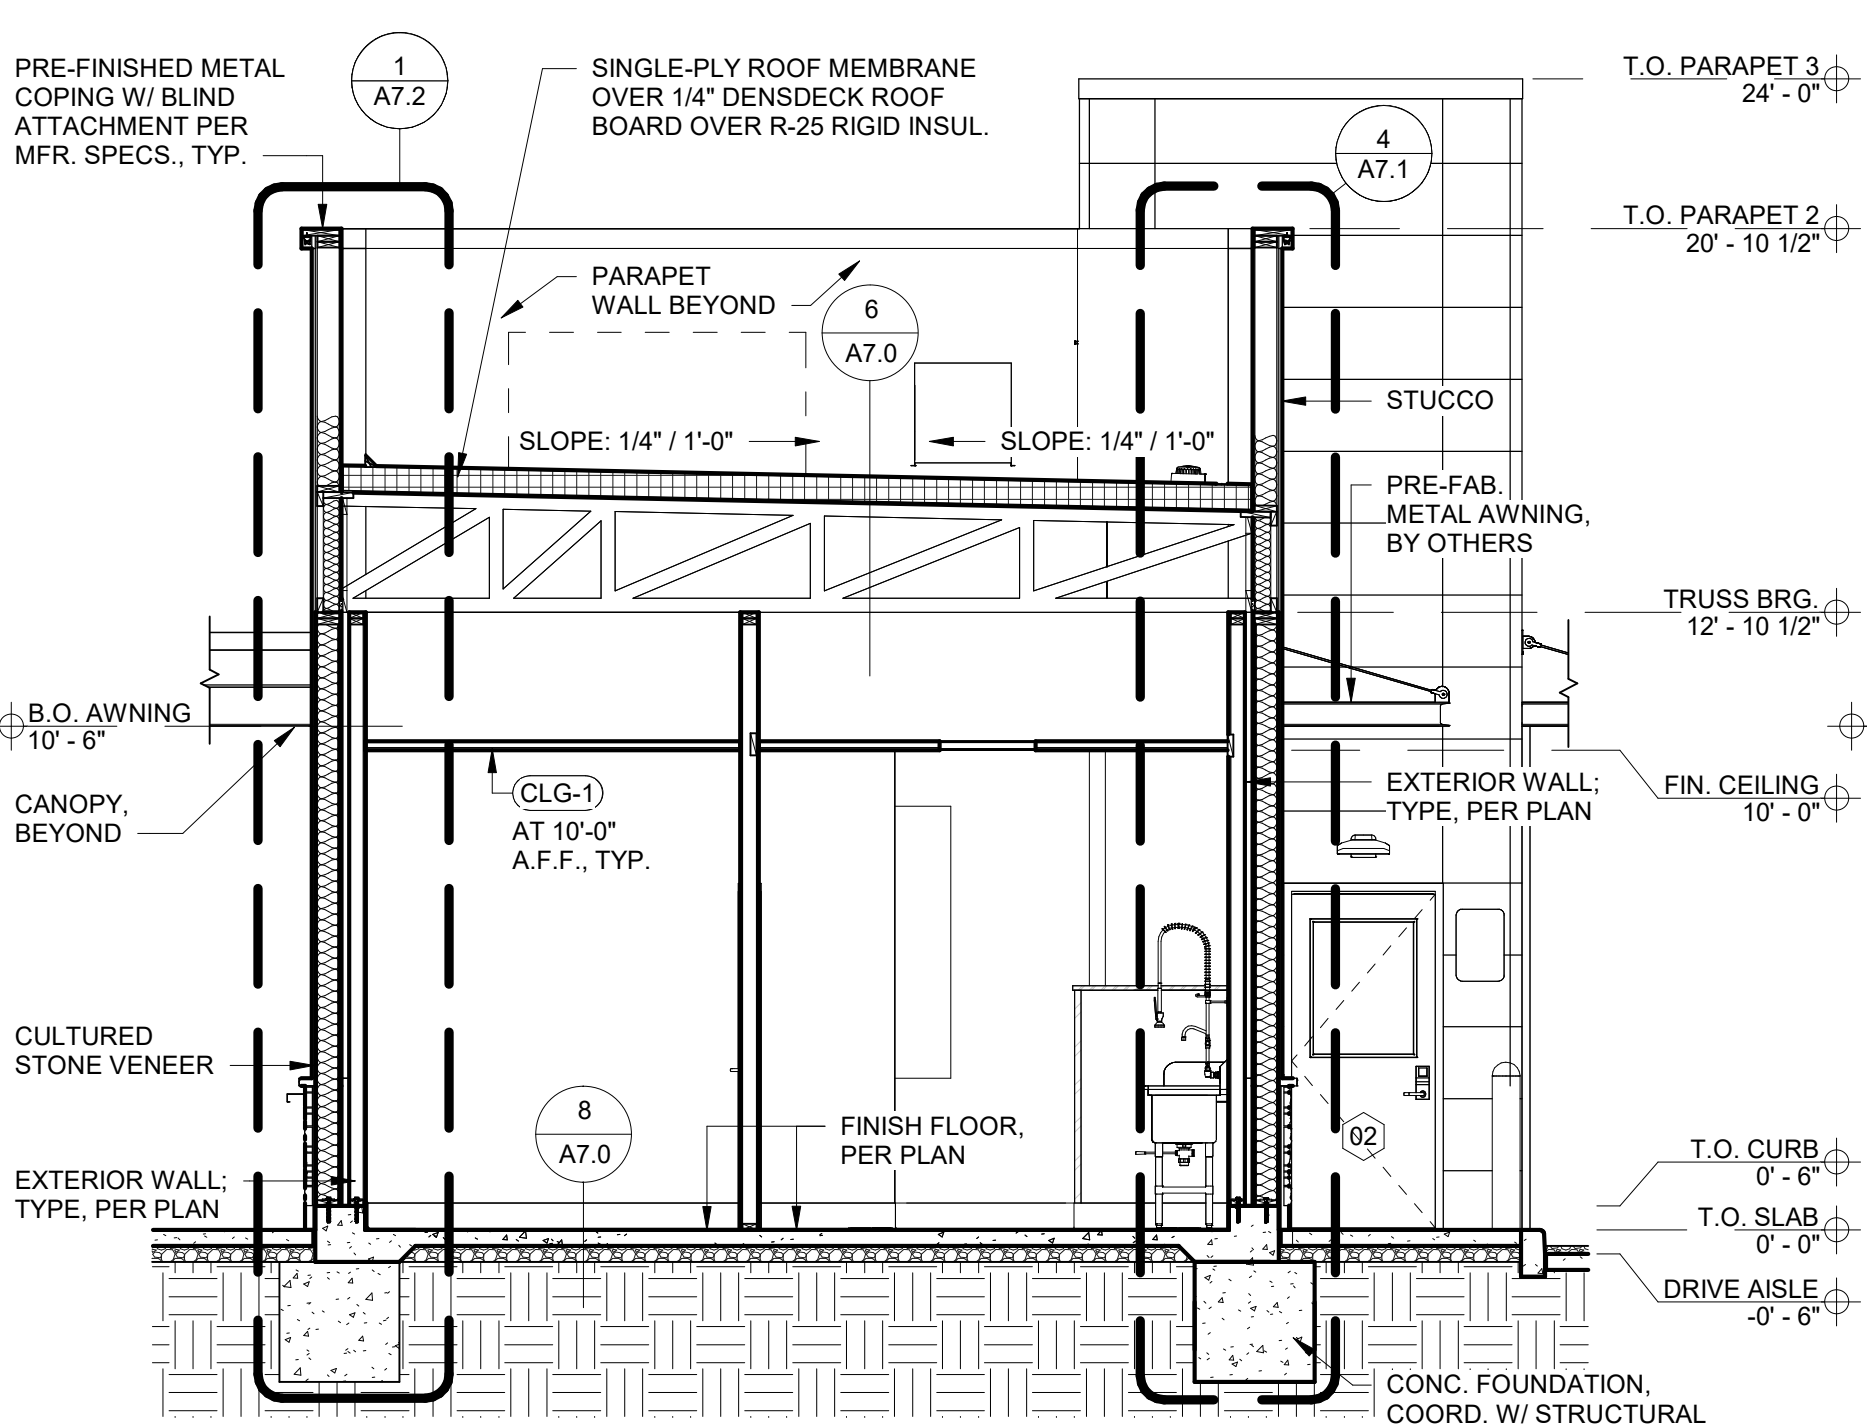


3 BUILDING SECTION 3
1/4" = 1'-0"

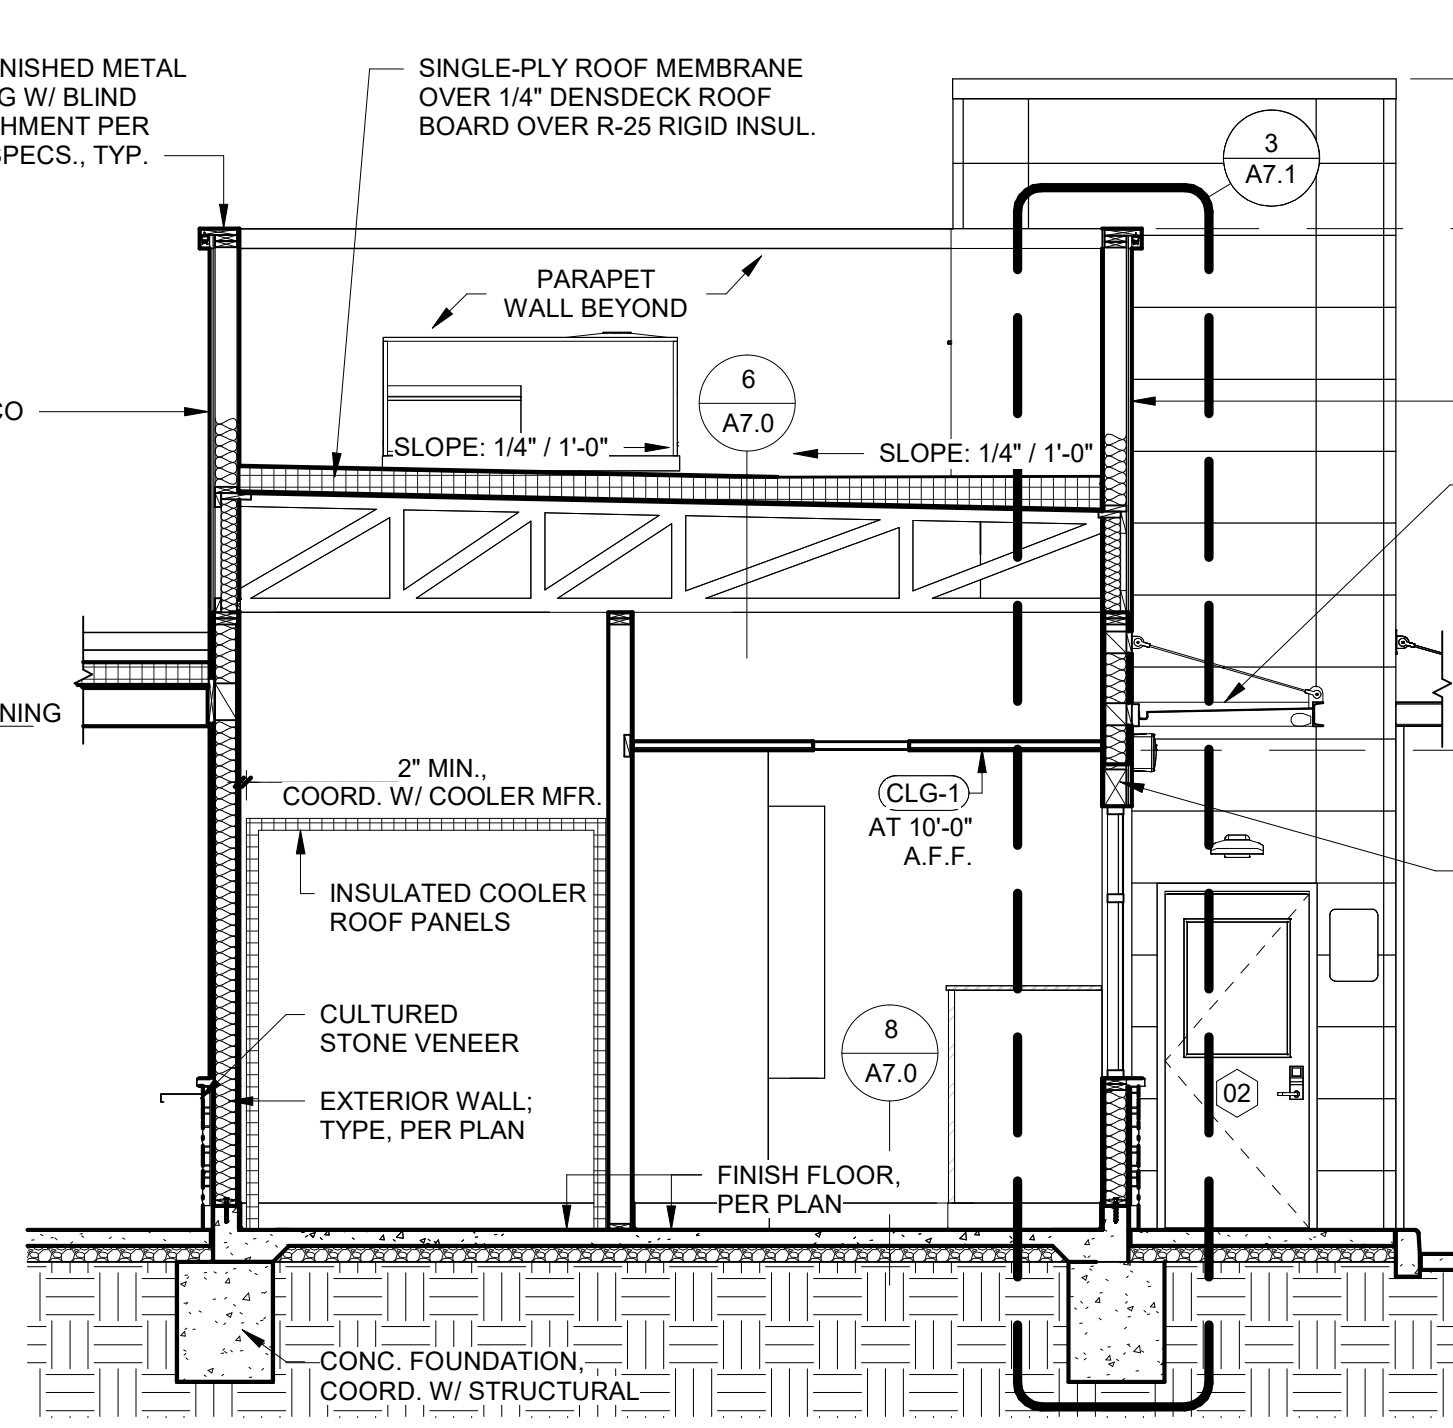

2 BUILDING SECTION 2
1/4" = 1'-0"

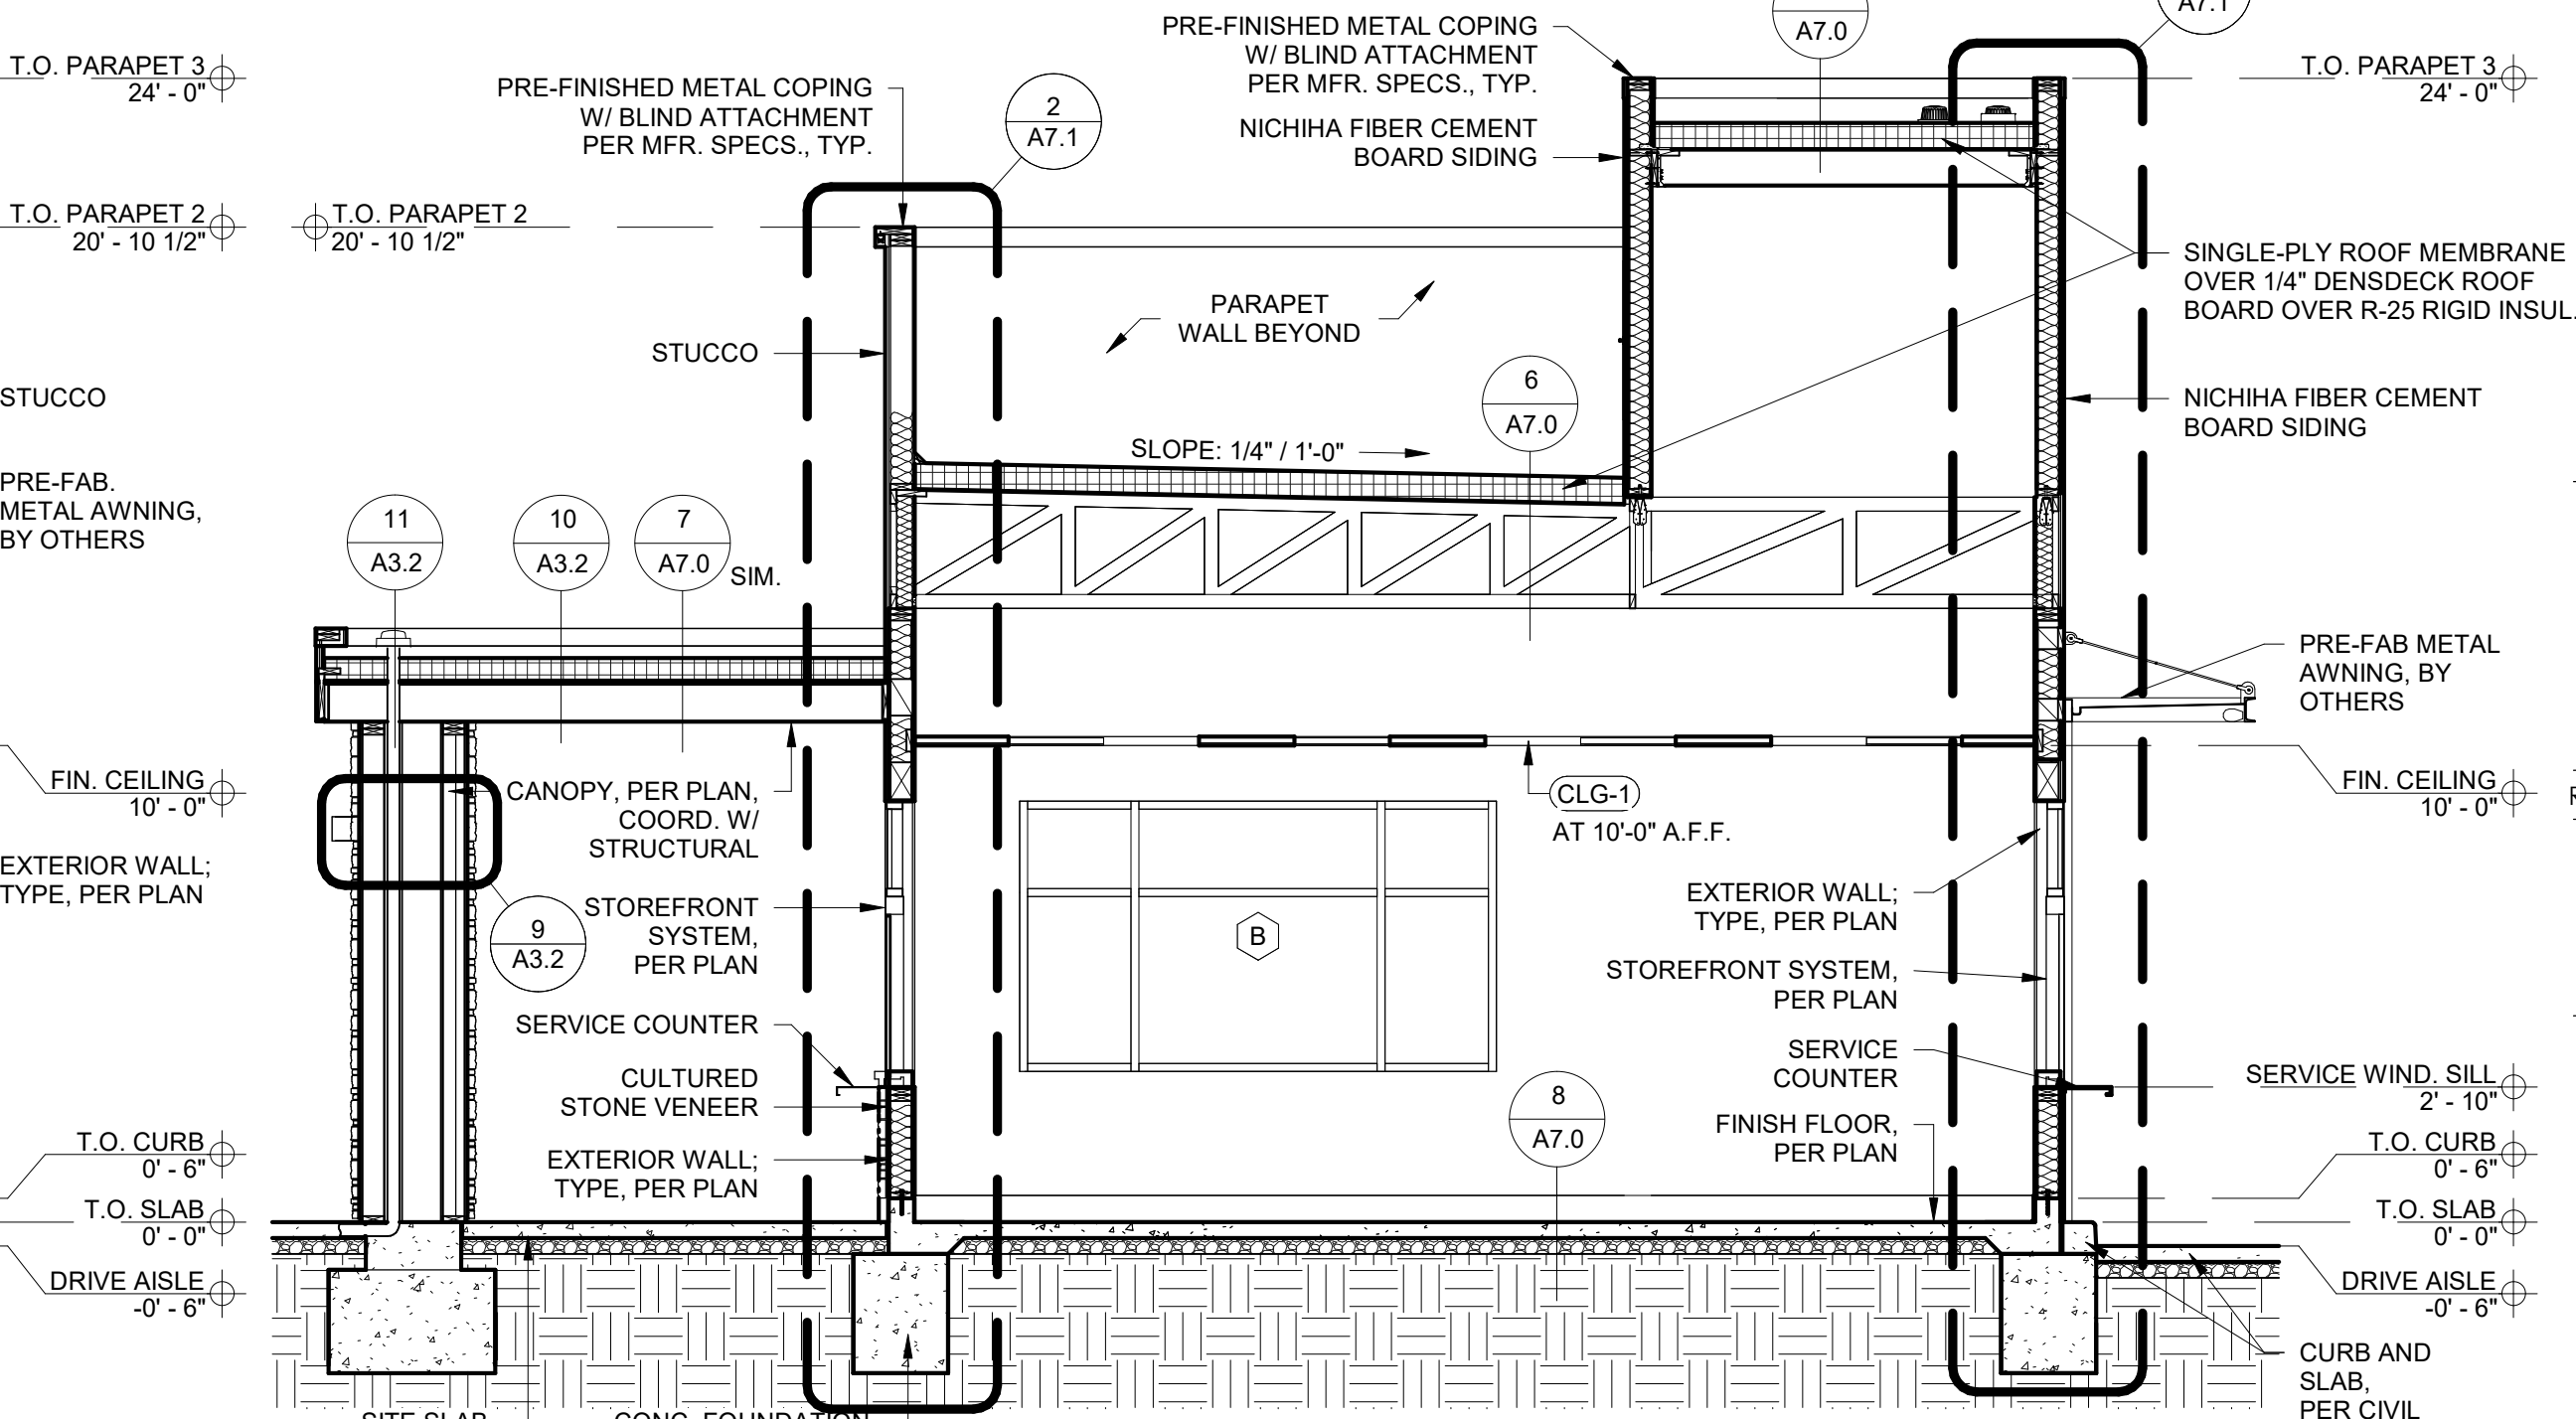

1 BUILDING SECTION 1
1/4" = 1'-0"

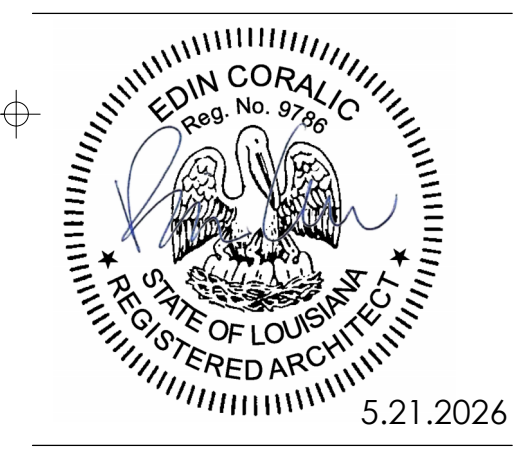

5.21.2026

Project No: LA0701

Dutch Bros Coffee - New Freestanding Store
1804 MACARTHUR DRIVE,
ALEXANDRIA, LA 71301
For: Dutch Bros Coffee
1930 W. Rio Salado Parkway
Tempe, AZ 85281

ANNIHILATOR A1

ISSUED FOR PERMIT

5.21.2026

REV:	DATE:	DESCRIPTION:

SHEET NAME:


BUILDING SECTIONS

SHEET NUMBER:


A7.0

© 2025 DB Franchising USA, LLC


"The name DUTCH-BROS. and all associated logos, distinctive designs, content, information, and other materials featured, displayed, contained herein, and made available by Dutch Bros., including but not limited to, the "look and feel" of the establishments and products, all text, images, colors, configurations, graphics, designs, illustrations, photographs, and pictures (collectively, the "Materials") are owned by and/or licensed by DB Franchising USA, LLC and are protected by copyright, trademark, trade dress, patent, and/or other intellectual property rights and unfair competition laws under the United States and foreign laws."

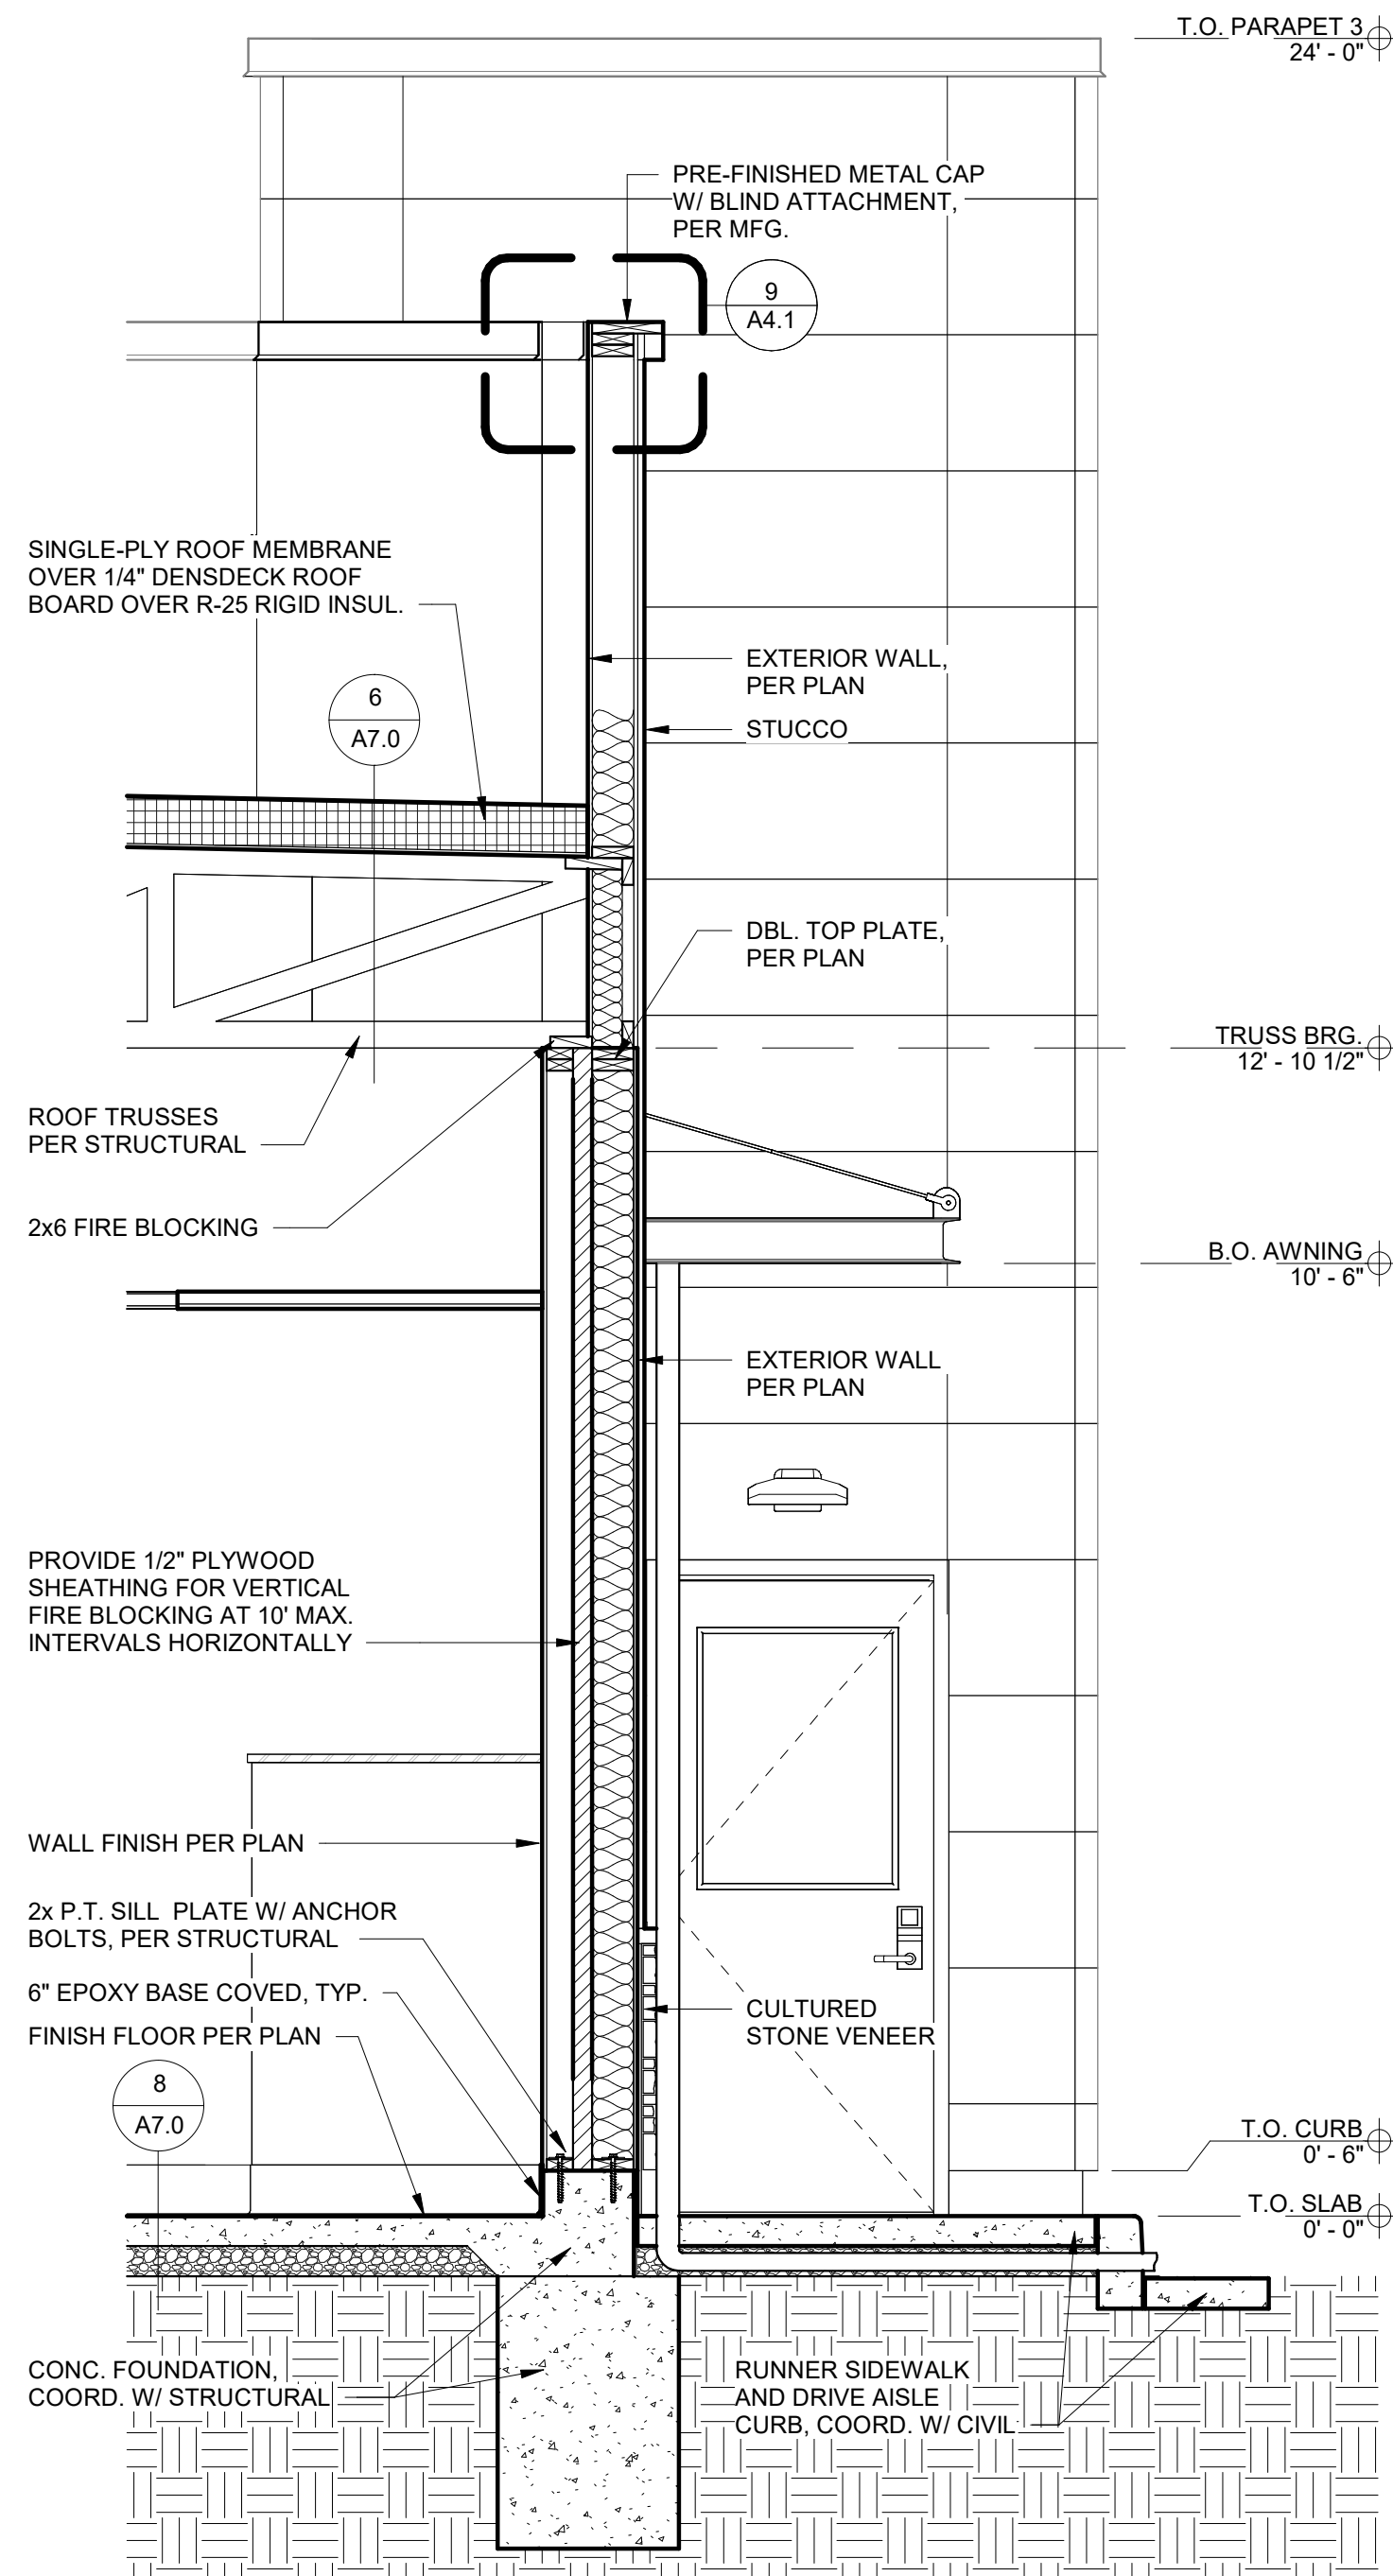


4 WALL SECTION 4
1/2" = 1'-0"

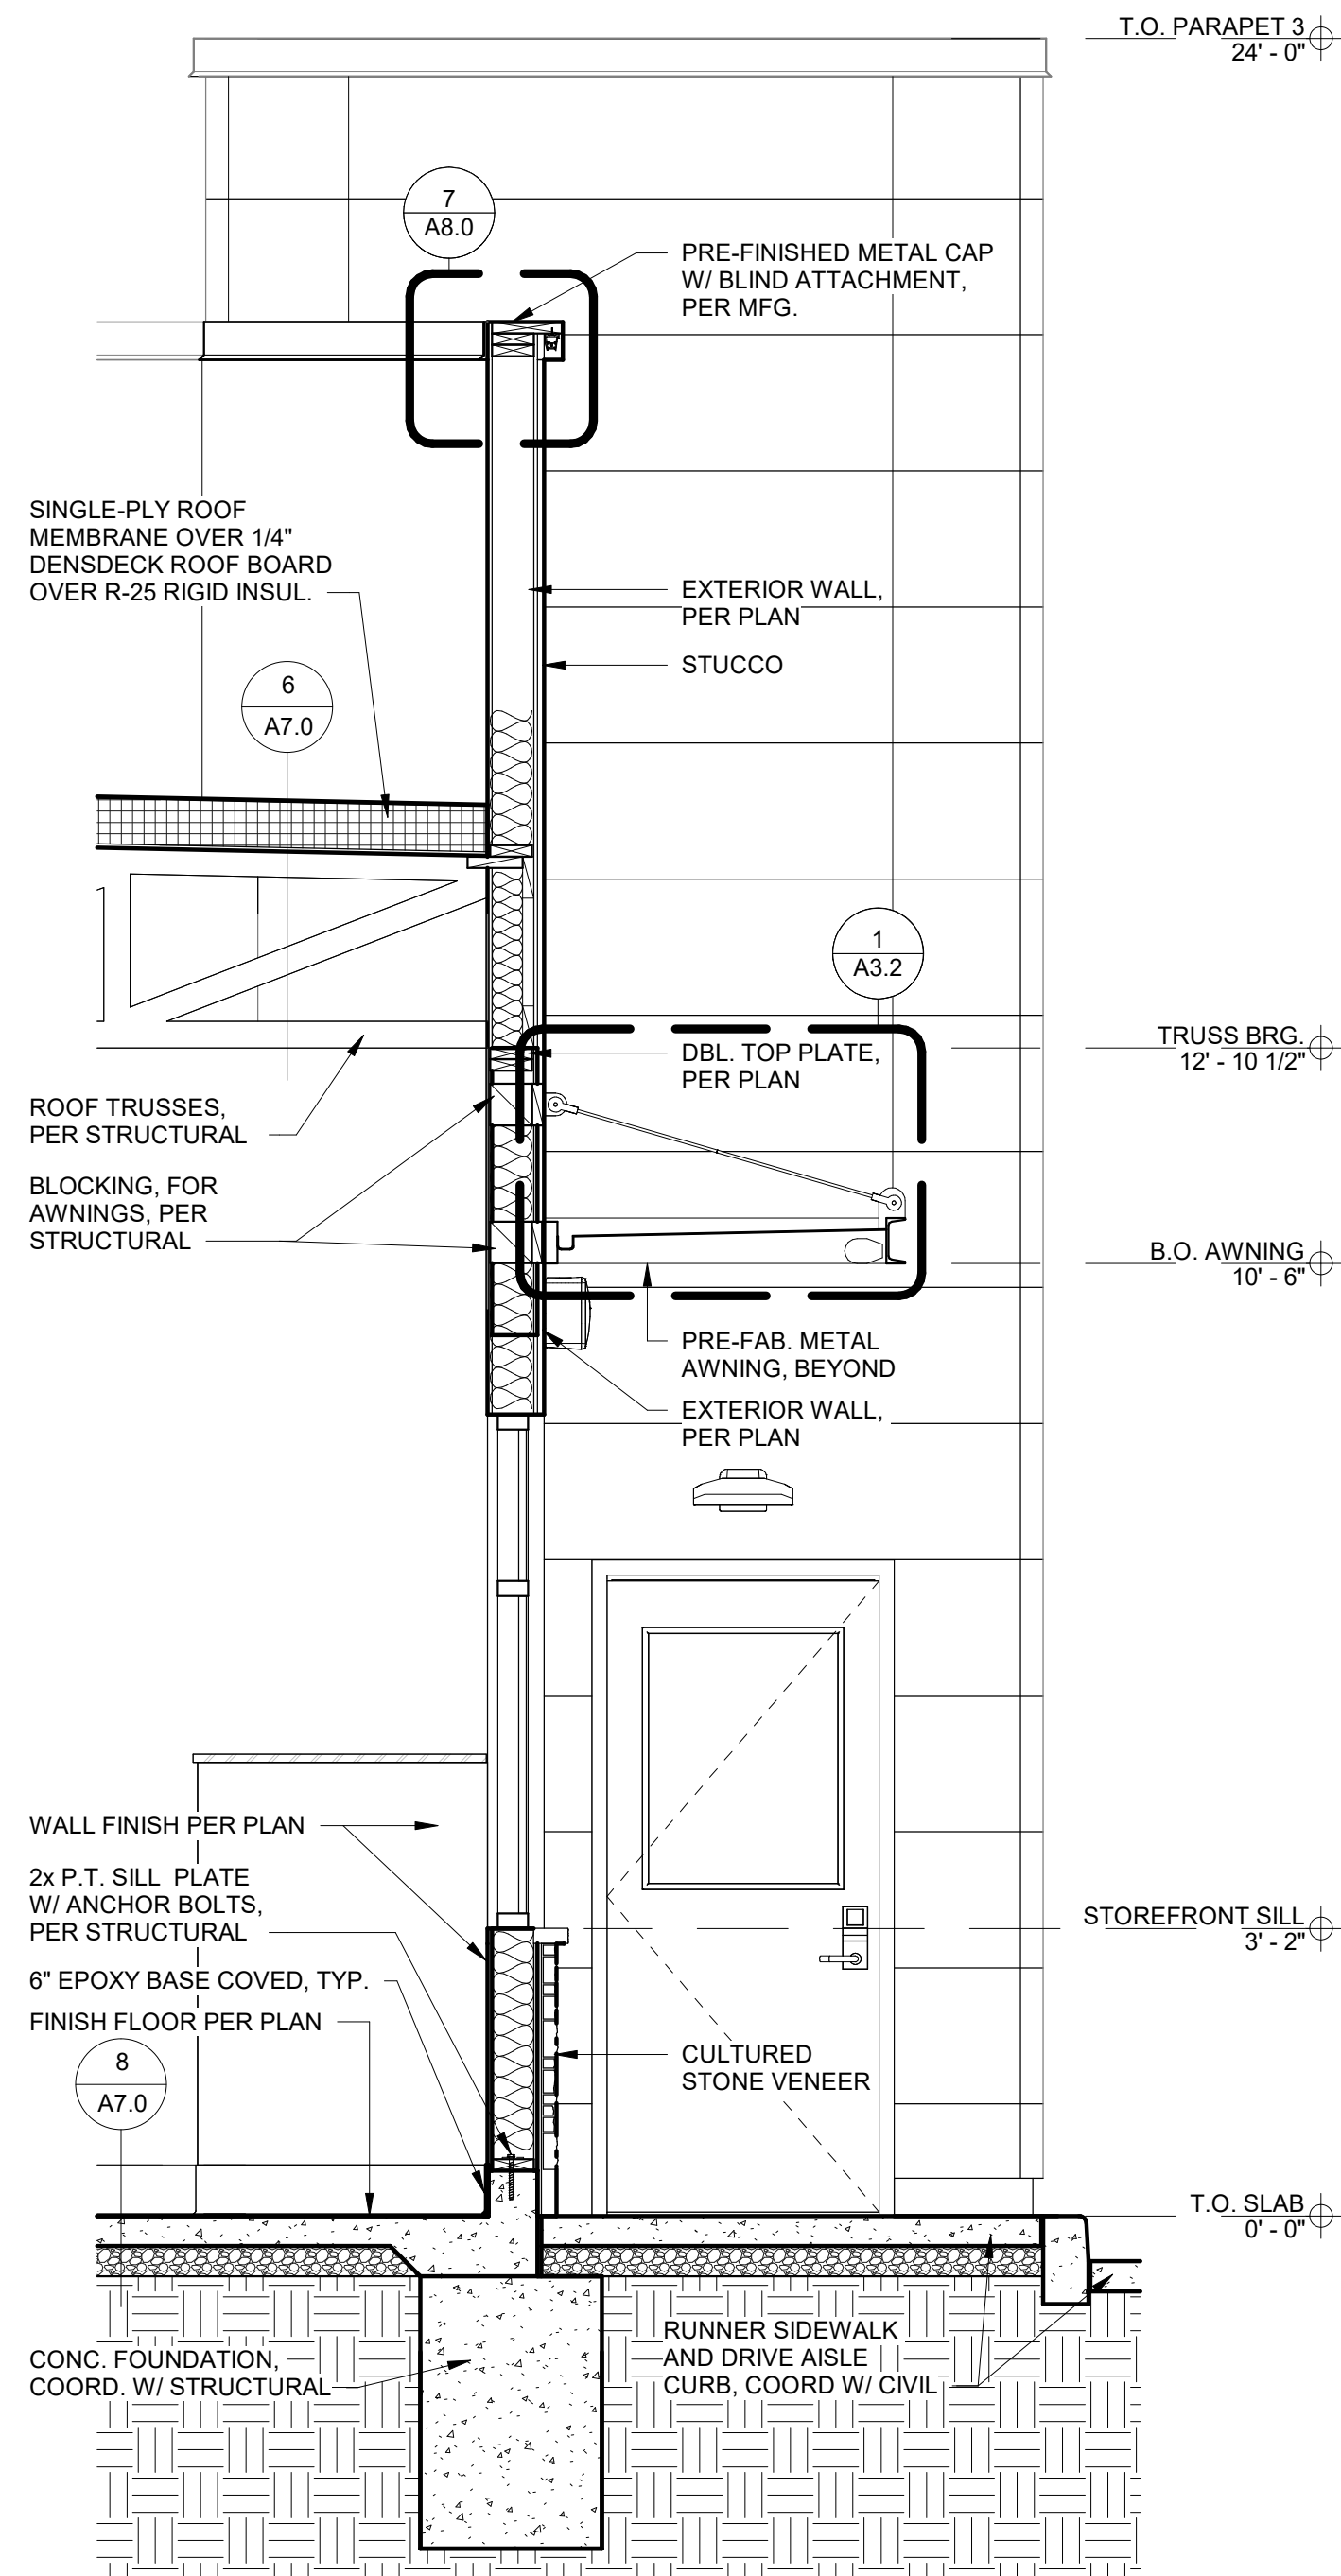

3 WALL SECTION 3
1/2" = 1'-0"

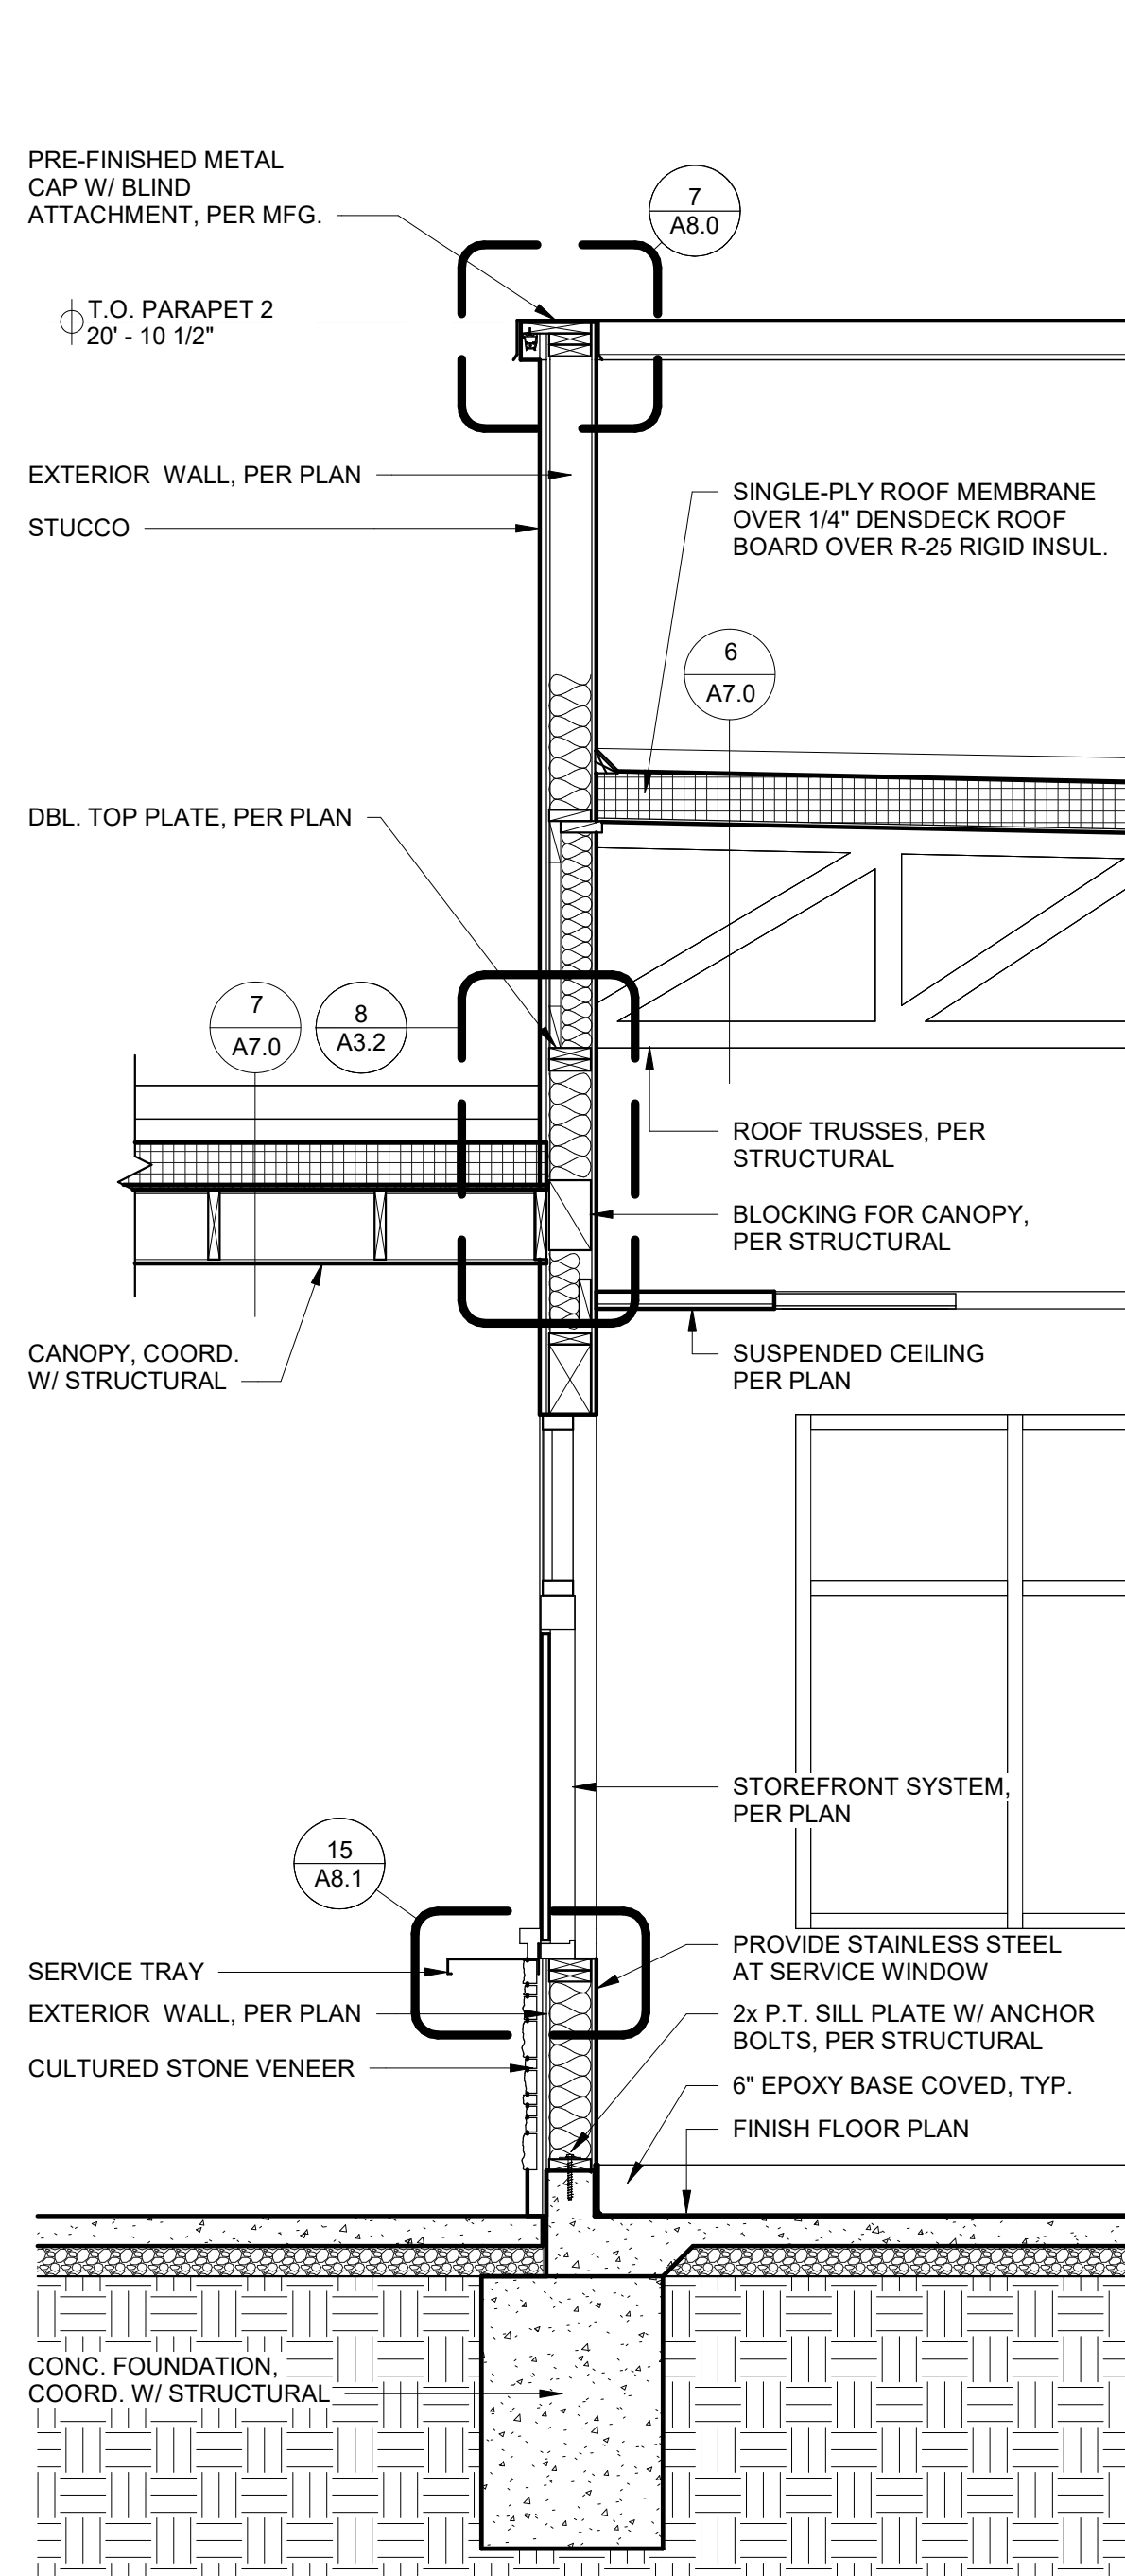

2 WALL SECTION 2
1/2" = 1'-0"

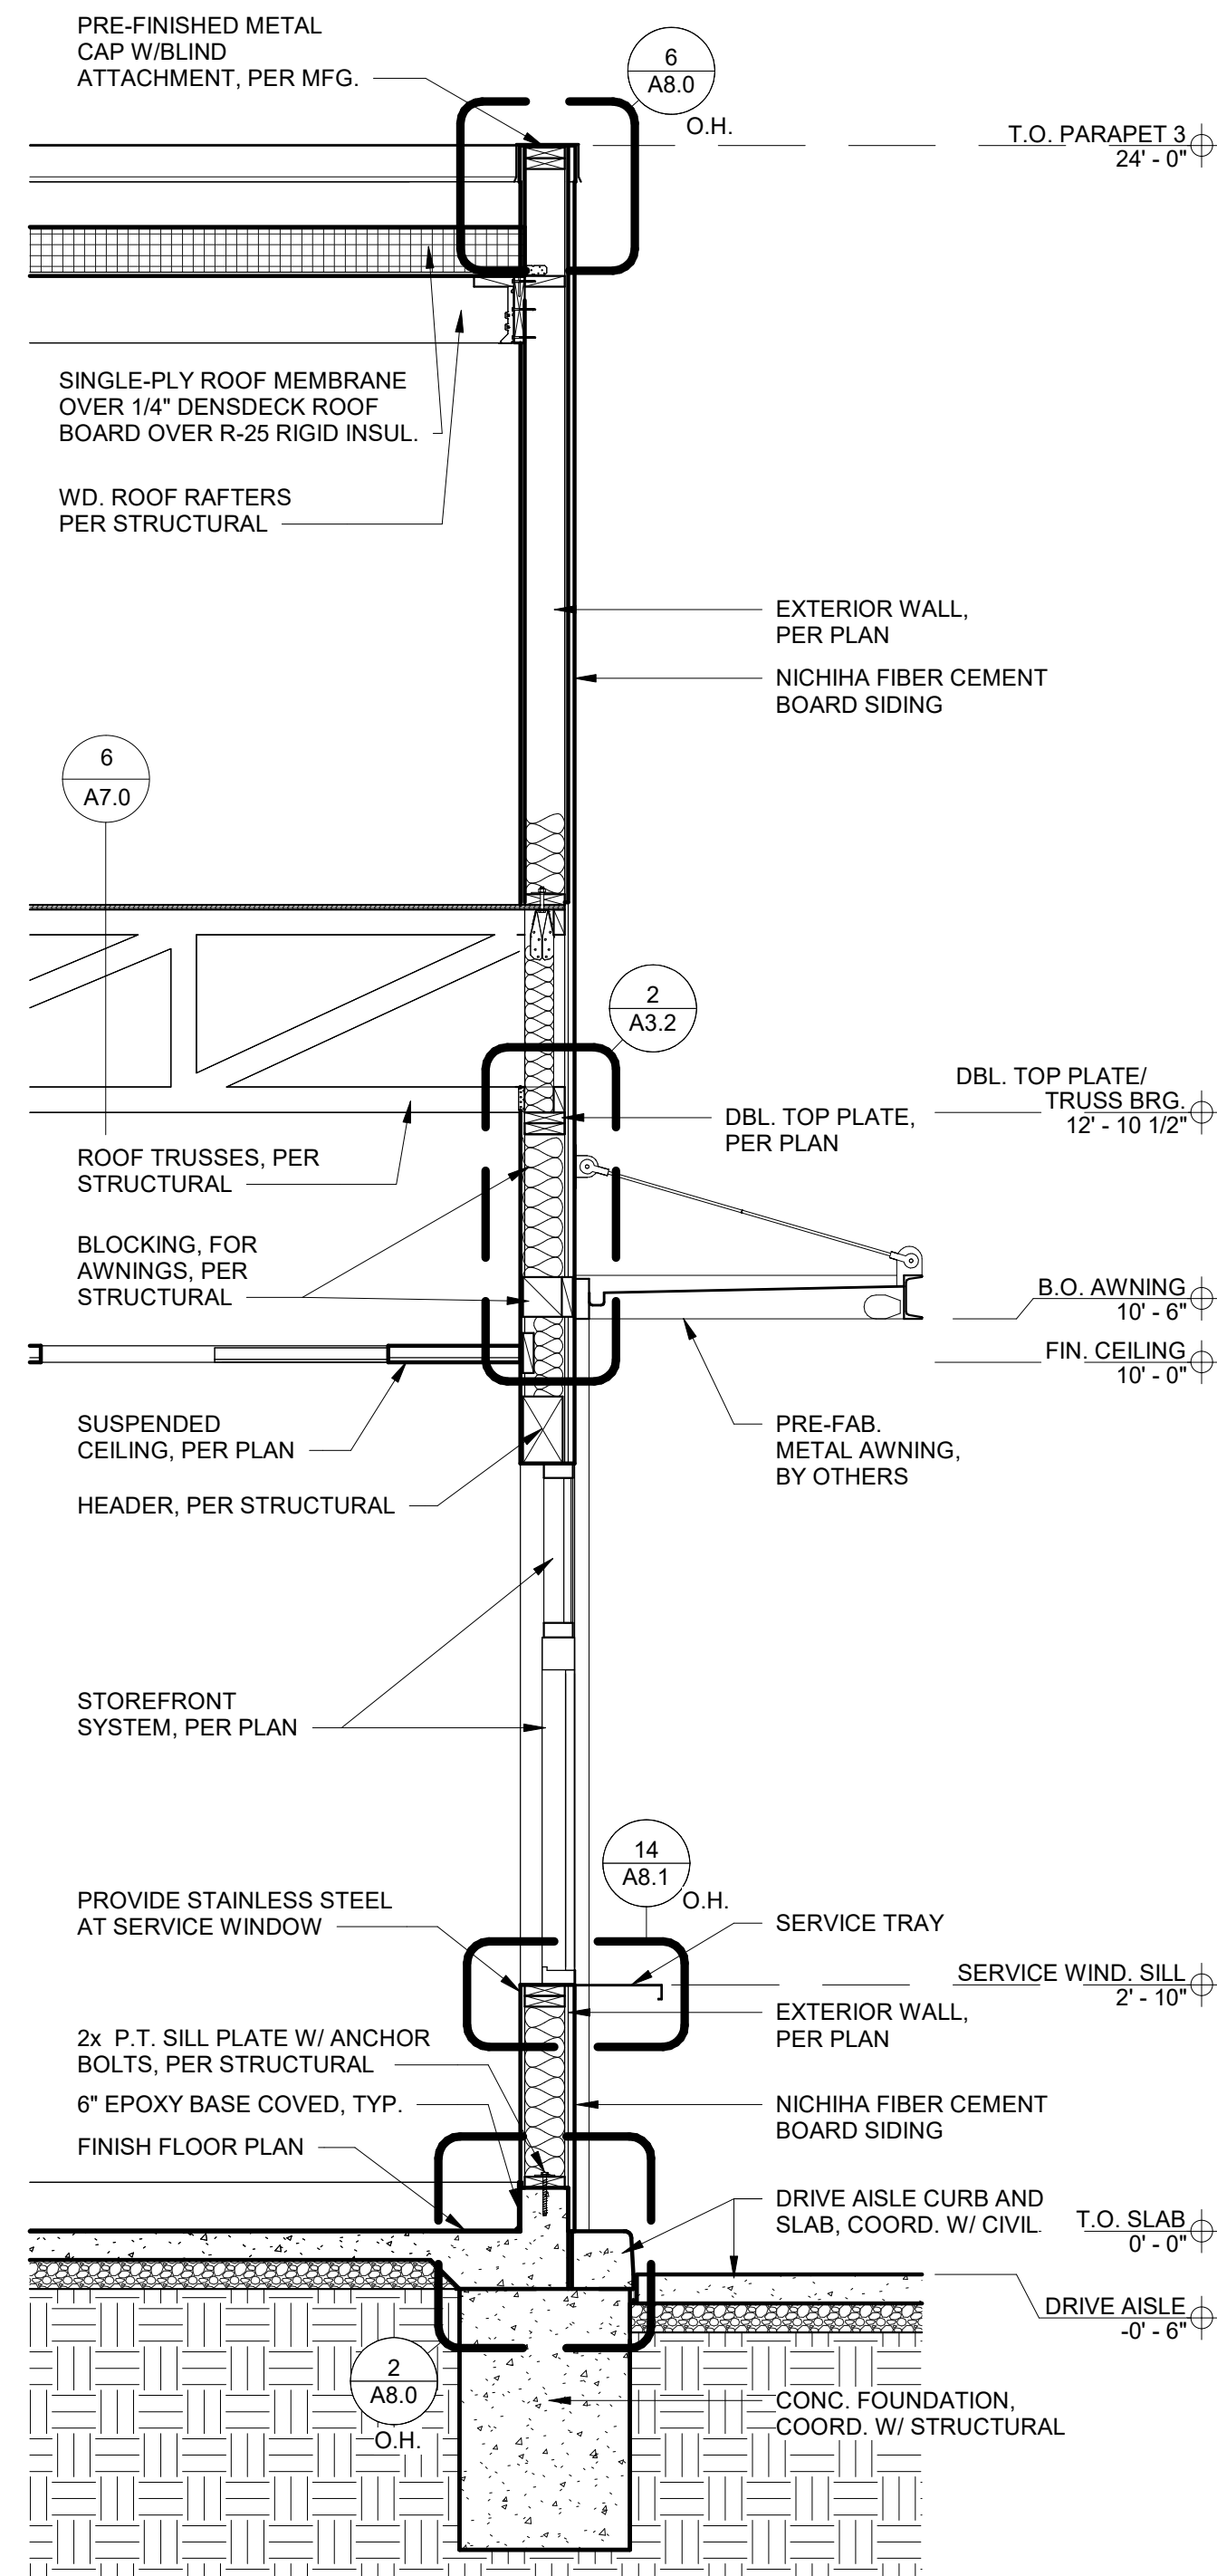

1 WALL SECTION 1
1/2" = 1'-0"



ARCHITECT
CORALIC, LLC
9700 MACKENZIE ROAD, STE. 222
ST. LOUIS, MO 63125

TJ 314.578.4953
EDIN@CORALICARCHITECTURE.COM

STRUCTURAL ENGINEER
KREHER ENGINEERING, INC.
208 N. MAIN STREET,
COLUMBIA, IL 62236

TJ 618.281.8505
NDREYER@KREHERENGINEERING.COM

MEP ENGINEER
CASE ENGINEERING, INC.
796 MERUS CT.
FENTON, MO 63026

TJ 636.349.1600
MCASE@CASEENGINEERINGINC.COM



ANNIHILATOR A1

Project No: LA0701
Dutch Bros Coffee - New Freestanding Store
1804 MACARTHUR DRIVE,
ALEXANDRIA, LA 71301
For: Dutch Bros Coffee
1930 W. Rio Salado Parkway
Tempe, AZ 85281

ISSUED FOR PERMIT

5.21.2026

REV: DATE: DESCRIPTION:


SHEET NAME:

WALL SECTIONS


SHEET NUMBER:

A7.1
© 2025 DB Franchising USA, LLC


The name DUTCHBROS. and all associated logos, distinctive designs, content, information, and other materials featured, displayed, contained herein, and made available by Dutch Bros., including but not limited to, the "hook and leaf" of the establishments and products, all text, images, colors, configurations, graphics, designs, illustrations, photographs, and pictures (collectively, the "Materials") are owned by and/or licensed by DB Franchising USA, LLC and are protected by copyright, trademark, trade dress, patent, and/or other intellectual property rights and under competition laws under the United States and foreign laws.

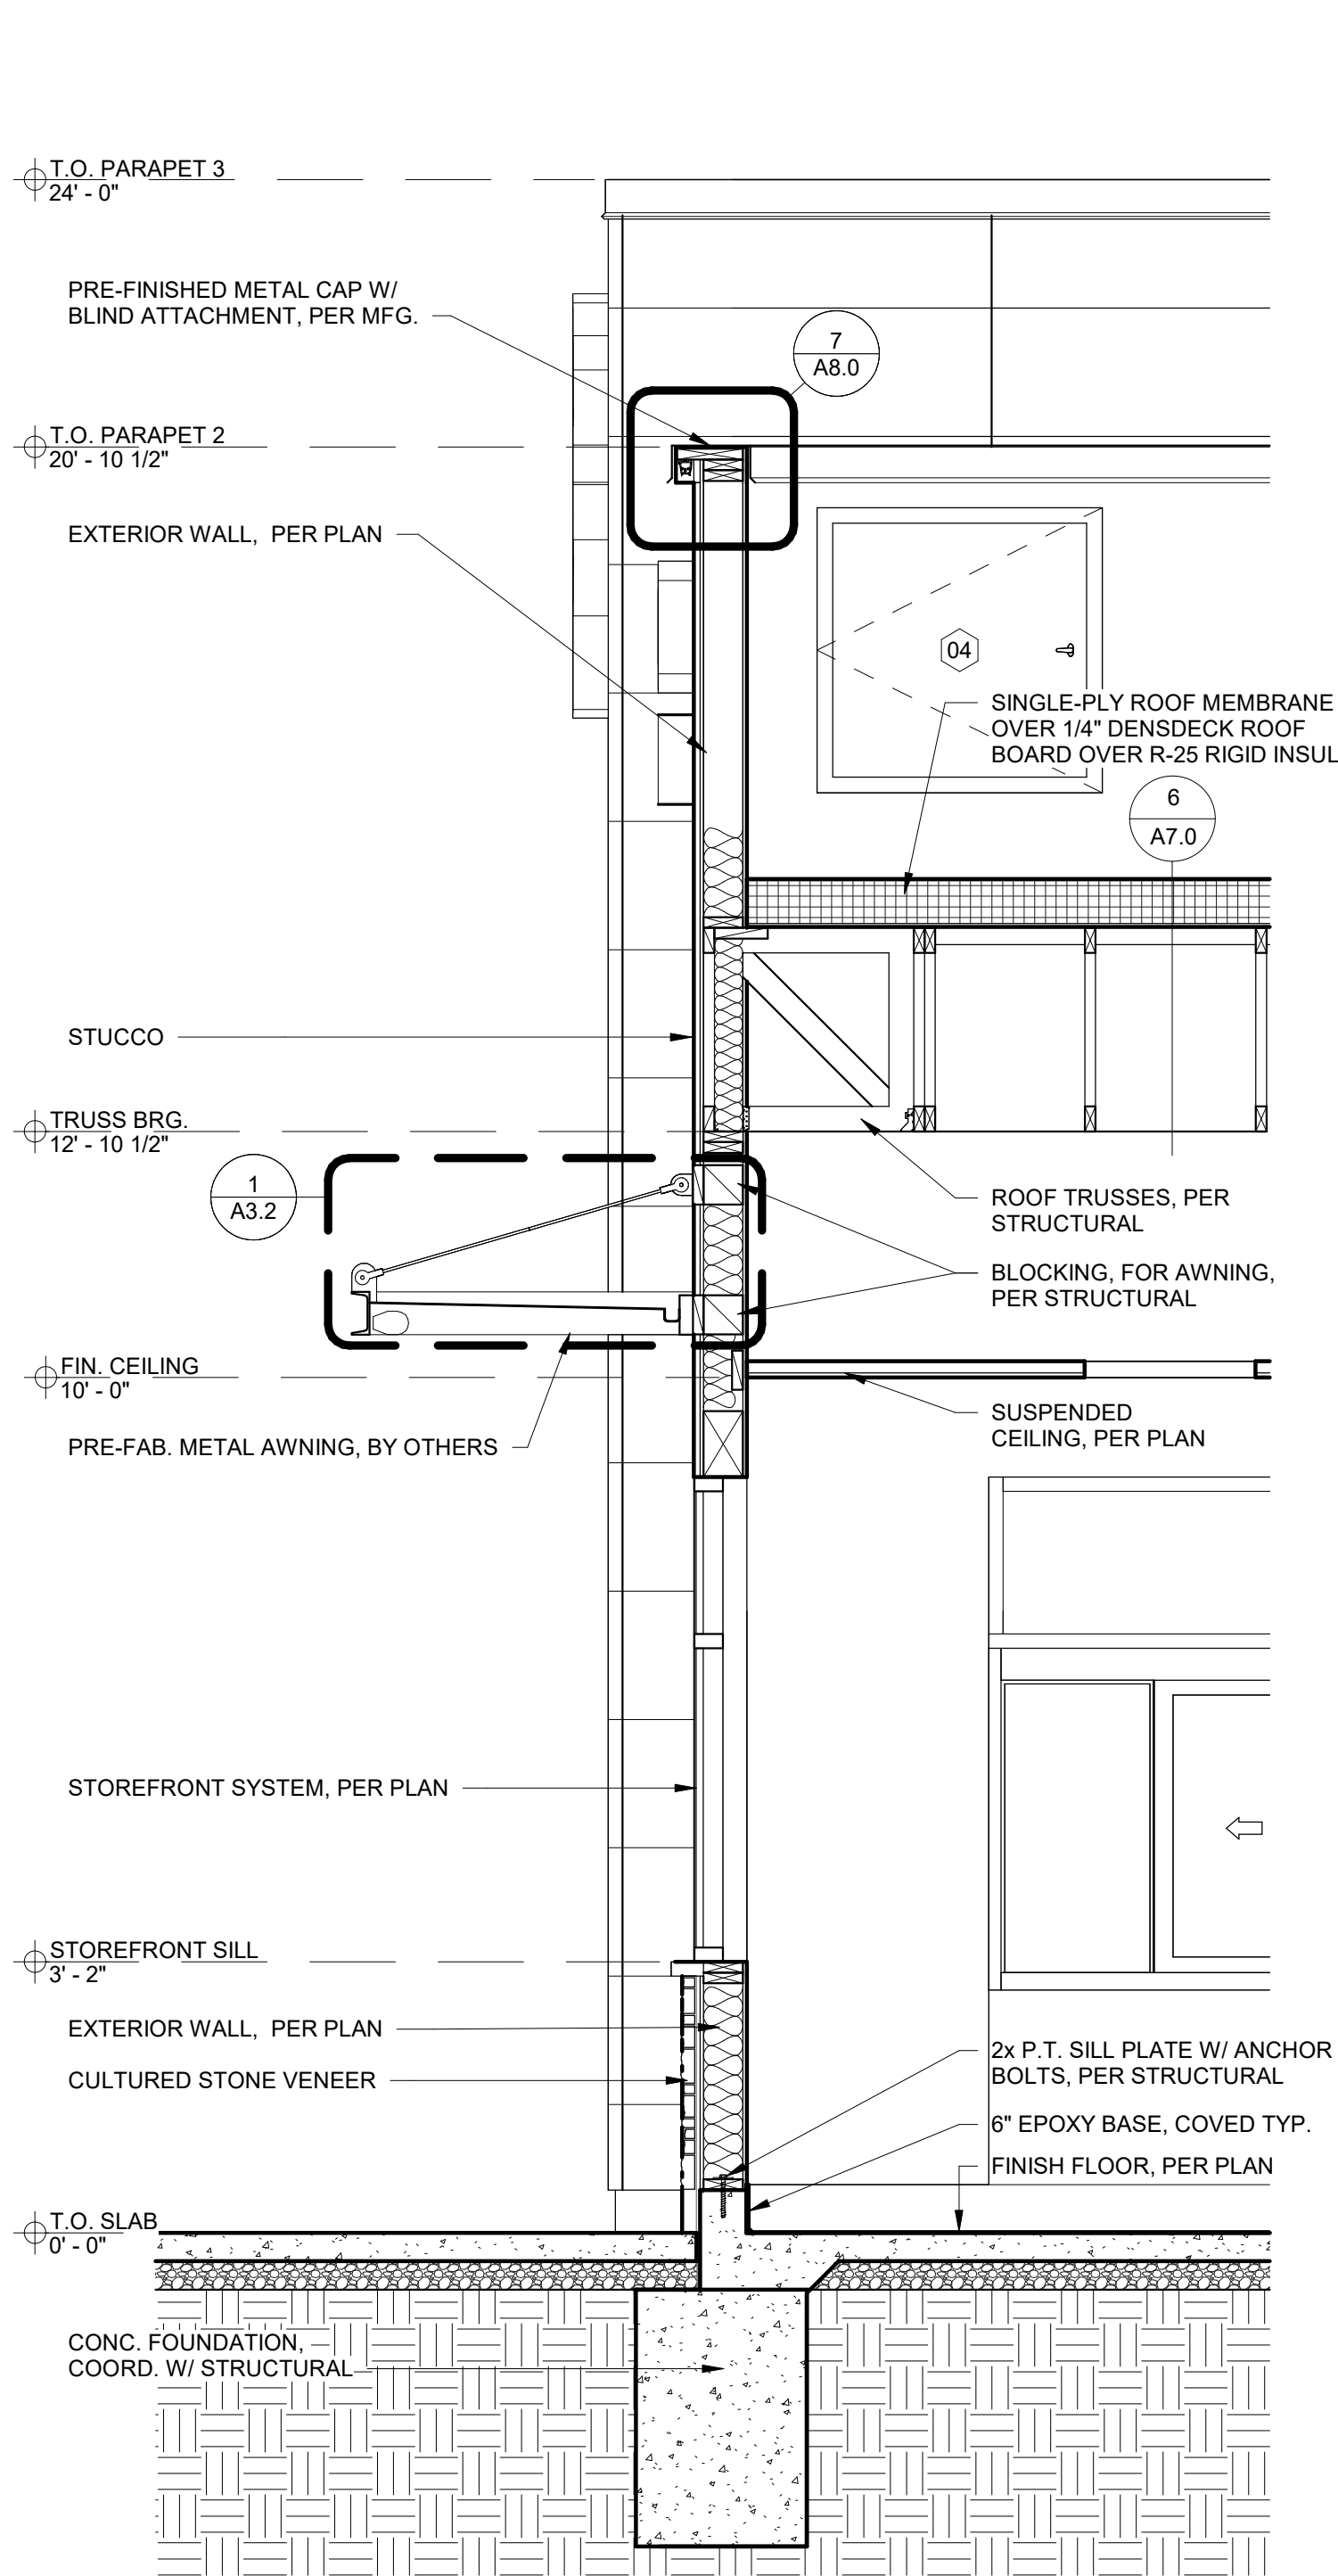


4 WALL SECTION 8
1/2" = 1'-0"

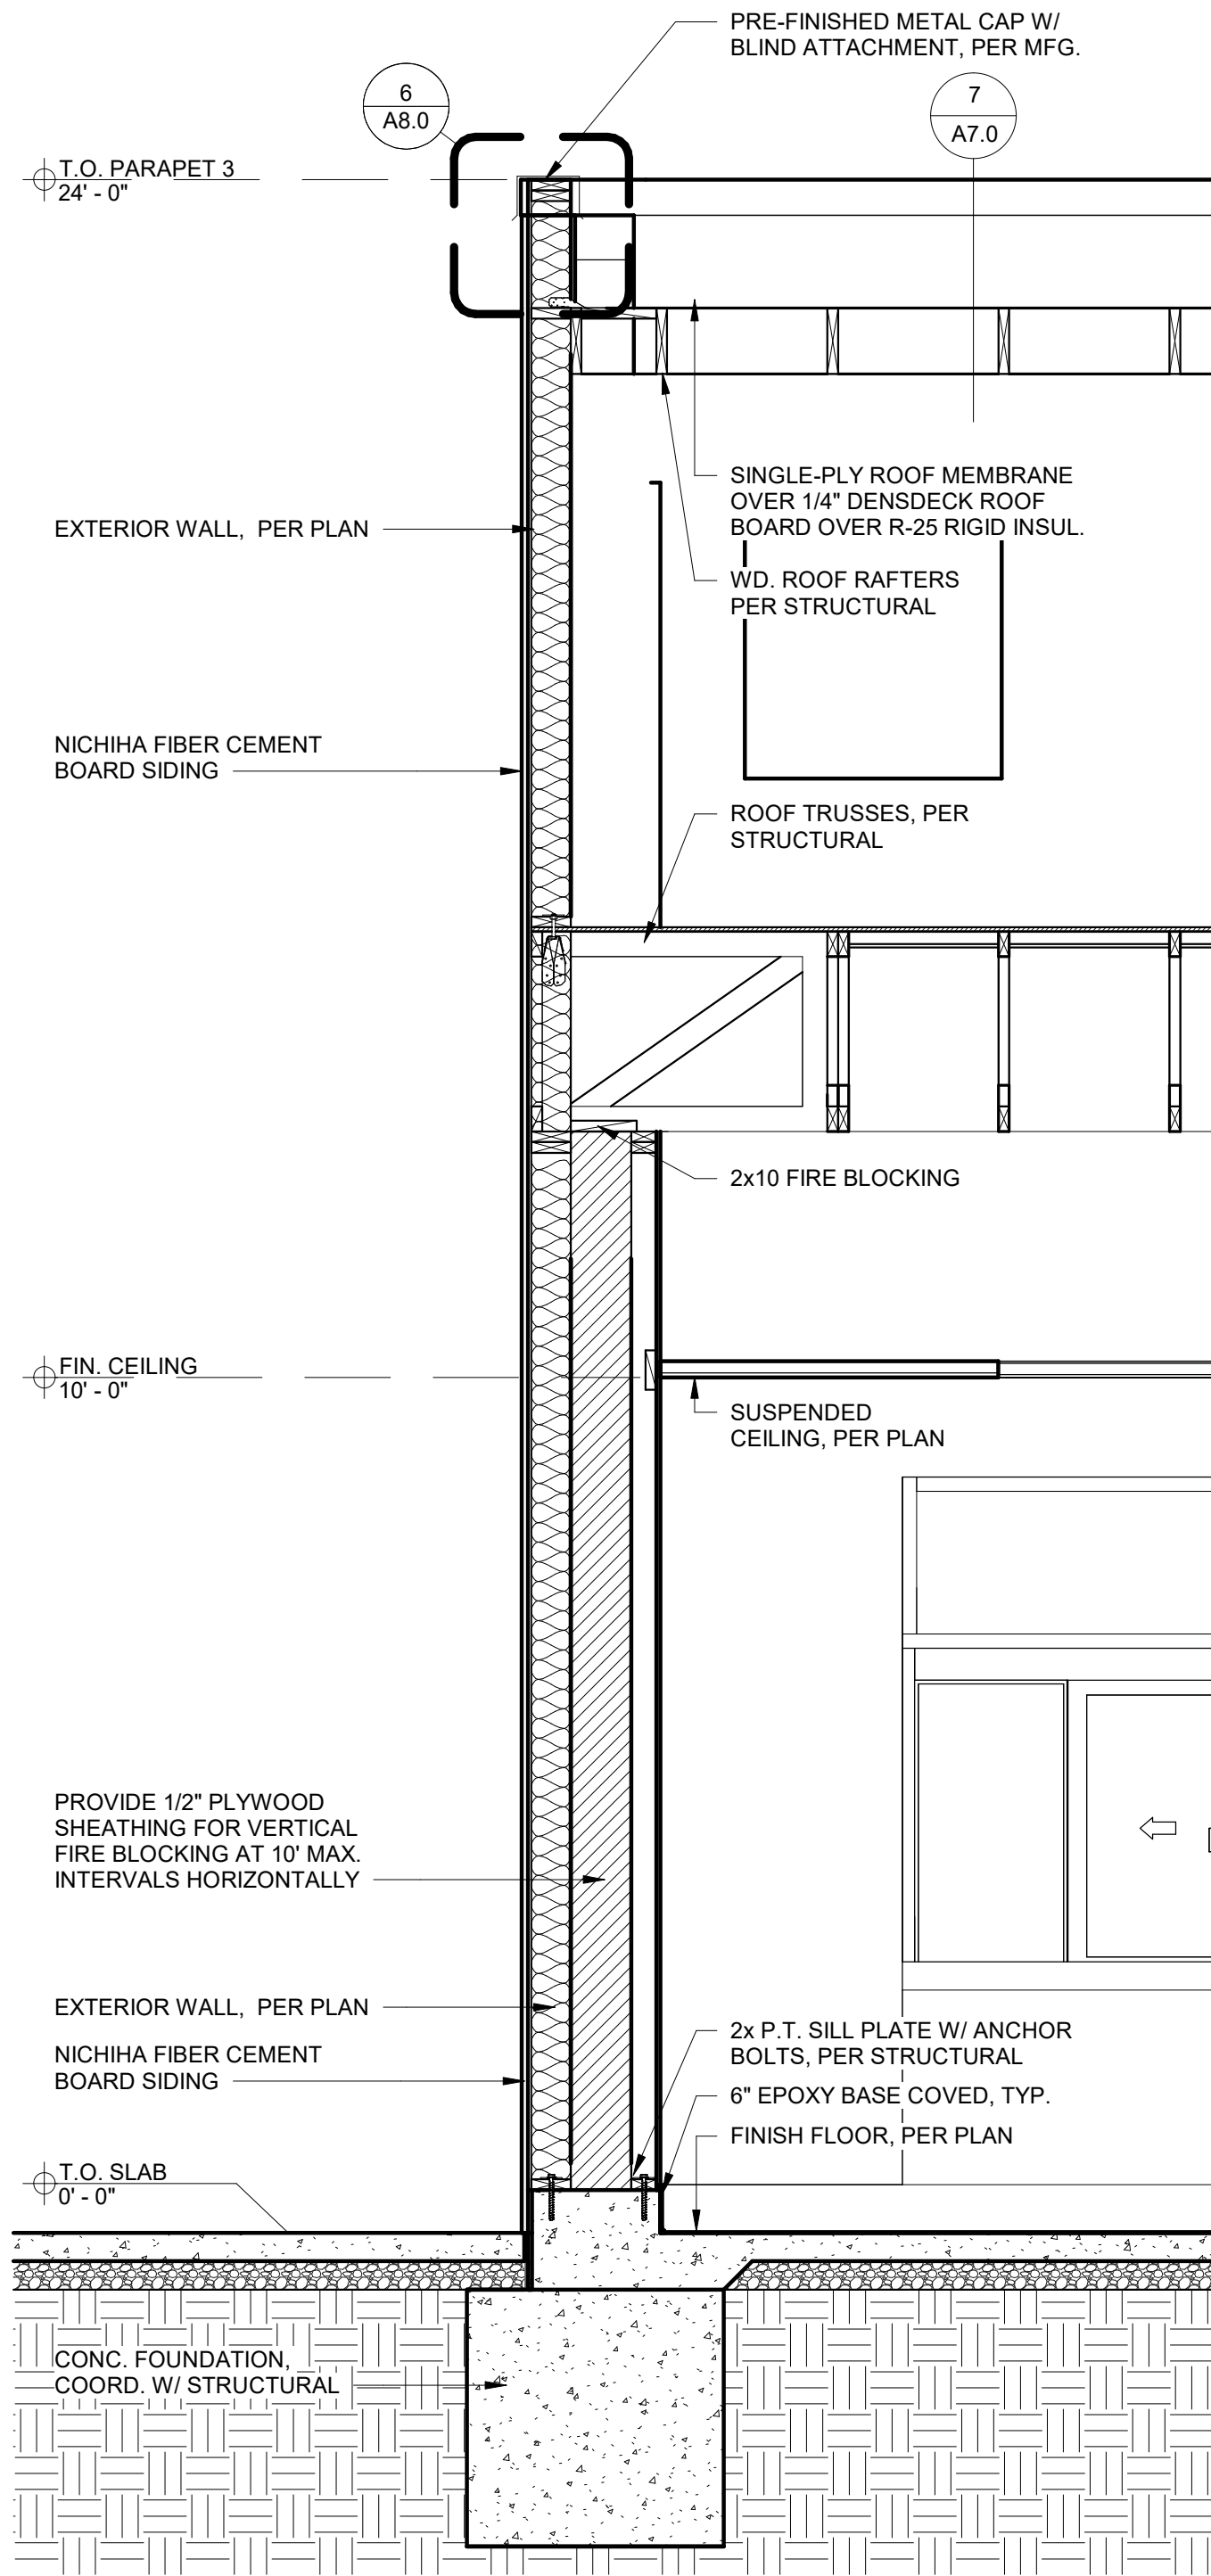

3 WALL SECTION 7
1/2" = 1'-0"

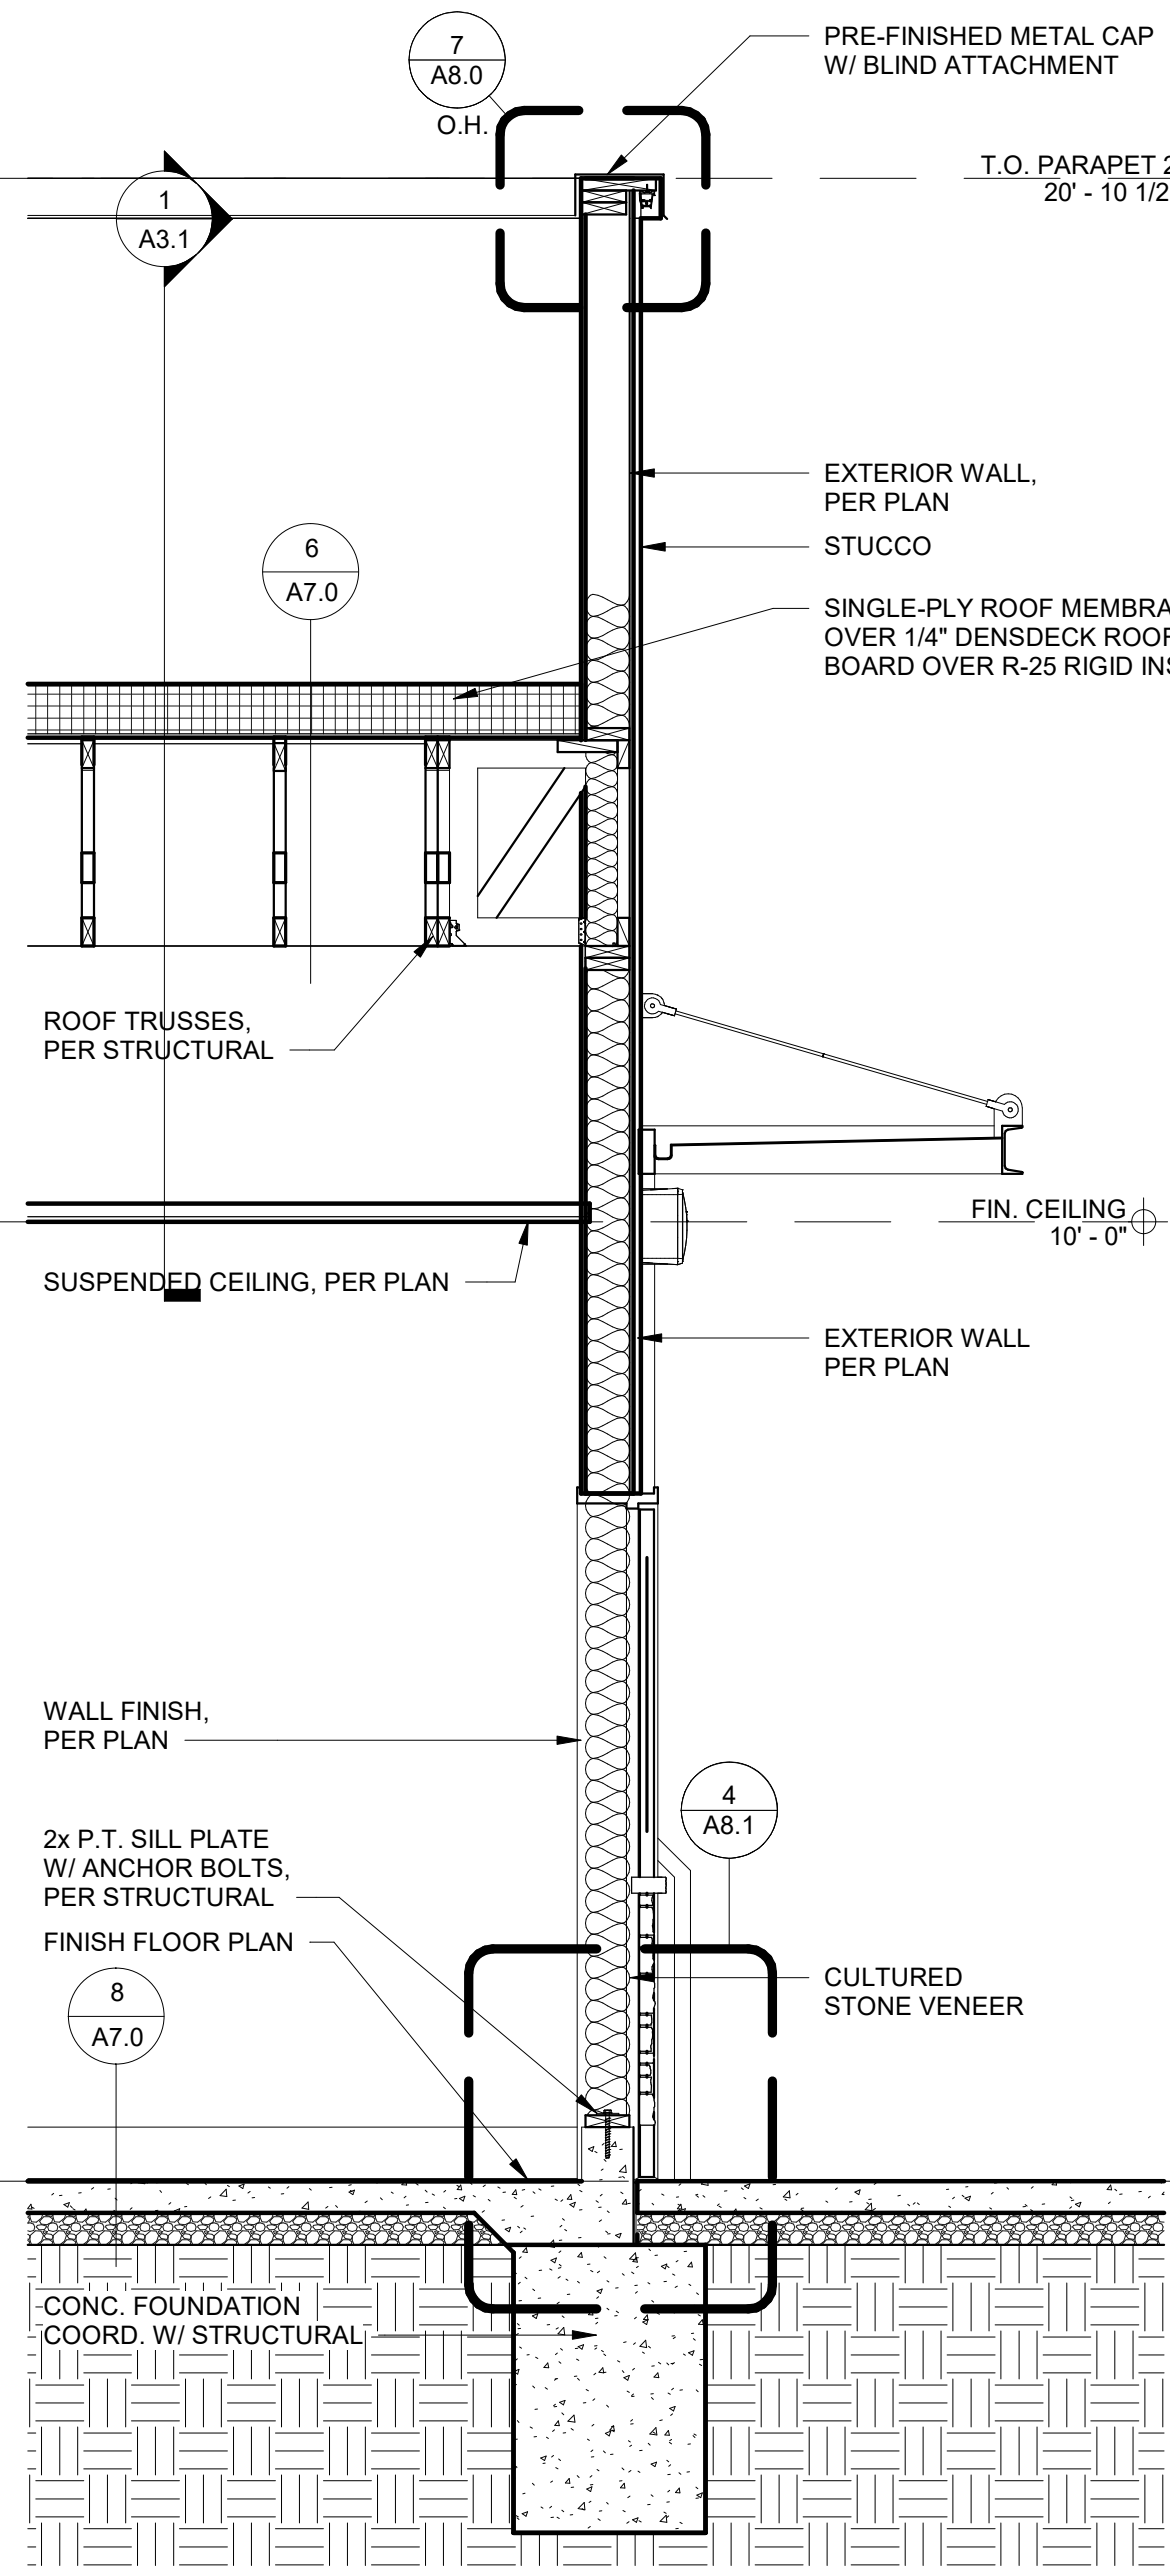

2 WALL SECTION 6
1/2" = 1'-0"

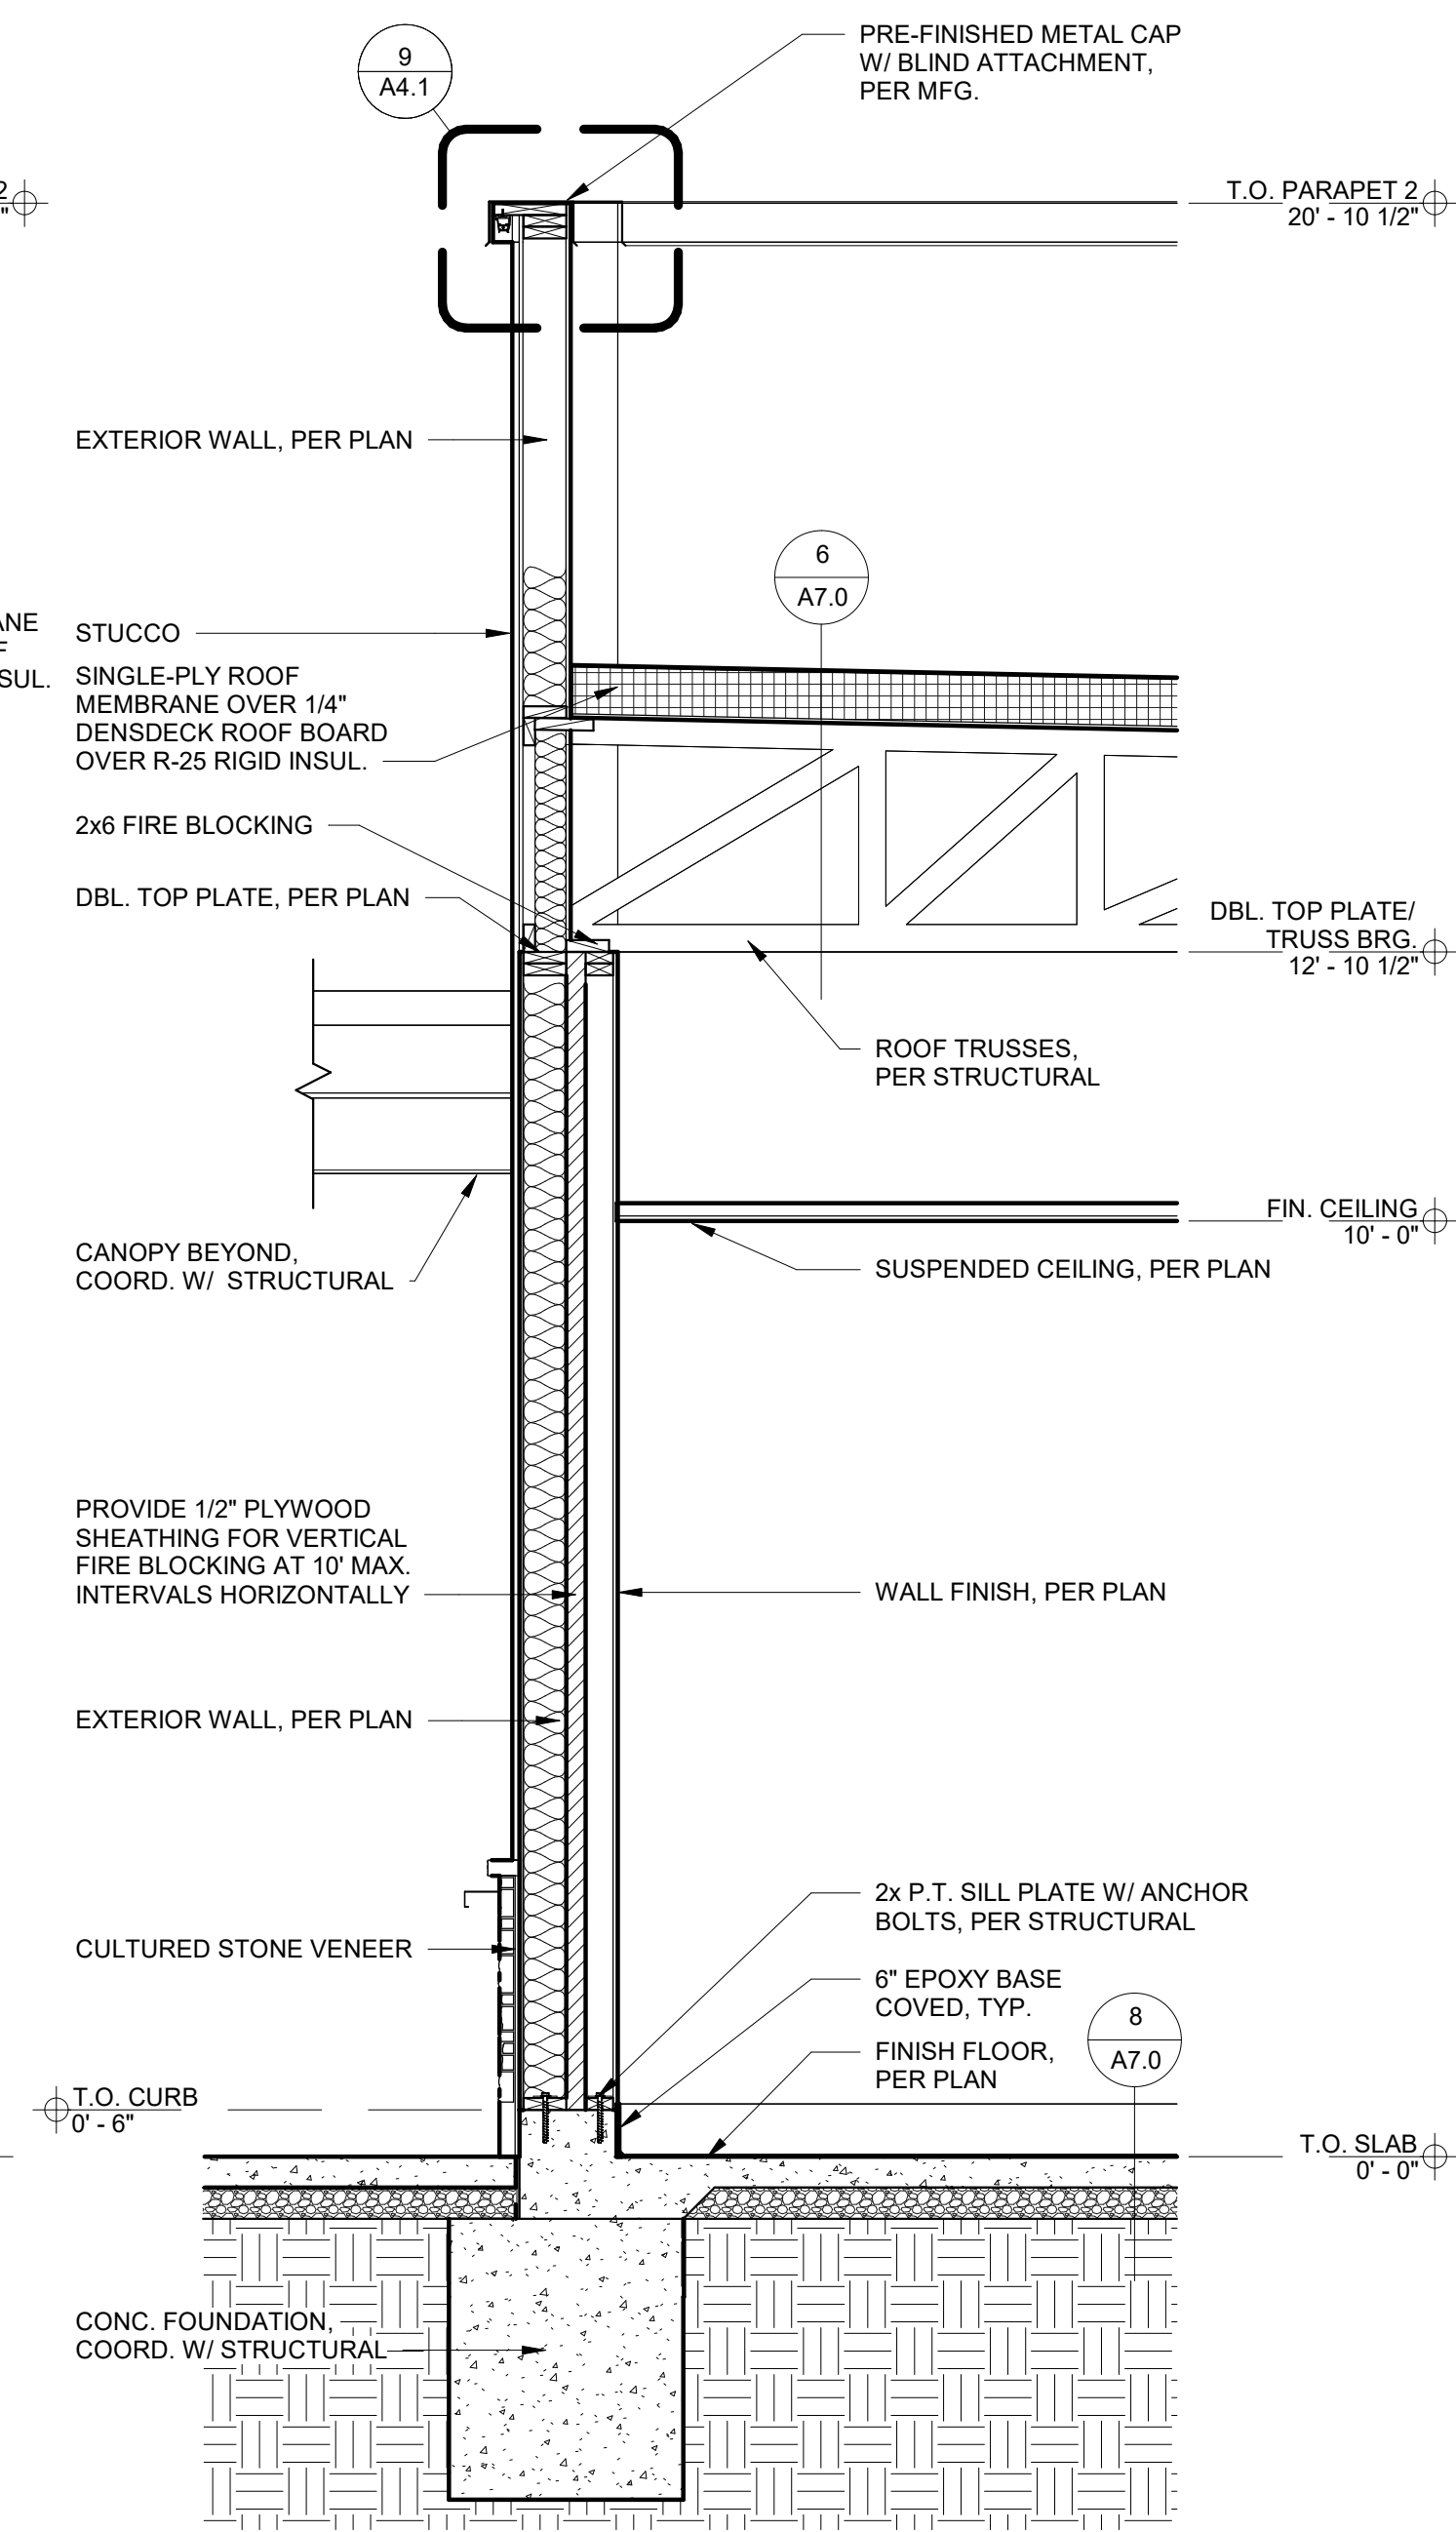

1 WALL SECTION 5
1/2" = 1'-0"



ARCHITECT
CORALIC, LLC
9700 MACKENZIE ROAD, STE. 222
ST. LOUIS, MO 63125

TJ 314.578.4953
EDIN@CORALICARCHITECTURE.COM

STRUCTURAL ENGINEER
KREHER ENGINEERING, INC.
208 N. MAIN STREET,
COLUMBIA, IL 62236

TJ 618.281.8505
NDREYER@KREHERENGINEERING.COM

MEP ENGINEER
CASE ENGINEERING, INC.
796 MERUS CT.
FENTON, MO 63026

TJ 636.349.1600
MCASE@CASEENGINEERINGINC.COM



ANNIHILATOR A1

Project No: LA0701
Dutch Bros Coffee - New Freestanding Store
1804 MACARTHUR DRIVE,
ALEXANDRIA, LA 71301
For: Dutch Bros Coffee
1930 W. Rio Salado Parkway
Tempe, AZ 85281

ISSUED FOR PERMIT

5.21.2026

REV:	DATE:	DESCRIPTION:

SHEET NAME:

WALL SECTIONS

SHEET NUMBER:

A7.2

"The name DUTCH-BROS. and all associated logos, distinctive designs, content, information, and other materials featured, contained herein, and made available by Dutch Bros., including but not limited to, the "hook and leaf" of the establishments and products, all text, images, colors, configurations, graphics, designs, illustrations, photographs, and pictures (collectively, the "Materials") are owned by and/or licensed by DB Franchising USA, LLC and are protected by copyright, trademark, trade dress, patent, and/or other intellectual property rights and unfair competition laws under the United States and foreign laws."



ARCHITECT
CORALIC, LLC
9700 MACKENZIE ROAD, STE. 222
ST. LOUIS, MO 63125
TJ 314.578.4953
EDIN@CORALICARCHITECTURE.COM
STRUCTURAL ENGINEER
KREHER ENGINEERING, INC.
208 N. MAIN STREET,
COLUMBIA, IL 62236
TJ 618.281.8505
NDREYER@KREHERENGINEERING.COM
MEP ENGINEER
CASE ENGINEERING, INC.
796 MERUS CT.
FENTON, MO 63026
TJ 636.349.1600
MCASE@CASEENGINEERINGINC.COM



ANNIHILATOR A1

Project No: LA0701
Dutch Bros Coffee - New Freestanding Store
1804 MACARTHUR DRIVE,
ALEXANDRIA, LA 71301
For: Dutch Bros Coffee
1930 W. Rio Salado Parkway
Tempe, AZ 85281

ISSUED FOR PERMIT

5.21.2026

REV:	DATE:	DESCRIPTION:


SHEET NAME:

BUILDING DETAILS


SHEET NUMBER:

A8.0


© 2025 DB Franchising USA, LLC

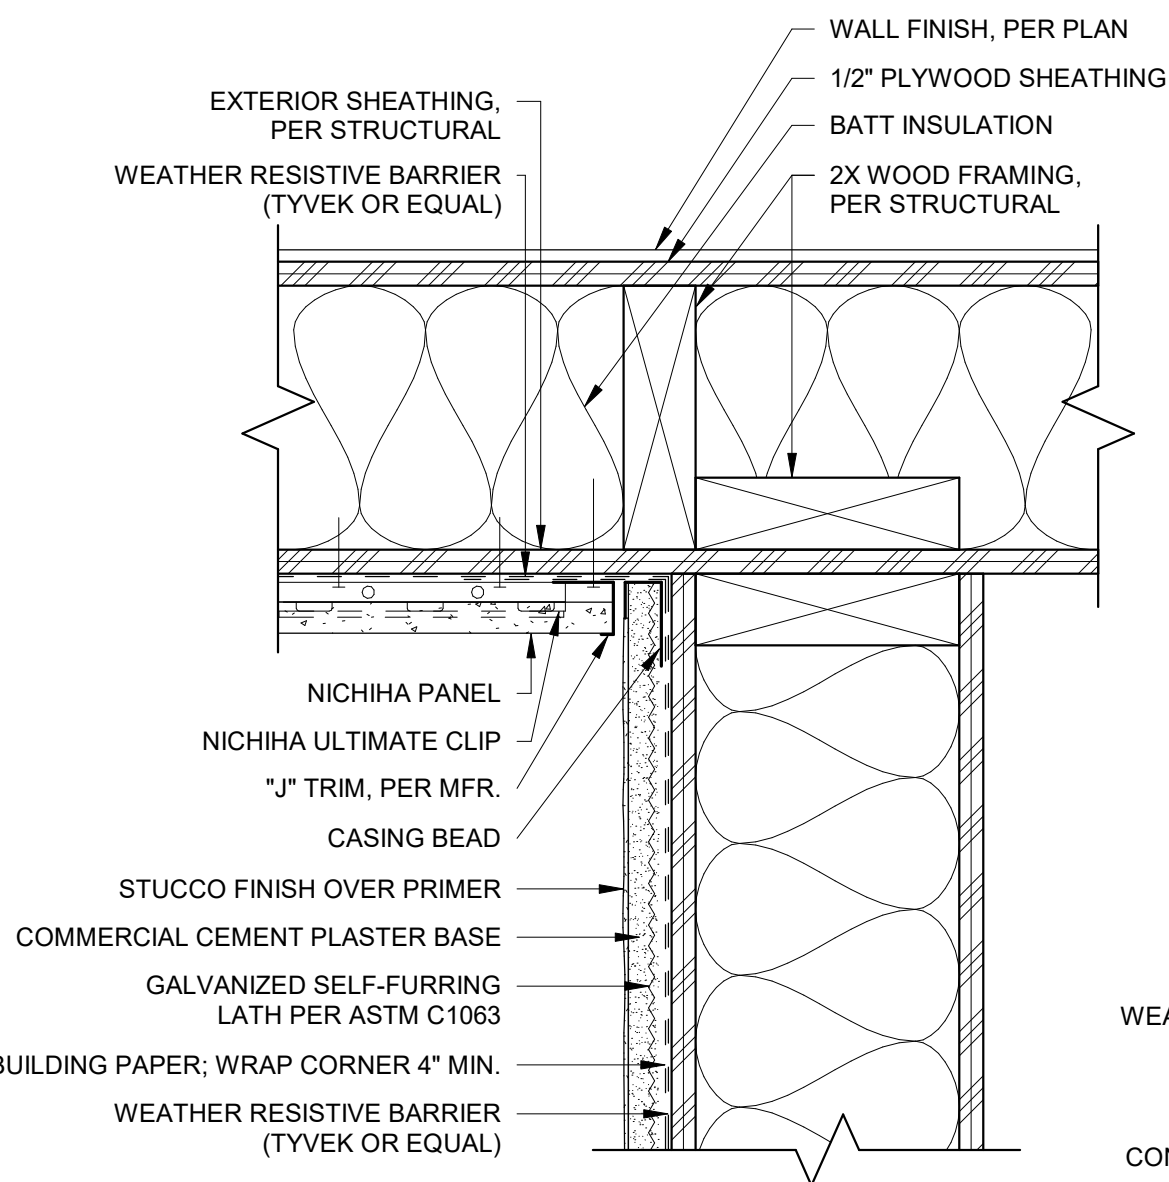


10 NICHIIA/STUCCO SIDING - INSIDE CORNER
3" = 1'-0"

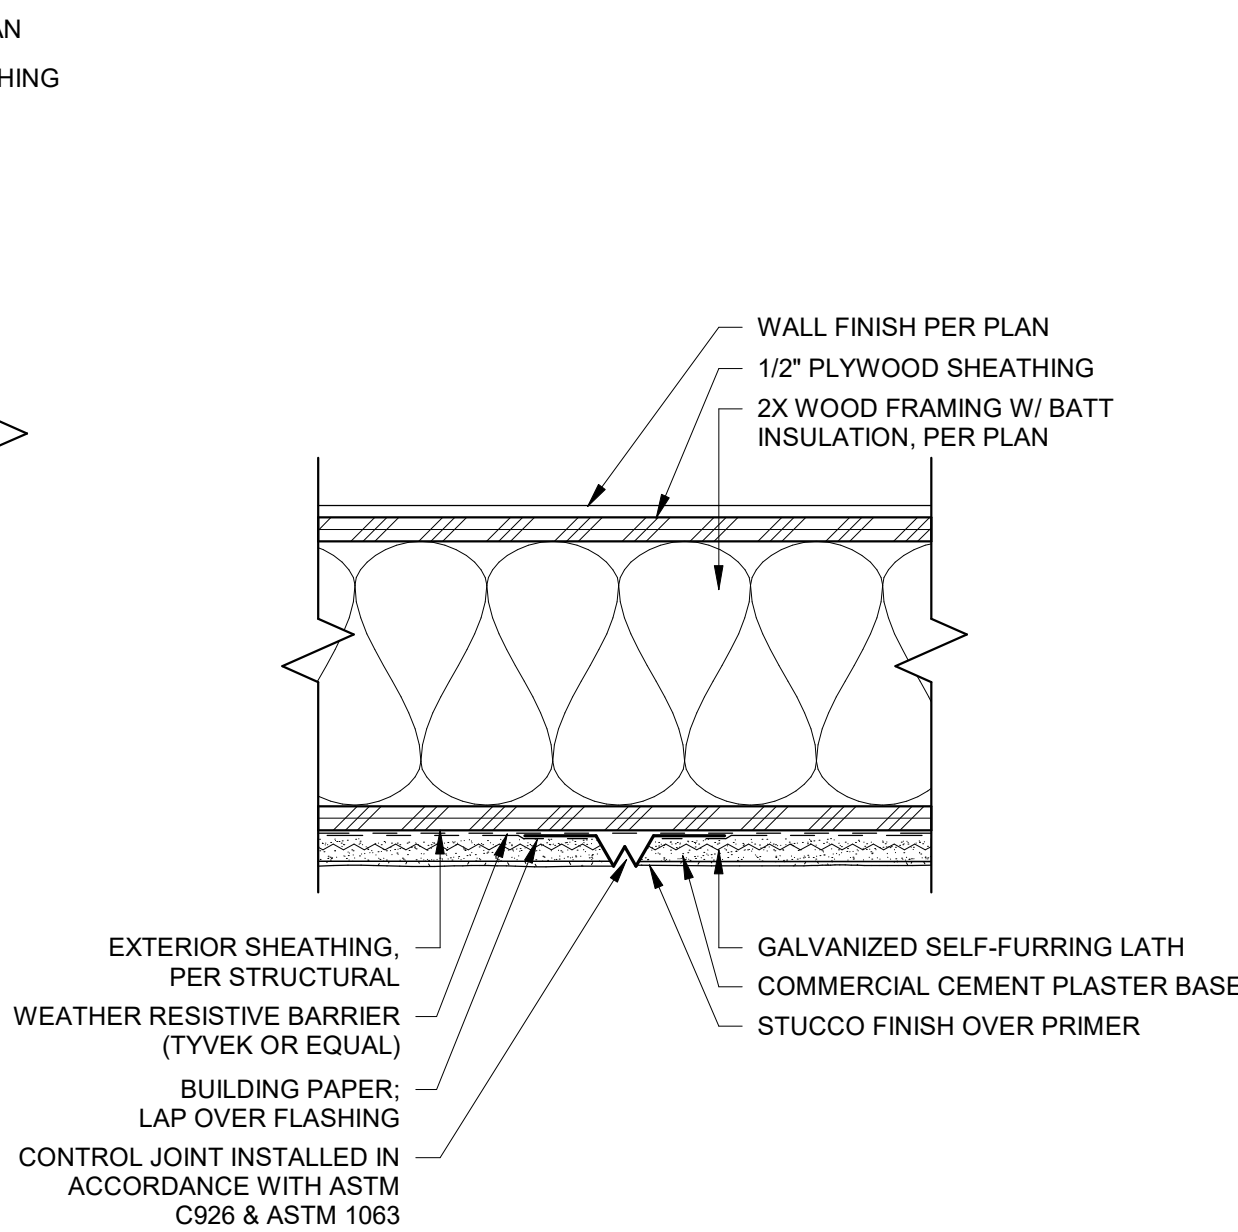


9 STUCCO SIDING - VERTICAL JOINT
3" = 1'-0"

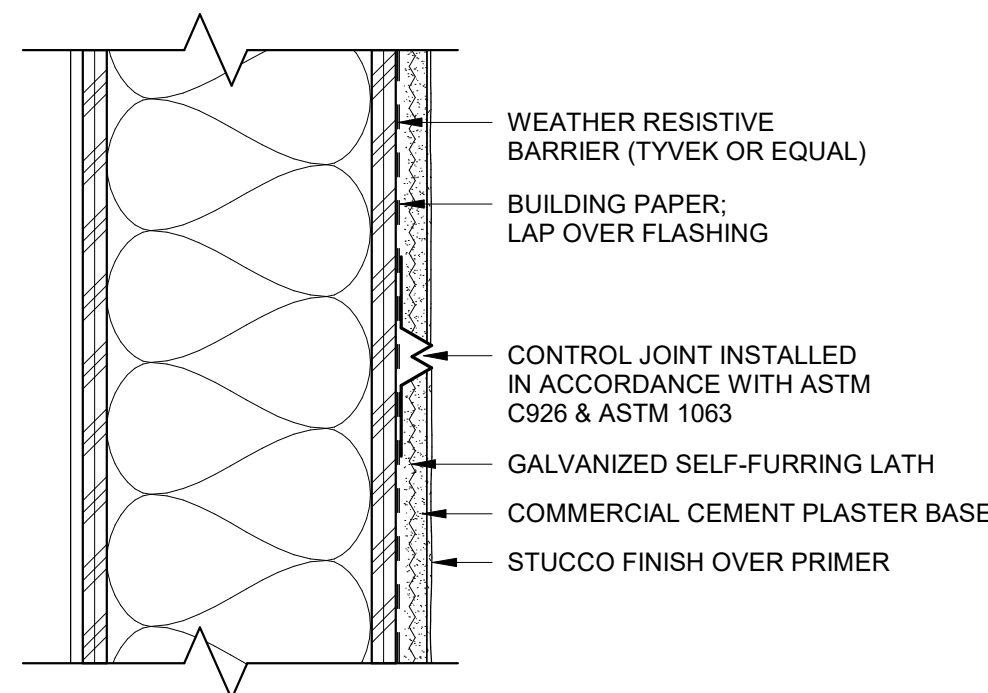


8 STUCCO SIDING - HORIZONTAL JOINT
3" = 1'-0"

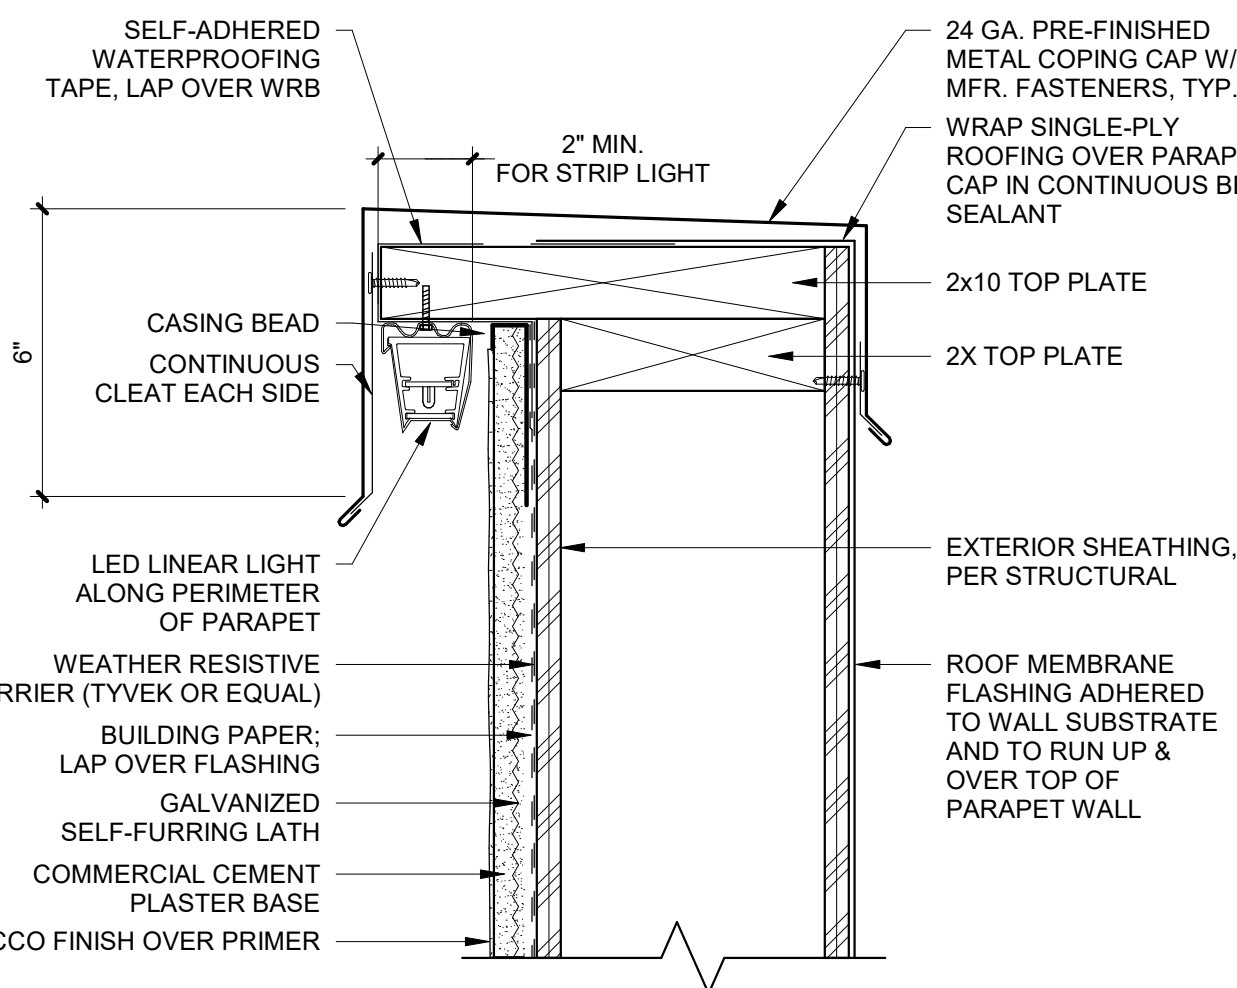


7 STUCCO SIDING - PARAPET 2 W/ LED
3" = 1'-0"

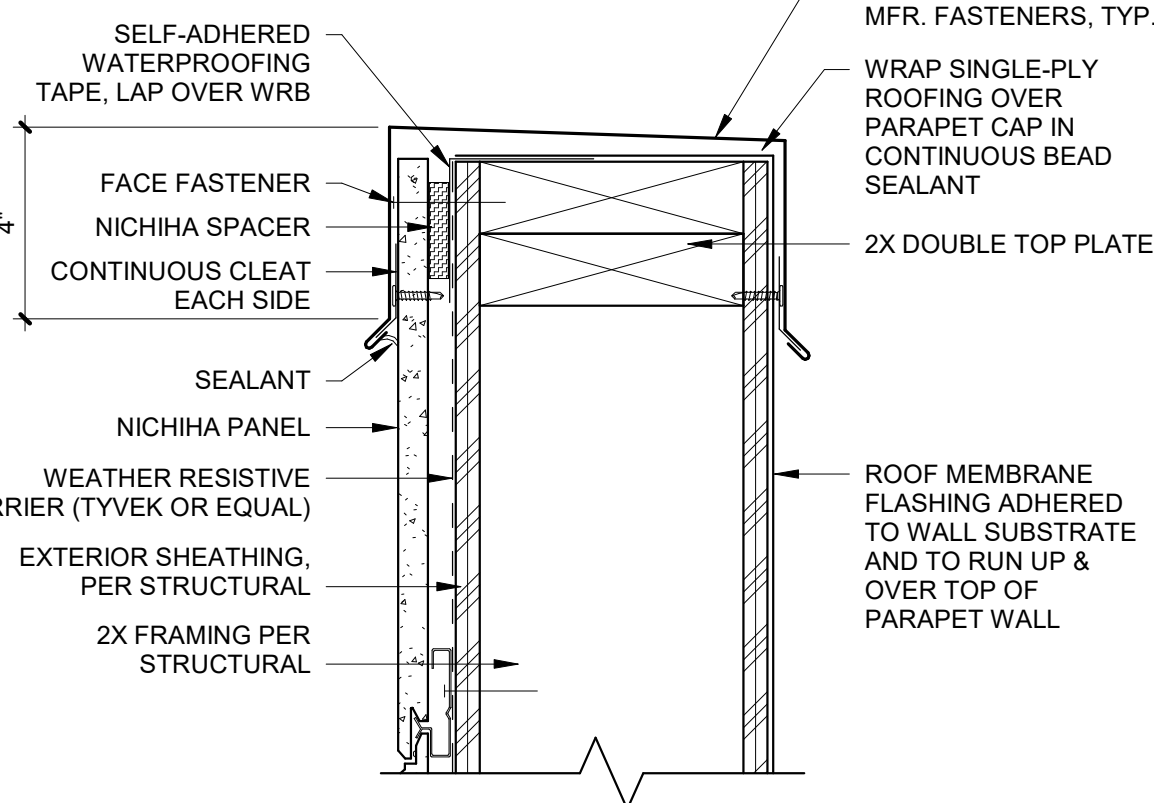


6 NICHIIA SIDING - PARAPET 3
3" = 1'-0"

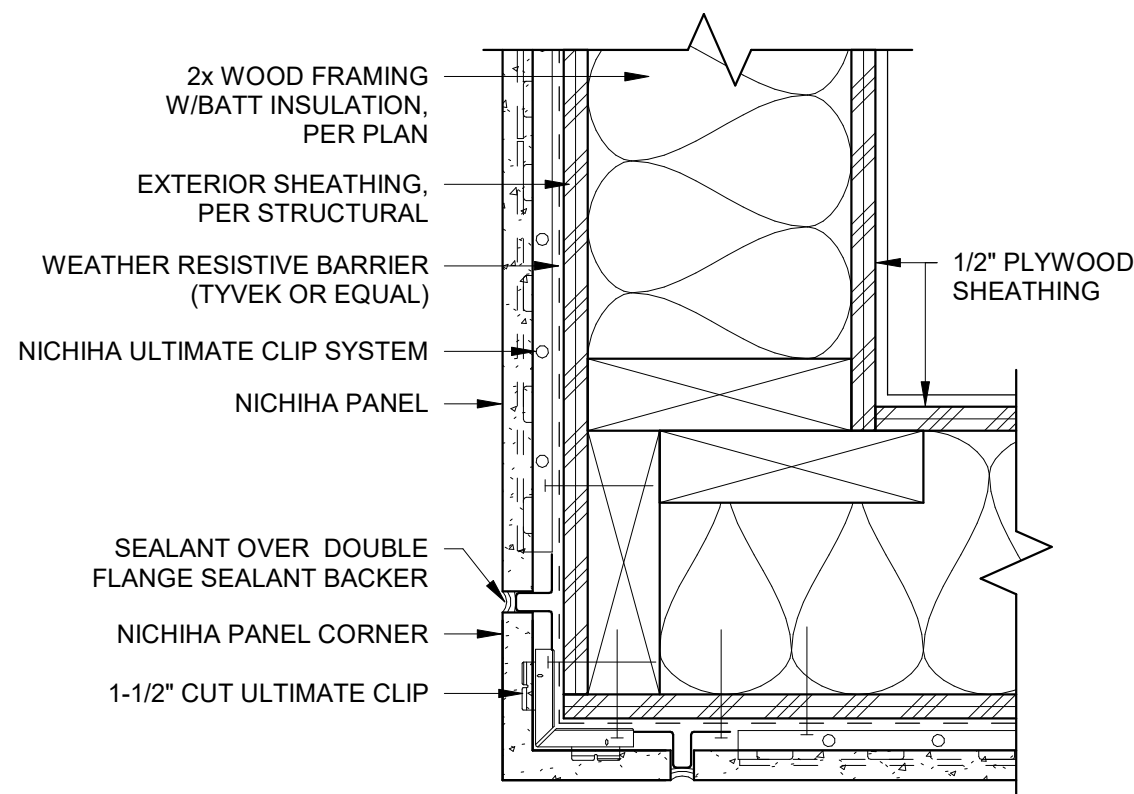


5 NICHIIA SIDING - PANEL OUTSIDE CORNER
3" = 1'-0"

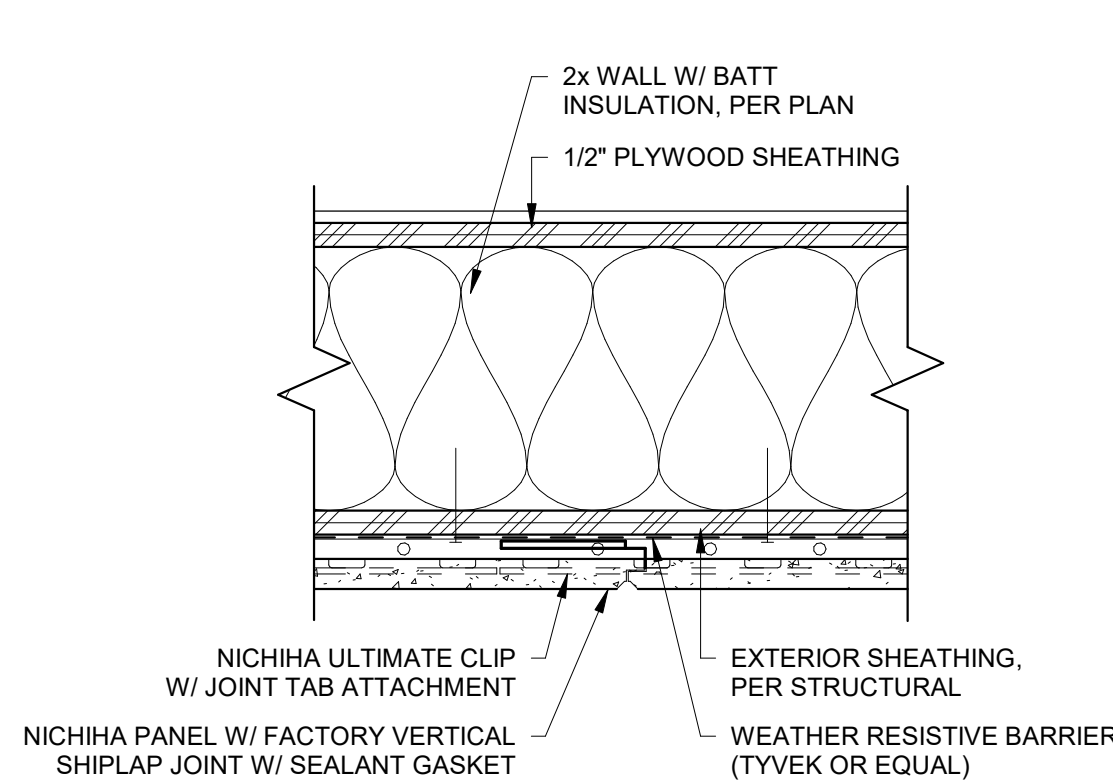


4 NICHIIA SIDING - VERTICAL SHIPLAP JOINT
3" = 1'-0"

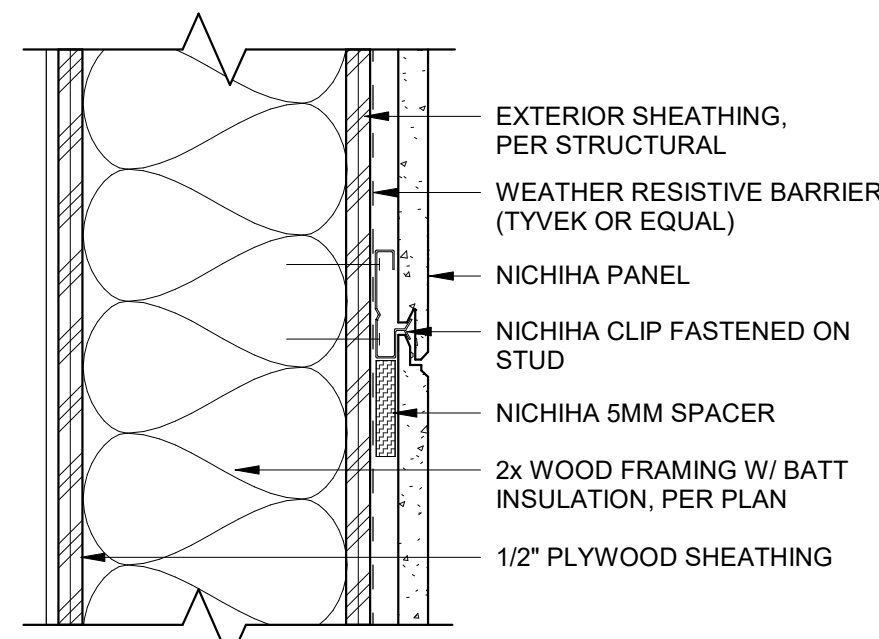


3 NICHIIA SIDING - HORIZONTAL JOINT
3" = 1'-0"

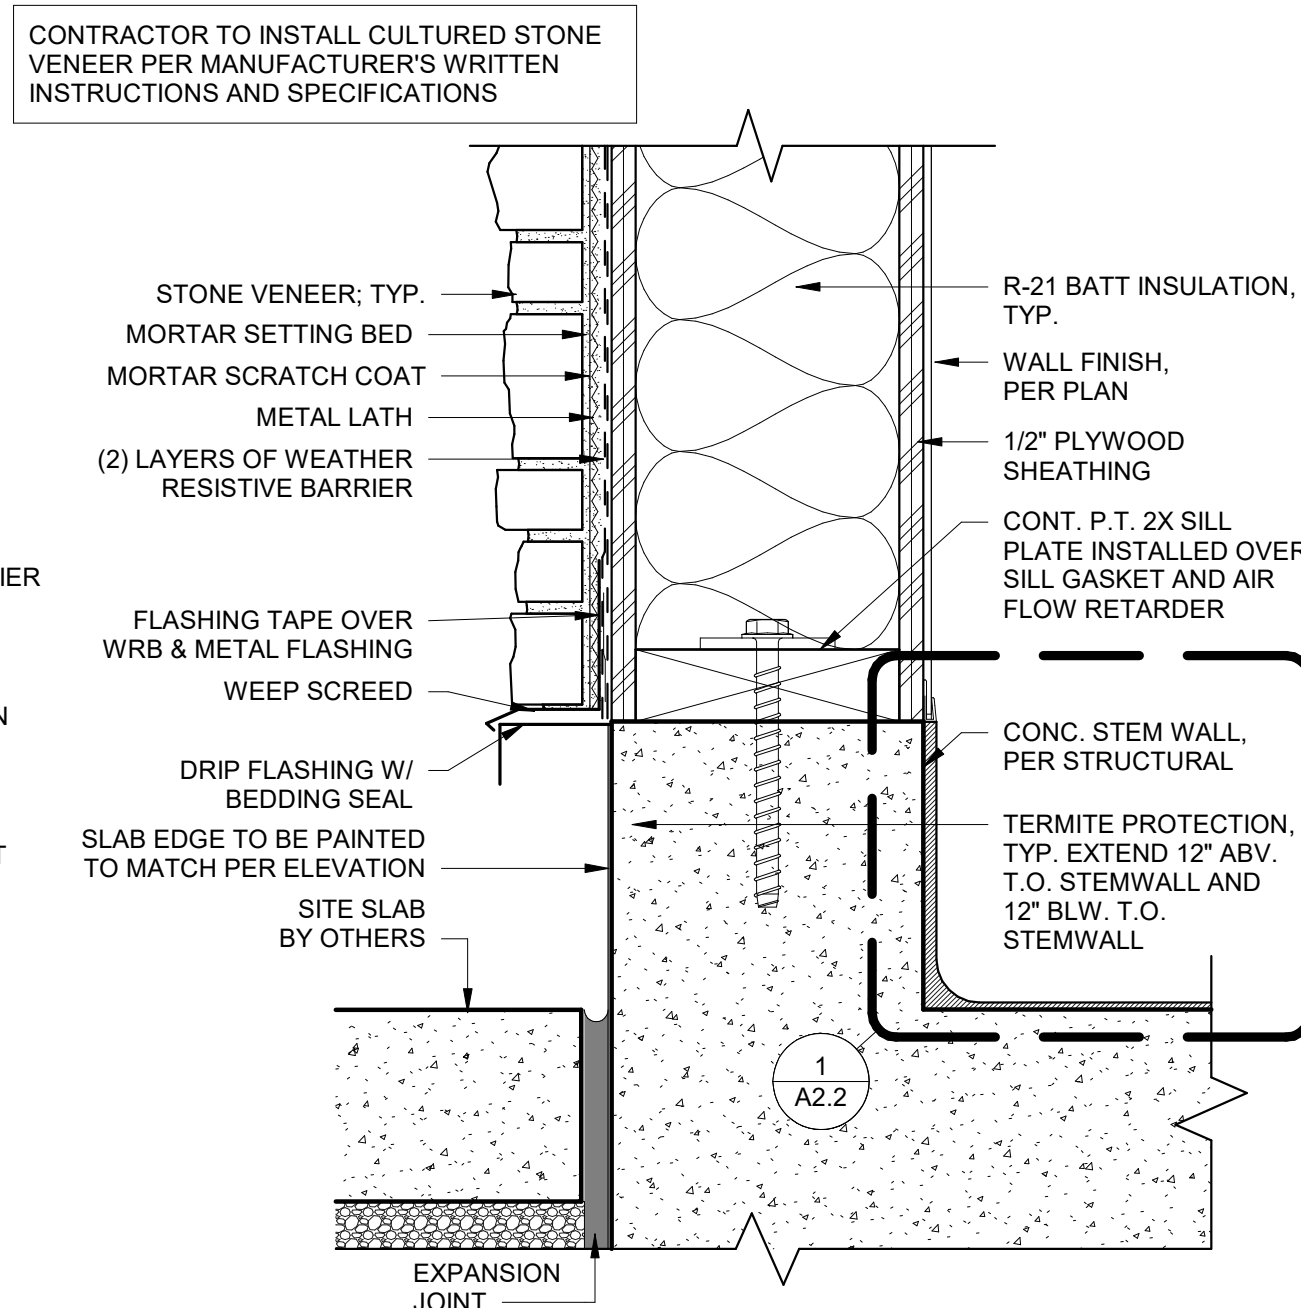


2 STUCCO SIDING - BASE
3" = 1'-0"

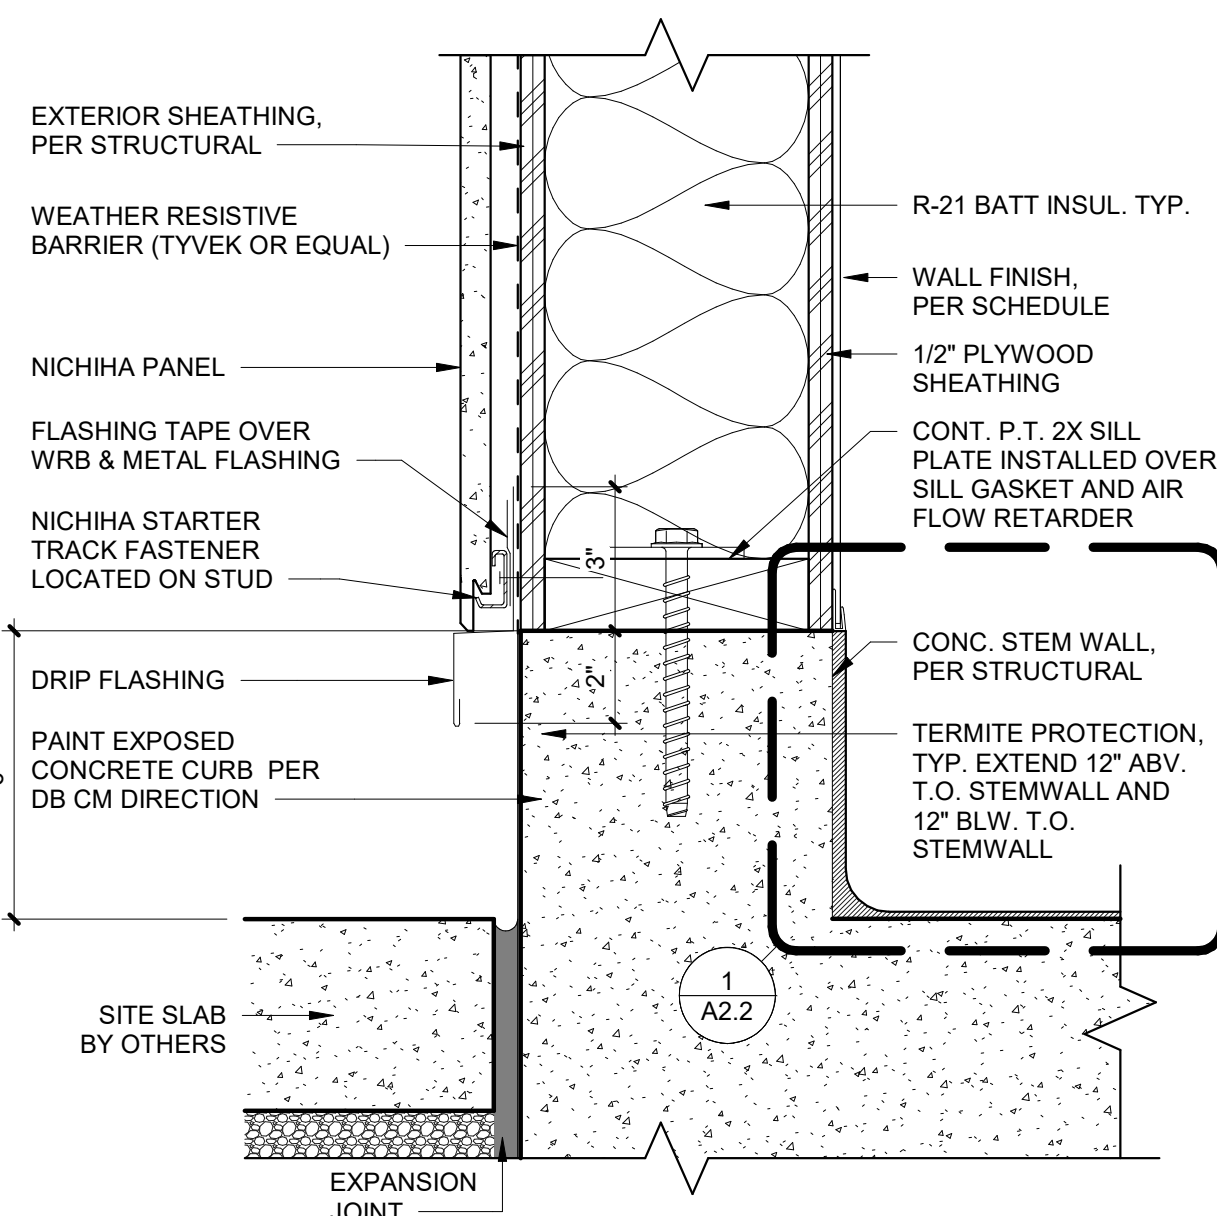


1 NICHIIA SIDING - BASE
3" = 1'-0"

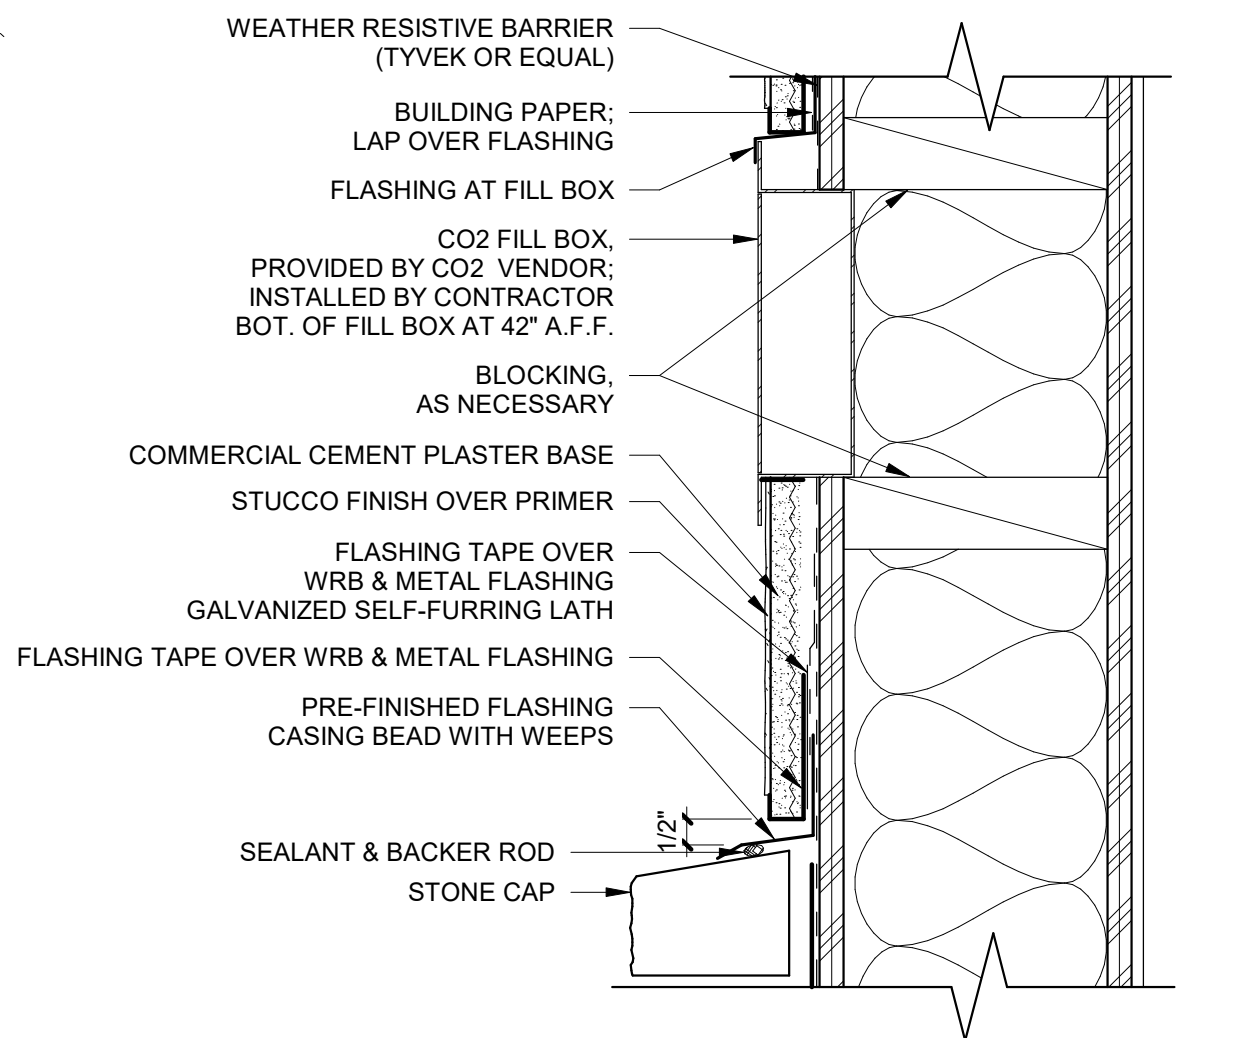

13 CO2 FILL BOX DETAIL STUCCO
3" = 1'-0"

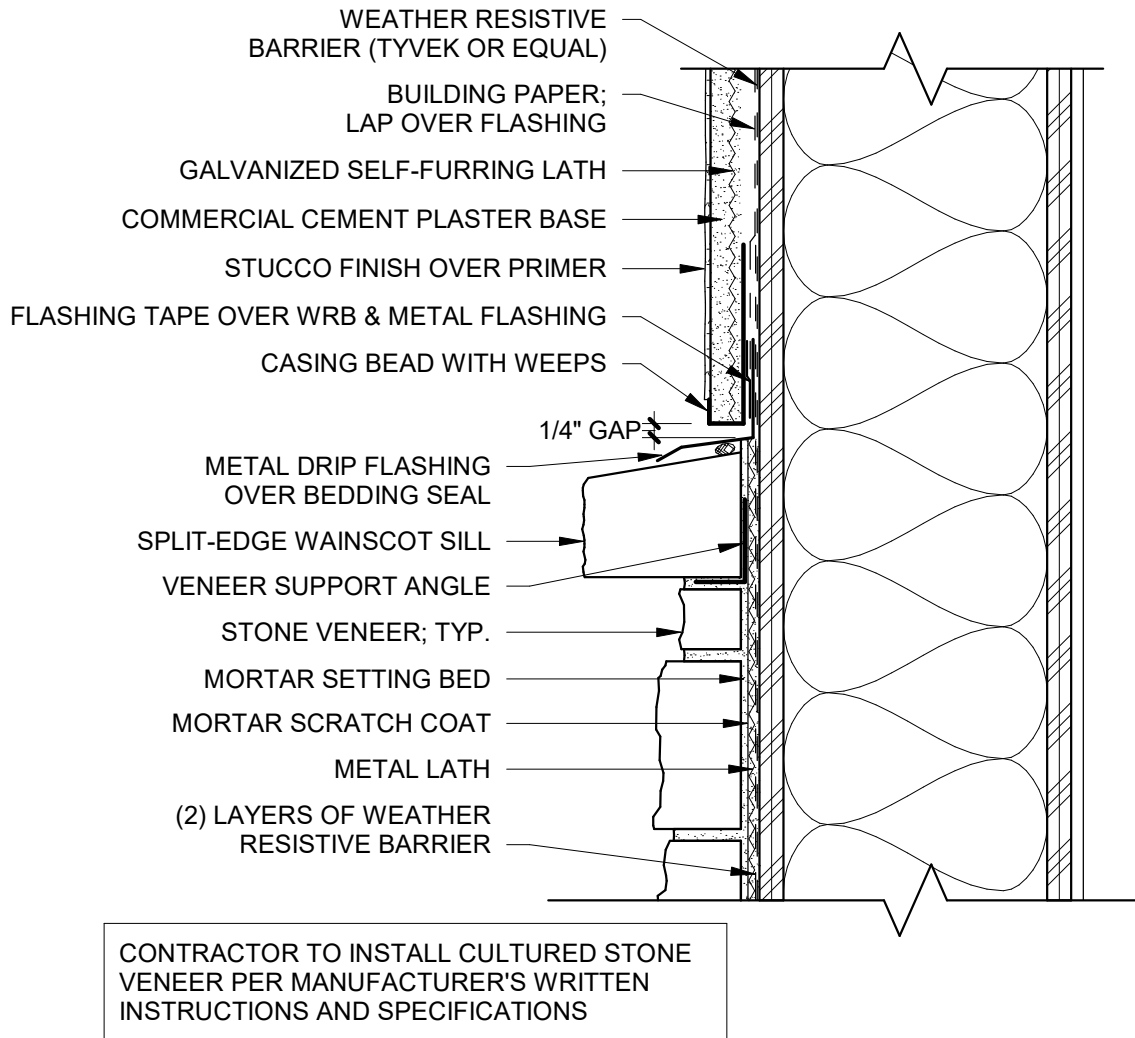


12 STUCCO SIDING @ STONE VENEER
3" = 1'-0"

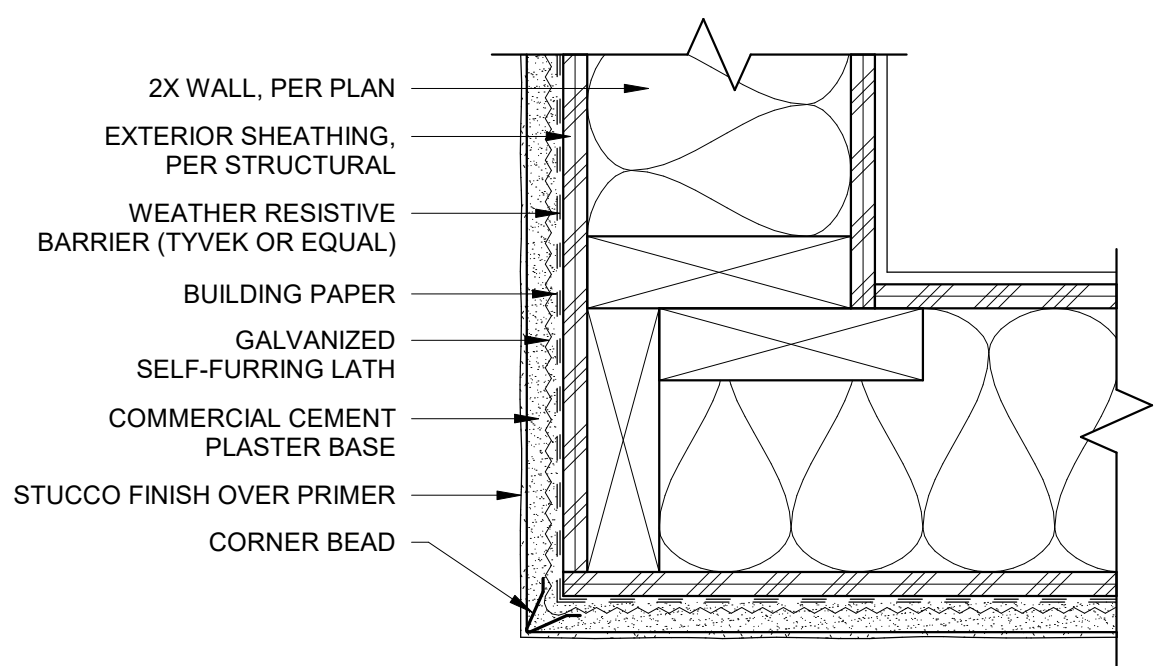

11 STUCCO SIDING - OUTSIDE CORNER
3" = 1'-0"

"The name DUTCH-BROS. and all associated logos, distinctive designs, content, information, and other materials featured, contained herein, and made available by Dutch Bros., including but not limited to, the "hook and feet" of the establishments and products, all text, images, colors, configurations, graphics, designs, illustrations, photographs, and pictures (collectively, the "Materials") are owned by and/or licensed by DB Franchising USA, LLC and are protected by copyright, trademark, trade dress, patent, and/or other intellectual property rights and unfair competition laws under the United States and foreign laws."

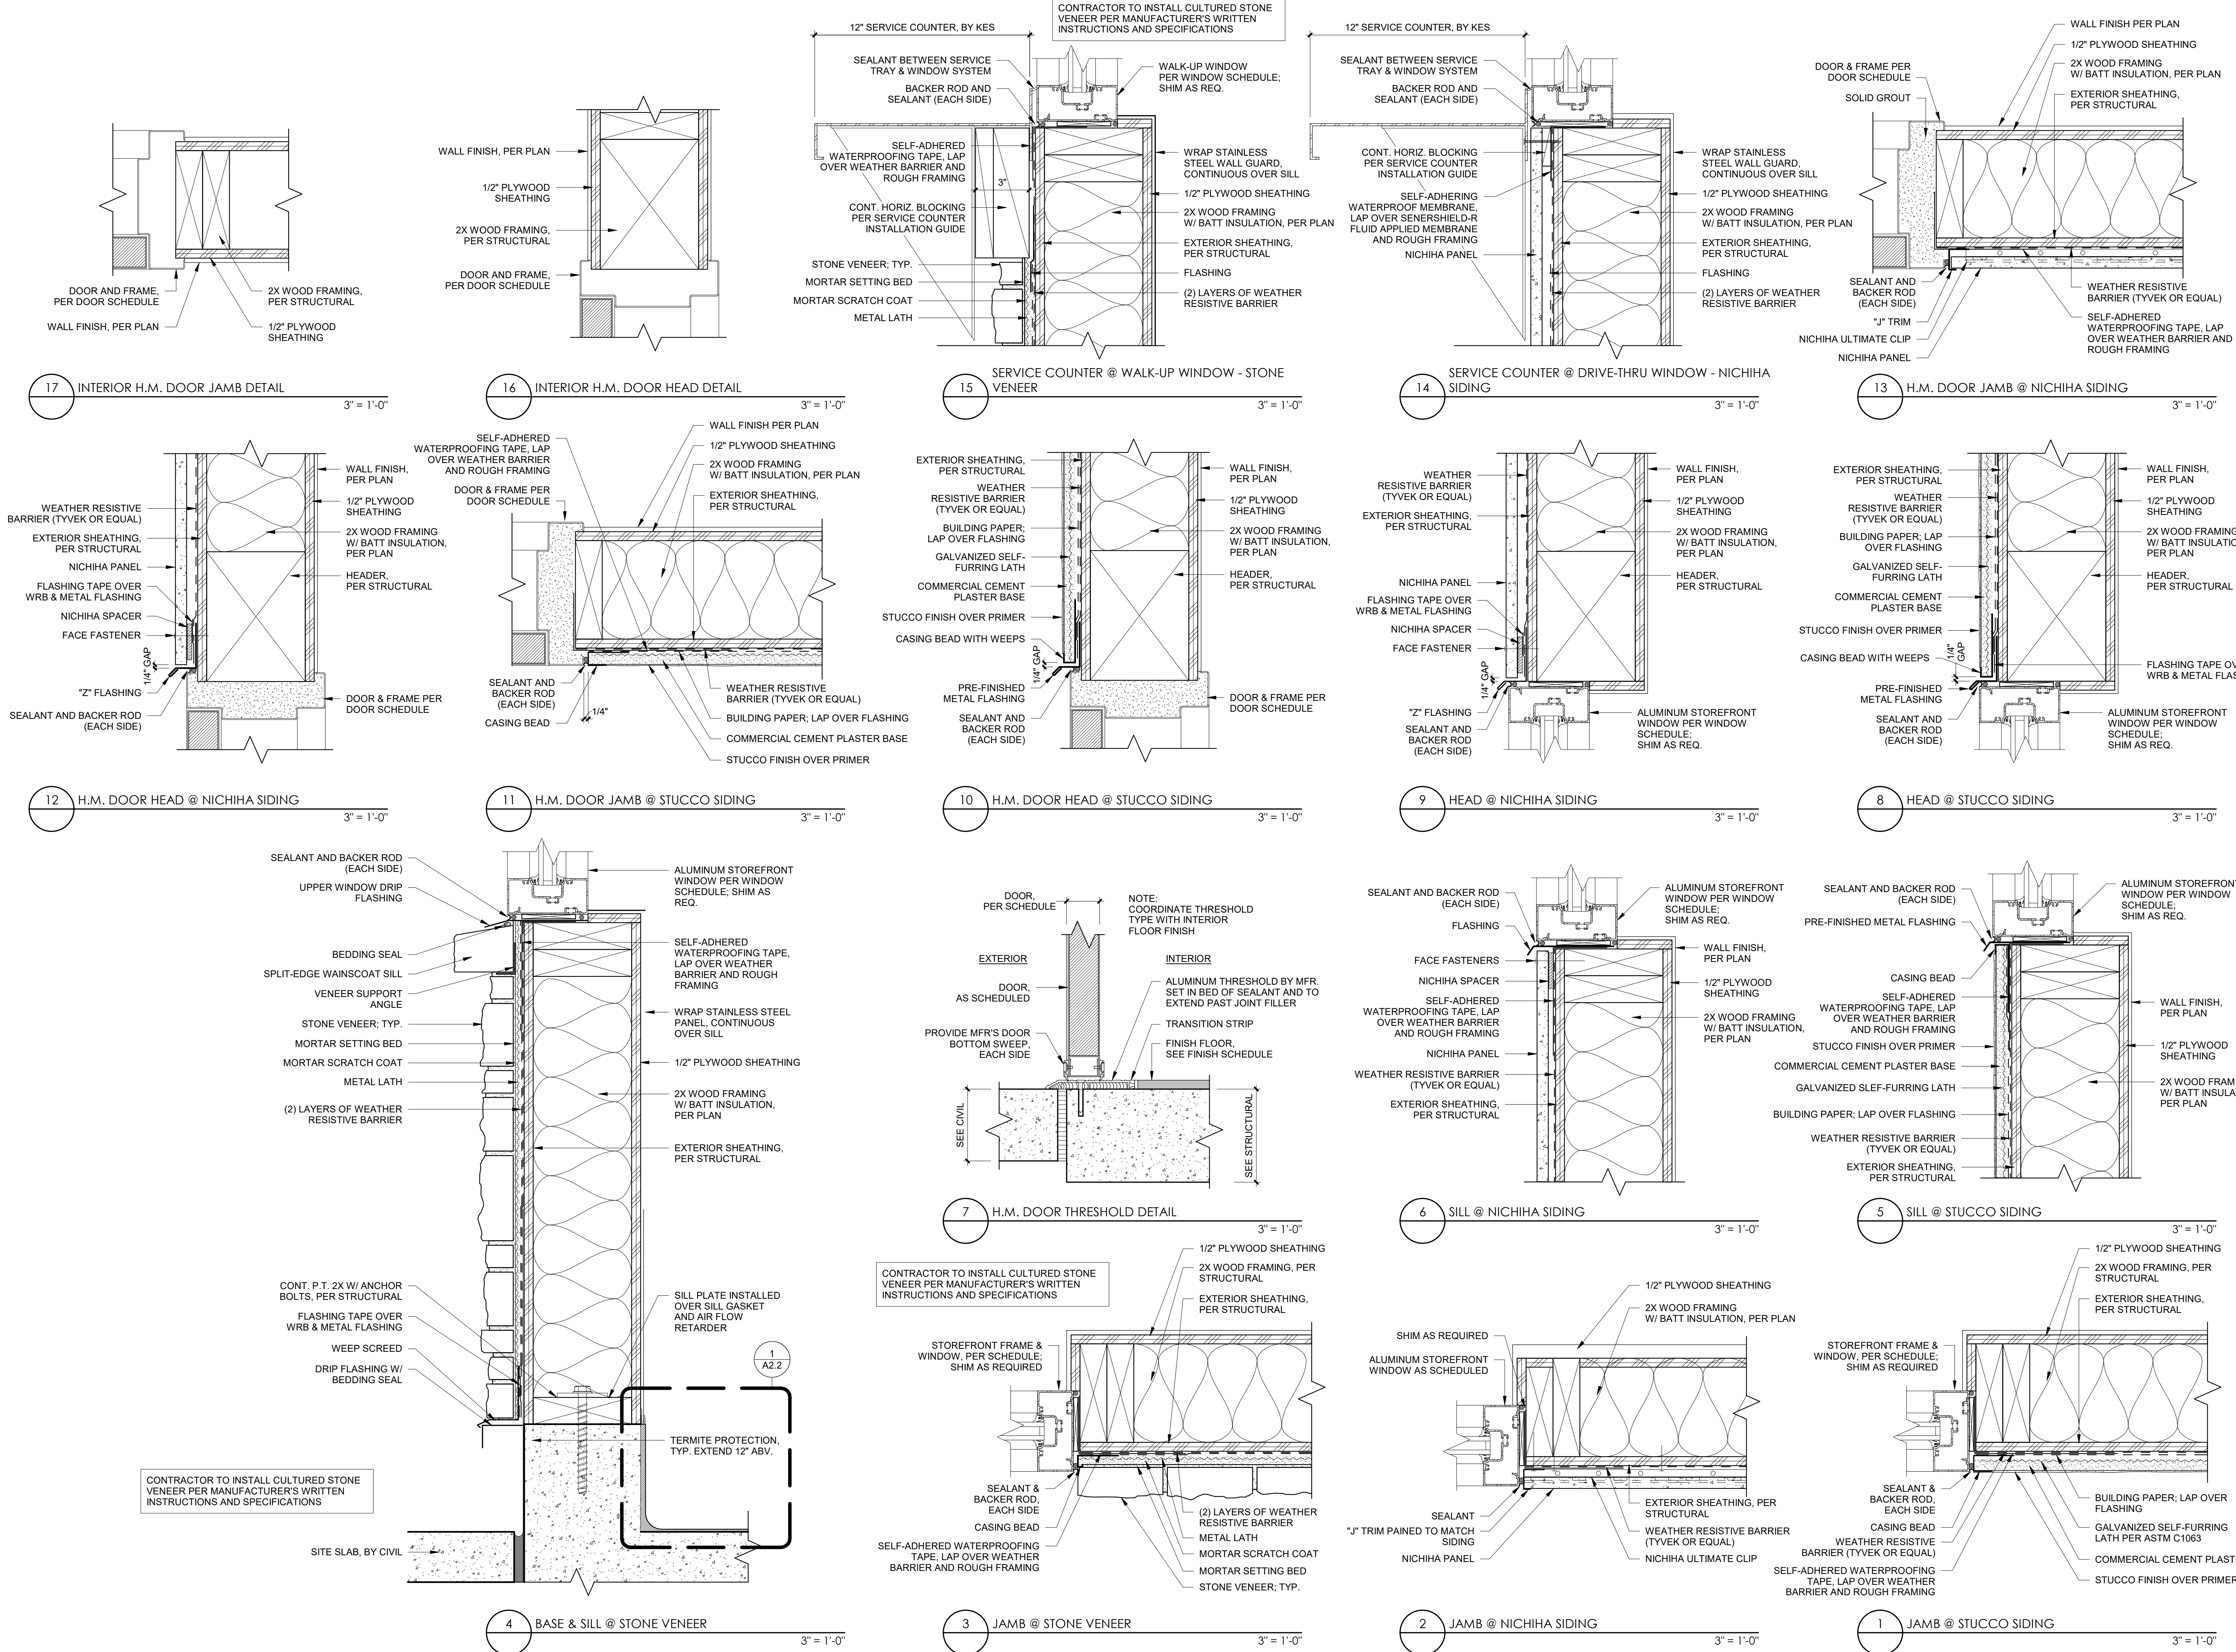



ARCHITECT
CORALIC, LLC
9700 MACKENZIE ROAD, STE. 222
ST. LOUIS, MO 63125
TJ 314.578.4953
EDIN@CORALICARCHITECTURE.COM

STRUCTURAL ENGINEER
KREHER ENGINEERING, INC.
208 N. MAIN STREET,
COLUMBIA, IL 62236
TJ 618.281.8505
NDREYER@KREHERENGINEERING.COM

MEP ENGINEER
CASE ENGINEERING, INC.
796 MERUS CT.
FENTON, MO 63026
TJ 636.349.1600
MCASE@CASEENGINEERINGINC.COM



5.21.2026

Project No: LA0701
Dutch Bros Coffee - New Freestanding Store
1804 MACARTHUR DRIVE,
ALEXANDRIA, LA 71301
For: Dutch Bros Coffee
1930 W. Rio Salado Parkway
Tempe, AZ 85281

ANNIHILATOR A1

ISSUED FOR PERMIT


5.21.2026

REV:	DATE:	DESCRIPTION:

SHEET NAME:
WINDOW AND DOOR DETAILS

SHEET NUMBER:
A8.1

© 2025 DB Franchising USA, LLC

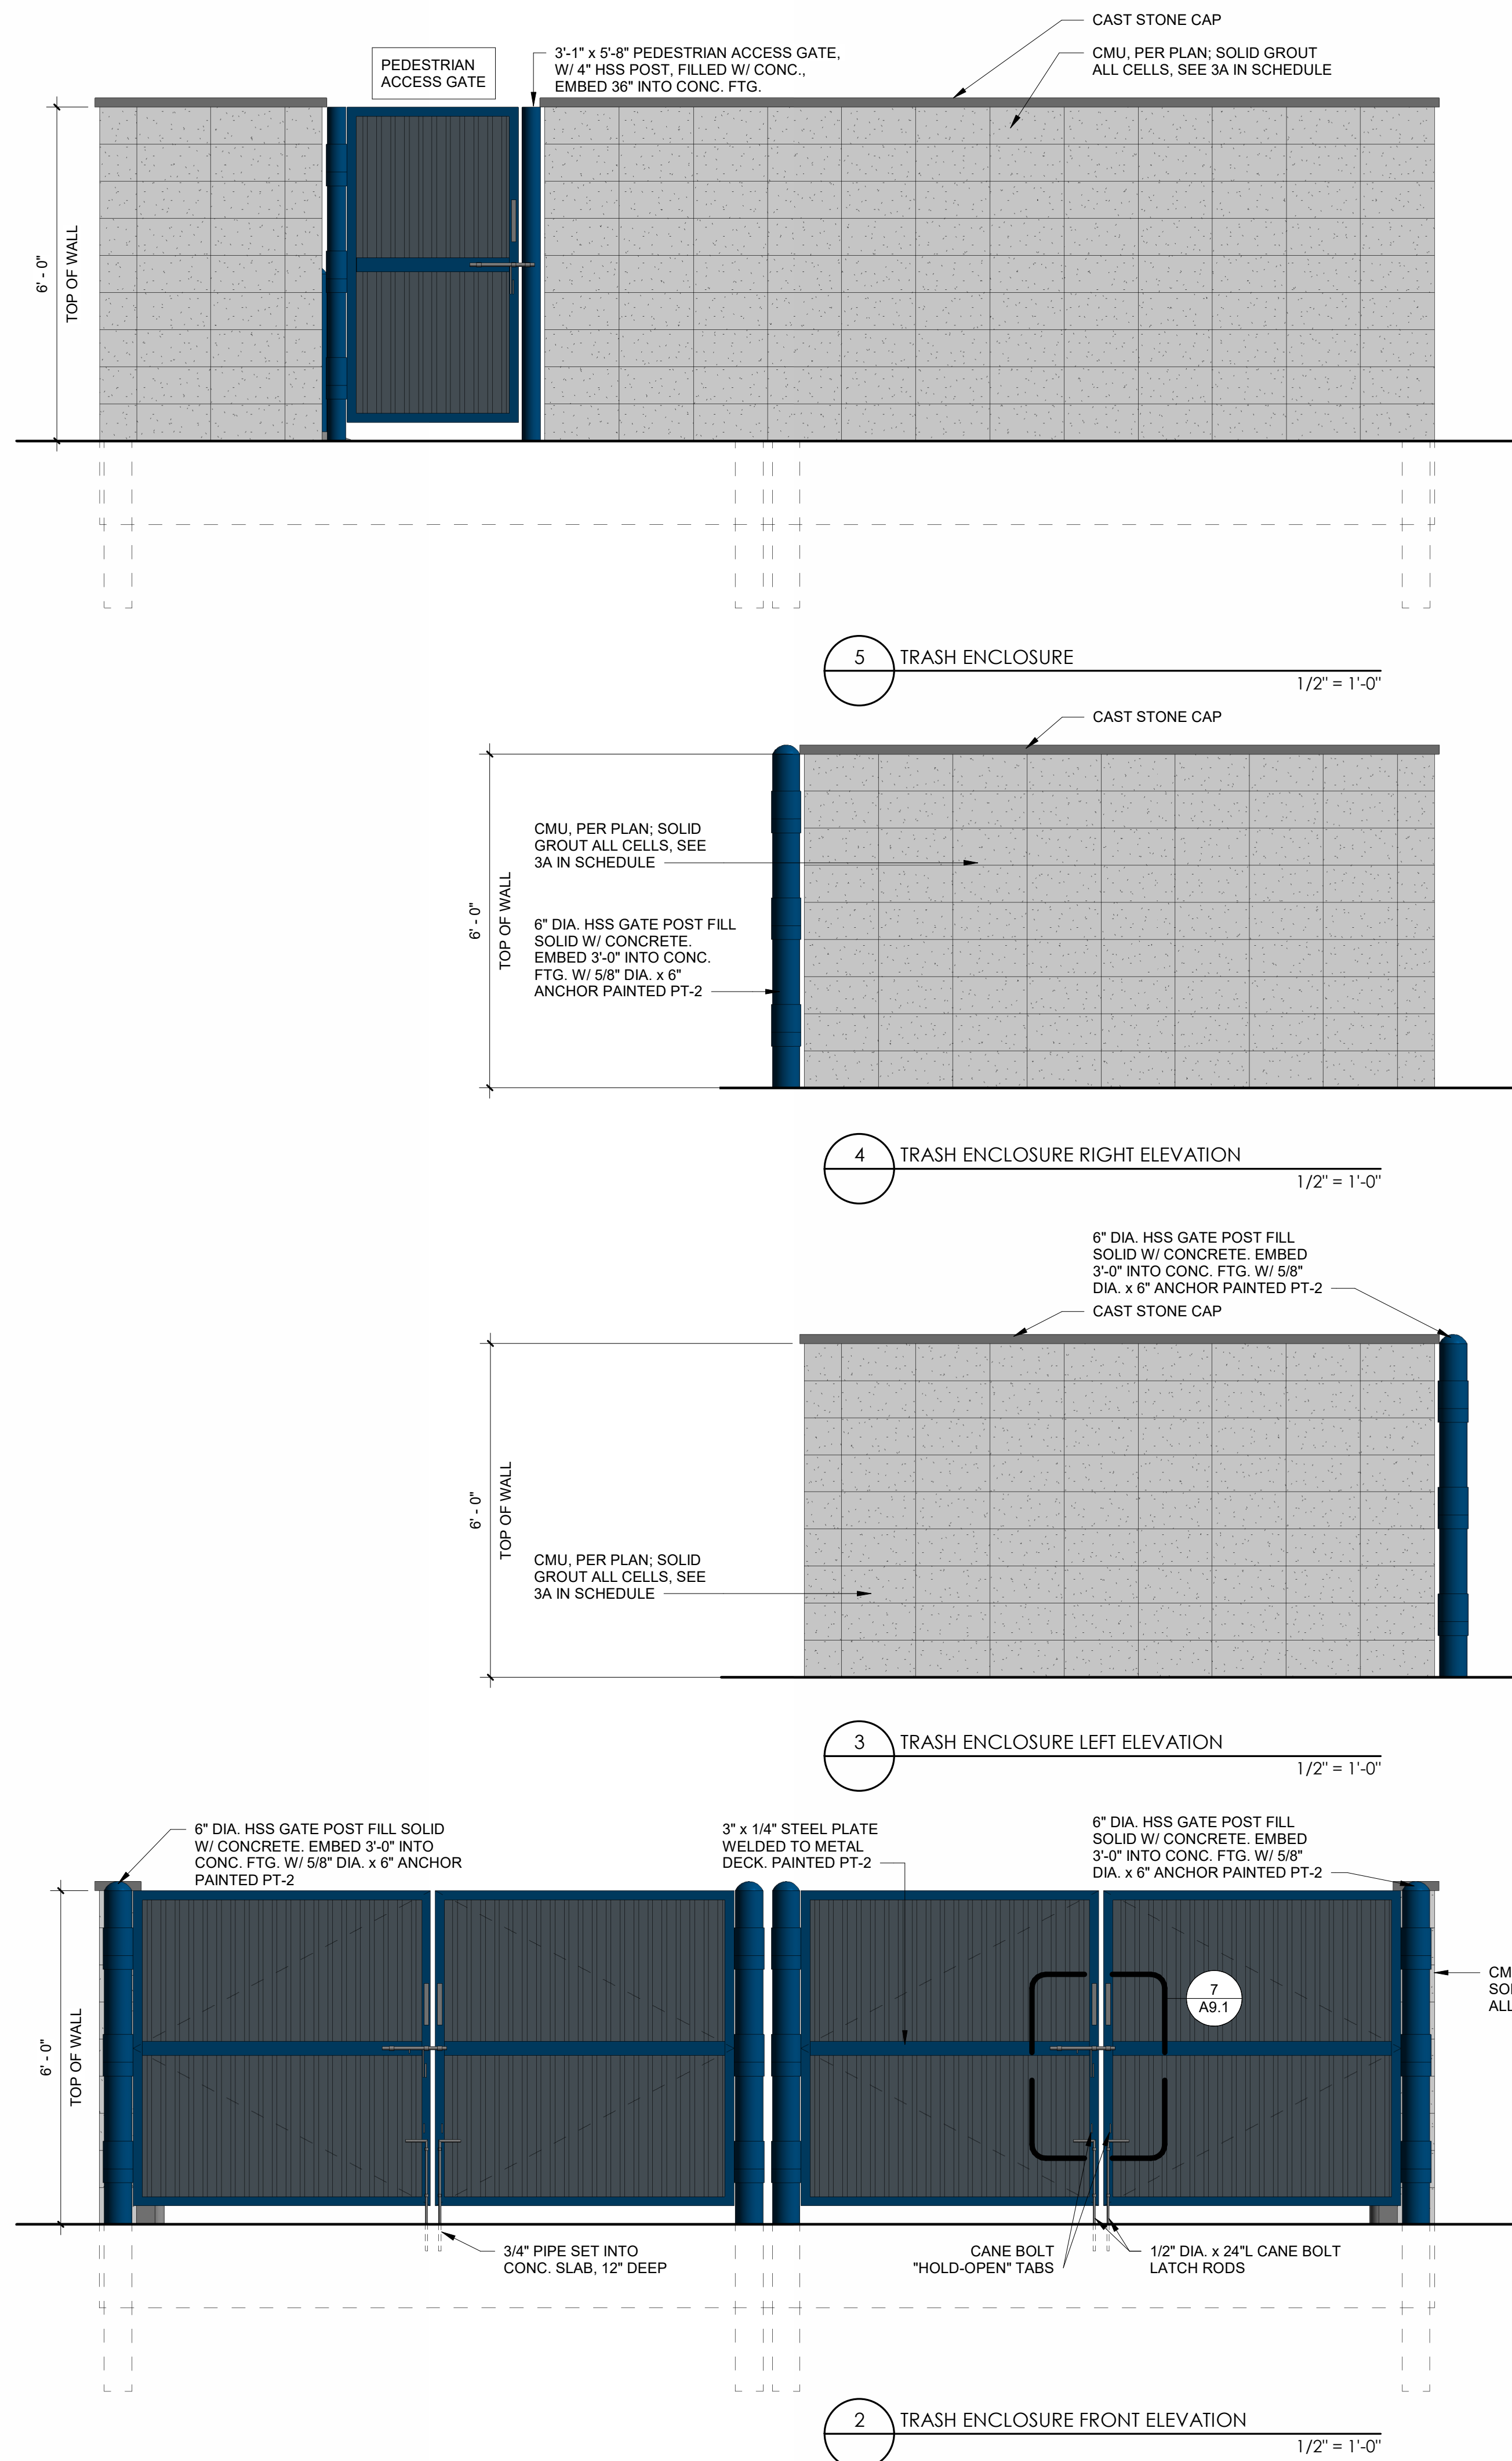

TRASH ENCLOSURE GENERAL NOTES:

1. REFER TO STRUCTURAL FOR MASONRY, CONCRETE, STRUCTURAL STEEL AND REINFORCING STEEL FOR SPECIFICATIONS.
2. PROVIDE LOCKING MECHANISM ON GATES AND PEDESTRIAN GATE.
3. GATES TO BE BUILT WITH 3"x2" SQUARE STEEL TUBING WITH ALL JOINTS FULLY WELDED TOGETHER AND 1 CROSS MEMBER PER GATE. FRAME TO BE PRIMED AND PAINTED PER PLAN.


TRASH ENCLOSURE MATERIALS				
ID	MATERIAL	MANUFACTURER	COLOR	NOTES
3A	CMU BLOCK	CONCRETE PRODUCTS GROUP	DOMINO	SPLIT FACE, 8x16x8, 8x8x8 AS NECESSARY
PT-1	PAINT	SHERWIN-WILLIAMS	GP-0624	DUTCH BROS GRAY, GATES BODY
PT-2	PAINT	SHERWIN-WILLIAMS	GP-0642	DUTCH BROS BLUE, GATE FRAMES & POSTS
CMU		CONCRETE PRODUCT GROUP 210 EUCLID AVENUE, DELAWARE, OH 43015 ATTN: CORY HUPP DIRECTOR OF NATIONAL ACCOUNTS CHUPP@CONCRETEPRODUCTSGROUP.COM (740) 917-3826		

EACH BIDDING CONTRACTOR MUST REACH OUT TO CONCRETE PRODUCTS GROUP FOR SPLIT FACE CMU RECOMMENDATION. SAMPLE FROM CONCRETE PRODUCTS GROUP ARE TO BE PRESENTED TO AOR AND DB FOR APPROVAL

ARCHITECT
CORALIC, LLC
9700 MACKENZIE ROAD, STE. 222
ST. LOUIS, MO 63125
TJ 314.578.4953
EDJIN@CORALICARCHITECTURE.COM

STRUCTURAL ENGINEER
KREHER ENGINEERING, INC.
208 N. MAIN STREET,
COLUMBIA, IL 62236
TJ 618.281.8505
NDREYER@KREHERENGINEERING.COM

MEP ENGINEER
CASE ENGINEERING, INC.
798 MERUS CT.
FENTON, MO 63026
TJ 636.349.1600
MCASE@CASEENGINEERINGINC.COM

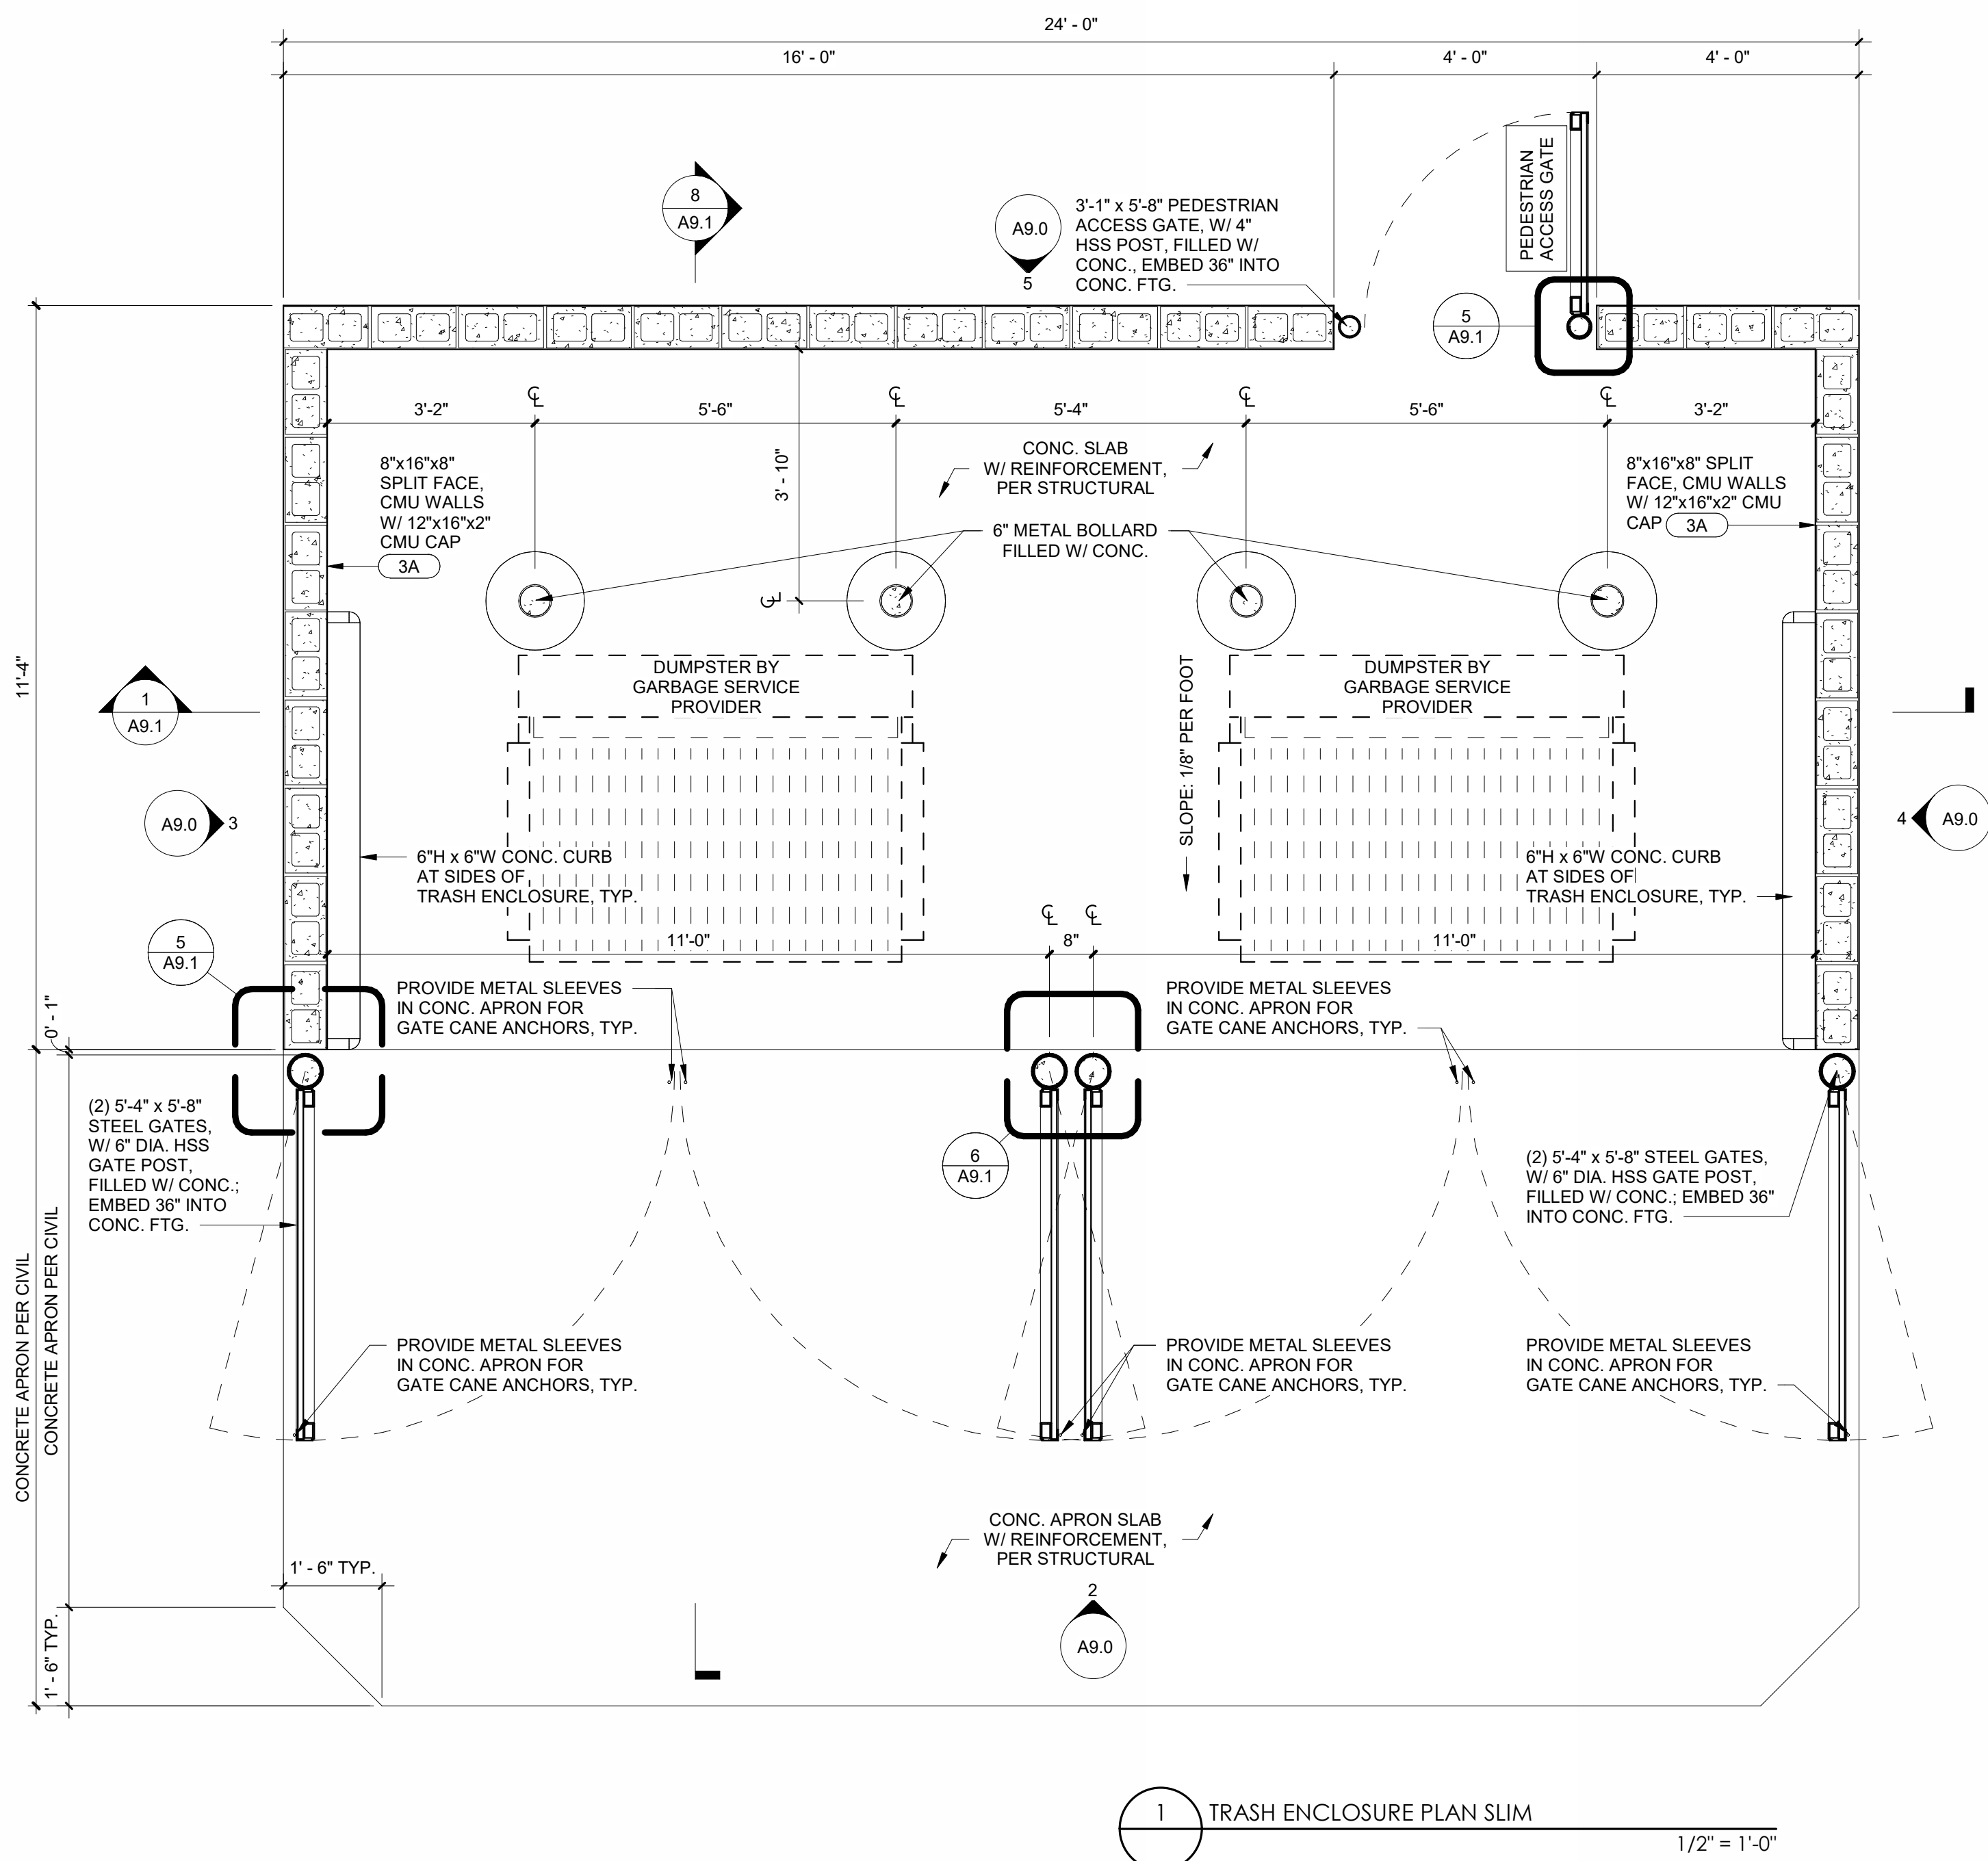

Project No: LA0701

Dutch Bros Coffee - New Freestanding Store
1804 MACARTHUR DRIVE,
ALEXANDRIA, LA 71301

For: Dutch Bros Coffee
1930 W. Rio Salado Parkway
Tempe, AZ 85281

ANNH

ANNIHILATOR A1

ISSUED FOR PERMIT

5.21.2026

REV:	DATE:	DESCRIPTION:


SHEET NAME

TRASH ENCLOSURE
PLAN/ ELEV.

SHEET NUMBER

A9.0

The name DUTCH-BROS. and all associated logos, distinctive designs, content, information, and other materials featured, displayed, contained herein, and made available by Dutch Bros., including but not limited to, the "hook and leaf" of the establishments and products, all text, images, colors, configurations, graphics, designs, illustrations, photographs, and pictures (collectively, the "Materials") are owned by and/or licensed by DB Franchising USA, LLC and are protected by copyright, trademark, trade dress, patent, and/or other intellectual property rights and unfair competition laws under the United States and foreign laws.

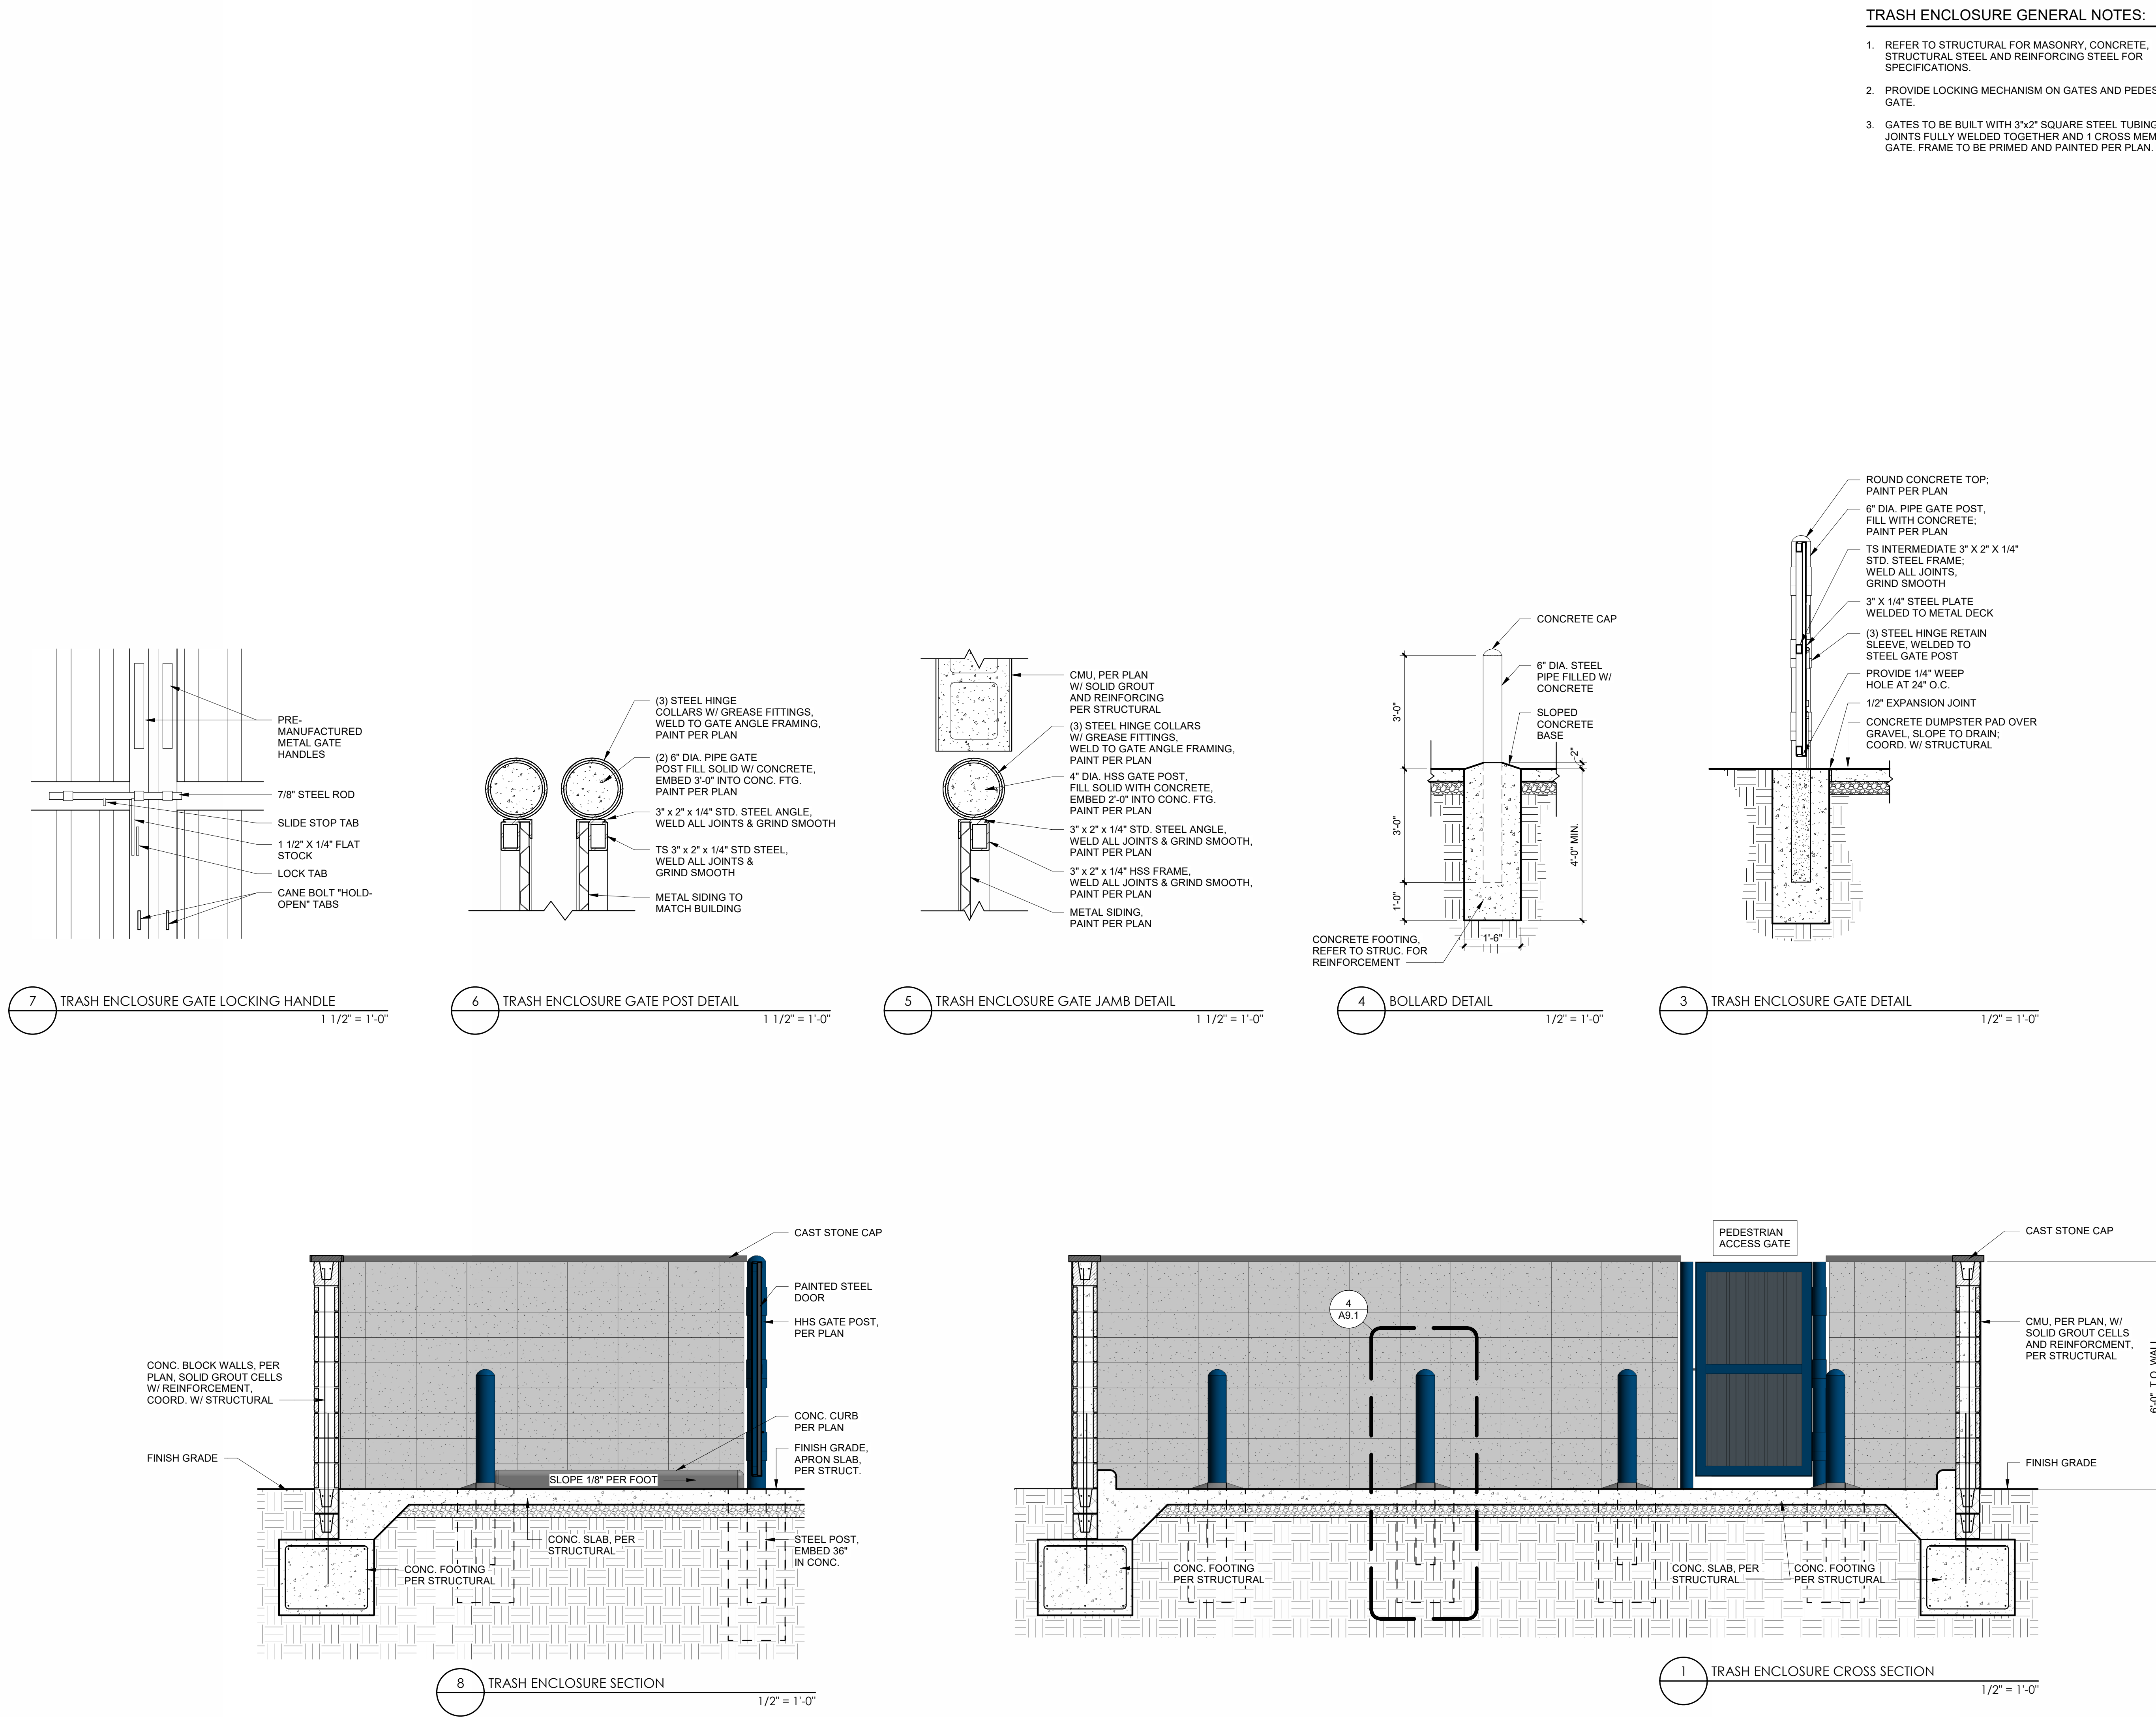



ARCHITECT
CORALIC, LLC
9700 MACKENZIE ROAD, STE. 222
ST. LOUIS, MO 63125

TJ 314.578.4953
EDIN@CORALICARCHITECTURE.COM

STRUCTURAL ENGINEER
KREHER ENGINEERING, INC.
208 N. MAIN STREET,
COLUMBIA, IL 62236

TJ 618.281.8505
NDREYER@KREHERENGINEERING.COM

MEP ENGINEER
CASE ENGINEERING, INC.
796 MERUS CT.
FENTON, MO 63026

TJ 636.349.1600
MCASE@CASEENGINEERINGINC.COM



5.21.2026

Project No: LA0701
Dutch Bros Coffee - New Freestanding Store
1804 MACARTHUR DRIVE,
ALEXANDRIA, LA 71301
For: Dutch Bros Coffee
1930 W. Rio Salado Parkway
Tempe, AZ 85281

ANNIHILATOR A1

ISSUED FOR PERMIT

5.21.2026

REV:	DATE:	DESCRIPTION:

SHEET NAME:

TRASH ENCLOSURE DETAILS

SHEET NUMBER:

A9.1

© 2025 DB Franchising USA, LLC