

DUNKIN DONUTS REMODEL

2083 CROWELL ROAD


COVINGTON, GA 30014



ABBREVIATIONS

#	Pound OR Number
&	And
@	At
ACT	Acoustic Ceiling Tile
AFF	Above Finished Floor
ALUM	Aluminum
ANOD	Anodized
BO	Bottom Of
CIP	Cast In Place
CHNL	Channel
CJ	Control Joint
CL	Center Line
CLG	Ceiling
CLR	Clear
CMU	Concrete Masonry Unit
COL	Column
CONC	Concrete
CONT	Continuous
OPT	Carpet
CT	Ceramic Tile
DEMO	Demolish or Demolition
DIA	Diameter
DIM	Dimension
DIMS	Dimensions
DN	Down
DR	Door
DWG	Drawing
EA	Each
EJ	Expansion Joint
ELEC	Electrical
ELEV	Elevator or Elevation
EO	Equal
EXIST	Existing
EXP JT	Expansion Joint
EXT	Exterior
FD	Floor Drain or Fire Department
FEC	Fire Extinguisher Cabinet
FF	Finished Face or Finished Floor
FXKT	Fixture
FLR	Floor
FO	Face Of
GA	Gauge
GALV	Galvanized
GW	Gypsum Wall Board
HC	Hollow Core
HI	High
HM	Hollow Metal
HP	High Point
HR	Hour
HVAC	Heating, Ventilating, And Air Conditioning
IRGW	Impact Resistant Gypsum Wall Board
ILO	In Lieu Of
INSUL	Insulated or Insulation
INT	Interior
LO	Low
MAX	Maximum
MO	Masonry Opening
MECH	Mechanical
MEMBR	Membrane
MIN	Minimum
MRGW	Moisture-Resistant Gypsum Wall Board
MTL	Metal
NIC	Not In Contract
NO	Number
NOM	Nominal
OC	On Center
OH	Overhang or Opposite Hand
OPP	Opposite or Opposite Hand
OZ	Ounce
PLUMB	Plumbing
PLYWD	Plywood
PT	Pressure Treated
PNT	Paint or Painted
PVC	Polyvinyl Chloride
RBR	Rubber
RCP	Reflected Ceiling Plan
RD	Roof Drain
REQ	Required
RM	Room
SIM	Similar
SD	Smoke Detector
SPEC	Specified OR Specification
SPK	Sprinkler or Speaker
SS	Stainless Steel
STC	Sound Transmission Coefficient
STL	Steel
STRUCT	Structure or Structural
T&G	Tongue And Groove
TEL	Telecommunications, Telephone
TME	To Match Existing
TO	Top Of
TOC	Top Of Concrete
TOS	Top Of Steel
T/D	Telephone/Data
TYP	Typical
UNO	Unless Noted Otherwise
US	Upside
VIF	Verify In Field
VP	Vision Panel
W	With
WD	Wood

SYMBOL LEGEND

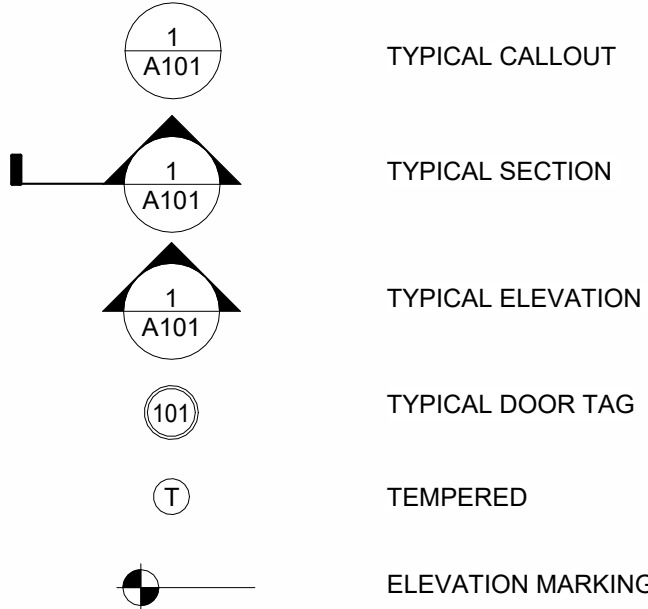

GENERAL NOTES:

- DO NOT SCALE DRAWINGS. USE WRITTEN DIMENSIONS ONLY. SUBMIT TO ARCHITECT ANY DISCREPANCIES FOR CLARIFICATION.
- ALL WORK SHALL BE IN COMPLIANCE WITH ALL APPLICABLE CODES, AIA A-201 GENERAL CONDITIONS OF THE CONTRACT FOR CONSTRUCTION, RECOGNIZED INDUSTRY STANDARDS, CRAFTSMANSHIP STANDARDS IN THE AREA, AND ALL MANUFACTURERS' RECOMMENDATIONS.
- THE CONTRACTOR(S) SHALL BE RESPONSIBLE FOR BUILDING THIS PROJECT IN ACCORDANCE WITH THE DRAWINGS AND SPECIFICATIONS UNLESS A WRITTEN NOTIFICATION FROM THE OWNER OR ARCHITECT TO THE CONTRARY IS RECEIVED. THE ARCHITECT DOES NOT GUARANTEE THE PERFORMANCE OF THE PROJECT IN ANY RESPECT OTHER THAN THAT OUR ARCHITECTURAL WORK AND JUDGMENT RENDERED MEET THE STANDARDS OF CARE OF OUR PROFESSION.
- BUILDING MUST COMPLY WITH CURRENT ACCESSIBILITY CODES AND MODIFICATIONS ADOPTED BY LOCAL AUTHORITIES HAVING JURISDICTION.
- THE LOCATION OF THE EXISTING UTILITIES AND STRUCTURES SHOWN HEREON ARE APPROXIMATE. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO VERIFY THE EXISTENCE AND ACTUAL LOCATION OF SUCH, WHETHER SHOWN HEREON OR NOT, PRIOR TO ANY EXCAVATION, ANY DAMAGES SHALL BE REPAIRED AT THE EXPENSE OF THE CONTRACTOR. THE CONTRACTOR SHALL EXTEND AND CONNECT THE UTILITY LINES TO THE CIVIL INFRASTRUCTURE.
- TO THE BEST OF OUR KNOWLEDGE, THIS BUILDING HAS BEEN DESIGNED IN ACCORDANCE WITH THE GEORGIA AMENDMENTS TO THE 2018 INTERNATIONAL BUILDING CODE, LIFE SAFETY CODE AND THE RULES AND REGULATIONS OF NEW CONSTRUCTION PER GEORGIA ACCESSIBILITY STANDARD.
- WHEN A BEAM OR COLUMN BECOMES PART OF A FIRE RATED WALL OR CEILING, IT MUST BE PROTECTED AND BE FIRE RATED AS IS THE WALL OR CEILING.
- FIRE BARRIER SHALL BE CONTINUOUS FROM OUTSIDE WALL TO OUTSIDE WALL, FROM ANOTHER FIRE BARRIER TO A FIRE BARRIER, OR A COMBINATION THEREOF, INCLUDING CONTINUITY THROUGH ALL CONCEALED SPACES SUCH AS THOSE FOUND ABOVE A CEILING, INCLUDING INTERSTITIAL SPACES.
- PENETRATIONS INTO OR THROUGH, OF EITHER VERTICAL OR HORIZONTAL FIRE RATED BARRIERS SHALL BE PROTECTED BY A SYSTEM LISTED BY A RECOGNIZED TESTING AGENCY. PROVIDE A DETAIL AND LISTING NUMBER.

CONSTRUCTION NOTES:

- ALL NOTES AND CALL OUTS FOR ONE SECTION OR DETAIL APPLY TO ALL OTHERS WHEN LIKE OR SIMILAR CONDITIONS ARE EVIDENT.
- REFER TO THE STRUCTURAL DRAWINGS FOR ALL INFORMATION ON FOUNDATIONS, SLABS, WALLS, REINFORCEMENT AND STRUCTURAL STEEL FRAMING.
- REFER TO THE STRUCTURAL DRAWINGS FOR INFORMATION ON CONSTRUCTION AND CONTROL JOINTS IN CONCRETE SLABS AND CONCRETE AND MASONRY WALLS. SLAB JOINTS ARE SPECIFIED AND LOCATED ON THE STRUCTURAL DRAWINGS. WALL AND SIDEWALK JOINTS ARE LOCATED ON THE ARCHITECTURAL DRAWINGS.
- CMU AND COMPOSITE WALLS SHALL HAVE HORIZONTAL REINFORCEMENT @ 16" O.C. UNLESS NOTED OTHERWISE. USE TRUSS TYPE THROUGHOUT WITH PREFABRICATED UNITS FOR CORNERS AND WALL INTERSECTIONS. USE ADJUSTABLE TYPE WHERE SPLIT FACE AND CMU COURSING DOES NOT ALIGN. SPLIT FACE AND CMU WYTHES OF COMPOSITE WALLS SHALL BE ERECTED CONCURRENTLY. FILL ALL VOIDS WITH MORTAR EXCEPT AT WEEPS. (SEE NOTE #18).
- WOOD BLOCKING, PLYWOOD AND NAILERS IN CONTACT WITH CMU OR CONCRETE BUILDING COMPONENTS AND IN WALL TOPS SHALL BE PRESSURE TREATED. SEE STRUCTURAL FOR SHEATHING THICKNESS.
- ALL EIFS BOARD SHALL BE 1 1/2" THICK MINIMUM ON WOOD SHEATHING SHEATHING ON STUDS UNLESS OTHERWISE NOTED.
- WOOD COMPONENTS IN WALL TOPS SHALL BE COVERED WITH 1/2" WATER SHIELD "LAP AND SEAL 6" MINIMUM.
- APPLY TYPE 30# FELT HORIZONTALLY OVER ALL EXTERIOR SHEATHING BEHIND BRICK AND CMU VENEER. UPPER LAYERS TO OVER LAP LOWER LAYERS 2" MIN. END LAPS SHALL BE 6" MIN. FELT SHALL BE FREE OF HOLES AND BREAKS OTHER THAN THOSE RESULTING FROM APPLICATION OR ATTACHMENT OF FASTENERS AND CONSTRUCTION SYSTEMS.
- COPINGS, FLASHINGS, GRAVEL STOPS, GUTTERS, DOWN SPOUTS, ETC SHALL BE STAINLESS STEEL UNLESS NOTED OTHERWISE ON THE DRAWINGS.

PC# 353751 / COOL PALETTE

- THE SPACE BETWEEN PENETRATING ITEM AND FIRE BARRIER SHALL BE FILLED WITH A MATERIAL CAPABLE OF MAINTAINING THE FIRE RESISTANCE RATING OF THE FIRE BARRIER PRODUCT. PRODUCT USED MUST MEET TEST METHODS ASTM E814 OR UL 1479 FOR FIRE RATING.
- ALL WORK SHALL BE IN COMPLIANCE WITH ALL APPLICABLE CODES, AIA A-201 GENERAL CONDITIONS OF THE CONTRACT FOR CONSTRUCTION, RECOGNIZED INDUSTRY STANDARDS, CRAFTSMANSHIP STANDARDS IN THE AREA, AND ALL MANUFACTURERS' RECOMMENDATIONS.
- IDENTIFICATION OF FIRE BARRIERS SHALL BE PERMANENTLY INSTALLED ABOVE ANY DECORATIVE GROUNDING AND/OR IN CONCEALED SPACES. THE LETTERING SHALL BE 2" IN HEIGHT AND SPACED EVERY 12". THE FOLLOWING WORKING IS RECOMMENDED: HOUR FIRE AND SMOKE BARRIER PROTECT ALL OPENINGS.
- THE FLOOR ON BOTH SIDES OF A DOOR SHALL BE LEVEL AND SHALL HAVE THE SAME ELEVATION ON BOTH SIDES OF THE DOOR. FOR A DISTANCE ON EACH SIDE EQUAL TO THE WIDTH OF THE WIDEST SINGLE DOOR.
- SIGNS, LOCATION, NUMBER, AND SIZE ARE NOT APPROVED UNDER THIS BUILDING PERMIT. A SEPARATE SIGN LOCATION PERMIT MAYBE REQUIRED FOR EACH SIGN.
- SEE DEVELOPMENT REVIEW FOR REVIEW AND SIGNAGE APPROVAL.
- ALL METAL STUD GAUGE DESIGN SHALL BE AS INDICATED IN THE SPECIFICATIONS OR PLANS.
- HORIZONTAL MASONRY WALL REINFORCING AT 16" O.C., MEASURED VERTICALLY.
- PROVIDE FLASHING AND WEEP WICKS OR WEEP HOLES AT MINIMUM 16" O.C. AT STEEL LINTELS, THRU WALL FLASHING, BASE OF WALLS, AND AT ANY HORIZONTAL BARRIER IN THE WALL, TYPICAL.
- SEE STRUCTURAL DRAWINGS FOR ADDITIONAL TYPICAL MASONRY NOTES.
- PROVIDE MASONRY CONTROL JOINTS THROUGH C.M.U. AS LOCATED ON STRUCTURAL AND/OR ARCHITECTURAL DRAWINGS. SEE TYPICAL DETAIL AND SPECIFICATIONS.
- SEE STRUCTURAL DRAWINGS FOR ADDITIONAL TYPICAL MASONRY NOTES.
- PROVIDE MASONRY CONTROL JOINTS THROUGH C.M.U. AS LOCATED ON STRUCTURAL AND/OR ARCHITECTURAL DRAWINGS. SEE TYPICAL DETAIL AND SPECIFICATIONS.

- PREVENT CONTACT OF DISSIMILAR METALS BY PROVIDING AN AIR SPACE OR PHYSICAL BARRIER (i.e. 15# FELT).
- PROVIDE FABRIC OR MEMBRANE THRU-WALL FLASHING IN MASONRY WALLS AT STEEL LINTELS, BEAMS, WALL BASES OR ANY OTHER HORIZONTAL BARRIER IN THE WALL. FLASHING SHALL BE DAMMED AT EACH END, PROVIDE 7" CORDED WEEPS IN HEAD JOINTS @ 32" O.C. MAXIMUM AT ALL THRU-WALL FLASHINGS.
- PROVIDE COR. FLASHING @ 40" MAX. CONTROL JOINTS AT 5' 0" O.C. EACH DIRECTION INCLUDING BUT NOT LIMITED TO THE FOLLOWING:
BUILDING SIGNAGE
TOILET ROOM ACCESSORIES
GRAB BARS
FIRE EXTINGUISHERS CABINETS & BRACKETS
- DO NOT MAKE ANY ATTACHMENTS TO THE METAL ROOF DECKING.
- COORDINATE WITH THE TENANT AND/OR THEIR SIGN VENDOR FOR POWER SUPPLY REQUIREMENTS AND JUNCTION BOX LOCATIONS FOR SIGNAGE. SIGNAGE SHALL BE PERMITTED SEPARATELY. NO JUNCTION BOXES ALLOWED ON REAR OF PARAPETS UNLESS OTHERWISE NOTED.
- PROVIDE CLEAN WALLS, DOORS, DOOR FRAMES, HANDRAILS, GUARDRAILS, ETC. PER PAINT MANUFACTURERS RECOMMENDATIONS PRIOR TO SEALING AND PAINTING CLEAN WALLS, DOORS, DOOR FRAMES, HANDRAILS, GUARDRAILS, ETC. INSTALL GUTTERS, DOWN SPOUTS, METER GROUPS, ETC. AFTER PAINTING.
- WHERE THE EXTERIOR GRADE IS HIGHER THAN THE INTERIOR FLOOR LEVEL, PROVIDE "MIRADRAM" WATERPROOFING WITH A 1" PROTECTION BOARD AND BACK FILL WITH GRAVEL. ENSURE POSITIVE DRAINAGE AWAY FROM THE BUILDING.
- REFER TO SURVEY FOR VARIATIONS AND LOCATIONS OF FINISH FLOOR ELEVATIONS.
- WALL TOP COPINGS SHALL HAVE 1" HIGH VERTICAL SEAMS AT ALL JOINTS.
- AT ALL CMU AND CONCRETE WALLS BEHIND BRICK AND CMU VENEERS SHALL BE TREATED WITH APPLIED DAMP-PROOFING. SEE SPECS.

- SEE STRUCTURAL DRAWINGS FOR ADDITIONAL TYPICAL MASONRY NOTES.
- PROVIDE MASONRY CONTROL JOINTS THROUGH C.M.U. AS LOCATED ON STRUCTURAL AND/OR ARCHITECTURAL DRAWINGS. SEE TYPICAL DETAIL AND SPECIFICATIONS.
- ANCHOR ALL PRESSURE TREATED WOOD BLOCKING AT TOPS OF MASONRY WALLS UNDER COPING WITH 3/8" DIA. ANCHORS AT 36" O.C. TYP.
- FASTEN ALL PRE FINISHED METAL COPING W/ CONT. CLEAT AT FRONT AND 24 NEOPRENE GROMMETTED FASTENERS AT 24" O.C. AT REAR. ALL JOINTS IN COPING SHALL BE STANDING SEAM PER "SMACNA" STANDARDS. (PAGE 16)
- PROVIDE J-MOLDS AND CORNER BEADS AT THE EDGES OF ALL E.I.F.S. AND GYPSUM BOARD.
- THE CONTRACTOR SHALL PROVIDE ADEQUATE BRACING AND SHORING FOR ALL WORK DURING THE CONSTRUCTION PERIOD.
- USE ONLY "LEAD-FREE" PIPE AND SOLDER FOR DOMESTIC WASTE SYSTEM.
- PROVIDE SHEET WATERPROOFING, BOARD PROTECTION, AND GRAVEL AT ALL LOCATIONS WHERE THE INTERIOR FLOOR SLAB FALLS BELOW EXTERIOR GRADE.
- CONCRETE TEST REPORTS WILL BE AVAILABLE AT JOB SITE AT ALL TIMES.
- THE STRUCTURE WILL CONFORM TO TYPE IIB BUILDING CONSTRUCTION. IT SHALL BE SPRINKLERED IN CONFORMANCE TO N.F.P.A. 13. ALL SPACES UNDER CANOPY SHALL BE SPRINKLERED.
- INSTALL SMOKE PARTITIONS AND BARRIERS INSIDE EXTERIOR CANOPY AS REQUIRED BY CODE AND BUILDING OFFICIALS.

SEALANT NOTES:

- PROVIDE CONTINUOUS SEALANT AND BACKER ROD AT ALL CONTROL JOINTS IN MASONRY WALLS. TYPICAL.
- PROVIDE CONTINUOUS SEALANT AND BACKER ROD AT ALL JUNCTIONS BETWEEN DISSIMILAR MATERIALS, I.E. BRICK TO E.I.F.S., STOREFRONT TO BRICK, ETC.
- PROVIDE CONTINUOUS SEALANT AT SIDEWALK EXPANSION JOINTS, TYPICAL OVER "SNAP CAP" BY WR MEADOWS. EXPANSION JOINTS AS SHOWN ON PLANS.
- PROVIDE CONTINUOUS SEALANT AND BACKER ROD AT ALL CONTROL JOINTS IN EIFS. TYPICAL.
- PROVIDE CONTINUOUS EXPANSION JOINT AT WALL TO ROOF, OR WALL TO WALL, EXTENDING UP AND OVER PARAPET WALL AND COPING AT PARAPET BETWEEN SHOPS AND ADJACENT BUILDINGS. PROVIDE PREFINISHED CLOSURE END CAPS AND 90 DEGREE TRANSITIONS AT ALL EXPANSION JOINTS AND PREFINISHED END WALL CAPS AT GRAVEL STOPS. TYPICAL.
- PROVIDE VERTICAL METAL FLASHING AT ALL INSIDE AND OUTSIDE CORNERS OF PARAPET. TO PROVIDE WEATHER TIGHT SEAL. EXTEND VERTICAL FLASHING UP UNDER COPING AND TERMINATE WITHIN 1" OF CANT STRIP OR 6" OF ROOF MEMBRANE. SEAL HEMMED EDGE OF VERTICAL FLASHING.
- PROVIDE SEALED SHEET MET. HOOD OVER PIPE PENETRATIONS THROUGH ROOF. PITCH PANS 16" MIN. AWAY FROM ROOF TOP HVAC UNITS. COORDINATE CUT IN CURB ROOFING CONTRACTOR.
- ALL METAL VENTS AND FLUES SHALL BE FLASHED WITH "PORTALS PLUS" FLASHING BOOT. TYPICAL. SEAL ALL METAL TO METAL CONNECTIONS (NOTE: NO CLEAR SILICONE SEALANT SHALL BE ALLOWED.) SEAL ALL METAL COPING DETAILING SEAM JOINTS.
- PROVIDE STANDING SEAM JOINTS AT ALL COPING SPLICES FOR THERMAL EXPANSION. ALL SEAMS SHALL BE SEALED. TYPICAL.
- PROVIDE CONTINUOUS WATERPROOFING SILICONE BASED SEALANT AND BACKER ROD AT ALL STOREFRONT AND MASONRY JUNCTIONS AND TERMINATIONS. SEALANT SHALL MATCH STOREFRONT.

APPLICABLE CODES:

THE BUILDING SHALL BE IN COMPLIANCE WITH THE:	INTERNATIONAL ENERGY CONSERVATION CODE - IECC 2015 W/ AMENDMENTS
INTERNATIONAL BUILDING CODE - IBC 2018 W/ GA. AMENDMENTS	NFPA NATIONAL ELECTRICAL CODE - 2020 W/ GA. AMENDMENTS
INTERNATIONAL FUEL GAS CODE - IFGC 2018 W/ GA. AMENDMENTS	NFPA 101 LIFE SAFETY CODE - 2024
INTERNATIONAL FIRE CODE - IFC 2018 W/ GA. AMENDMENTS	ACCESSIBILITY CODE - STATE OF GEORGIA ACCESSIBILITY CODE
INTERNATIONAL MECHANICAL CODE - IMC 2018 W/ GA. AMENDMENTS	THE CURRENT EDITION OF THE NFPA CODES AND STANDARDS AS ADOPTED AND MODIFIED BY THE STATE FIRE MARSHAL
INTERNATIONAL PLUMBING CODE - IPC 2018 W/ GA. AMENDMENTS	ANY OTHER CODES, LAWS OR ORDINANCES ENFORCED BY LOCAL AUTHORITY HAVING JURISDICTION

SPECIAL INSPECTIONS:

- A SPECIAL INSPECTOR SHALL BE ENGAGED BY THE CONTRACTOR. SPECIAL INSPECTOR SHALL BE FULLY QUALIFIED, APPROVED BY THE BUILDING OFFICIAL, REGISTERED BY APPLICABLE REGISTRATION BOARD IF REQUIRED BY THE LOCAL BUILDING OFFICIAL, AND SHALL BE ACCEPTABLE TO THE ARCHITECT.
- THE SPECIAL INSPECTOR SHALL PROVIDE VERIFICATION OF CONSTRUCTION QUALITY CONTROL INSPECTIONS AND TESTING AS REQUIRED BY THE INTERNATIONAL BUILDING CODE. THE SPECIAL INSPECTOR SHALL CERTIFY THAT ALL WORK REQUIRING INSPECTION IS PERFORMED IN COMPLIANCE WITH ALL REQUIREMENTS OF THE CONTRACT DOCUMENTS, BUILDING CODE REQUIREMENTS AND LOCAL BUILDING DEPARTMENT REQUIREMENTS.
- SPECIAL INSPECTIONS ARE REQUIRED FOR THE ITEMS NOTED IN THE STATEMENT OF SPECIAL INSPECTIONS AND THE 2018 IBC CHAPTER 17. THE CONTRACTOR SHALL OBTAIN A COPY OF THE STATEMENT OF SPECIAL INSPECTIONS AND NOTIFY THE SPECIAL INSPECTOR WHEN WORK IS READY TO BE INSPECTED. SEE SPECIFICATIONS.
- FAILURE TO NOTIFY THE SPECIAL INSPECTOR PRIOR TO OBTAINING AN ITEM REQUIRING INSPECTION MAY RESULT IN THE CONTRACTOR REMOVING OTHER WORK TO ALLOW INSPECTION. THIS WORK WILL BE REMOVED AND REPLACED AT THE CONTRACTORS EXPENSE. FAILURE TO HAVE REQUIRED ITEMS INSPECTED IS REASON FOR REJECTION OF THE WORK.
- PREMATURE NOTIFICATION FOR INSPECTIONS WILL RESULT IN ADDITIONAL INSPECTION WITH ALL EXPENSES AND FEES PAID FOR BY THE CONTRACTOR.
- SPECIAL INSPECTION REPORTS AND FINAL REPORT IN ACCORDANCE WITH SECTION 1704.2.4 SHALL BE SUBMITTED TO THE BUILDING OFFICIAL PRIOR TO THE TIME THAT PHASE OF WORK IS APPROVED FOR OCCUPANCY.

PROJECT TEAM:

ARCHITECT:	SAMIA COKER - GA. REG. #013668 ROBERTSON LOIA ROOF, PC
STRUCTURAL ENGINEER:	AL MCPETERS - GA. REG. #25834 ROBERTSON LOIA ROOF, PC
MECHANICAL ENGINEER:	NIMIR DESAI - GA. REG. #036083 ROBERTSON LOIA ROOF, PC
ELECTRICAL ENGINEER:	SCOTT WALKER - GA. REG. #024903 ROBERTSON LOIA ROOF, PC

VICINITY MAP



INDEX OF DRAWINGS

G1.0	COVER SHEET
G1.1	ACCESSIBILITY REQUIREMENT DETAILS
G1.2	LIFE SAFETY PLAN
AD1.1	FLOOR PLAN - DEMO
AD1.2	ELEVATIONS - DEMO
A1.1	FLOOR PLAN
A1.2	REFLECTED CEILING PLAN
A1.3	FINISH PLAN
A1.4	DRIVE-THRU PLAN & DETAILS
A2.1	ELEVATIONS
A3.1	WALL SECTIONS
A3.2	WALL SECTIONS
A4.1	INTERIOR ELEVATIONS
A5.1	SECTION DETAILS AND DUNKIN DETAILS
EQ1.1	EQUIPMENT PLAN
EQ1.2	EQUIPMENT SCHEDULE
M1.1	HVAC FLOOR PLAN
M3.1	HVAC DETAILS
M3.2	HOOD DETAILS
M3.3	HOOD DETAILS
M6.1	HVAC NOTES AND SCHEDULES
P1.1	SANITARY FLOOR PLANS
P1.2	WATER FLOOR PLANS
P6.1	FIXTURE SCHEDULE, DETAILS & NOTES
E1.1	LIGHTING PLAN
E2.1	POWER PLAN
E6.1	ELECTRICAL LEGEND AND SCHEDULES
E7.1	ELECTRICAL SITE PLAN

SCOPE OF WORK:
RENOVATION OF EXISTING DUNKIN' DONUTS. BUILDING IS SHARE WITH AN EXISTING CONVENIENCE STORE. SCOPE IS LIMITED TO THE DUNKIN' SIDE OF THE BUILDING AND ENCOMPASSES PARTS OF THE EXTERIOR AND INTERIOR FINISHES.

SHEET TITLE
COVER SHEET

DATE
07/21/2025


PROJECT NUMBER
24163

SHEET NUMBER
G1.0

DUNKIN DONUTS REMODEL
2083 CROWELL ROAD
COVINGTON, GA. 30014
FOR:
JPC DESIGN & CONSTRUCTION, LLC
PO BOX 710
JACKSON, GA. 30233



ROBERTSON LOIA ROOF
ARCHITECTS & ENGINEERS
3460 Preston Ridge Road - Suite 275 - Alpharetta, GA. 30005
770.674.2600 / www.rlrpc.com
GA CDA # PEF000562

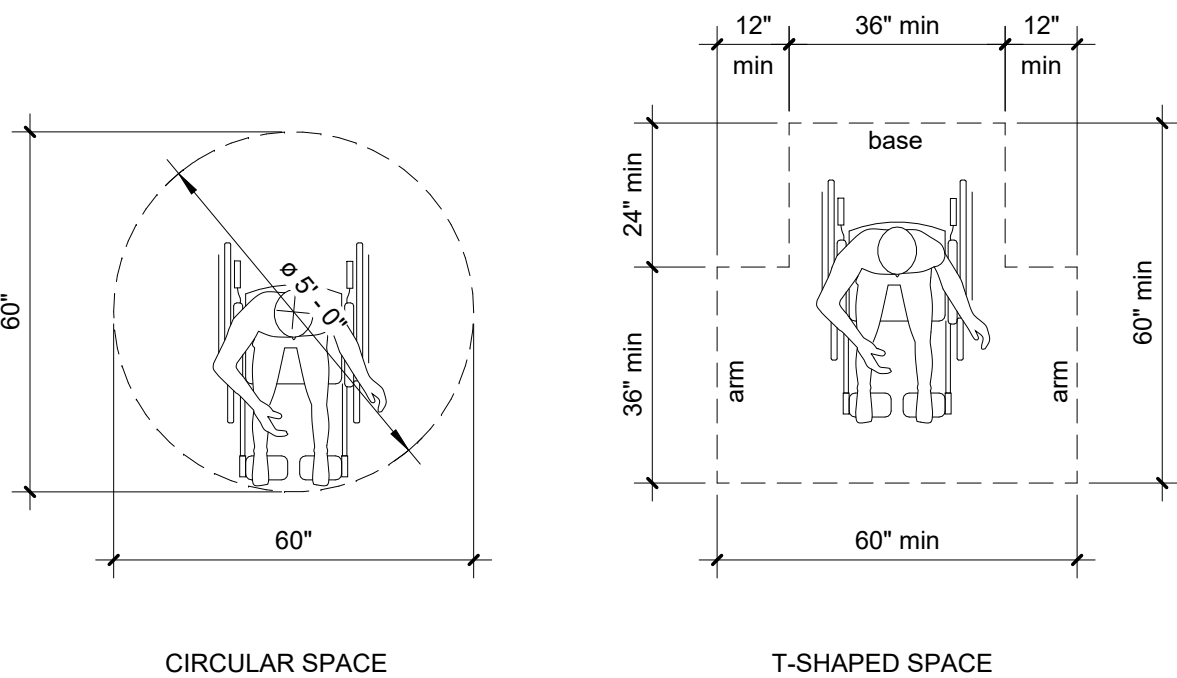

PROJECT DATA

NAME	DUNKIN' DONUTS RENOVATION
ADDRESS	2083 CROWELL ROAD, COVINGTON, GA, 30014
ZONING	CH (HIGHWAY COMMERCIAL)

BUILDING CODE ANALYSIS

TYPE OF CONSTRUCTION	TYPE VB / NON SPRINKLERED	
OCCUPANCY GROUP	MIKED USE / NON SEPARATED	IBC 508.3
ALLOWED BUILDING HEIGHT	40 FEET (M) [ACTUAL = 24 FEET]	IBC 504.3
ALLOWED NUMBER OF STORIES	1 (M) [ACTUAL = 1 STORY]	IBC 504.4
ALLOWED AREA	9,000 S.F.(M) [ACTUAL = 4,412 S.F.]	IBC 506.2
AUTOMATIC SPRKL. SYSTEM	NOT REQUIRED	IBC 903.2

MAX. TRAVEL DISTANCE	(M) 150 FEET	LS 7.6
MAX. PATH OF TRAVEL	(M) 75 FEET	LS 7.6
MAX. DEAD END CORRIDOR	(M) 50 FEET	LS 7.6

OCCUPANT LOAD ANALYSIS


C-STORE (EXISTING-M)	AREA	FACTOR	OCCUPANT LOAD	LS 7.3.1.2
SALES	1478 SF	30	49	
STORAGE	623 SF	300	3	
OFFICE	50 SF	150	1	
RESTROOMS / CIRCULATION	314 SF			
TOTAL	2,465 SF		53 OCCUPANTS	

DUNKIN' (EXISTING-B)	AREA	FACTOR	OCCUPANT LOAD	LS 7.3.1.2
SEATING	12 SEATS		12	
QUEUE	54 SF	7	8	
STORAGE	241 SF	300	1	
KITCHEN	980 SF	100	10	
CIRCULATION / ANCILLARY	306 SF			
TOTAL	1,547 SF		31 OCCUPANTS	
BUILDING TOTAL	4,412 SF		84 OCCUPANTS	

EGRESS REQUIREMENTS				
C-STORE				
REQ. EXITS = 2	PROVIDED = 2	REQ. EGRESS WIDTH = 53x0.2 = 11"	PROVIDED = 118"	LS 7.3.3
DUNKIN				
REQ. EXITS = 2	PROVIDED = 3	REQ. EGRESS WIDTH = 31x0.2 = 7"	PROVIDED = 182"	LS 7.3.3

PLUMBING FIXTURES

CODE REQUIREMENTS			
MERCANTILE			IPC 403.1
LAVATORIES PER GENDER = 1/750 OCCUPANTS	WC PER GENDER = 1/500 OCCUPANTS		
BUSINESS			
LAVATORIES PER GENDER = 1/200 OCCUPANTS	WC PER GENDER = 1/75 OCCUPANTS		
PROJECT REQUIREMENTS			
WOMEN			
LAV. REQUIRED = 42/200 = 1 LAVATORY	PROVIDED = 2 LAVATORIES		
WC REQUIRED = 42/75 = 1 WC	PROVIDED = 2 WC		
MEN			
LAV. REQUIRED = 42/200 = 1 LAVATORY	PROVIDED = 2 LAVATORIES		
WC REQUIRED = 42/75 = 1 WC	PROVIDED = 2 WC		

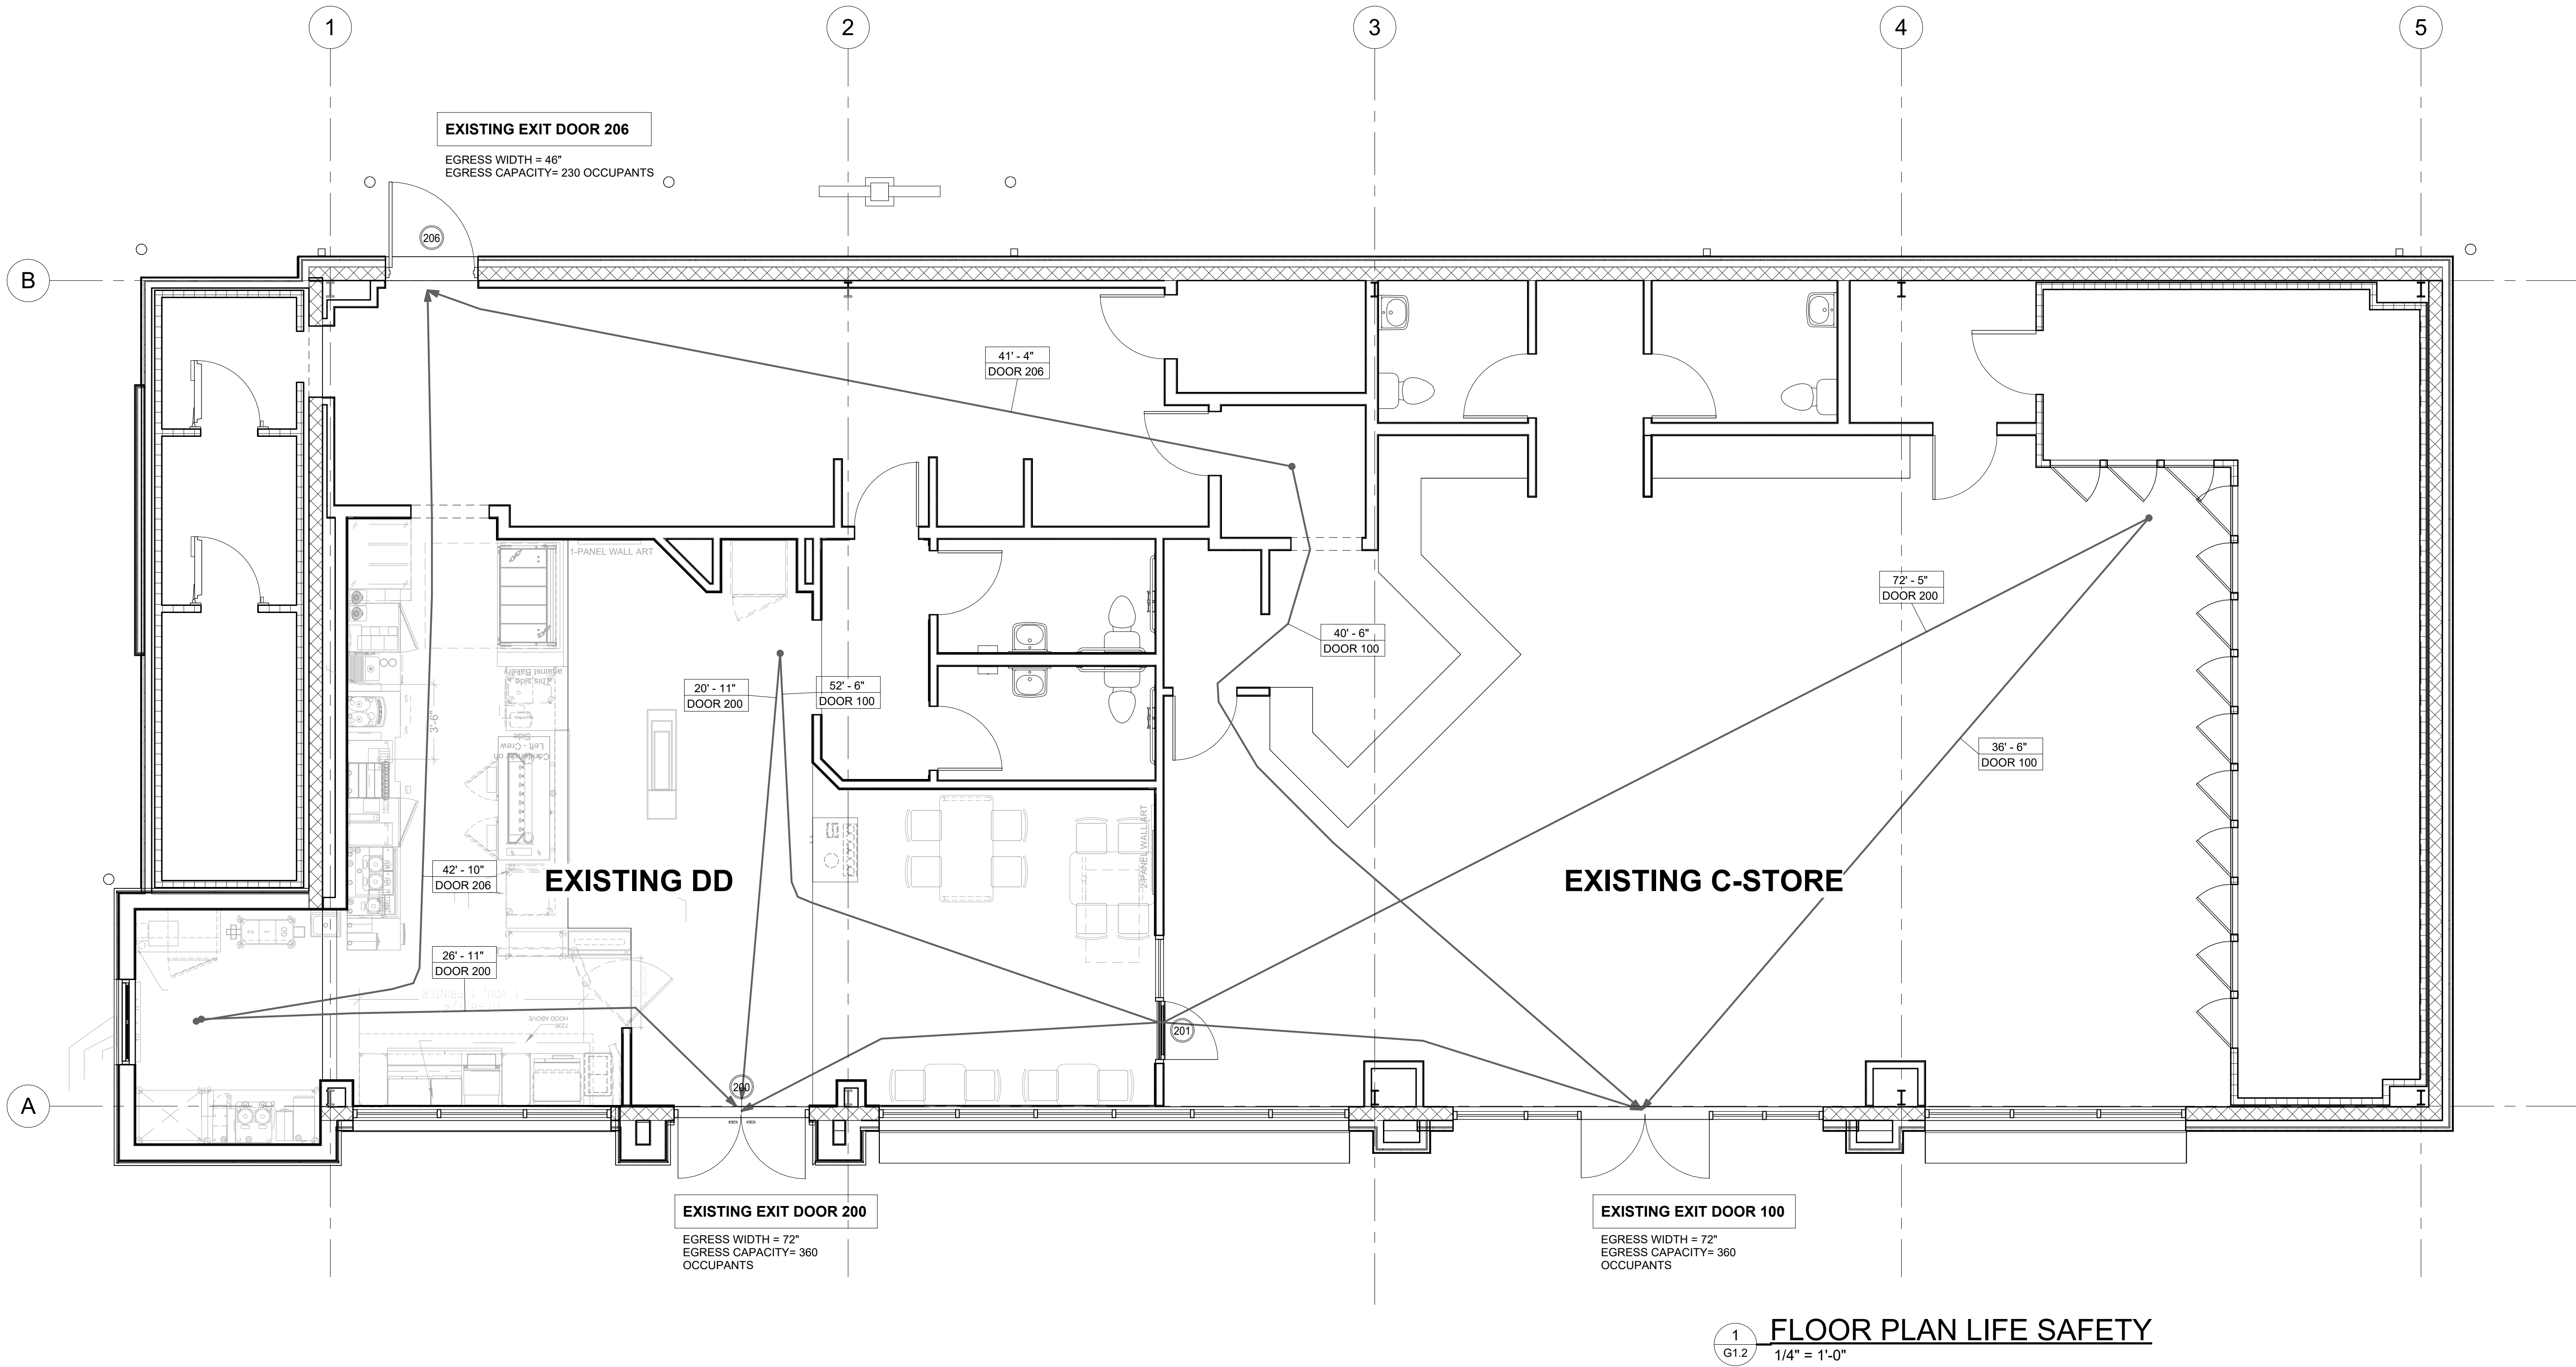


1
G1.2 FLOOR PLAN LIFE SAFETY
1/4\" = 1'-0"

REVISIONS	DATE	DESCRIPTION


1. NOT USED
2. CONTRACTOR RESPONSIBLE FOR FIELD VERIFYING EXISTING CONDITIONS. ALL EXISTING DIMENSIONS SHOWN TO BE FIELD VERIFIED. NEW WORK SHOULD BE COORDINATED BEFORE DEMOLITION BEGINS.
3. CONTRACTOR SHALL VERIFY LOCATION OF ALL EXISTING UTILITIES PRIOR TO DEMOLITION.
4. COORDINATE DEMOLITION OF ANY DUCTWORK, DIFFUSERS, RETURNS, LIGHT FIXTURES, ETC. WITH MECHANICAL AND ELECTRICAL SHEETS.
5. REMOVE, RELOCATE OR DETACH/RESET, AS APPLICABLE, EXISTING LIGHT FIXTURES IN ANY CEILING OR SOFFIT TO BE REMOVED OR IN ANY CEILING TO BE REPLACED. TYP. SEE ELECTRICAL
6. CLEAN LENSES AND ENSURE BULBS ARE OPERATIONAL IN ALL EXISTING LIGHT FIXTURES TO REMAIN. TYP.
7. REMOVE, RELOCATE OR DETACH/RESET, AS APPLICABLE, EXISTING DIFFUSERS, GRILLES, VENTS, ETC. IN ANY CEILING OR SOFFIT TO BE REMOVED OR IN ANY CEILING TO BE REPLACED. TYP. SEE MECHANICAL
8. CLEAN ALL EXISTING DIFFUSERS, GRILLES, VENTS, ETC. TO REMAIN. TYP.
9. WHERE ANY FUTURE/EQUIPMENT REMOVED FROM A CEILING THAT IS TO REMAIN, PATCH AND REPAIR AND/OR INFILL CEILING AS REQUIRED. TYP. AS APPLICABLE, INSTALL FINISHES TO MATCH ADJACENT.
10. CONTRACTOR TO DETERMINE INTEGRITY OF THE BUILDING BEFORE AND AFTER DEMOLITION WORK.
11. PREDEMOLITION PHOTOGRAPHS: SHOW EXISTING CONDITIONS OF ADJOINING CONSTRUCTION AND SITE IMPROVEMENTS, INCLUDING FINISH SURFACES, THAT MIGHT BE MISCONSTRUCTED OR DAMAGED CAUSED BY DEMOLITION OPERATIONS. COMPLY WITH SECTION 013230 "PHOTOGRAPHIC DOCUMENTATION" SUBMIT BEFORE WORK BEGINS
12. REGULATORY REQUIREMENTS, COMPLY WITH GOVERNING EPA AND ALL OTHER GOVERNMENT AGENCIES NOTIFICATION REGULATIONS OF AUTHORITIES HAVING JURISDICTION.
13. HAZARDOUS MATERIALS:
 - a. HAZARDOUS MATERIALS WILL BE REMOVED BY OWNER BEFORE THE START OF WORK, (UNDER SEPARATE CONTRACT)
 - b. IF MATERIALS SUSPECTED OF CONTAINING HAZARDOUS MATERIALS ARE ENCOUNTERED: DO NOT DISTURB; IMMEDIATELY NOTIFY ARCHITECT AND OWNER. HAZARDOUS MATERIALS WILL BE REMOVED BY OWNER UNDER SEPARATE CONTRACT.
 - c. VERIFY THAT HAZARDOUS MATERIALS HAVE BEEN REMEDIATED BEFORE PROCEEDING WITH BUILDING DEMOLITION OPERATIONS.
14. PREDEMOLITION CONFERENCE: CONDUCT CONFERENCE AT PROJECT SITE:
 - a. INSPECT AND DISCUSS CONDITION OF CONSTRUCTION TO BE DEMOLISHED.
 - b. REVIEW STRUCTURAL LOAD LIMITATIONS OF EXISTING STRUCTURES.
 - c. REVIEW AND FINALIZE BUILDING DEMOLITION SCHEDULE AND VERIFY AVAILABILITY OF DEMOLITION PERSONNEL, EQUIPMENT, AND FACILITIES NEEDED TO MAKE PROGRESS AND AVOID DELAYS.
 - d. REVIEW AND FINALIZE PROTECTION REQUIREMENTS.
 - e. REVIEW PROCEDURES FOR NOISE CONTROL AND DUST CONTROL.
 - f. REVIEW PROCEDURES FOR PROTECTION OF ADJACENT BUILDINGS.
 - g. REVIEW ITEMS TO BE SALVAGE AND RETURNED TO OWNER.

1. CONTRACTOR RESPONSIBLE FOR FIELD VERIFYING EXISTING CONDITIONS. ALL EXISTING DIMENSIONS SHOWN TO BE FIELD VERIFIED, NEW WORK SHOULD BE COORDINATED BEFORE DEMOLITION BEGINS.
2. NOT USED.
3. CONTRACTOR SHALL PROVIDE PROPER SHORING OF EXISTING STRUCTURE AND PERFORMED ANY STRUCTURAL WORK REQUIRED TO MAINTAIN THE INTEGRITY OF THE BUILDING BEFORE AND AFTER DEMOLITION WORK.
4. CONTRACTOR SHALL PROVIDE TEMPORARY CONSTRUCTION BARRIERS FOR NOISE AND DUST CONTROL, PROVIDE TEMPORARY CHAIN LINK FENCE WITH GREEN FABRIC FOR SCREENING OF EXTERIOR DEMOLITION AND CONSTRUCTION AREAS, AND TO PROTECT SHOPPING CENTER TENANTS/CUSTOMERS FROM BLOWING DEBRIS, COORDINATE LOCATIONS WITH OWNER AND PROPERTY MANAGERS.
5. REMOVE PLUMBING FIXTURES, PIPING, LIGHTING, WIRING AND CONDUIT FROM ALL WALLS AND CEILING TO BE DEMOLISHED. WHERE PLUMBING FIXTURES ARE TO BE REMOVED DRAINS SHALL BE CAPPED.
6. CONTRACTOR TO SUBMIT TO OWNER AND THE ARCHITECT MEANS AND METHODS APPROPRIATE.
7. CONTRACTOR RESPONSIBLE FOR DISCONNECTING, MOVING, RESETTLE & RECONNECTING STOREFRONT SYSTEMS, AIR CURTAINS, ETC. AND ANY FIXTURES/HELPPING/PLUMBING/ELECTRICAL/ETC. THAT HAVE BEEN RELOCATED AND/OR STORED FOR REMODELED FLOORS AND WALLS.
8. ALL FIXTURES TO REMAIN, TO BE REMOVED OR TO BE RELOCATED CAN BE FOUND ON OWNER'S FIXTURE PLAN, UNLESS NOTED OTHERWISE ON DRAWINGS. COORDINATE WITH OWNER.
9. NOT USED.
10. REFER TO STRUCTURAL, MECHANICAL, ELECTRICAL AND PLUMBING DRAWINGS FOR ANY ADDITIONAL DEMOLITION
11. REFER TO EXISTING DOCUMENTS FOR PREVIOUS REMODEL INFORMATION
12. REMOVE/PROTECT/STORE ALL WALL AND FLOOR MOUNTED EQUIPMENT/FIXTURES TO REMAIN IN THE STORE WHILE WORK IN THE AREAS IS BEING PERFORMED. THIS INCLUDES BUT IS NOT LIMITED TO: FIXTURES, SINKS, MECHANICAL HOODS, OUTLET COVERS, SWITCHPLATES, DEVICES, ETC. REINSTALL AFTER WORK IS COMPLETE.
13. PROVIDE WOOD BLOCKING FOR NEW EQUIPMENT MOUNTED TO WALLS AND REINSTALLED EQUIPMENT WHERE NEEDED.
14. FLUSH ALL EXISTING FLOOR DRAINS FREE OF ANY DEBRIS.
15. CONTRACTOR TO DETERMINE INTEGRITY OF THE BUILDING BEFORE AND AFTER DEMOLITION WORK.
16. PREDEMOLITION PHOTOGRAPHS: SHOW EXISTING CONDITIONS OF ADJOINING CONSTRUCTION AND SITE IMPROVEMENTS, INCLUDING FINISH SURFACES.
THAT MUST BE MISCONDUCTED AS DAMAGED CAUSED BY DEMOLITION OPERATIONS. COMPLY WITH SECTION 013233 "PHOTOGRAPHIC DOCUMENTATION" SUBMIT BEFORE WORK BEGINS.
17. REGULATORY REQUIREMENTS: COMPLY WITH GOVERNING EPA AND ALL OTHER GOVERNMENT AGENCIES NOTIFICATION REGULATIONS OF AUTHORITIES HAVING JURISDICTION.
18. HAZARDOUS MATERIALS:
 - a. HAZARDOUS MATERIALS WILL BE REMOVED BY OWNER BEFORE THE START OF WORK, (UNDER SEPARATE CONTRACT) IF MATERIALS SUSPECTED OF CONTAINING HAZARDOUS MATERIALS ARE ENCOUNTERED. DO NOT DISTURB; IMMEDIATELY NOTIFY ARCHITECT AND OWNER. HAZARDOUS MATERIALS WILL BE REMOVED BY OWNER UNDER SEPARATE CONTRACT.
 - c. VERIFY THAT HAZARDOUS MATERIALS HAVE BEEN REMEDIATED BEFORE PROCEEDING WITH BUILDING DEMOLITION OPERATIONS.
19. PREDEMOLITION CONFERENCE: CONDUCT CONFERENCE AT PROJECT SITE:
 - a. INSPECT AND DISCUSS CONDITION OF CONSTRUCTION TO BE DEMOLISHED.
 - b. REVIEW STRUCTURAL LOAD LIMITATIONS OF EXISTING STRUCTURES.
 - c. REVIEW AND FINALIZE BUILDING DEMOLITION SCHEDULE AND VERIFY AVAILABILITY OF DEMOLITION PERSONNEL, EQUIPMENT, AND FACILITIES NEEDED TO MAKE PROGRESS AND AVOID DELAYS.
 - d. REVIEW AND FINALIZE PROTECTION REQUIREMENTS.
 - e. REVIEW PROCEDURES FOR NOISE CONTROL AND DUST CONTROL.
 - f. REVIEW PROCEDURES FOR PROTECTION OF ADJACENT BUILDINGS.
 - g. REVIEW ITEMS TO BE SALVAGE AND RETURNED TO OWNER.

- | | |
|---|--|
|  | EXISTING CEILING TO BE REMOVED |
|  | EXISTING GYPSUM BOARD CEILING/SOFFIT TO REMAIN |
|  | EXISTING ACT CEILING TO REMAIN |
|  | COOLER CEILING |

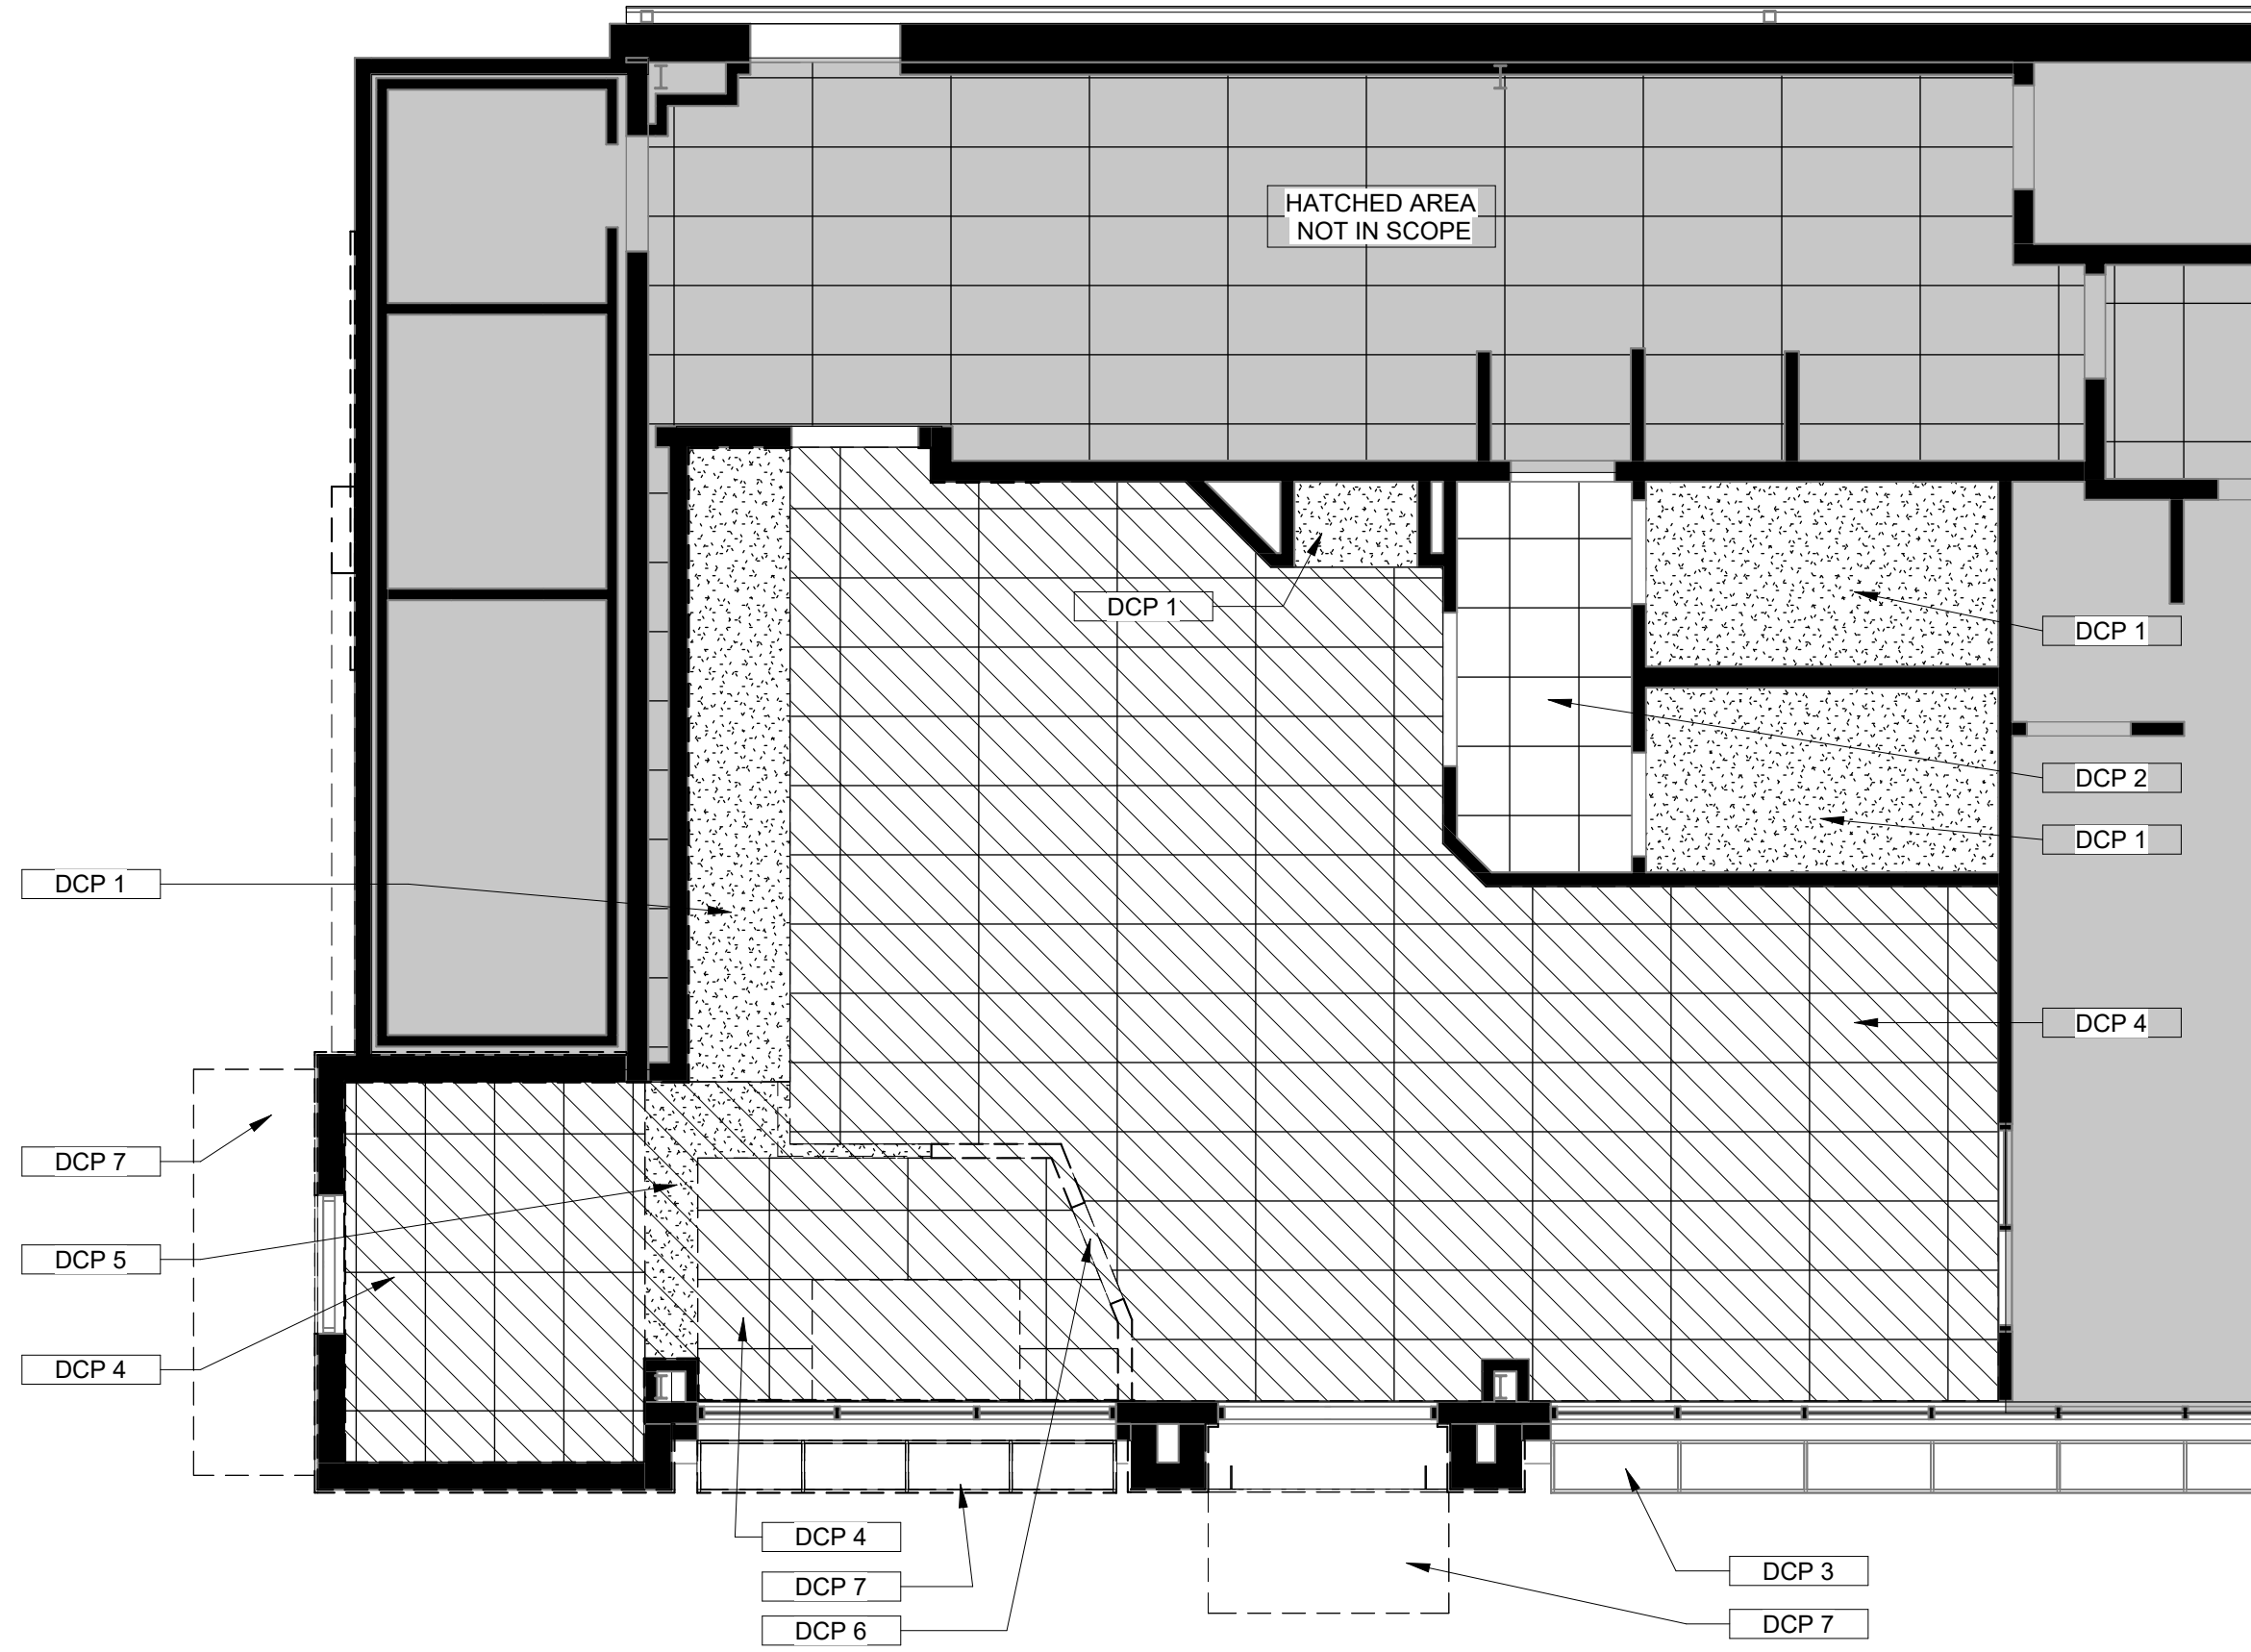

2 REF CLG PLAN DEMO
AD1.1 3/16" = 1'-0"

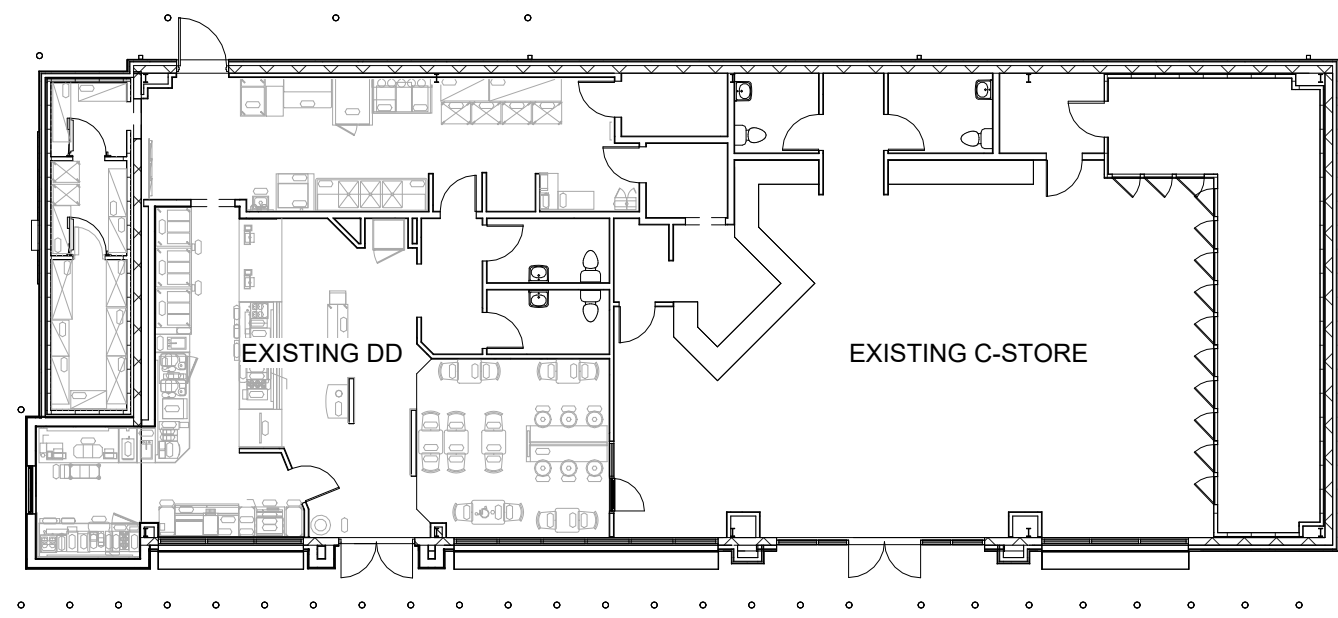

3
AD1.1


EXISTING FLOOR PLAN

1/16" = 1'-0"

FOR REFERENCE

- | | |
|-------|--|
| DCP 1 | EXISTING GYP. BD. SOFFIT TO REMAIN. PRIME AND PAINT. |
| DCP 2 | EXISTING A.C.T. CEILING TO REMAIN. REPLACE ANY DAMAGED OR OUT OF ORDER LIGHT FIXTURES / DIFFUSERS. |
| DCP 3 | EXISTING EXT. MTL. AWNING TO REMAIN. |
| DCP 4 | REMOVE EXISTING A.CT CEILING. PATCH AND REPAIR ADJACENT WALLS AS REQUIRED. |
| DCP 5 | REMOVE EXISTING GYP. CEILING. PATCH AND REPAIR ADJACENT WALLS AS REQUIRED. |
| DCP 6 | REMOVE EXISTING SOFFIT. SEE INTERIOR ELEVATIONS FOR NEW SOFFIT HEIGHT |
| DCP 7 | REMOVE EXISTING EXT. MTL. CANOPY. REPAIR EXT. SHEATHING AND W.P. MEMBRANE AS REQUIRED. |


- | | |
|-------|---|
| DP 1 | REMOVE EXISTING PORCELAIN PLANK AND TILE WALL BASE. PATCH AND REPAIR CONCRETE AS REQUIRED. PREP FOR NEW TILE INSTALLATION. |
| DP 2 | REMOVE EXISTING PORCELAIN FLOOR TILES AND TILE WALL BASE. PATCH AND REPAIR CONCRETE AS REQUIRED. PREP FOR NEW TILE INSTALLATION. |
| DP 3 | REMOVE EXISTING QUARRY TILES AND QUARRY WALL BASE. PATCH AND REPAIR CONCRETE AS REQUIRED. PREP FOR NEW TILE INSTALLATION. |
| DP 5 | EXISTING WALL TO REMAIN. PREP SURFACE FOR NEW FINISHES. |
| DP 6 | REMOVE EXISTING WALL PARTITION. REMOVE ANY FIXTURES OR UTILITIES ON/WITHIN WALL. PATCH AND REPAIR CONCRETE FLOOR AND REMAINING WALLS AS NEEDED. |
| DP 7 | REMOVE EXISTING DOOR AND FRAME. |
| DP 8 | REMOVE EXISTING WALL TILE. |
| DP 10 | WALL STUD FRAMING AND EXTERIOR SHEATHING TO REMAIN. REPAIR AS NEEDED. |
| DP 11 | EXISTING STROFEONT SYSTEM TO REMAIN. |
| DP 12 | EXISTING FLOOR THRU DRAIN TO REMAIN |
| DP 13 | REMOVE EXISTING WALL EXTERIOR SIDING & WEATHERBARRIER. PREPARE SUBSTRATE FOR NEW WEATHERBARRIER & PANELS INSTALLATION. |
| DP 14 | REMOVE EXISTING EIFS & STONE VENEER AS REQUIRED FOR THE INSTALLATION OF NEW WALL FINISH. |
| DP 15 | REMOVE EXISTING DOOR AND S & F RAMING. VERIFY STATUS OF EXISTING EIFS/STONE VENEER BEHIND. PATCH/REPAIR AS NEEDED. |

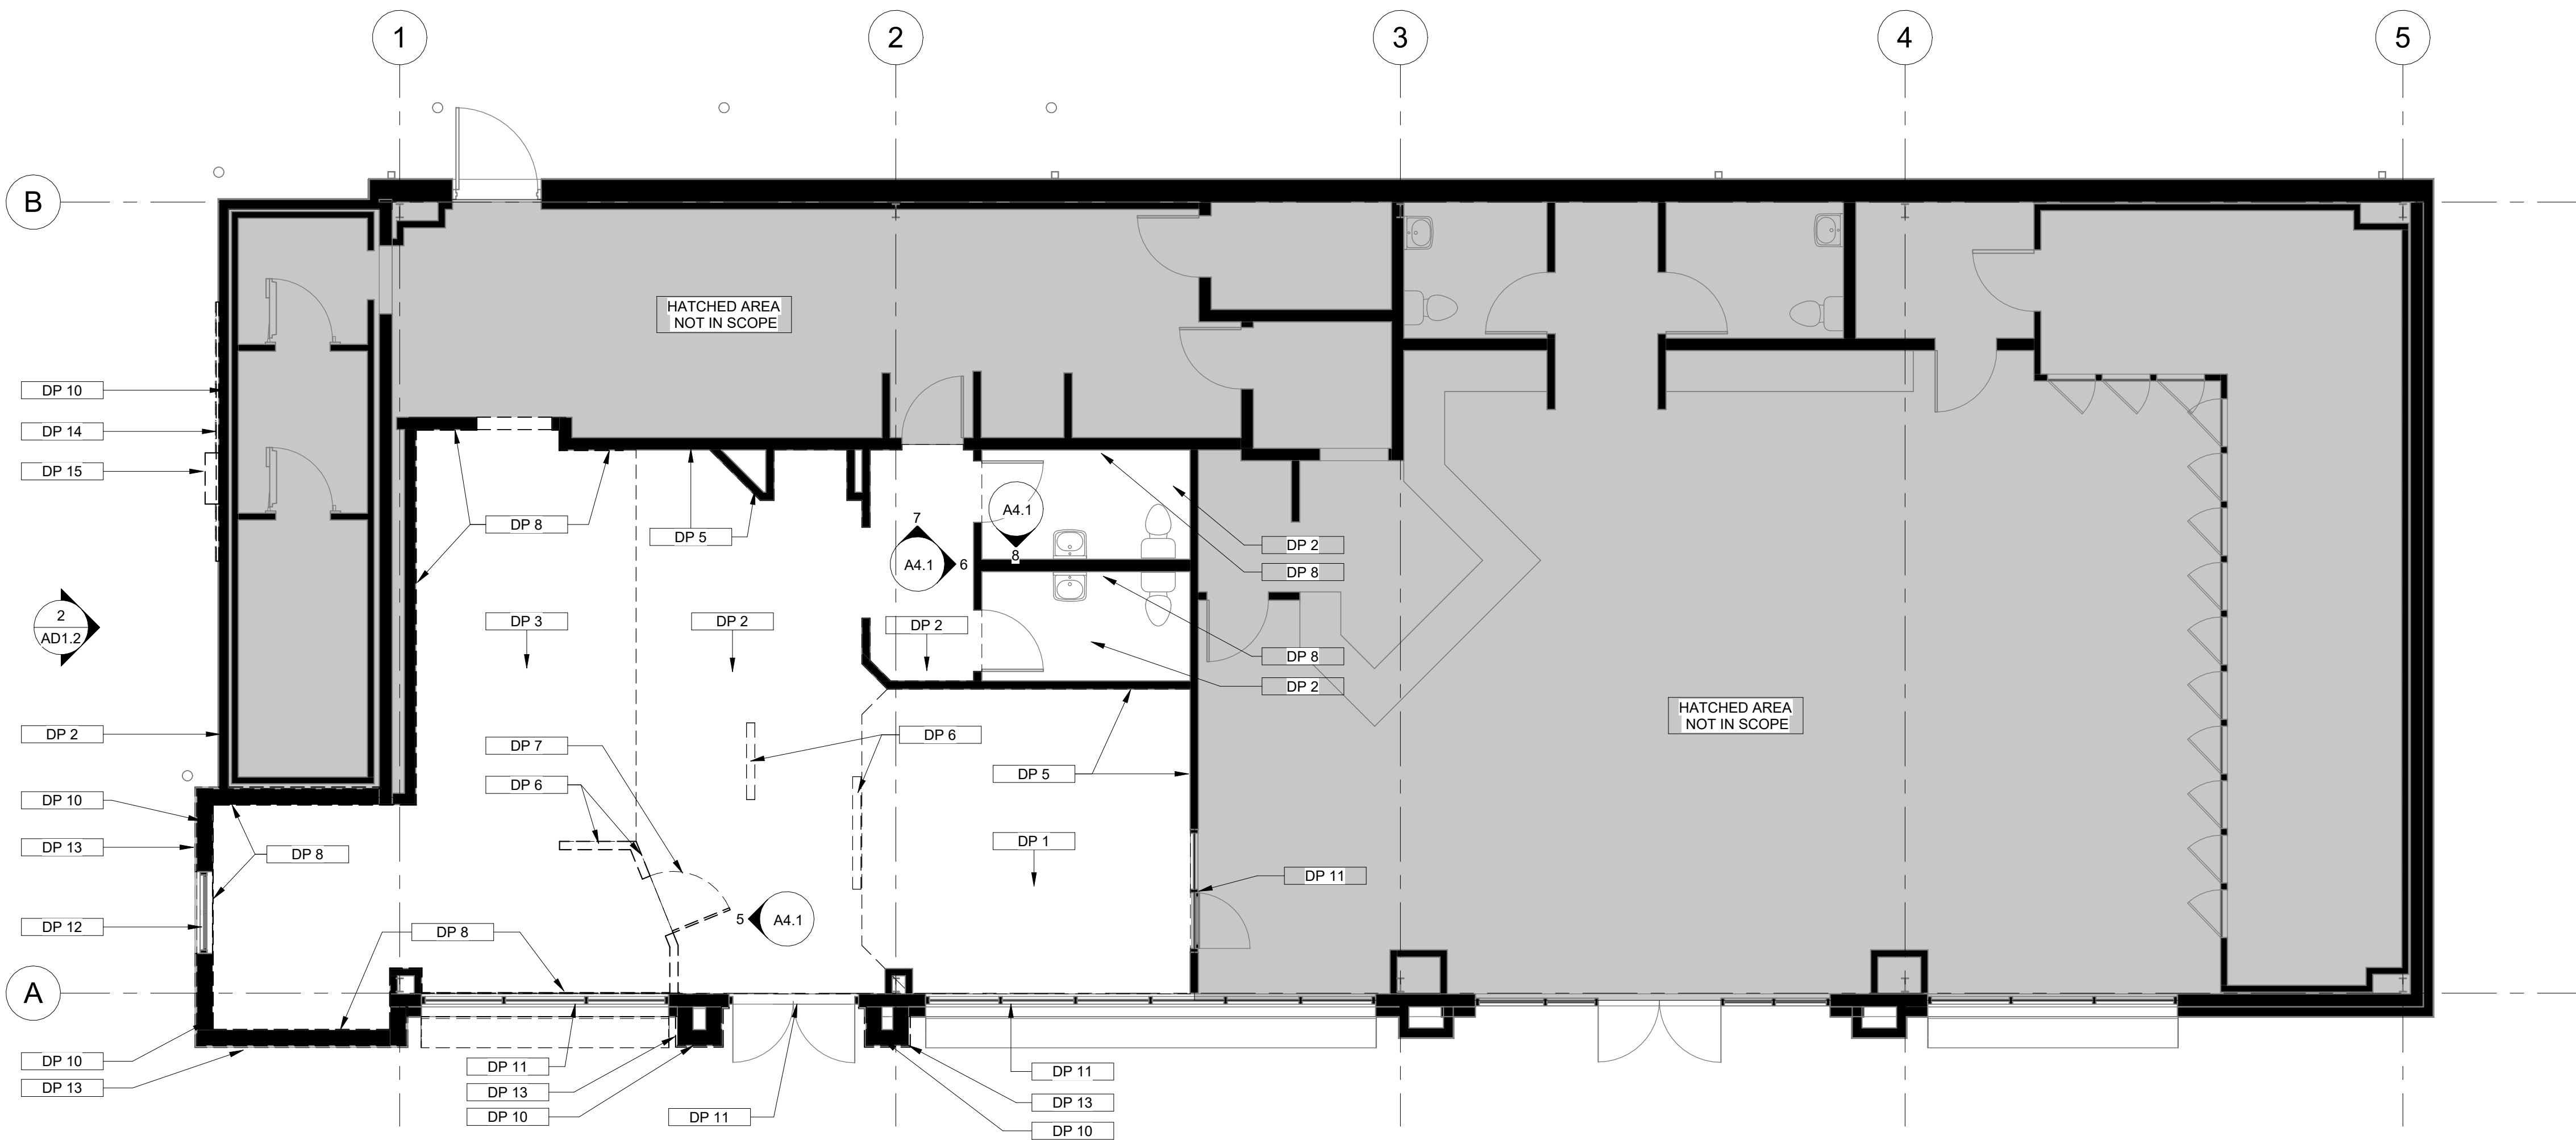


FLOOR PLAN DEMO

DEMOLITION ELEVATION GENERAL NOTES

- CONTRACTOR RESPONSIBLE FOR FIELD VERIFYING EXISTING CONDITIONS. ALL EXISTING DIMENSIONS SHOWN TO BE FIELD ERIFIED. NEW WORK SHOULD BE COORDINATED BEFORE DEMOLITION BEGINS.
- REFER TO SPECIFICATION SECTION 01 74 19 CONSTRUCTION WASTE MANAGEMENT FOR MATERIALS TO BE DISPOSED AND RECYCLED.
- CONTRACTOR SHALL PROVIDE PROPER SHORING OF EXISTING STRUCTURE AND PERFORMED ANY STRUCTURAL WORK REQUIRED TO MAINTAIN THE INTEGRITY OF THE BUILDING BEFORE AND AFTER DEMOLITION WORK.
- REMOVE PLUMBING FIXTURES, PIPING, LIGHTING, WIRING AND CONDUIT FROM ALL WALLS AND CEILING TO BE DEMOLISHED. WHERE PLUMBING FIXTURES ARE TO BE REMOVED DRAINS SHALL BE CAPPED.
- CONTRACTOR TO SUBMIT TO OWNER AND THE ARCHITECT MEANS AND METHODS APPROPRIATE.
- REFER TO STRUCTURAL, MECHANICAL, ELECTRICAL AND PLUMBING DRAWINGS FOR ANY ADDITIONAL DEMOLITION
- REMOVE/PROTECT/STORE ALL WALL AND FLOOR MOUNTED EQUIPMENT/FIXTURES TO REMAIN IN THE STORE WHILE WORK IN THE AREAS IS BEING PERFORMED. THIS INCLUDES BUT IS NOT LIMITED TO: FIXTURES, SINKS, MECHANICAL HOODS, OUTLET COVERS, SWITCHPLATES, DEVICES, ETC. REINSTALL AFTER WORK IS COMPLETE.
- CONTRACTOR SHALL ESTABLISH IF WALL OR ITEM TO BE REMOVED IS LOAD BEARING IN ANY WAY OR IF IT BRACES ANY BUILDING COMPONENT, SUPPORT ROOF, INTERIOR OR EXTERIOR EQUIPMENT. IF SO, CONTRACTOR SHALL REFRAIN FROM DEMOLISHING THE COMPONENT IN QUESTION UNTIL CONTRACTOR HAS CONTACTED THE STRUCTURAL ENGINEER AND OBTAINED HIS AUTHORIZATION TO PROCEED. CONTRACTOR IS RESPONSIBLE FOR ALL DEMOLITION SHORING AND BRACING.
- REGULATORY REQUIREMENTS: COMPLY WITH GOVERNING EPA AND ALL OTHER GOVERNMENT AGENCIES NOTIFICATION. REGULATIONS OF AUTHORITIES HAVING JURISDICTION.
- HAZARDOUS MATERIALS:
 - HAZARDOUS MATERIALS WILL BE REMOVED BY OWNER BEFORE THE START OF WORK. (UNDER SEPARATE CONTRACT)
 - IF MATERIALS SUSPECTED OF CONTAINING HAZARDOUS MATERIALS ARE ENCOUNTERED, DO NOT DISTURB. IMMEDIATELY NOTIFY ARCHITECT AND OWNER. HAZARDOUS MATERIALS WILL BE REMOVED BY OWNER UNDER SEPERATE CONTRACT.
 - VERIFY THAT HAZARDOUS MATERIALS HAVE BEEN REMEDIATED BEFORE PROCEEDING WITH BUILDING DEMOLITION OPERATIONS.
- PREDEMOLITION PHOTOGRAPHS: SHOW EXISTING CONDITIONS OF ADJOINING CONSTRUCTION AND SITE IMPROVEMENTS, INCLUDING FINISH SURFACES, THAT MIGHT BE MISCONSTRUCTED AS DAMAGED CAUSED BY DEMOLITION OPERATIONS. COMPLY WITH SECTION 013233 "PHOTOGRAPHIC DOCUMENTATION". SUBMIT BEFORE WORK BEGINS.
- ENGAGE A PROFESSIONAL ENGINEER TO PERFORM AN ENGINEERING SURVEY OF CONDITION OF BUILDING TO DETERMINE WHETHER REMOVING ANY ELEMENT MIGHT RESULT IN STRUCTURAL DEFICIENCY OR UNPLANNED COLLAPSE OF ANY PORTION OF STRUCTURE OR ADJACENT STRUCTURES DURING BUILDING DEMOLITION OPERATIONS.
- PREDEMOLITION CONFERENCE: CONDUCT CONFERENCE AT PROJECT SITE:
 - INSPECT AND DISCUSS CONDITION OF CONSTRUCTION TO BE DEMOLISHED.
 - REVIEW STRUCTURAL LOAD LIMITATIONS OF EXISTING STRUCTURES.
 - REVIEW AND FINALIZE BUILDING DEMOLITION SCHEDULE AND VERIFY AVAILABILITY OF DEMOLITION PERSONNEL, EQUIPMENT, AND FACILITIES NEEDED TO MAKE PROGRESS AND AVOID DELAYS.
 - REVIEW AND FINALIZE PROTECTION REQUIREMENTS.
 - REVIEW PROCEDURES FOR NOISE CONTROL AND DUST CONTROL.
 - REVIEW PROCEDURES FOR PROTECTION OF ADJACENT BUILDINGS.
 - REVIEW ITEMS TO BE SALVAGE AND RETURNED TO OWNER.
- TEMPORARY SHORING: PROVIDE AND MAINTAIN INTERIOR AND EXTERIOR SHORING, BRACING, OR STRUCTURAL SUPPORT TO PRESERVE STABILITY AND PREVENT UNEXPECTED MOVEMENT OF COLLAPSE OF CONSTRUCTION BEING DEMOLISHED. STRENGTHEN OR ADD SUPPORTS WHEN REQUIRED DURING PROGRESS OF DEMOLITION.
- OWNER ASSUMES NO RESPONSIBILITY FOR BUILDINGS AND STRUCTURES TO BE DEMOLISHED.
- REMOVE: DETACH ITEMS FROM EXISTING CONSTRUCTION AND LEGALLY DISPOSE OF THEM OFF-SITE UNLESS INDICATED TO BE REMOVED AND SALVAGED.
- EXISTING UTILITIES: LOCATE, IDENTIFY, DISCONNECT AND SEAL OR CAP OFF INDICATED UTILITIES TO BE DEMOLISHED. CONSULT WITH OWNER AND ARCHITECT TO IDENTIFY.
- THE CONTRACTOR SHALL PREPARE ALL INTERIOR AND EXTERIOR SURFACES TO BE PRIMED, PAINTED COATED OR TO RECEIVE APPLICATIONS OF FLOOD-PROOFING, WATER-PROOFING, EIFS OR STONE VENEERS IN ACCORDANCE WITH THE REQUIREMENTS AND RECOMMENDATIONS OF THE MANUFACTURERS AND INSTALLERS OF THESE PRODUCTS AND SYSTEMS. IF HAZARDOUS MATERIALS ARE ENCOUNTERED, CONTACT OWNER.

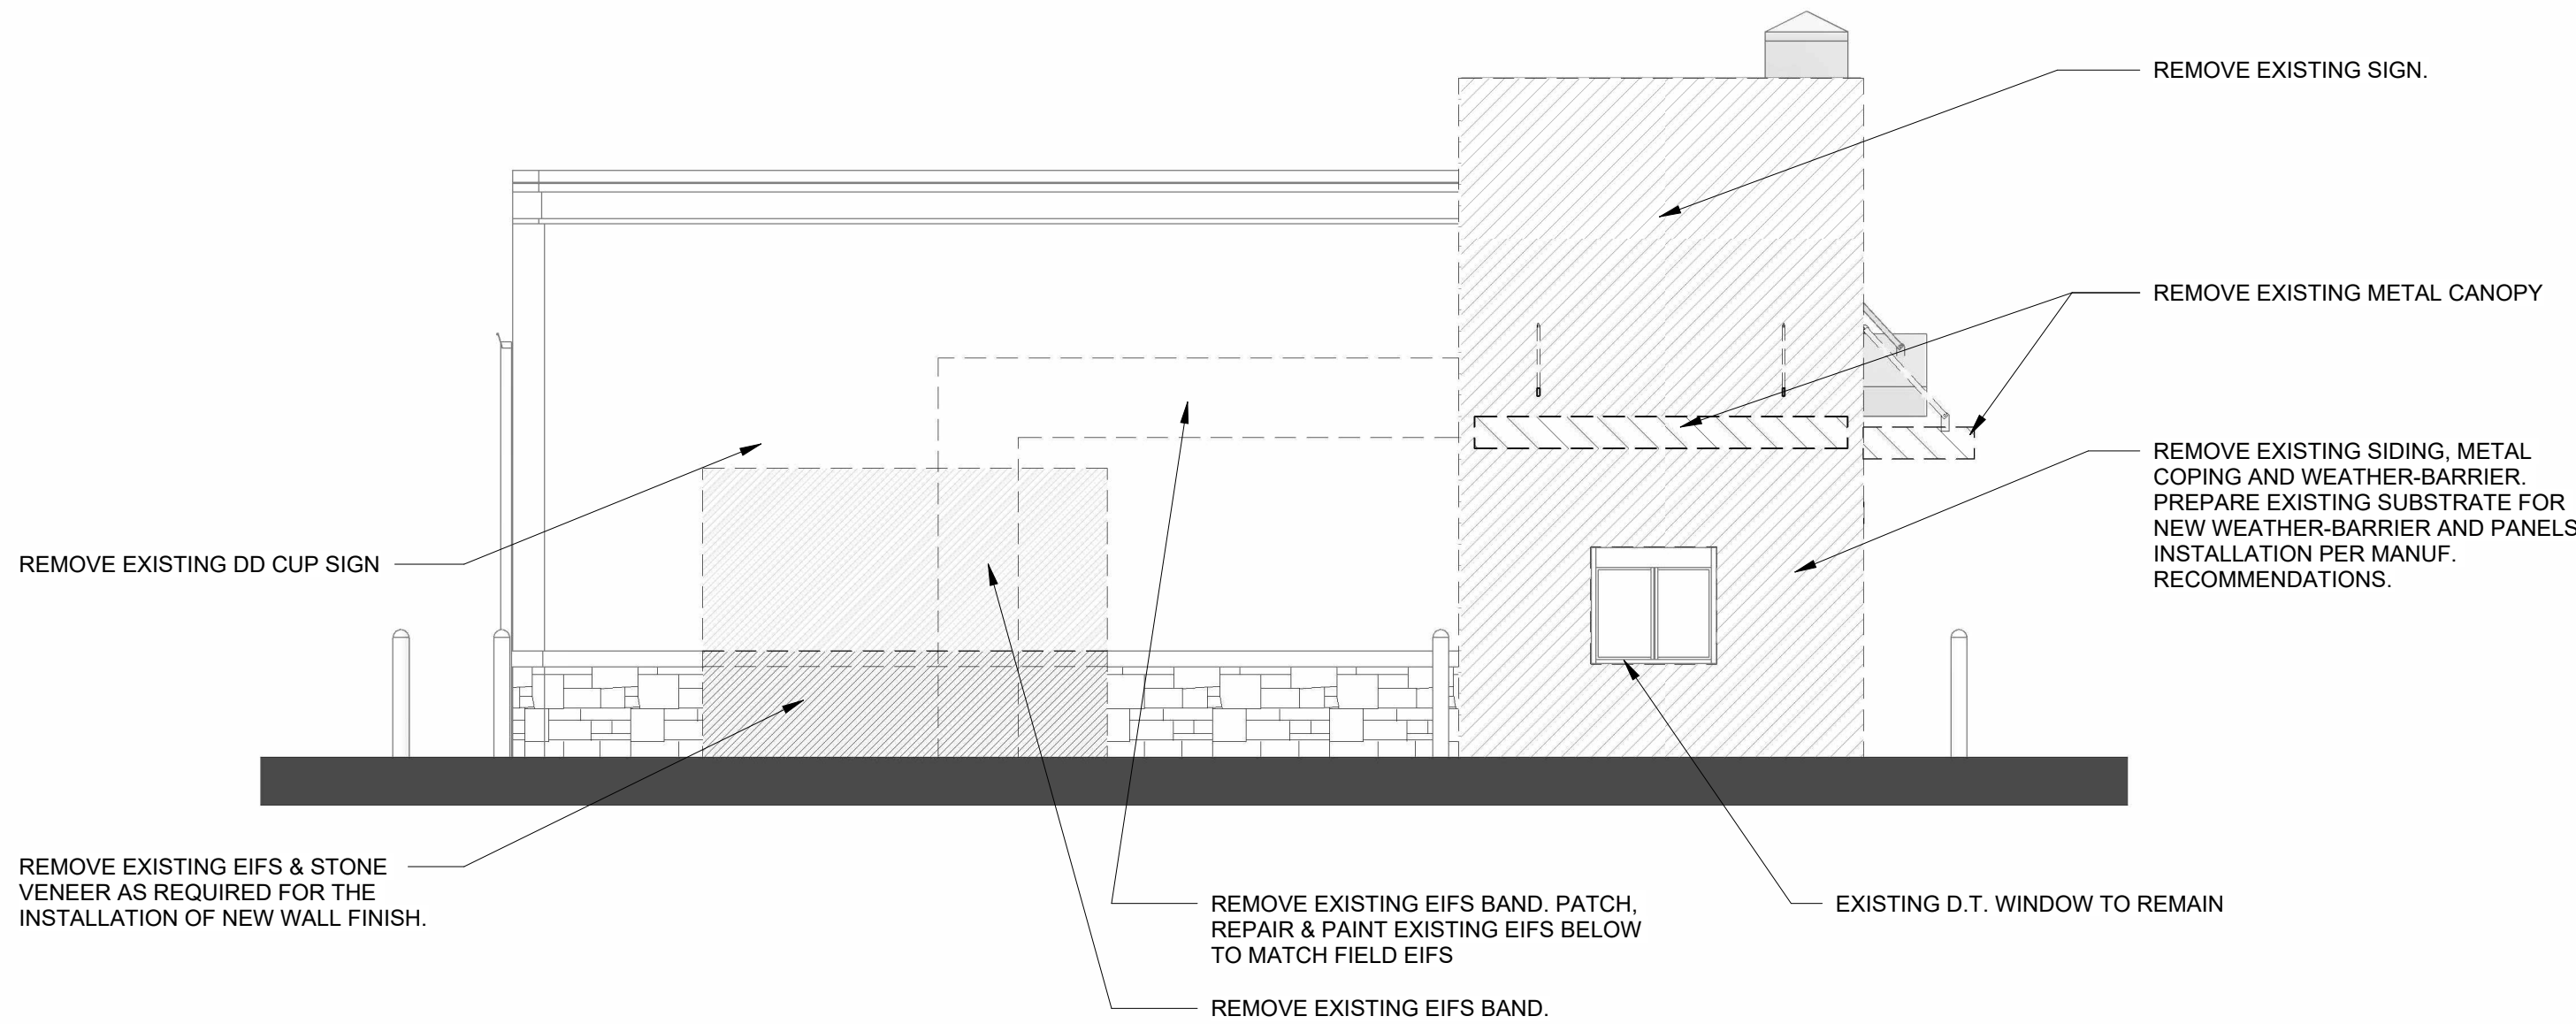

2 SIDE ELEVATION - DEMO
AD1.2 3/16" = 1'-0"

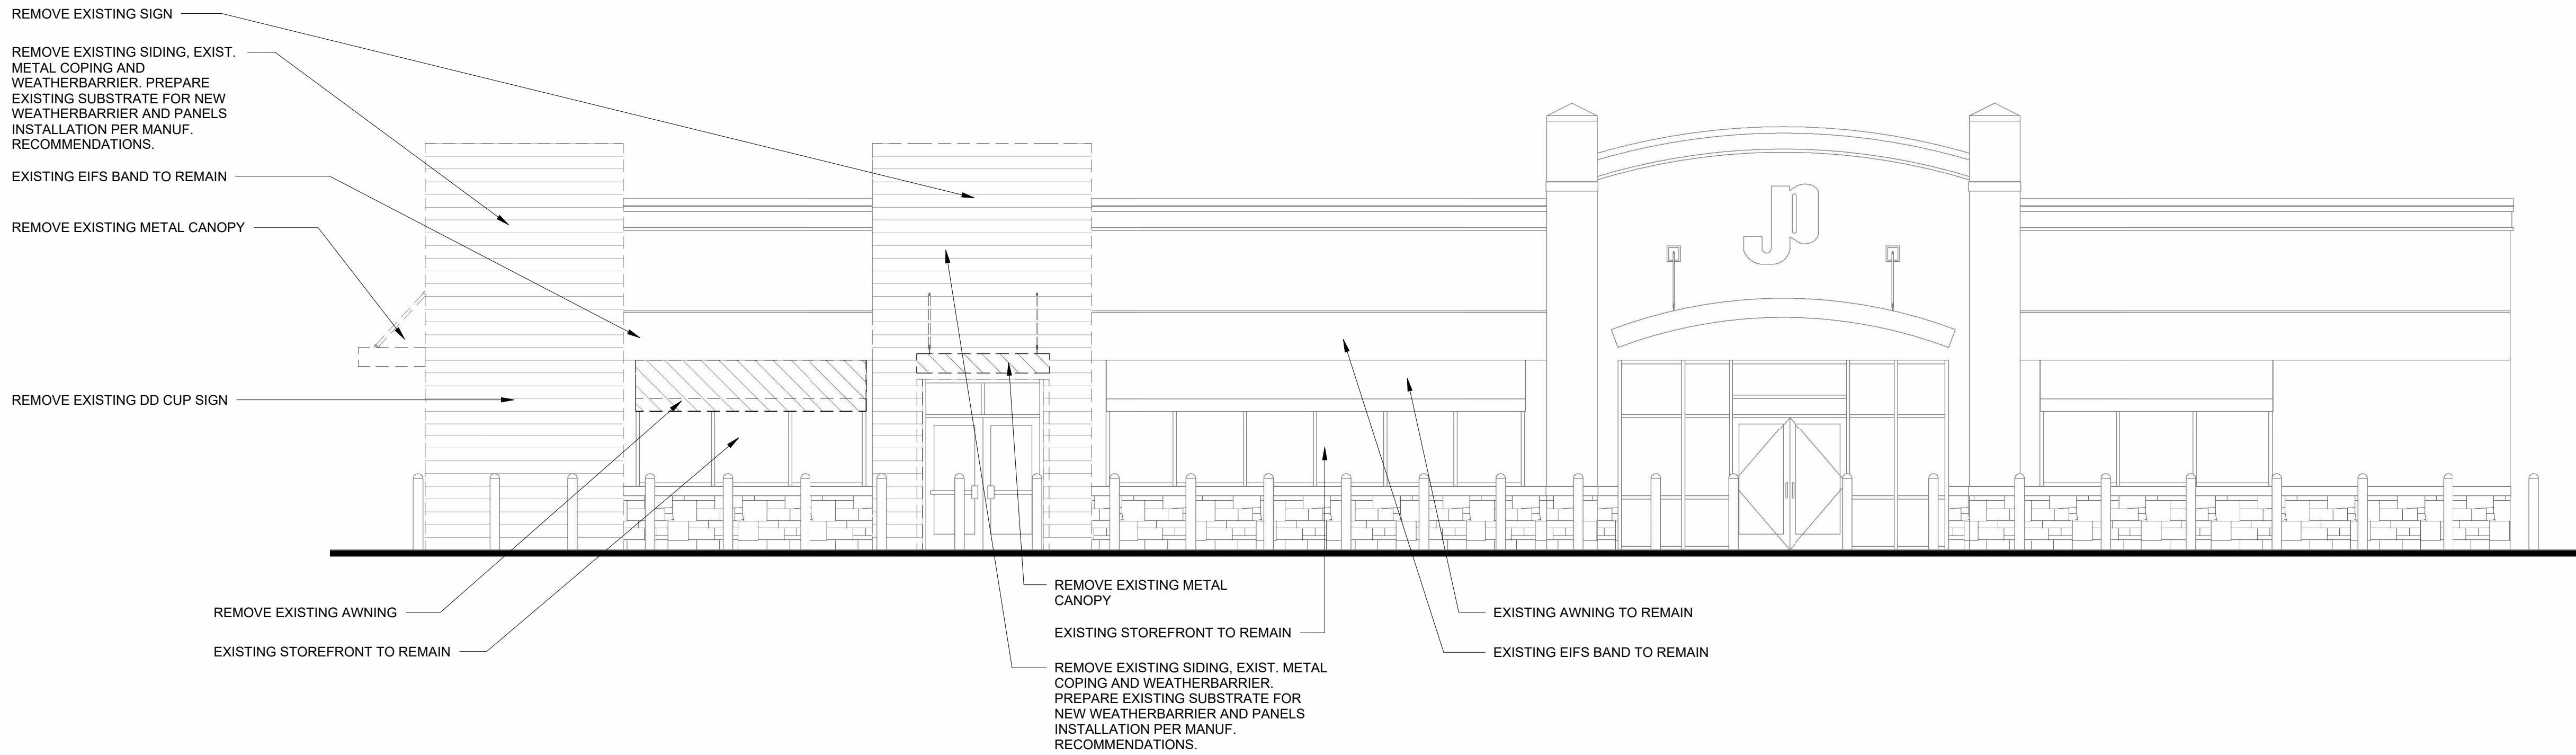

1 FRONT ELEVATION - DEMO
AD1.2 3/16" = 1'-0"

REVISIONS	#	DATE	DESCRIPTION

SUBSTRATE SCHEDULE

- 1


CEMENT WALLBOARD
5/8" DUROCK CEMENT BOARD WITH BEVELED, SQUARE OR TAPERED EDGES, APPLIED VERTICALLY OR HORIZONTALLY. VERTICAL JOINTS CENTERED OVER STUDS AND STAGGERED ONE STUD CAVITY ON OPPOSITE SIDES OF STUDS. HORIZONTAL EDGE JOINTS AND HORIZONTAL BUTT JOINTS ON OPPOSITE SIDES OF STUDS STAGGERED A MIN. ON 12" TILE FINISH PER SCHEDULE
- 2

GYPSUM WALLBOARD
5/8" GYPSUM PANELS WITH BEVELED, SQUARE OR TAPERED EDGES, APPLIED VERTICALLY OR HORIZONTALLY. VERTICAL JOINTS CENTERED OVER STUDS AND STAGGERED ONE STUD CAVITY ON OPPOSITE SIDES OF STUDS. HORIZONTAL EDGE JOINTS AND HORIZONTAL BUTT JOINTS ON OPPOSITE SIDES OF STUDS STAGGERED A MIN. ON 12" PAINT OR WALL FINISH PER SCHEDULE
- 3


PLYWOOD PANELS
5/8" EXTERIOR GRADE PLYWOOD SHEETS
FIBERGLASS REINFORCED PLASTIC (FRP) PANELS FINISH PER SCHEDULE
- S

EXTERIOR FINISH - SEE ELEVATIONS AND SECTIONS


WALL TYPES

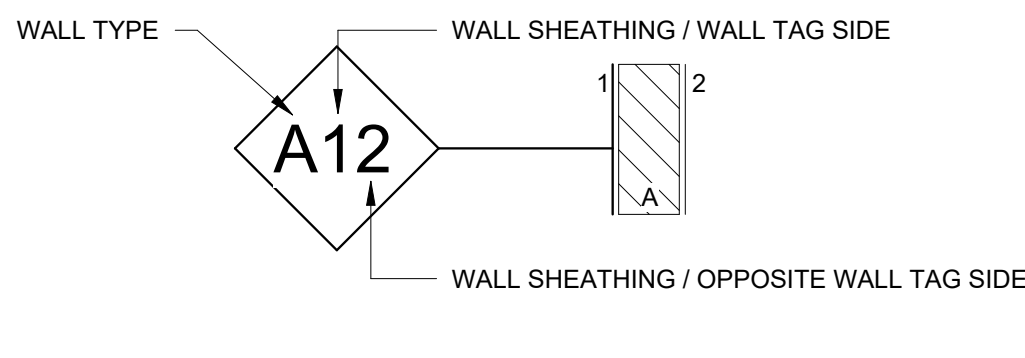


WALL TYPE A

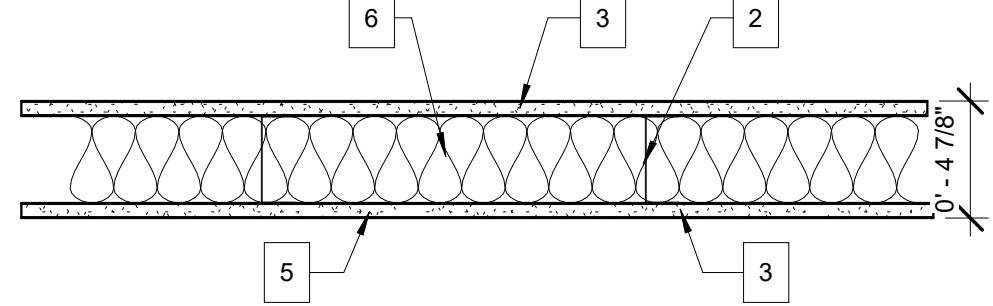


- FLOOR AND TOP RUNNERS (NOT SHOWN) - 3 5/8" CHANNEL SHAPED, FABRICATED FROM 20 GA. CORROSION-PROTECTED STEEL WITH MIN. 1" LONG LEGS, ATTACHED TO FLOOR WITH FASTENERS @ 24" O.C. MAX. BRACE TOP RUNNERS AT 8'-0" MAX. SEAL THE PARTITION PERIMETER WITH 1/4" MIN. BEAD OF ACOUSTICAL SEALANT, SEAL AROUND ALL CUTOUTS
- STEEL STUDS - 3 5/8" CHANNEL SHAPED, FABRICATED FROM 20 GA. CORROSION-PROTECTED STEEL, MIN. 1 1/4" FLANGES AND 1/4" RETURN, SPACED @ 16" O.C.
- SUBSTRATE PER SCHEDULE
- FASTENERS (NOT SHOWN) - TYPE S OR S-12 SELF-DRILLING, SELF TAPPING STEEL SCREWS USED TO ATTACH PANELS TO STUDS (ITEM 2), 1" LONG, SPACED 8" O.C. WHEN PANELS ARE APPLIED HORIZONTALLY, OR 12" O.C. WHEN PANELS ARE APPLIED VERTICALLY.
- JOINT TAPE AND COMPOUND - VINYL OR CASEIN, DRY OR PREMIXED JOINT COMPOUND APPLIED IN THREE COATS TO JOINTS AND SCREW HEADS OF OUTER LAYERS. PAPER TAPE, NOM. 2" WIDE, EMBEDDED IN FIRST LAYER OF COMPOUND OVER ALL JOINT OF OUTER PANELS.
- BATTS & BLANKETS - FIBERGLASS BATTS, FRICTION FITTED BETWEEN STUDS AND RUNNERS, MIN. 3 1/2" NOMINAL THICKNESS AT RESTROOMS AND OFFICE ONLY

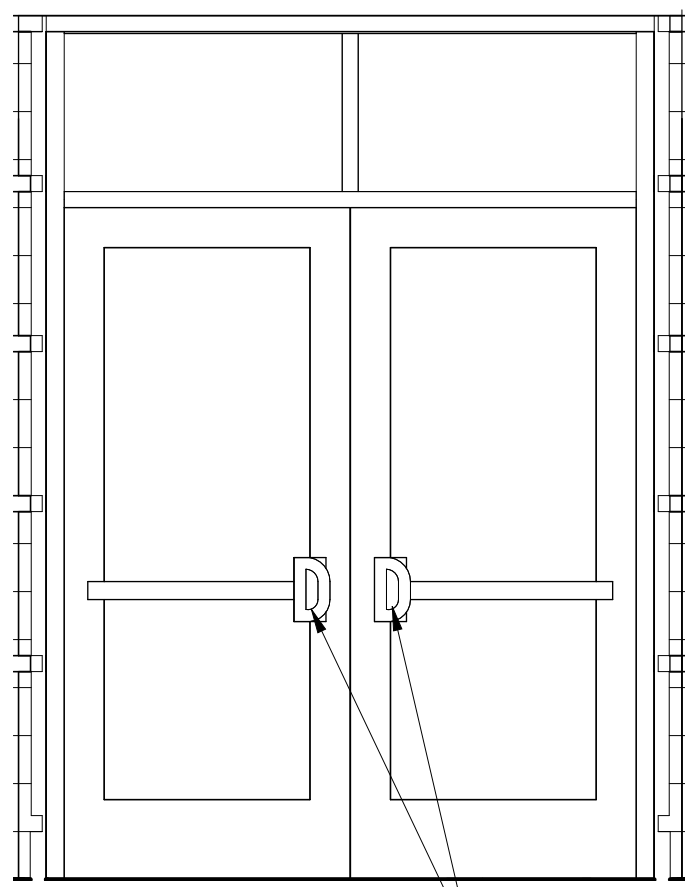

4
A1.1
DOOR HANDLE DETAIL
1/2" = 1'-0"

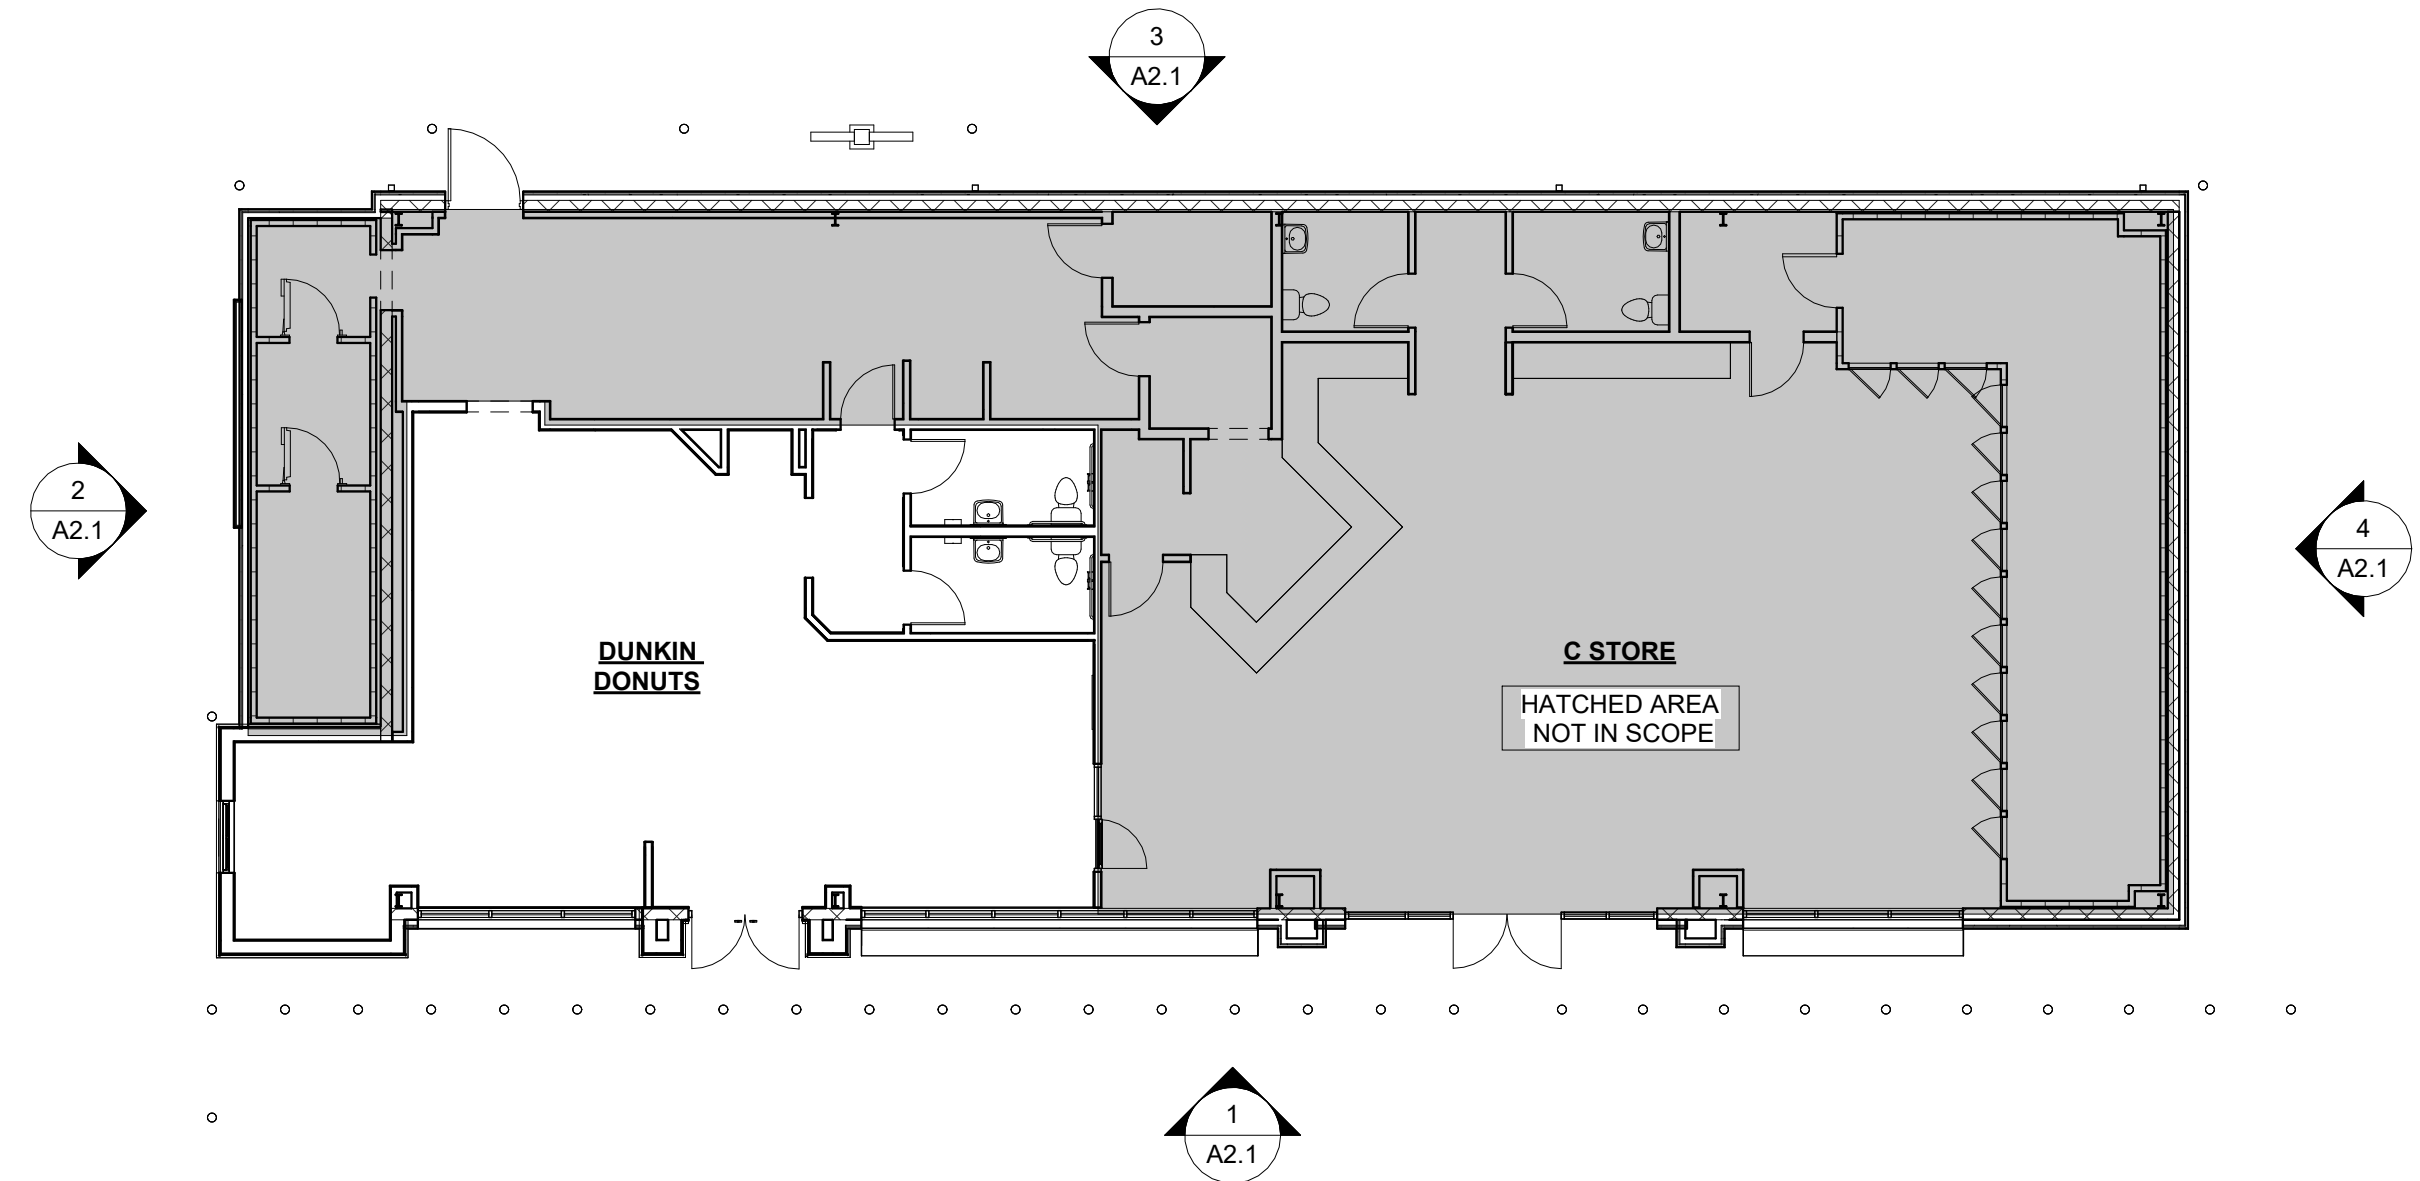


2
A1.1
OVERALL FLOOR PLAN
3/32" = 1'-0"

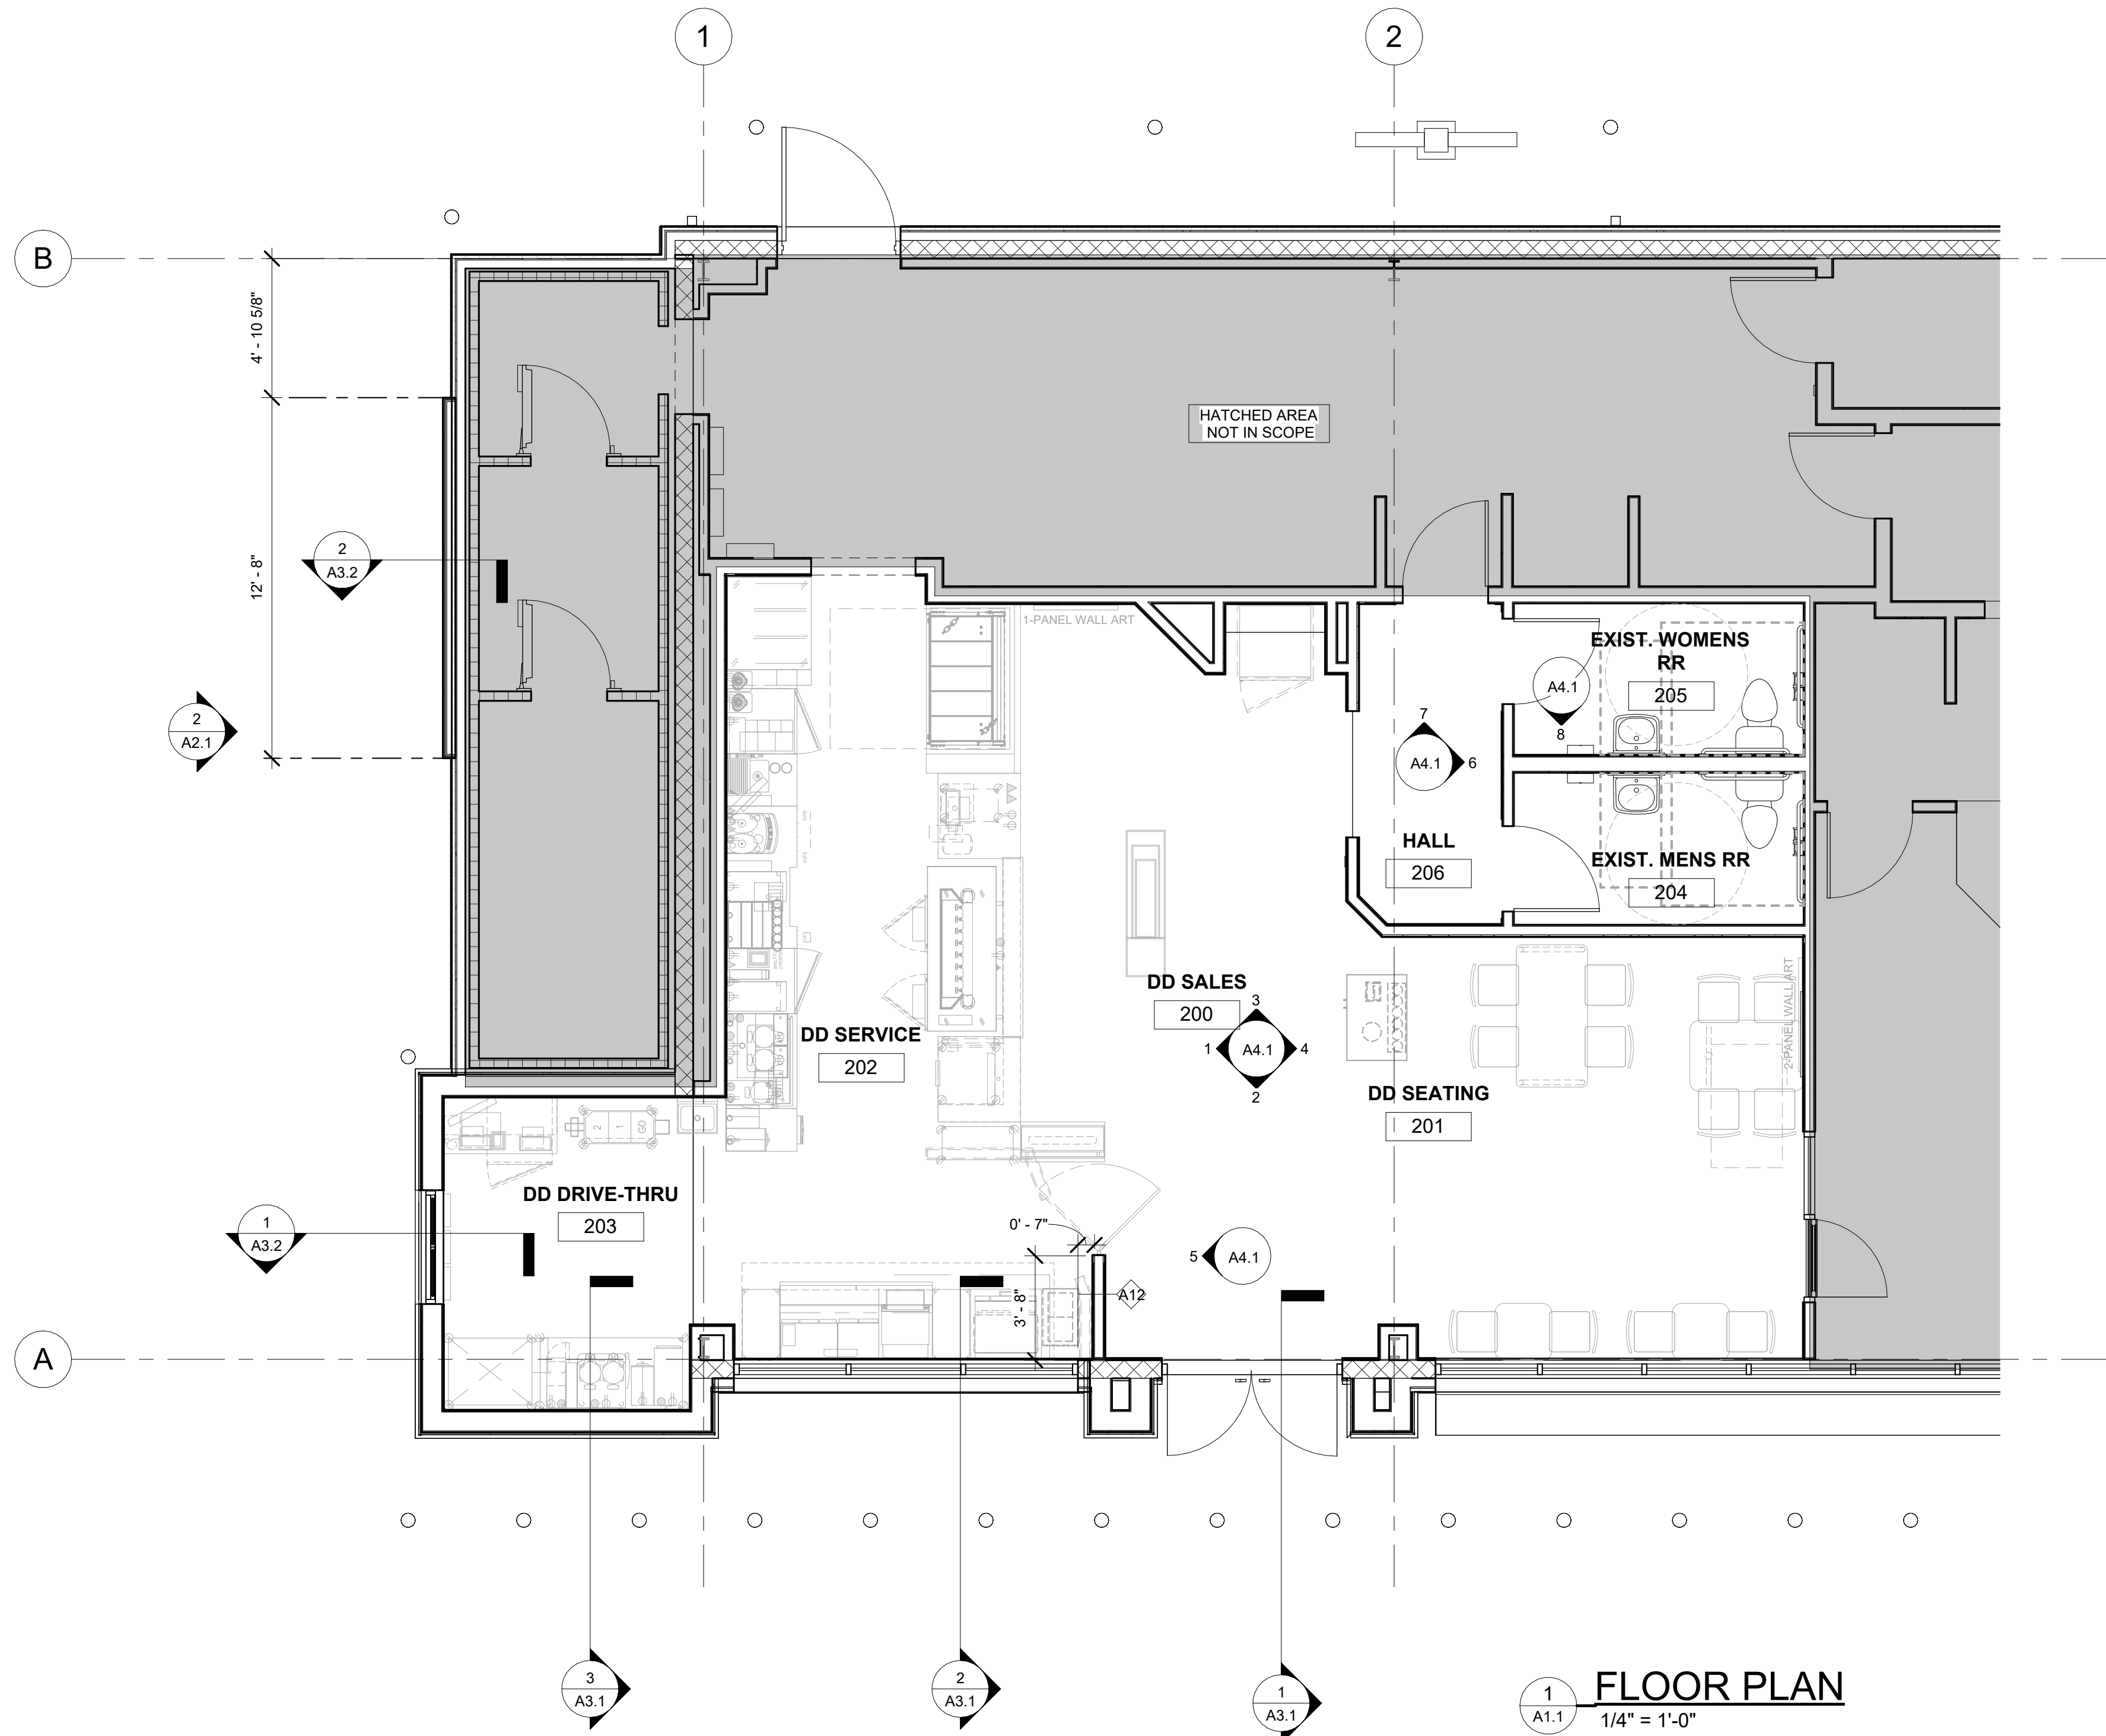

1
A1.1
FLOOR PLAN
1/4" = 1'-0"

REVISIONS	#	DATE	DESCRIPTION

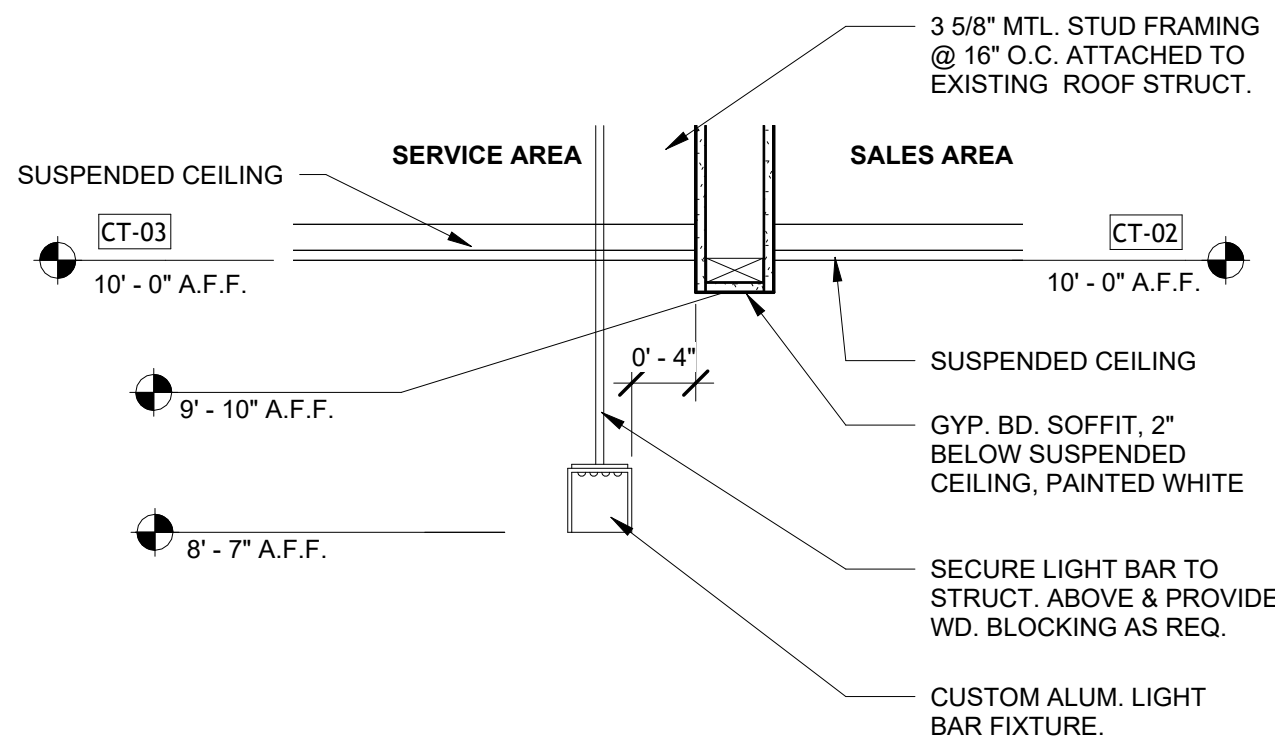


3
A1.2
1" = 1'-0"

INTERIOR SOFFIT DETAIL

CEILING SCHEDULE

TYPE	DESCRIPTION	MANUFACTURER	PRODUCT	REMARKS
CT-02	CEILING TILE & GRID SYSTEM	ARMSTRONG	BLACK FACTORY FINISH 1728 BL (2'x2')	
CT-03	VINYL FACED CLG. TILE	ARMSTRONG	#868 (2'x2') WHITE TILE & GRID	
GYP-1	PAINTED GYPSUM BOARD	USG	SUSPENDED GYPSUM BOARD SYSTEM	
GYP-2	EXTERIOR GYPSUM BOARD	USG	EXTERIOR GYPSUM BOARD SYSTEM	
ACT-01	ACOUSTIC CEILING TILES	-	-	

NOTE: SEE ELECTRICAL AND MECHANICAL DRAWINGS FOR LOCATIONS OF LIGHT FIXTURES, DIFFUSERS, GRILLES AND EXHAUST FANS AND ANY OTHER ELECTRICAL AND MECHANICAL DEVICES.

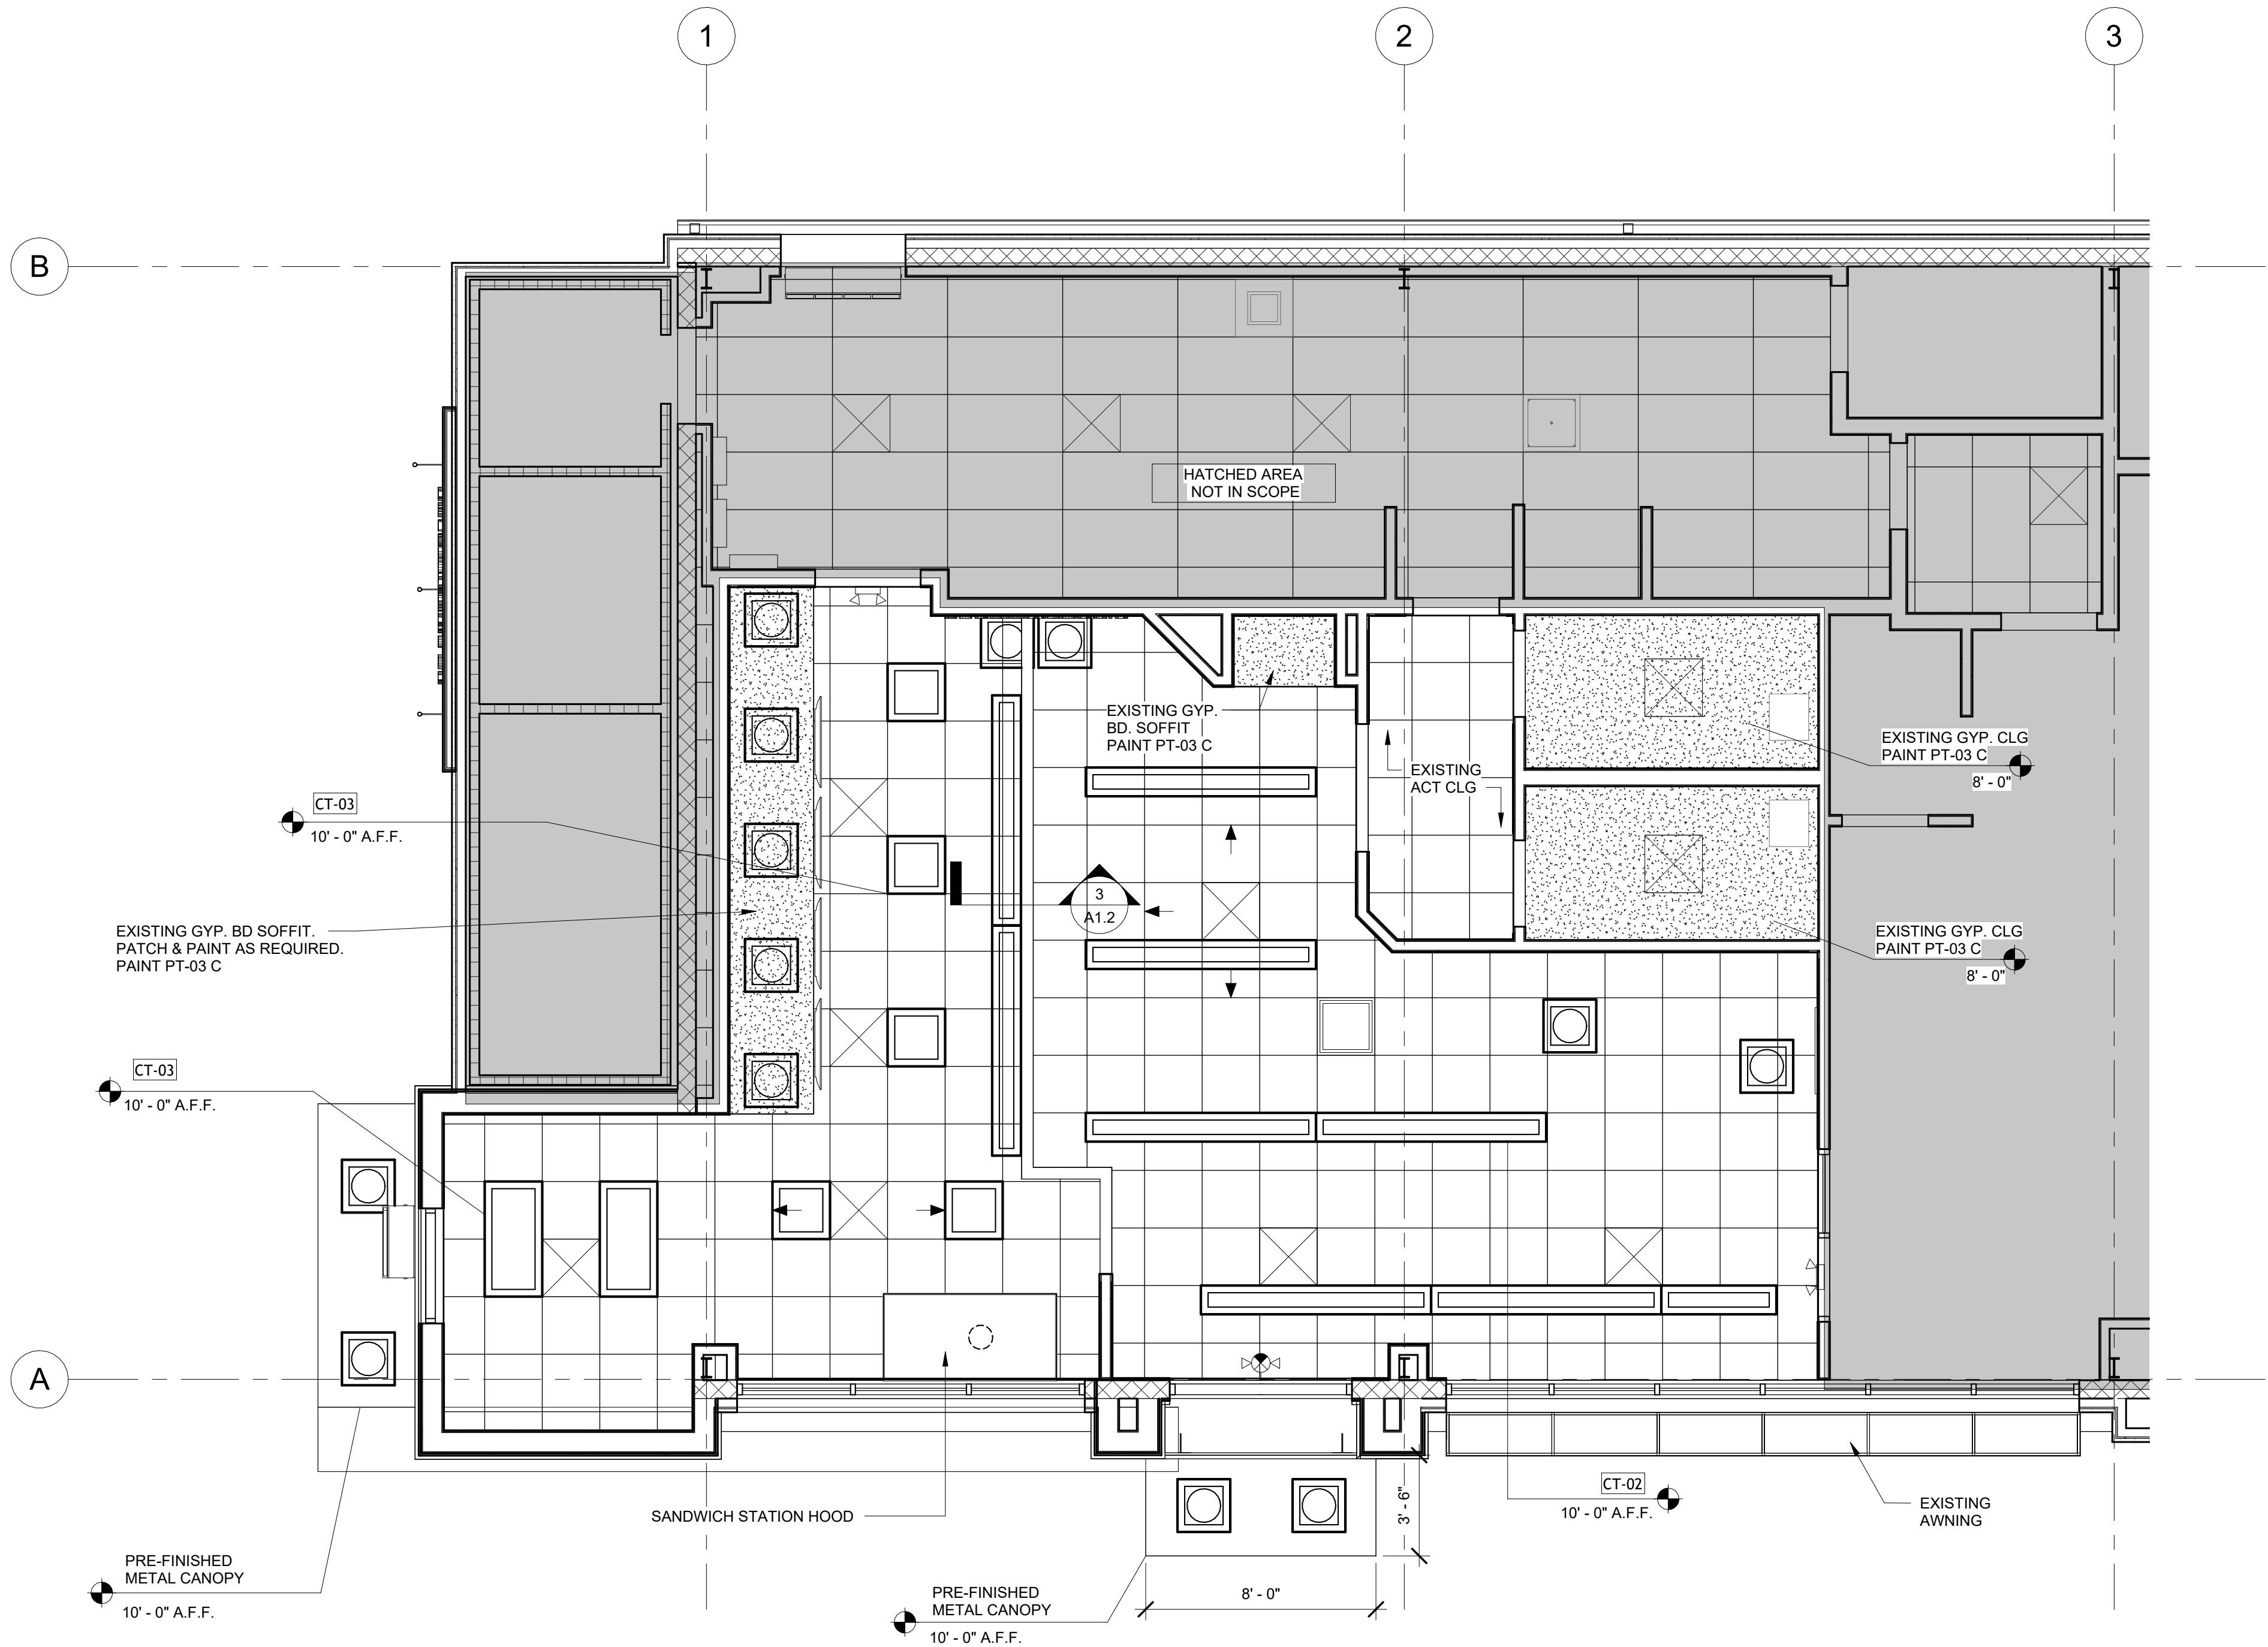


1
A1.2
1/4" = 1'-0"

REFLECTED CEILING PLAN


REVISIONS	#	DATE	DESCRIPTION

INTERIOR MATERIAL SCHEDULE - DUNKIN DONUTS				
MARK	MATERIAL	MANUFACTURER	PRODUCT NO.	DESCRIPTION/REMARKS
FT-01C	PORCELAIN TILE	DAL TILE	DB PORTFOLIO POR 12X24 FLOOR PF05 "ASH GREY STD" # PF0512241PK	12"x24" TILE / USE W/ GROUT G-01 (C)
FT-02	QUARRY TILE	DAL TILE	DB TEXTURES 6X6X1/2 FLOOR CE 0T03 "ASH GREY STD" # 0T03661P	6"x6" TILE / USE W/ GROUT G-02
FTB-01C	PORCELAIN TILE BASE	DAL TILE	DB PORTFOLIO POR 12X24 FLOOR PF05 "ASH GREY STD" # PF0512241PK	CUT 12"x24" FLOOR TILE W/ BRUSHED NICKEL SCHLUTER STRIP CAP JOLLY - ANIGB / COLOR MATCH WALL TILE ALUMINUM TRIM MATTE WHITE TSSG DARK ANTHRACITE TSSG STONE GREY
FTB-02 C	QUARRY TILE BASE	DAL TILE	DB TEXTURES 03565U 0T03 "ASH GREY STD" # 0T0303565U1P	5"x6" COVE BASE. SEE NAT. ACCOUNT FOR INSIDE/OUTSIDE CORNER NUMBERS. USE W/ GROUT G-02
G-01C	GROUT	MAPEI	ULTRACOLOR PLUS FA	#107 IRON - CUSTOMER AREA
G-02	GROUT	MAPEI	ULTRACOLOR PLUS FA	#11 - SAHARA BEIGE
G-03	GROUT	MAPEI	ULTRACOLOR PLUS FA	#38 AVALANCHE
G-04	GROUT	MAPEI	ULTRACOLOR PLUS FA	#10 BLACK
G-05	GROUT	MAPEI	ULTRACOLOR PLUS FA	#09 GRAY
WP-PL2 C	LAMINATE	WILSONART	4557-SHADOW ZEPHYR	MATTE FINISH. PLAM WALL PANELS 48"x96"
WP-CR1	WALL PROTECTION	IMPACT SPECIALTIES	BRUSHED NICKEL	SARATOGA CHAIR RAIL 3" H x 114" L / VA200 BRUSHED NICKEL CORNER GUARD
WC-01 C	VINYL WALL COVERING	DLC COUCH	DLC-122 "MINERAL"	VERSA ARIES PARTITION 20 OZ TYPE II W/ AQUASAFE
WC-03 C	ADVANCE WALL PROTECTION	DLC COUCH	DLC-26519C	WOOD WALL P3TEC (NATURELLE) 48" WIDE 15 YARD BOLT) WOOD WALL MUST BE INSTALLED RAILROADED.
WT-01 C	PORCELAIN TILE	DAL TILE	# N812DD1241P21	12x24 / GROUT G-03 / INSTALL PER PATTERN SHOWN ON DETAIL 4/A5.1 ALUM. PROFILE: SCHLUTER JOLLY MBW MATTE WHITE. HEIGHT 10mm (3/8") A100MBW
WT-02	PORCELAIN TILE	DAL TILE	DB PORTFOLIO POR 6X24 FLOOR PF09 "CHARCOAL" # PF096241PK	BRICK STYLE 6"x24" OR 4"x12" SP. ORDER CUT TO SIZE (WT-2). - USE GROUT G-04 ALUM. PROFILE: SCHLUTER JOLLY, TSSA DARK ANTHRACITE. 8mm HEIGHT A80TSDA
WT-03	PORCELAIN TILE	DAL TILE	DB FIELD 6X18 COLOR WHEEL LINEAR - ARTIC WHITE #0790 MATTE	STACK BOND PATTERN 6"x18" - USE GROUT G-05. ALUM. PROFILE: SCHLUTER, JOLLY, MBW MATTE WHITE 8mm HEIGHT A80MBW
WT-04 C	PORCELAIN TILE	DAL TILE	DB BLOCK PARTY 6X6 2-TILE ACCENT - #N51GBP1061P4	ACCENT TILE 6"x6" - USE GROUT G-05. ALUM. PROFILE: SCHLUTER, JOLLY, TSSG STONE GRAY 8mm HEIGHT A80TSSG
PT-01 C	PAINT	SHERWIN WILLIAMS	SW 7671 "ON THE ROCKS"	LIGHT GRAY. SHEEN: SATIN/EGGSHELL
PT-02 C	PAINT	SHERWIN WILLIAMS	SW 7099 "IRON ORE"	CHARCOAL. SHEEN: FLAT FOR CLG/OFFSET; SEMIGLOSS FOR DOORS & FRAMES
PT-03 C	CEILING PAINT	SHERWIN WILLIAMS	SW 6252 "ICE CUBE"	OFF WHITE. SHEEN: FLAT FOR CLGS / SEMIGLOSS FOR DOORS & FRAMES
CT-02	CEILING TILE	ARMSTRONG	1728 BL 2'x2'	BLACK FACTORY FINISH
CT-03	CEILING TILE	ARMSTRONG	#868 2'x2'	VINYL COATED - WHITE TILE & GRID

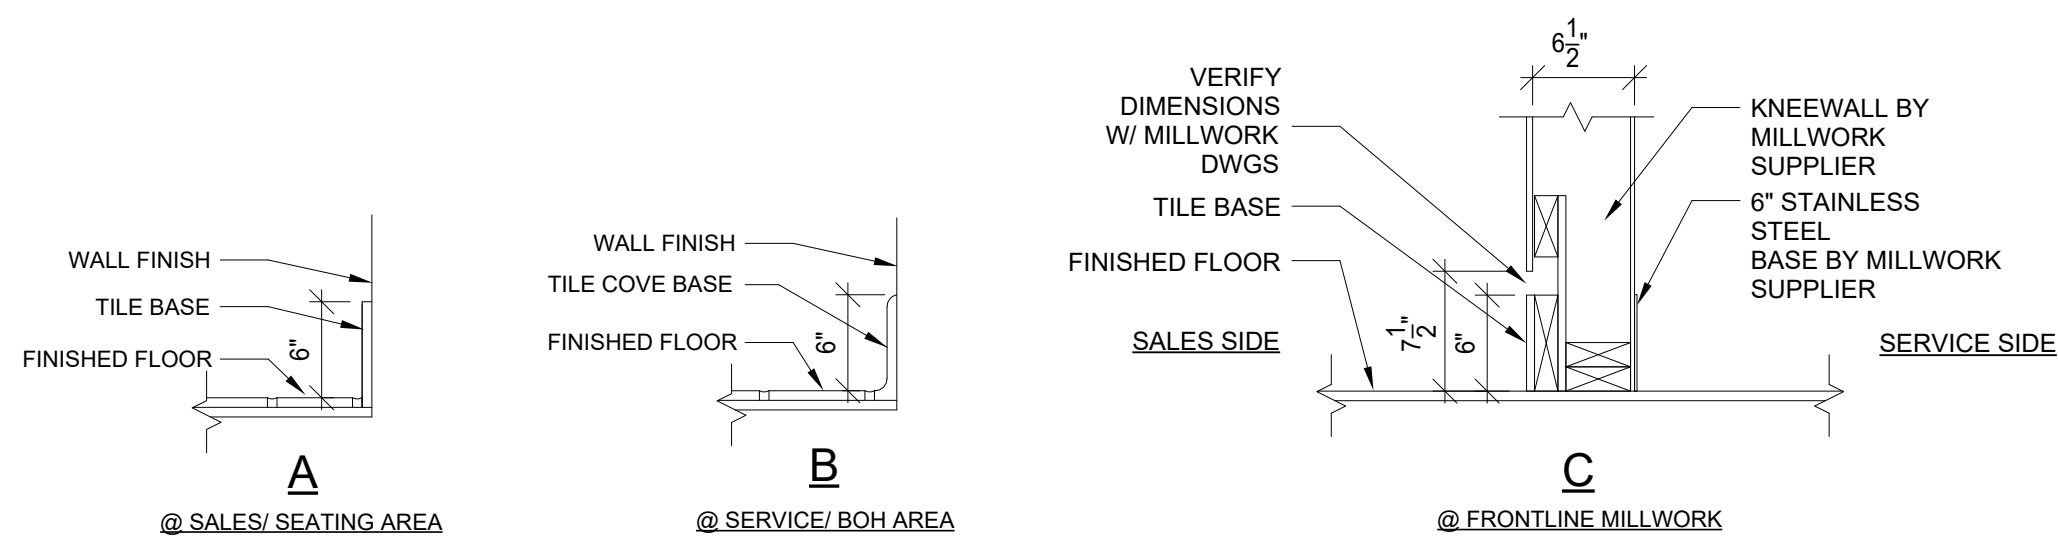


TILE BASE DETAIL

FINISH SCHEDULE					
NO.	NAME	FLOOR FINISH	BASE FINISH	WALL FINISH	CEILING FINISH
202	DD SALES	FT-01	SEE A4.1	SEE A4.1	CT-02
201	DD SEATING	FT-01	SEE A4.1	SEE A4.1	CT-02
202	DD SERVICE	FT-02	FTB-02-C	SEE A4.1	CT-02
203	DD DRIVE-THRU	FT-02	FTB-02-C	WT-01 C3	CT-13
204	EXIST. MENS RR	FT-01	SEE A4.1	SEE A4.1	GYP-1
204	EXIST. WOMENS RR	FT-01	SEE A4.1	SEE A4.1	GYP-1
206	HALL	FT-01	FTB-01 C	PT-01 C	ACT

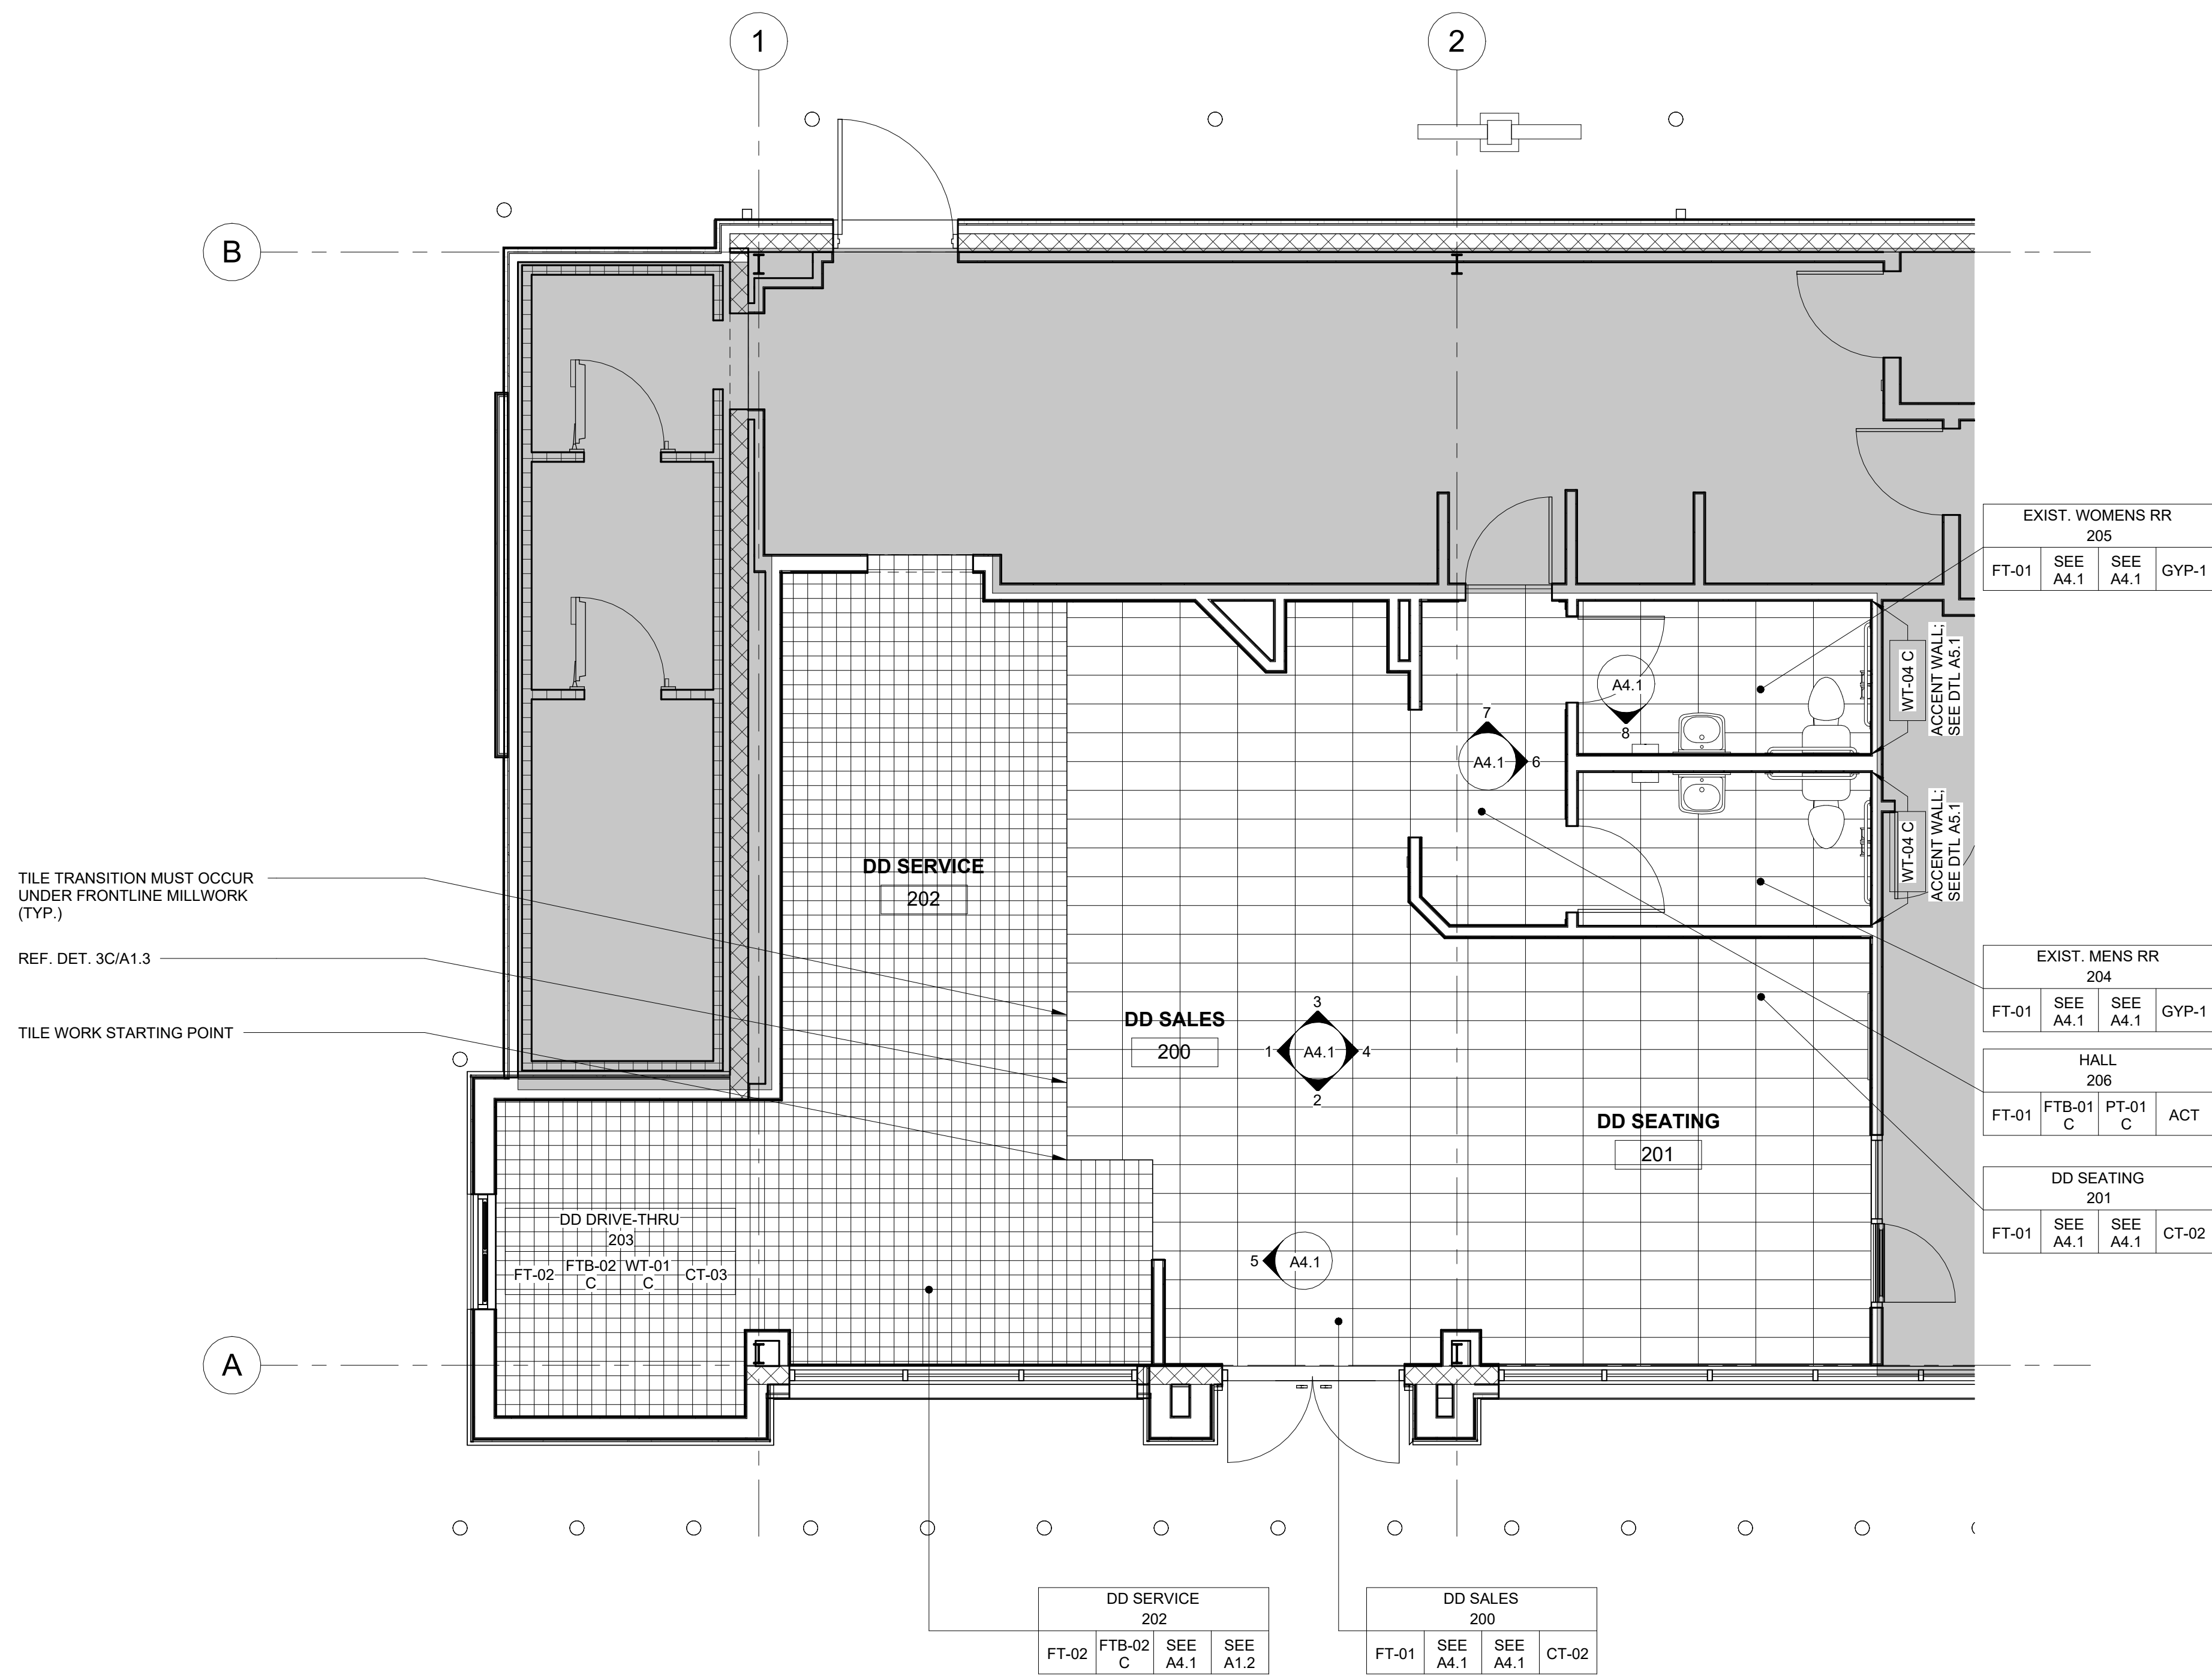

FLOOR PLAN FINISH
1/4" = 1'-0"

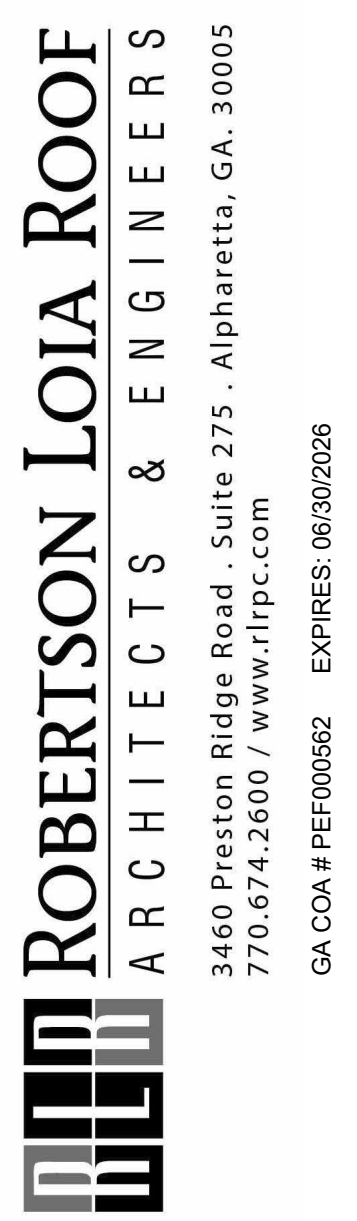

DUNKIN DONUTS REMODEL
2083 CROWELL ROAD
COVINGTON, GA. 30014
FOR: **JPC DESIGN & CONSTRUCTION, LLC**
PO BOX 710
JACKSON, GA. 30233

[illegible]

FINISH PLAN





07/21/2025


PROJECT NUMBER
24163

SHEET NUMBER


A 1 2

A1.3

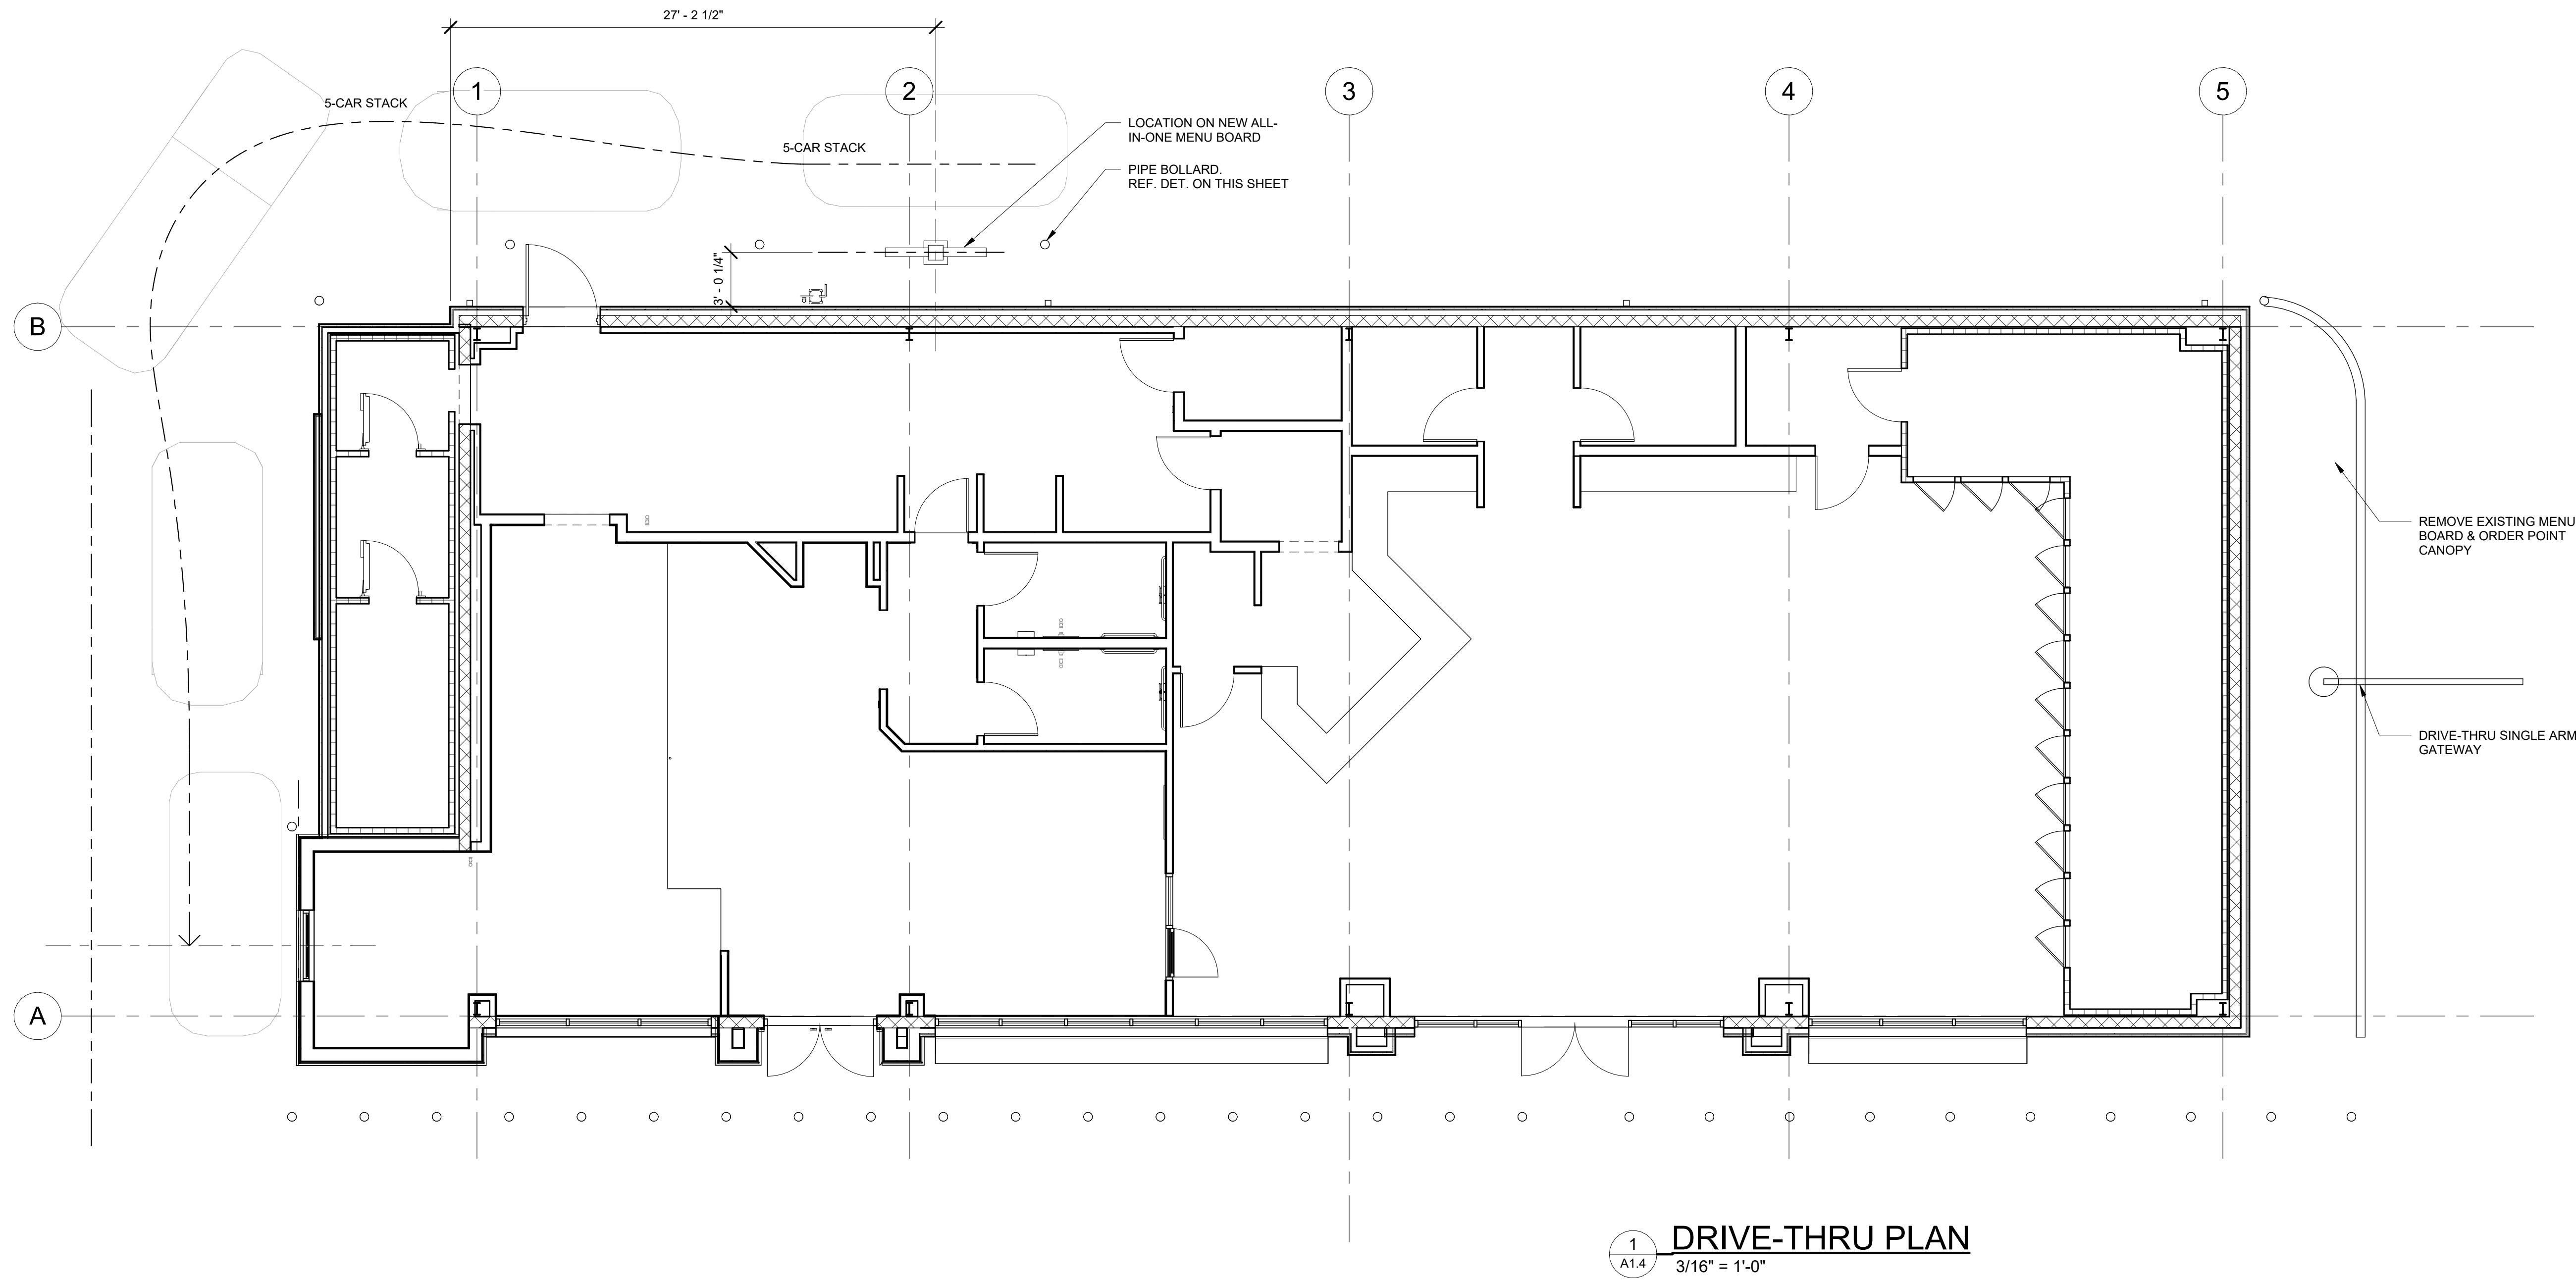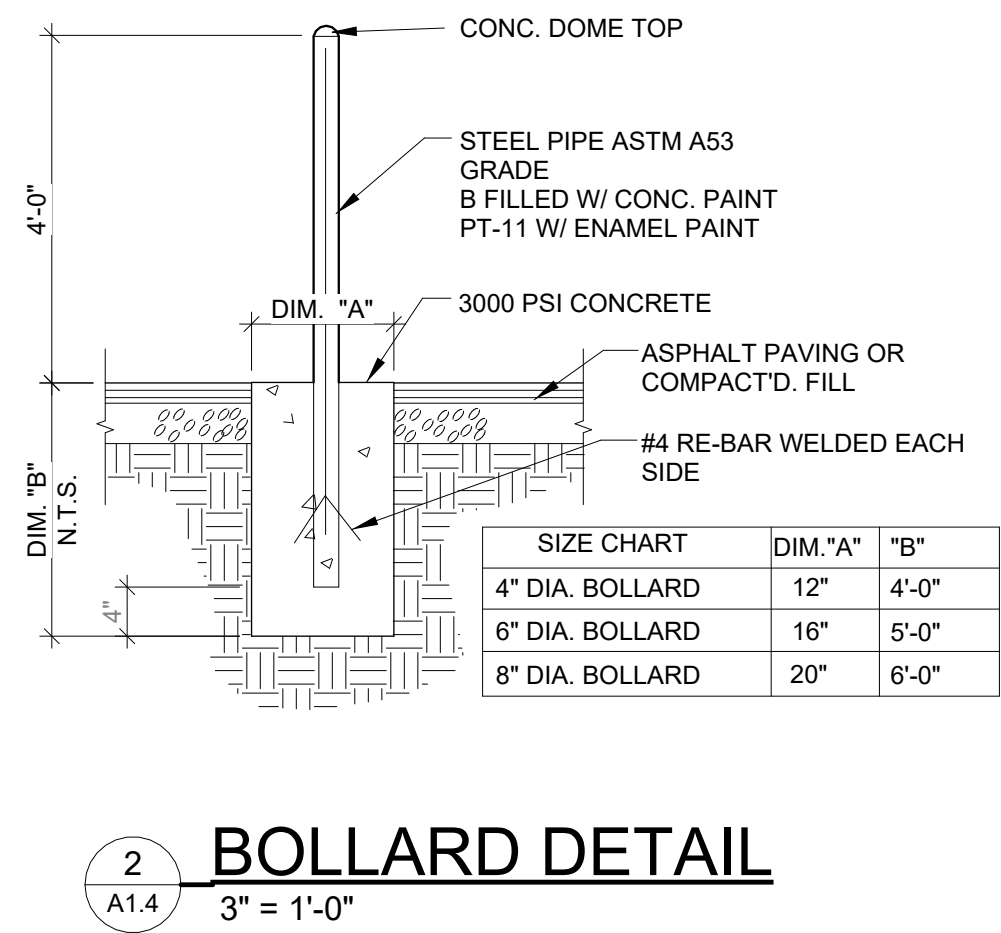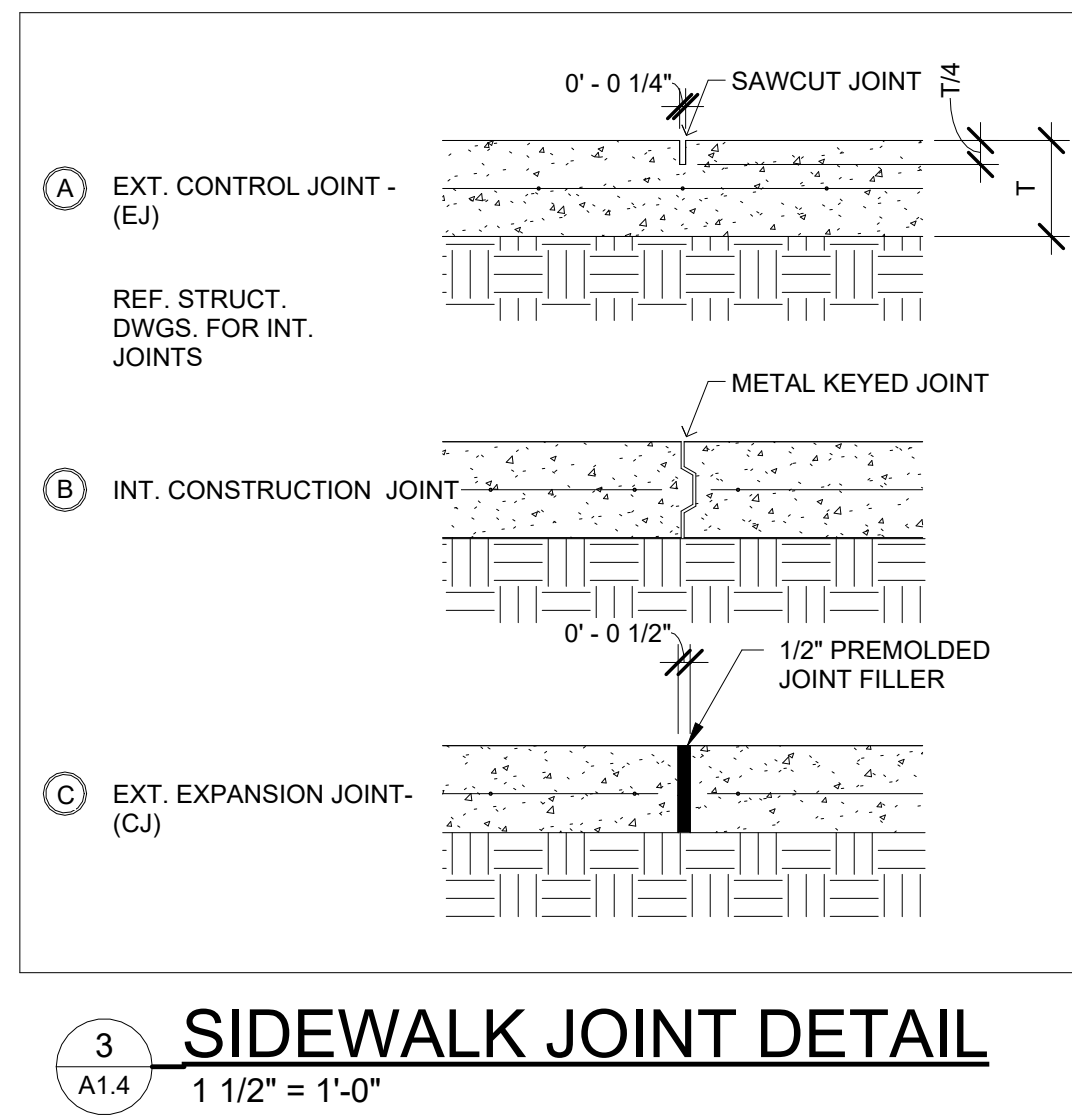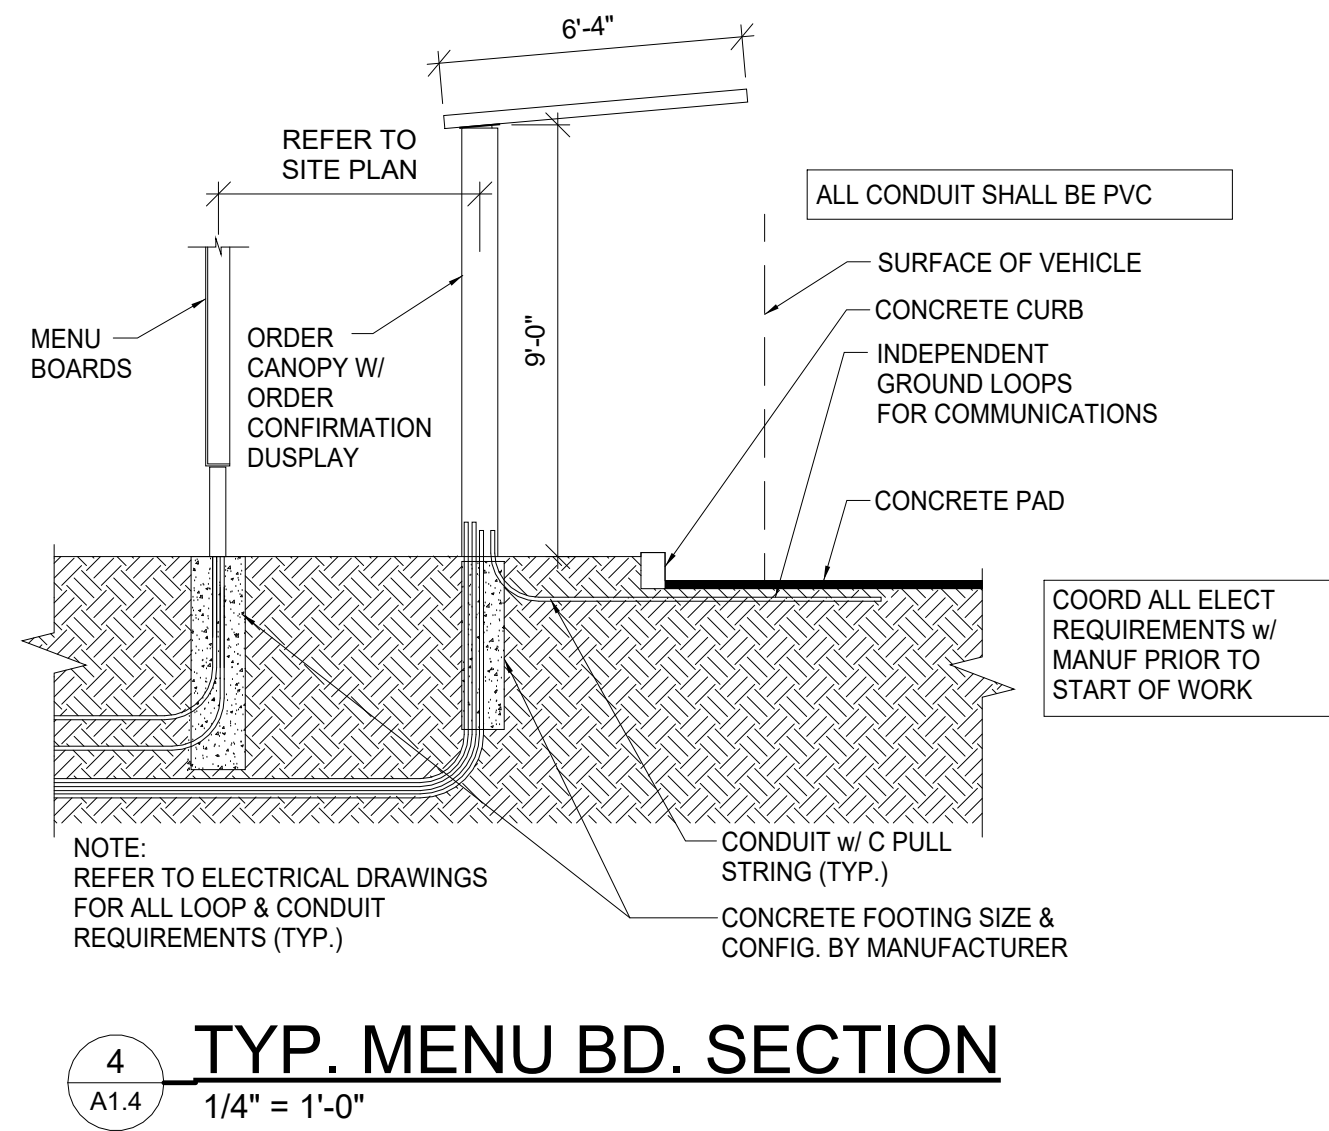


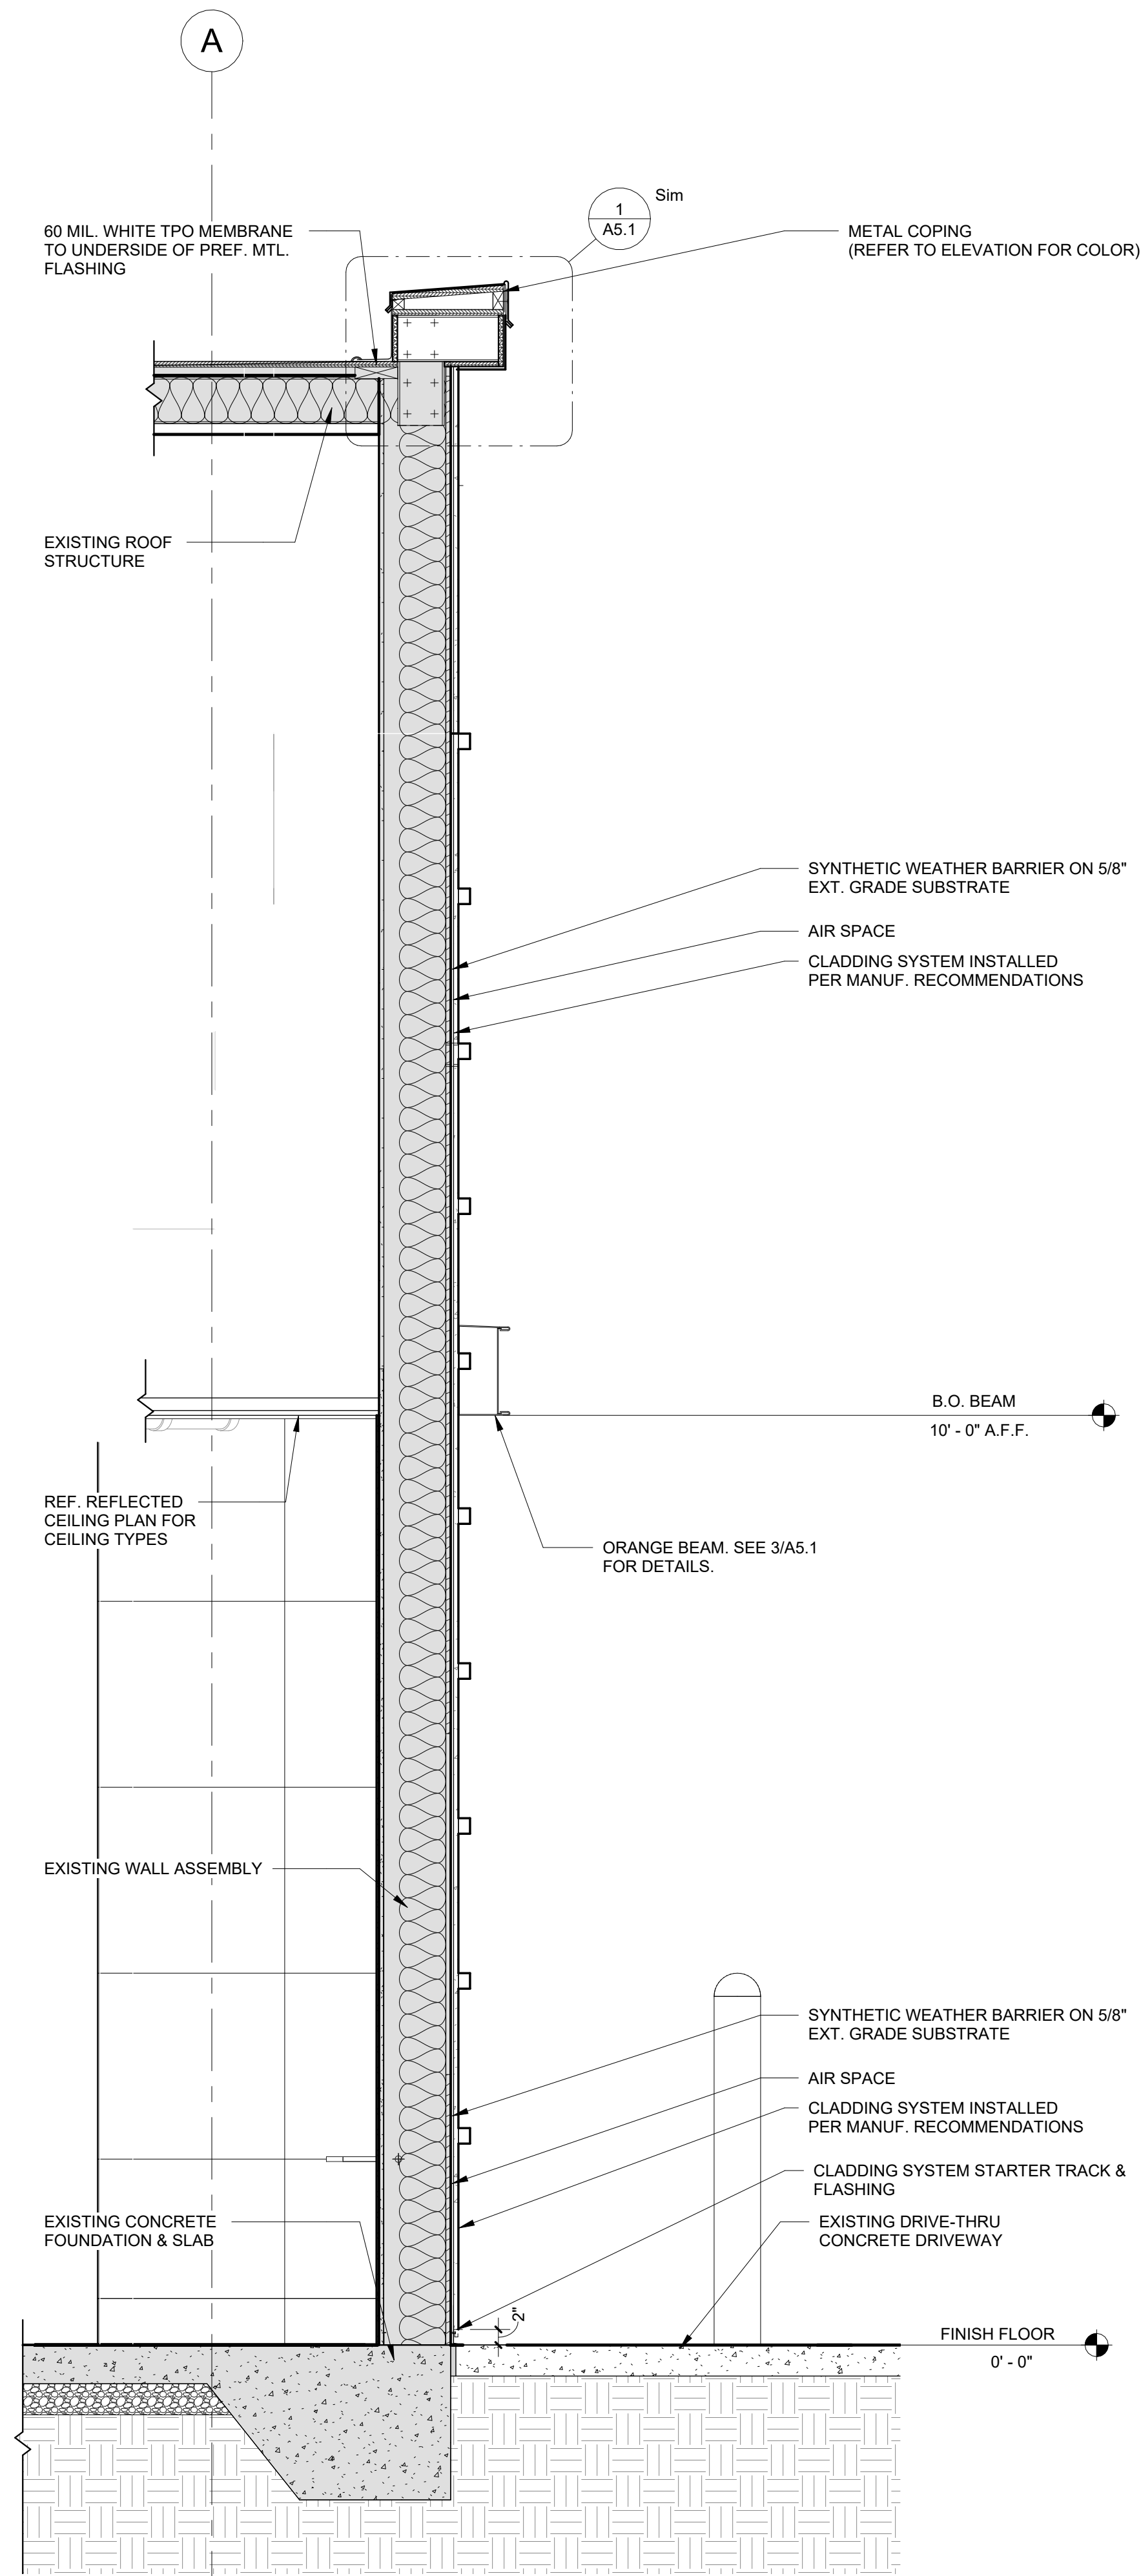

3 WALL SECTION
3/4" = 1'-0"

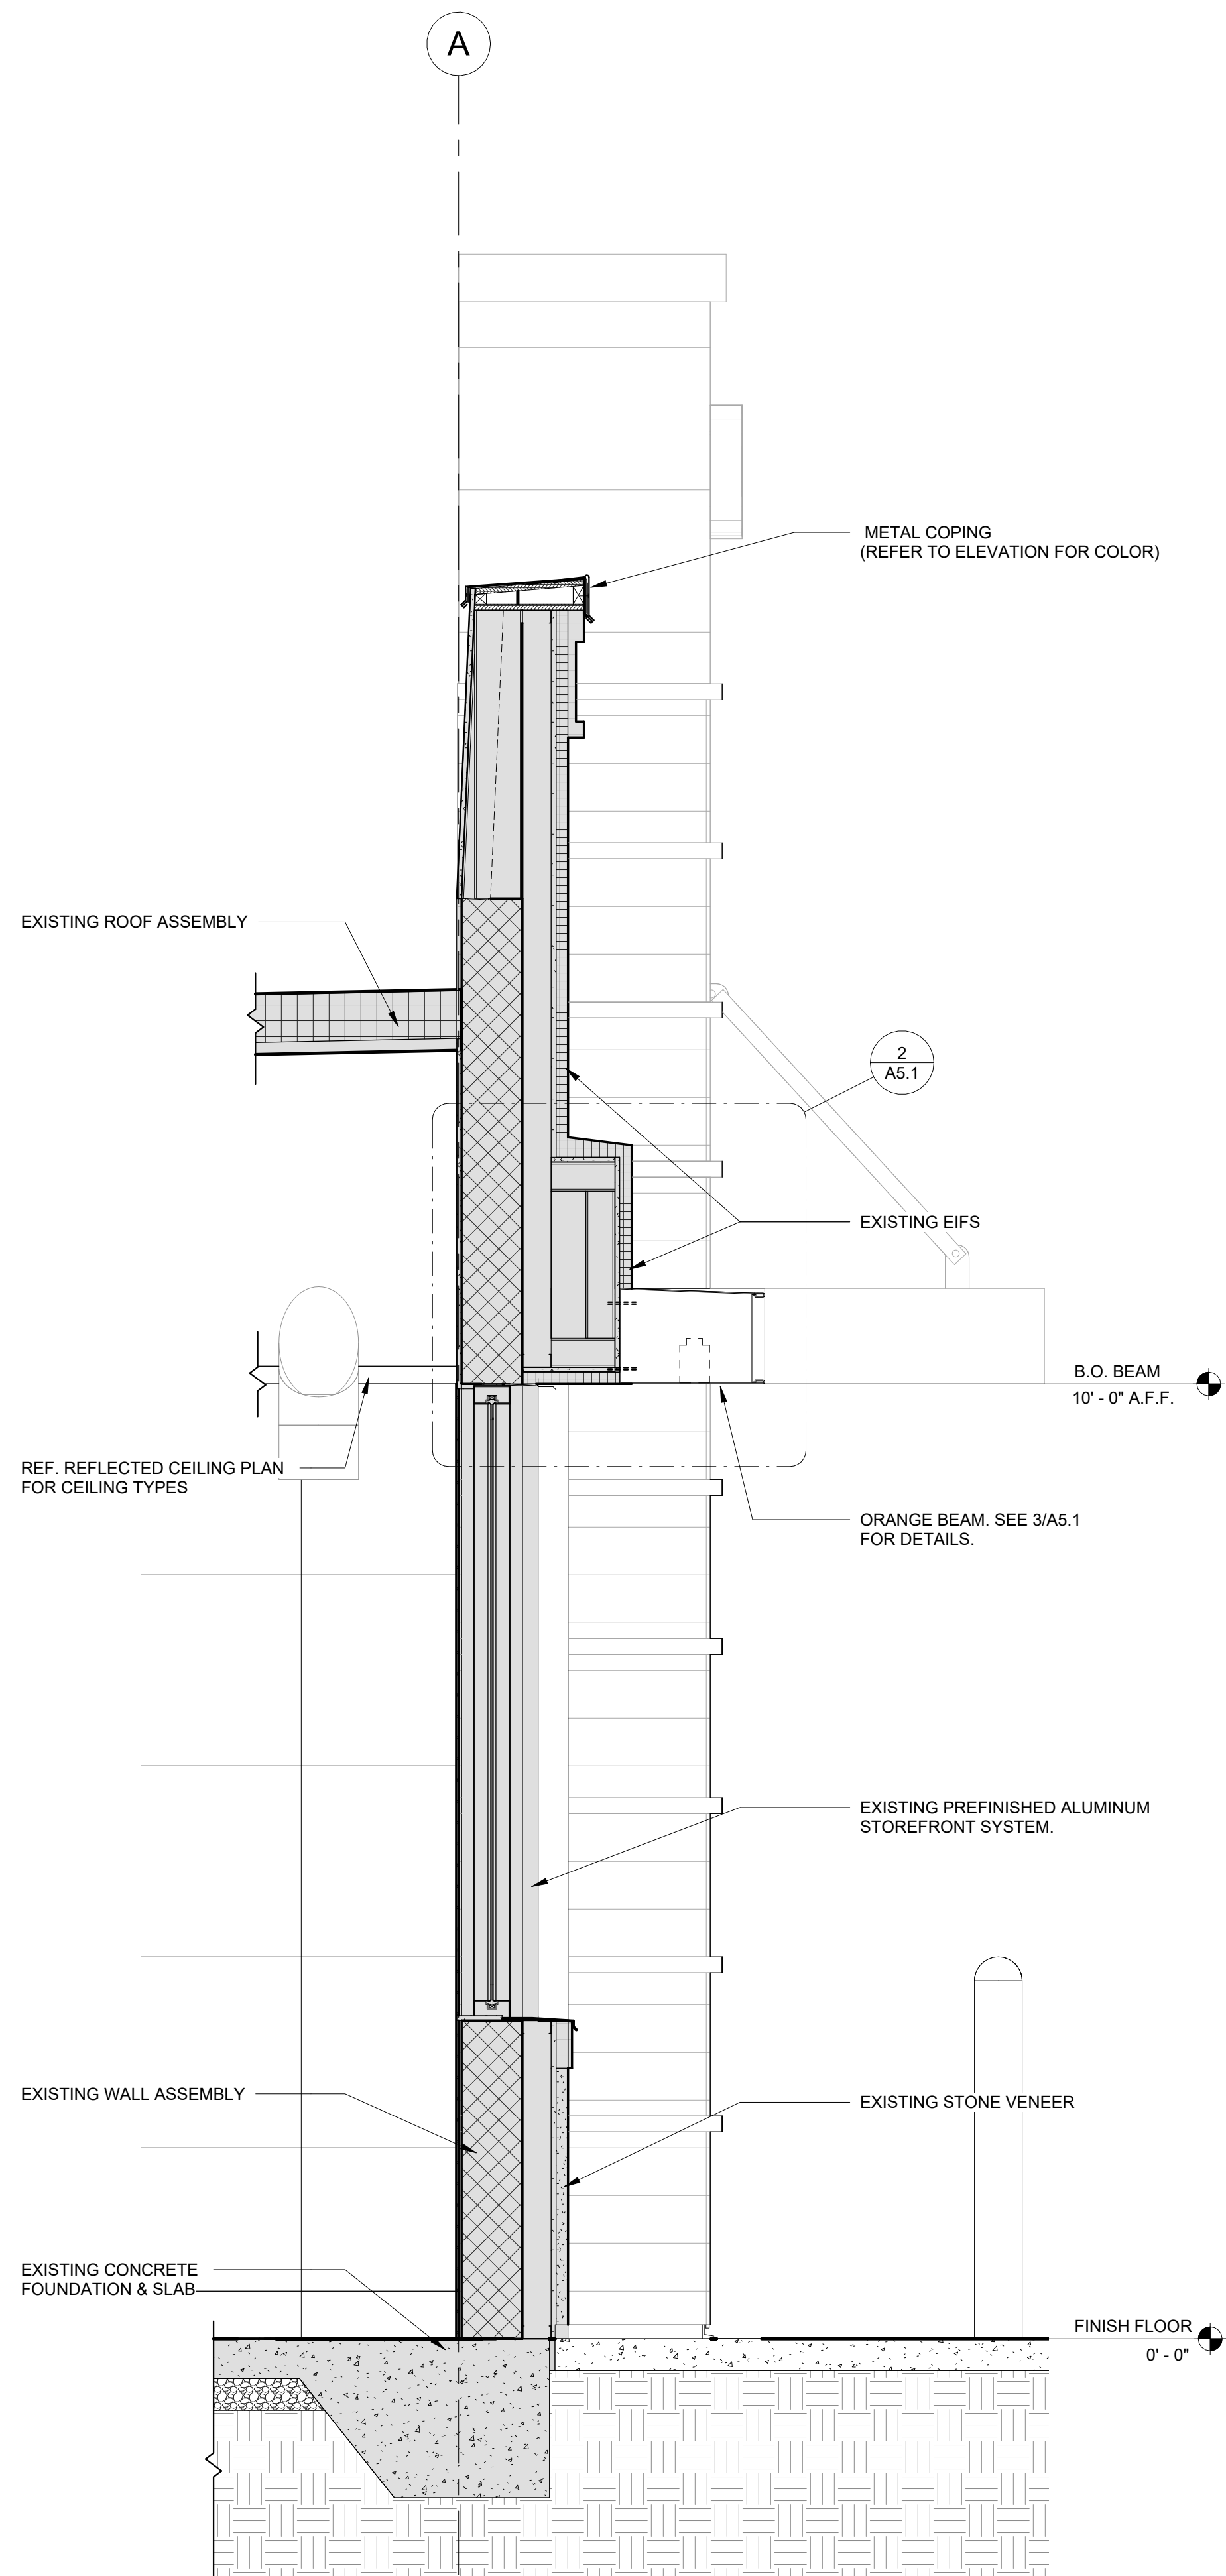


2 WALL SECTION
3/4" = 1'-0"

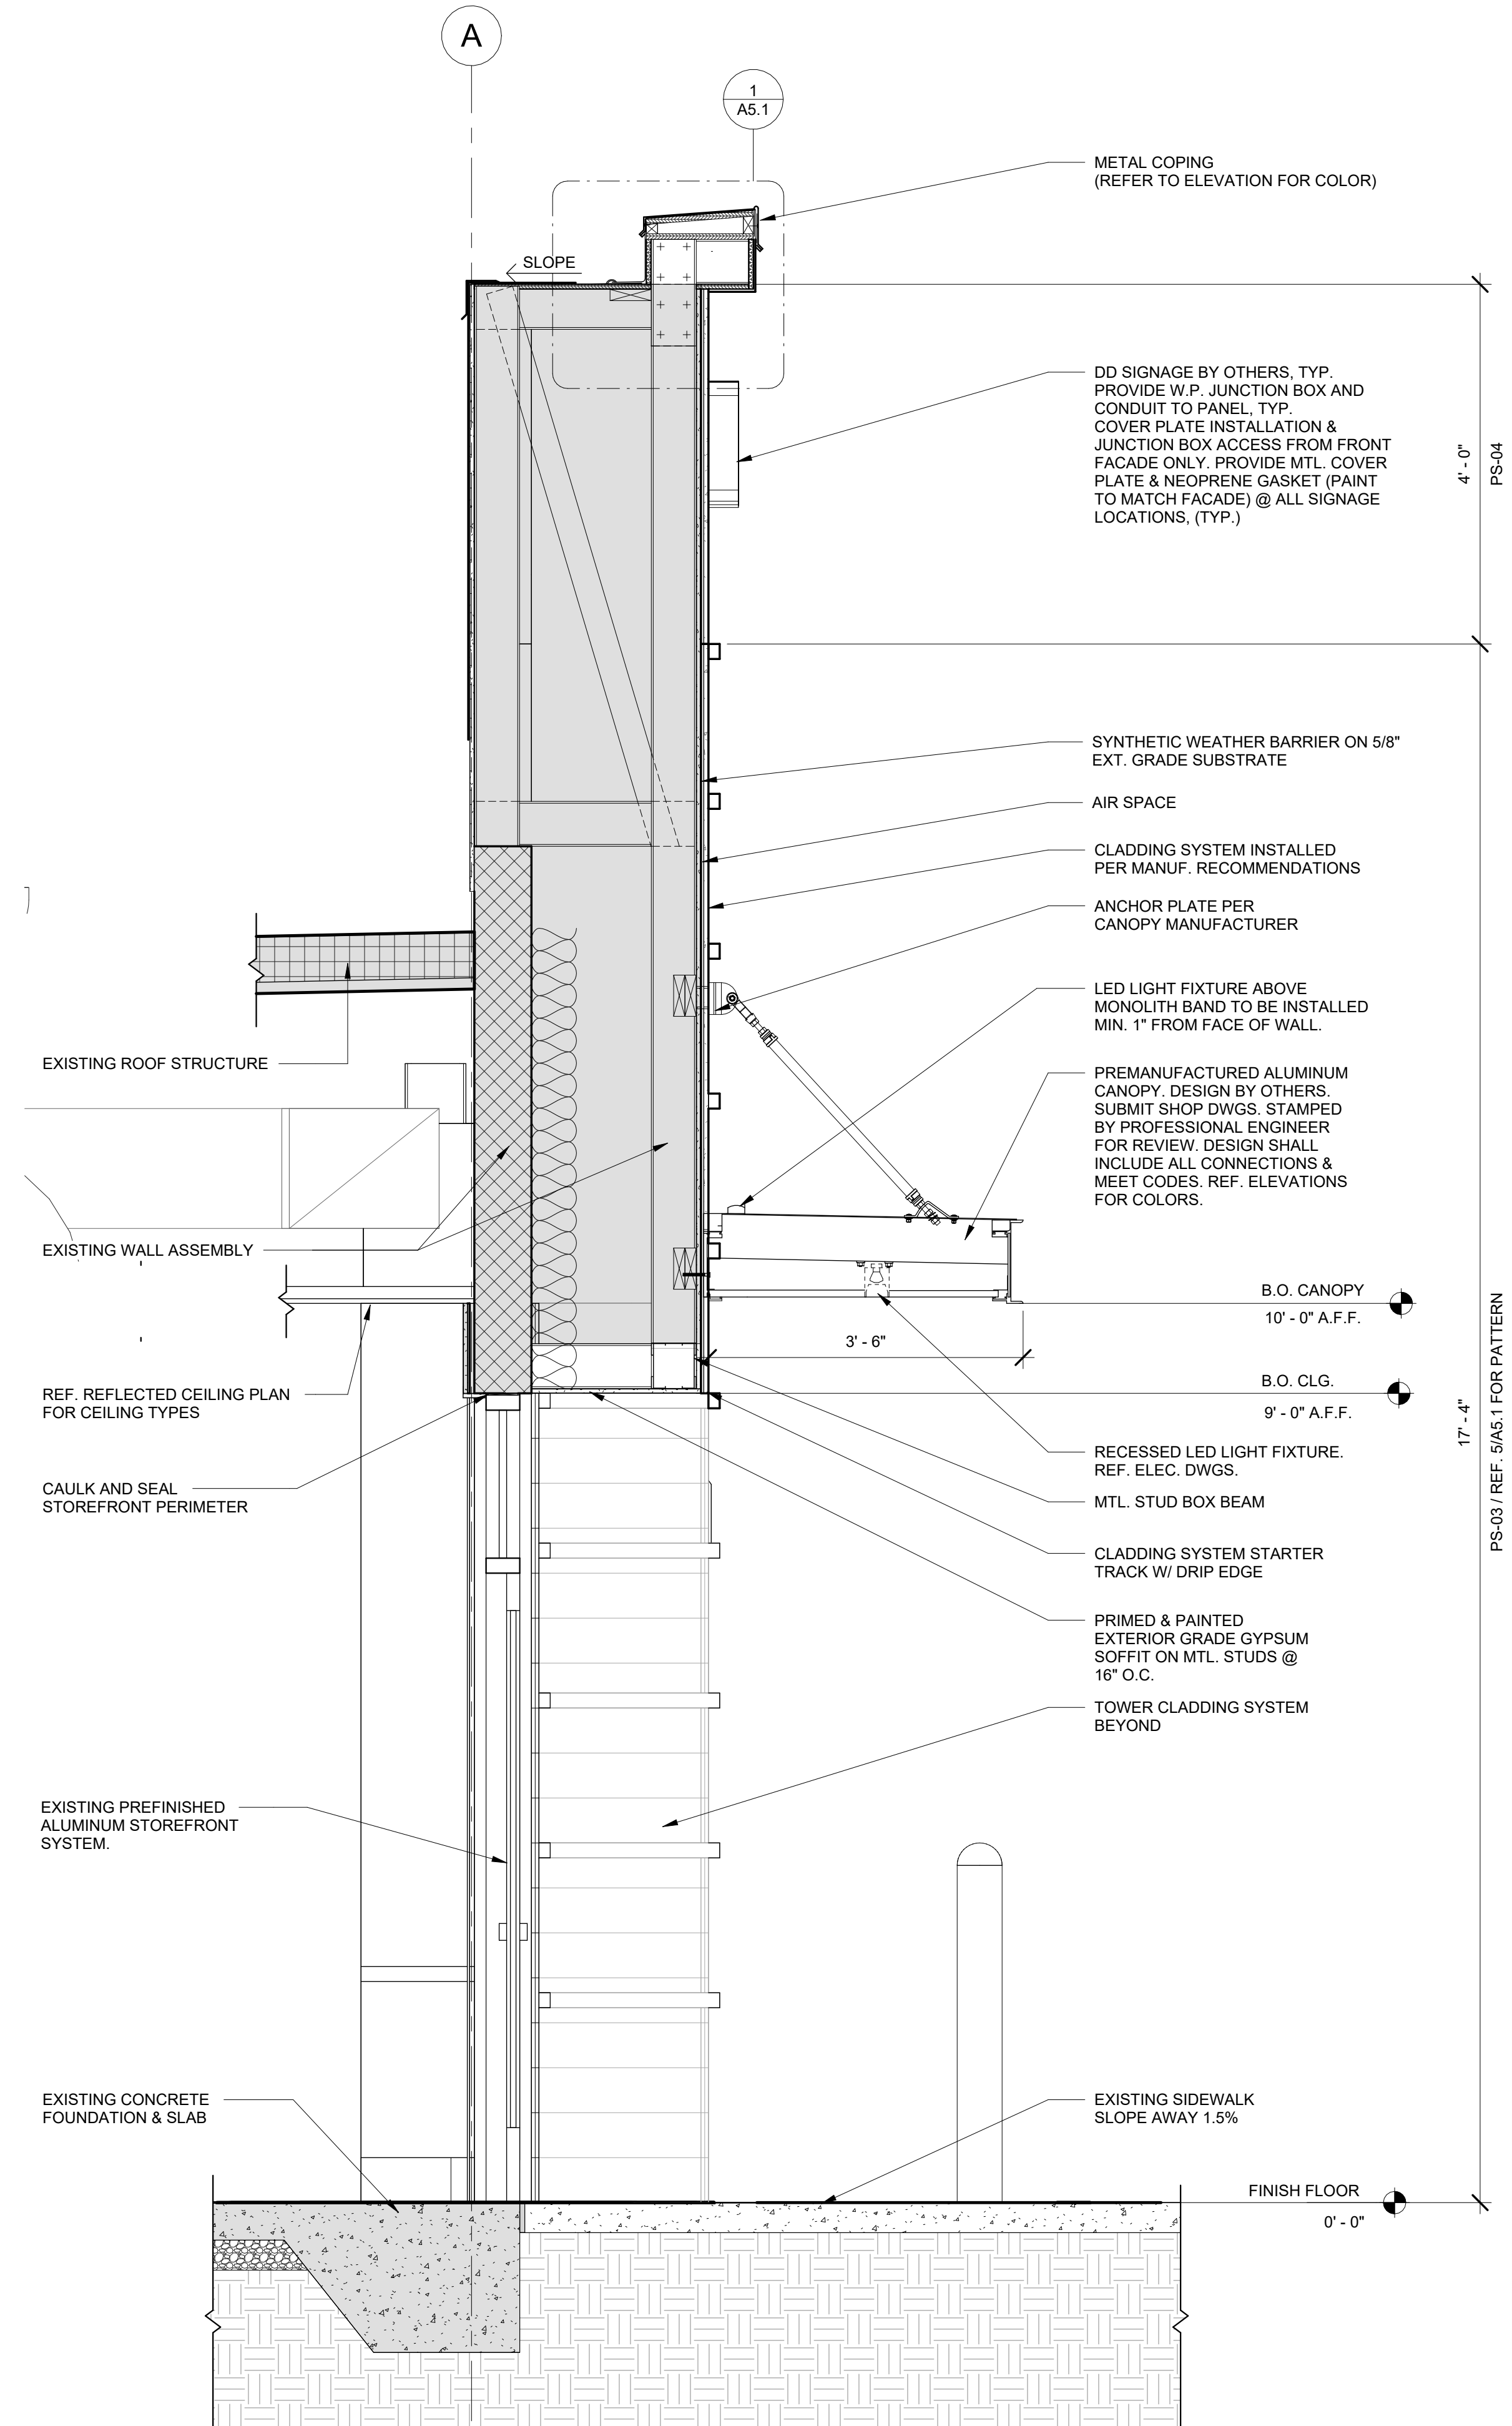


1 WALL SECTION
3/4" = 1'-0"


REVISIONS	DESCRIPTION
#	
DATE	

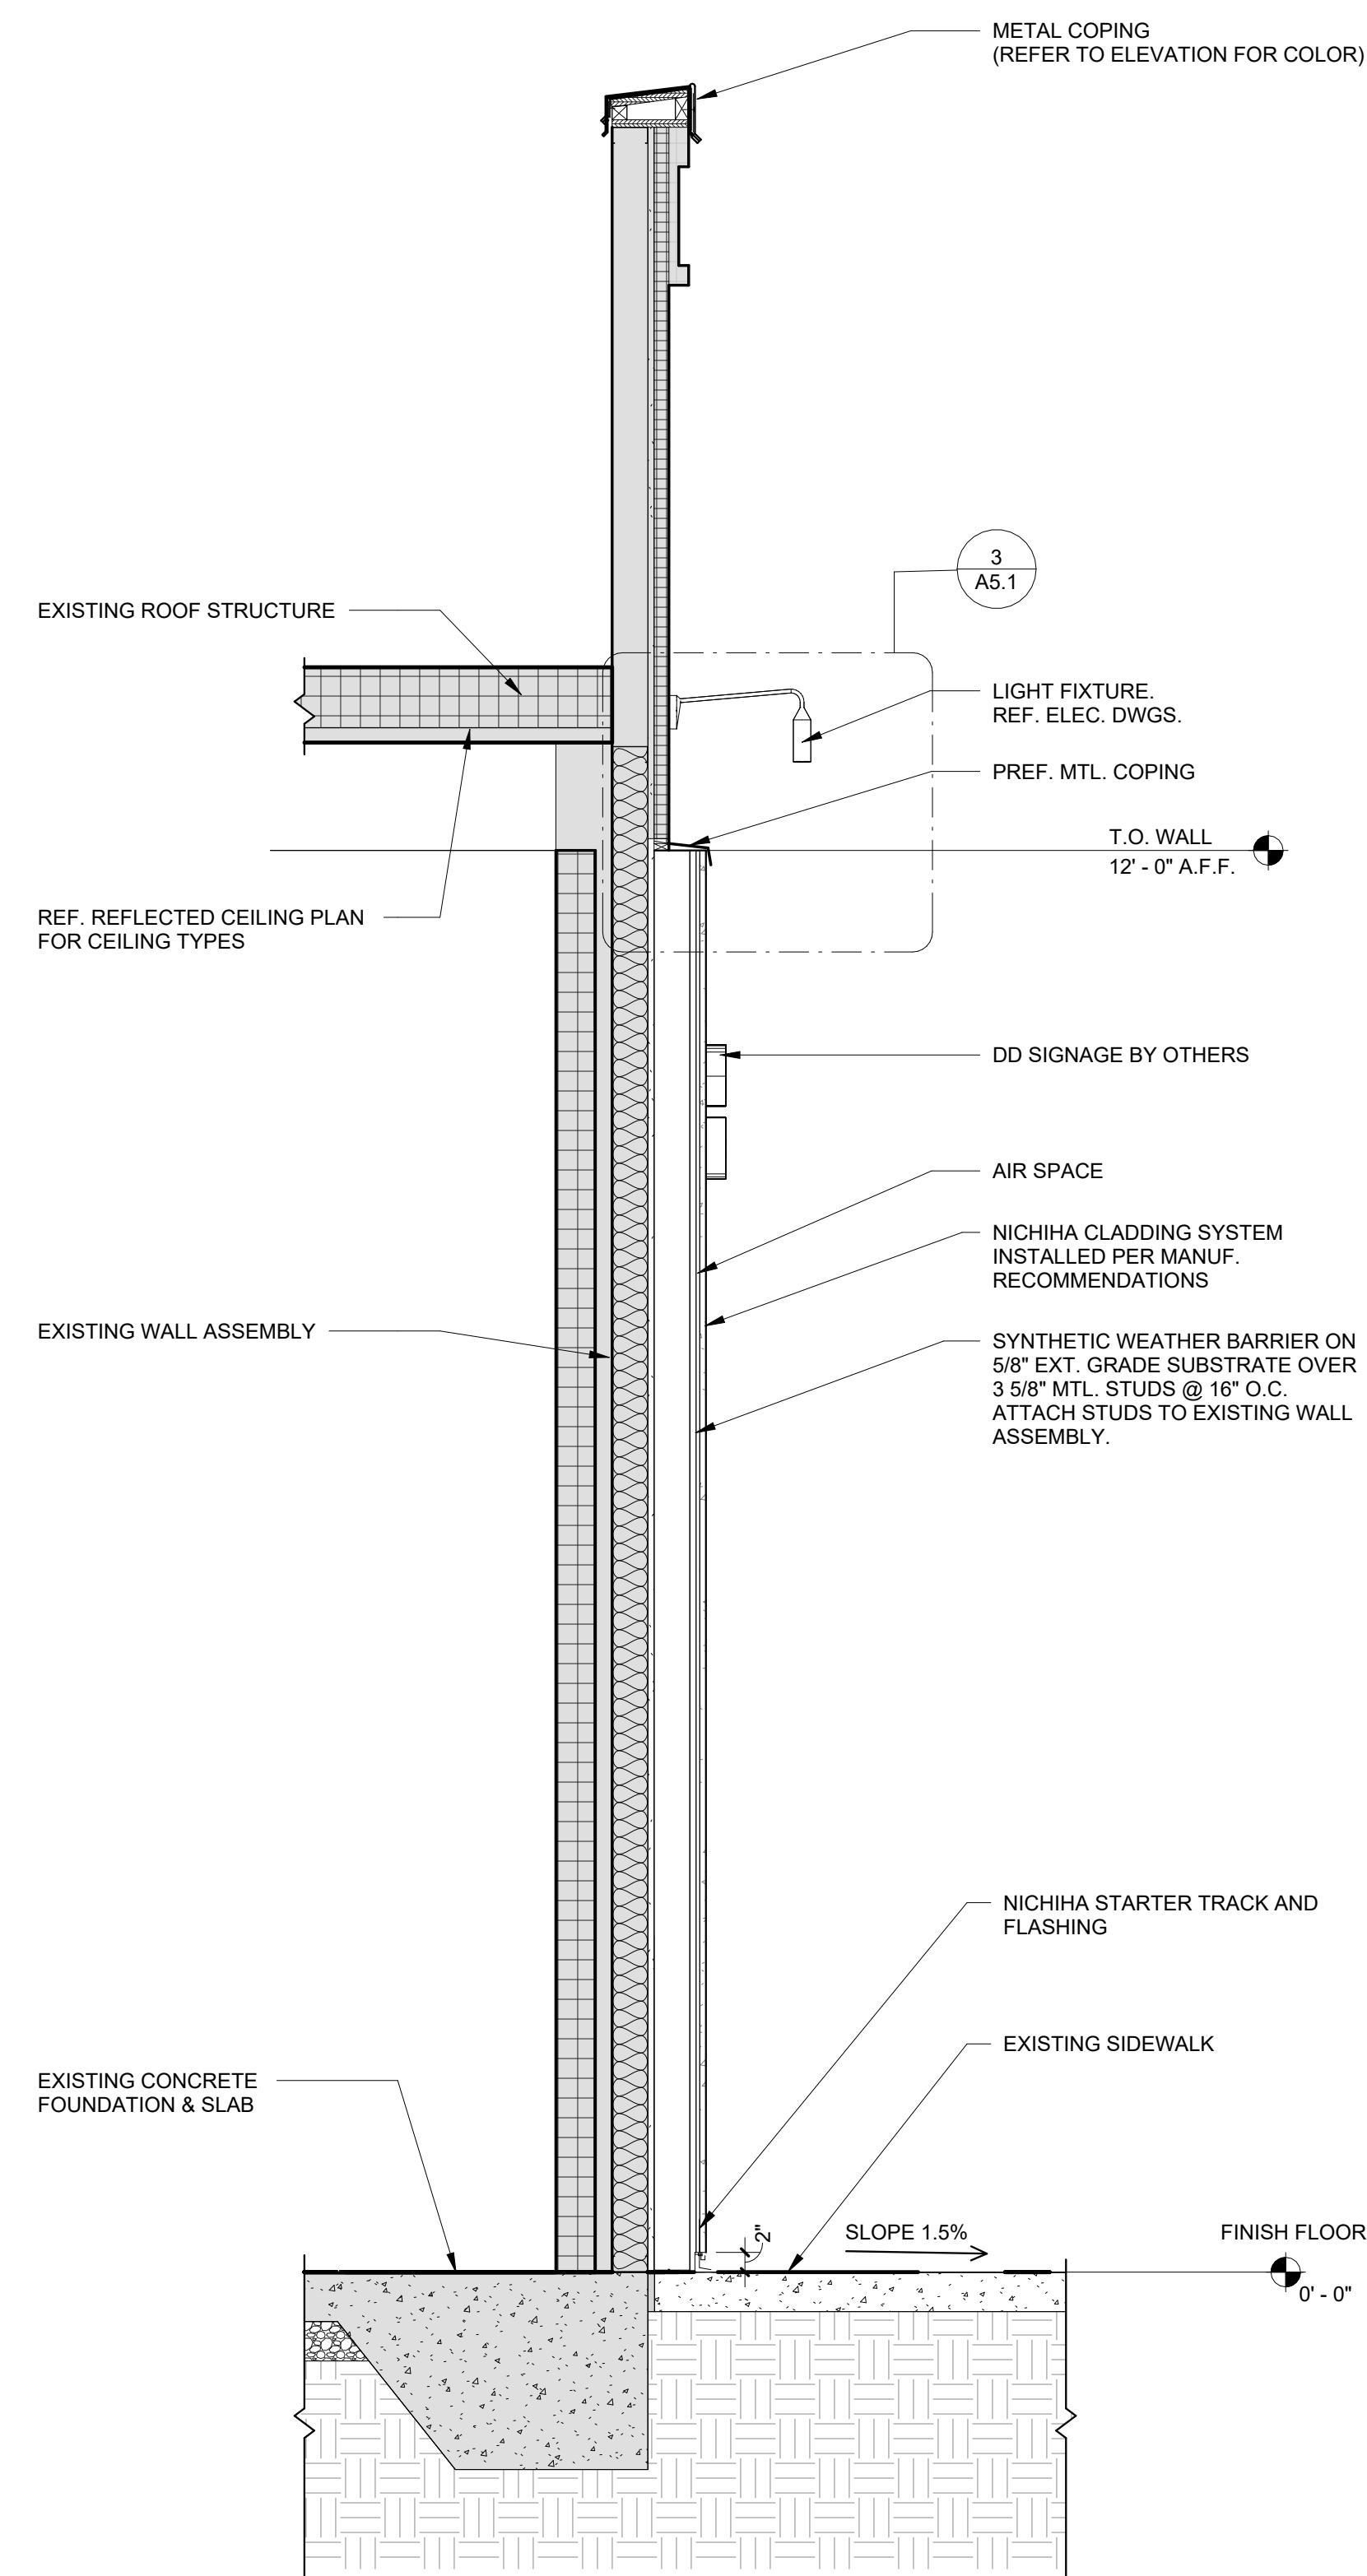

2 WALL SECTION
A3.2 3/4" = 1'-0"

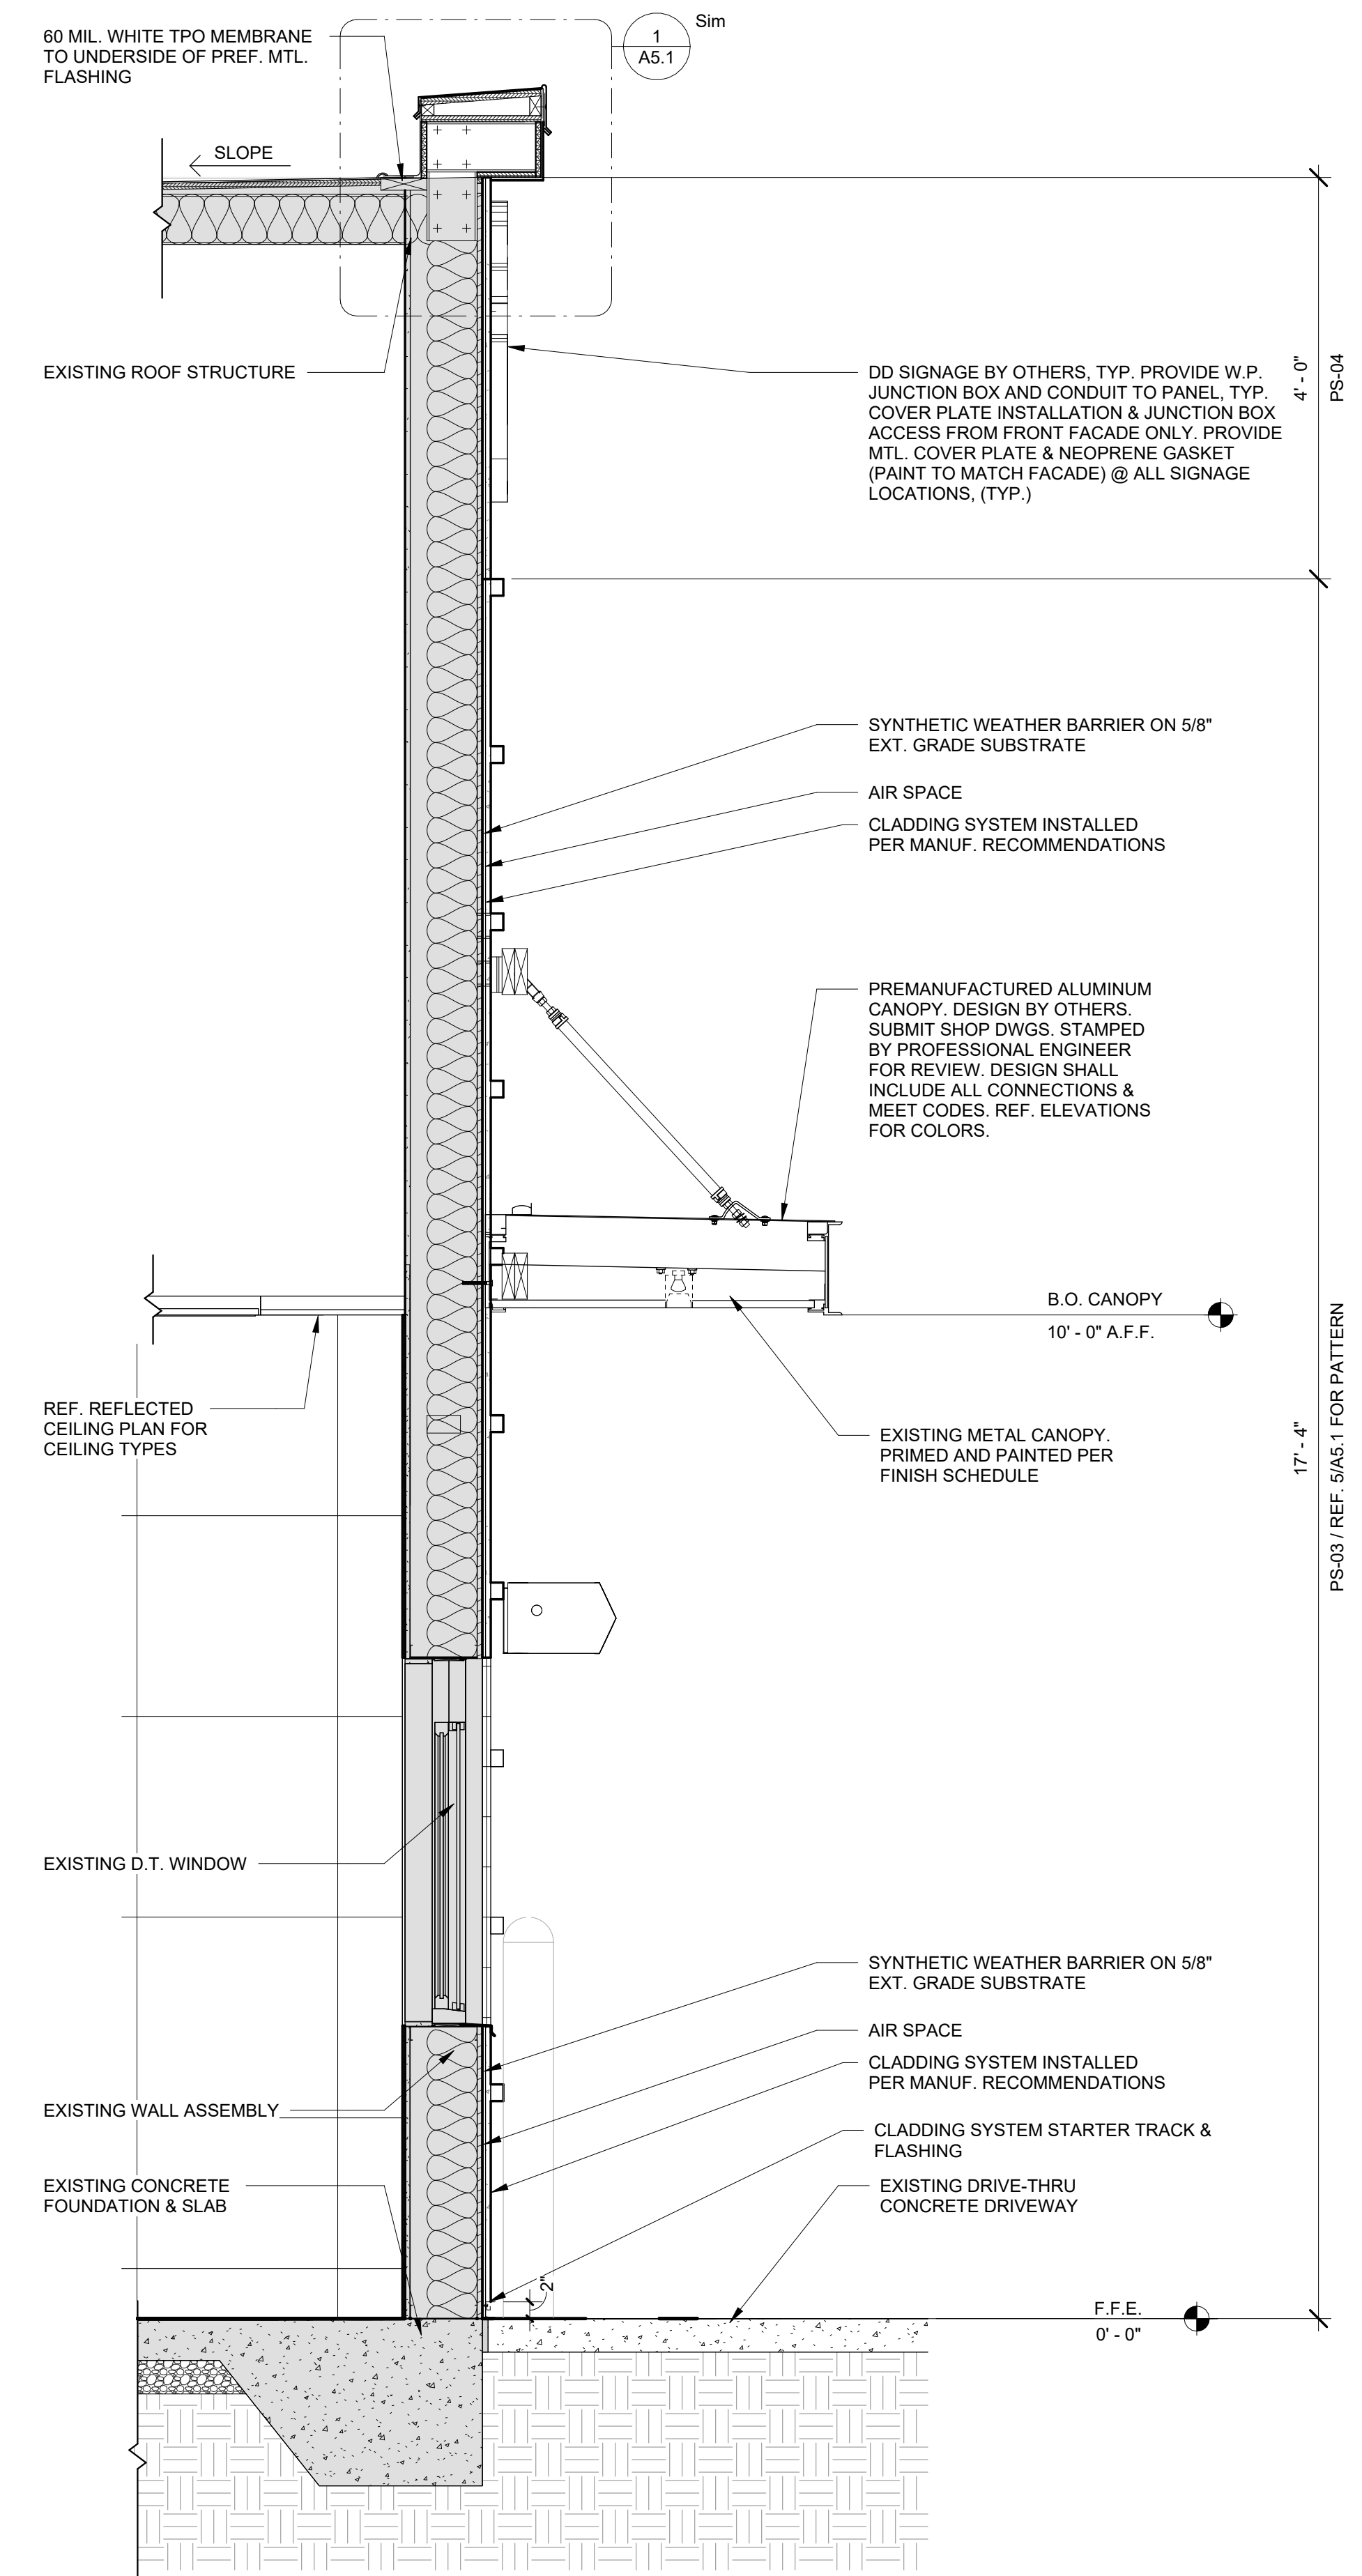

1 WALL SECTION
A3.2 3/4" = 1'-0"

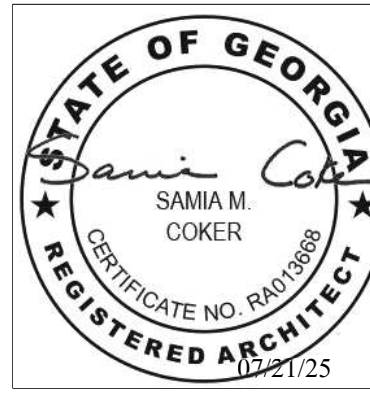

DUNKIN DONUTS REMODEL
2083 CROWELL ROAD
COVINGTON, GA. 30014
FOR:
JPC DESIGN & CONSTRUCTION, LLC
PO BOX 710
JACKSON, GA. 30233

[illegible]

SHEET TITLE
WALL SECTIONS


DATE 07/21/2025

PROJECT NUMBER
24163

SHEET NUMBER


A3.2

INTERIOR MATERIAL SCHEDULE - DUNKIN DONUTS				
MARK	MATERIAL	MANUFACTURER	PRODUCT NO.	DESCRIPTION/REMARKS
FT-01C	PORCELAIN TILE	DAL TILE	DB PORTFOLIO POR 12X24 FLOOR PF05 "ASH GREY STD" # PF0512241PK	12"x24" TILE / USE W/ GROUT G-01 (C)
FT-02	QUARRY TILE	DAL TILE	DB TEXTURES 6X6X1/2 FLOOR CE 0T03 "ASH GREY STD" # 0T030651P	6"x6" TILE / USE W/ GROUT G-02
FTB-01C	PORCELAIN TILE BASE	DAL TILE	DB PORTFOLIO POR 12X24 FLOOR PF05 "ASH GREY STD" # PF0512241PK	CUT 12"x24" FLOOR TILE W/ BRUSHED NICKEL SCHLUTER STRIP CAP JOLLY - ANIGB / COLOR MATCH WALL TILE ALUMINUM TRIM MATTE WHITE TSDA DARK ANTHRACITE TSSG STONE GREY
FTB-02 C	QUARRY TILE BASE	DAL TILE	DB TEXTURES 03565U 0T03 "ASH GREY STD" # 0T03Q3565U1P	5"x6" COVE BASE. SEE NAT. ACCOUNT FOR INSIDE/OUTSIDE CORNER NUMBERS. USE W/ GROUT G-02
G-01C	GROUT	MAPEI	ULTRACOLOR PLUS FA	#107 IRON - CUSTOMER AREA
G-02	GROUT	MAPEI	ULTRACOLOR PLUS FA	#11 - SAHARA BEIGE
G-03	GROUT	MAPEI	ULTRACOLOR PLUS FA	#38 AVALANCHE
G-04	GROUT	MAPEI	ULTRACOLOR PLUS FA	#10 BLACK
G-05	GROUT	MAPEI	ULTRACOLOR PLUS FA	#09 GRAY
WP-PL2 C	LAMINATE	WILSONART	4857-80 SHADOW ZEPHYR	MATTE FINISH. PLAM WALL PANELS 48"x96"
WP-CR1	WALL PROTECTION	IMPACT SPECIALTIES	BRUSHED NICKEL	SARATOGA CHAIR RAIL 3" H x 114"L x 1/2" / VA200 BRUSHED NICKEL CORNER GUARD
WC-01 C	VINYL WALL COVERING	DL COUCH	DLC-122 "MINERAL"	VERSA ARIES PATTERN 20 OZ TYPE II W/ AQUASAFE
WC-03 C	ADVANCE WALL PROTECTION	DL COUCH	DLC-26519C	WOOD WALL P3TEC (NATURELLE)(48" WIDE 15 YARD BOLT) WOOD WALL MUST BE INSTALLED RAILROADED.
WT-01 C	PORCELAIN TILE	DAL TILE	# N812DD12241P2	12x24 / GROUT G-03 / INSTALL PER PATTERN SHOWN ON DETAIL 4/A5.1. ALUM. PROFILE: SCHLUTER JOLLY MBW MATTE WHITE. HEIGHT 10mm (3/8") A100MBW
WT-02	PORCELAIN TILE	DAL TILE	DB PORTFOLIO POR 6X24 FLOOR PF09 "CHARCOAL" # PF096241PK	BRICK STYLE 6"x24" OR 4"x12" SP. ORDER CUT TO SIZE (WT-2) - USE GROUT G-04. ALUM. PROFILE: SCHLUTER, JOLLY, TSDA DARK ANTHRACITE. 8mm HEIGHT A80TSDA
WT-03	PORCELAIN TILE	DAL TILE	DB FIELD 6X18 COLOR WHEEL LINEAR - ARTIC WHITE #0790 MATTE	STACK BOND PATTERN 6"x18" - USE GROUT G-05. ALUM. PROFILE: SCHLUTER, JOLLY, MBW MATTE WHITE 8mm HEIGHT A80MBW
WT-04 C	PORCELAIN TILE	DAL TILE	DB BLOCK PARTY 6X6 2-TILE ACCENT - #NS15BP01661P4	ACCENT TILE 6"x6" - USE GROUT G-05. ALUM. PROFILE: SCHLUTER, JOLLY, TSSG STONE GRAY 8mm HEIGHT A80TSSG
PT-01 C	PAINT	SHERWIN WILLIAMS	SW 7671 "ON THE ROCKS"	LIGHT GRAY. SHEEN: SATIN/EGGSHELL
PT-02 C	PAINT	SHERWIN WILLIAMS	SW 7099 "IRON ORE"	CHARCOAL. SHEEN: FLAT FOR CLG/SOFFIT; SEMIGLOSS FOR DOORS & FRAMES
PT-03 C	CEILING PAINT	SHERWIN WILLIAMS	SW 6292 "ICE CUBE"	OFF-WHITE. SHEEN: FLAT FOR CLGS. / SEMIGLOSS FOR DOORS & FRAMES
CT-02	CEILING TILE	ARMSTRONG	1728 BL 2'x2'	BLACK FACTORY FINISH
CT-03	CEILING TILE	ARMSTRONG	#8668 2'x2'	VINYL COATED - WHITE TILE & GRID

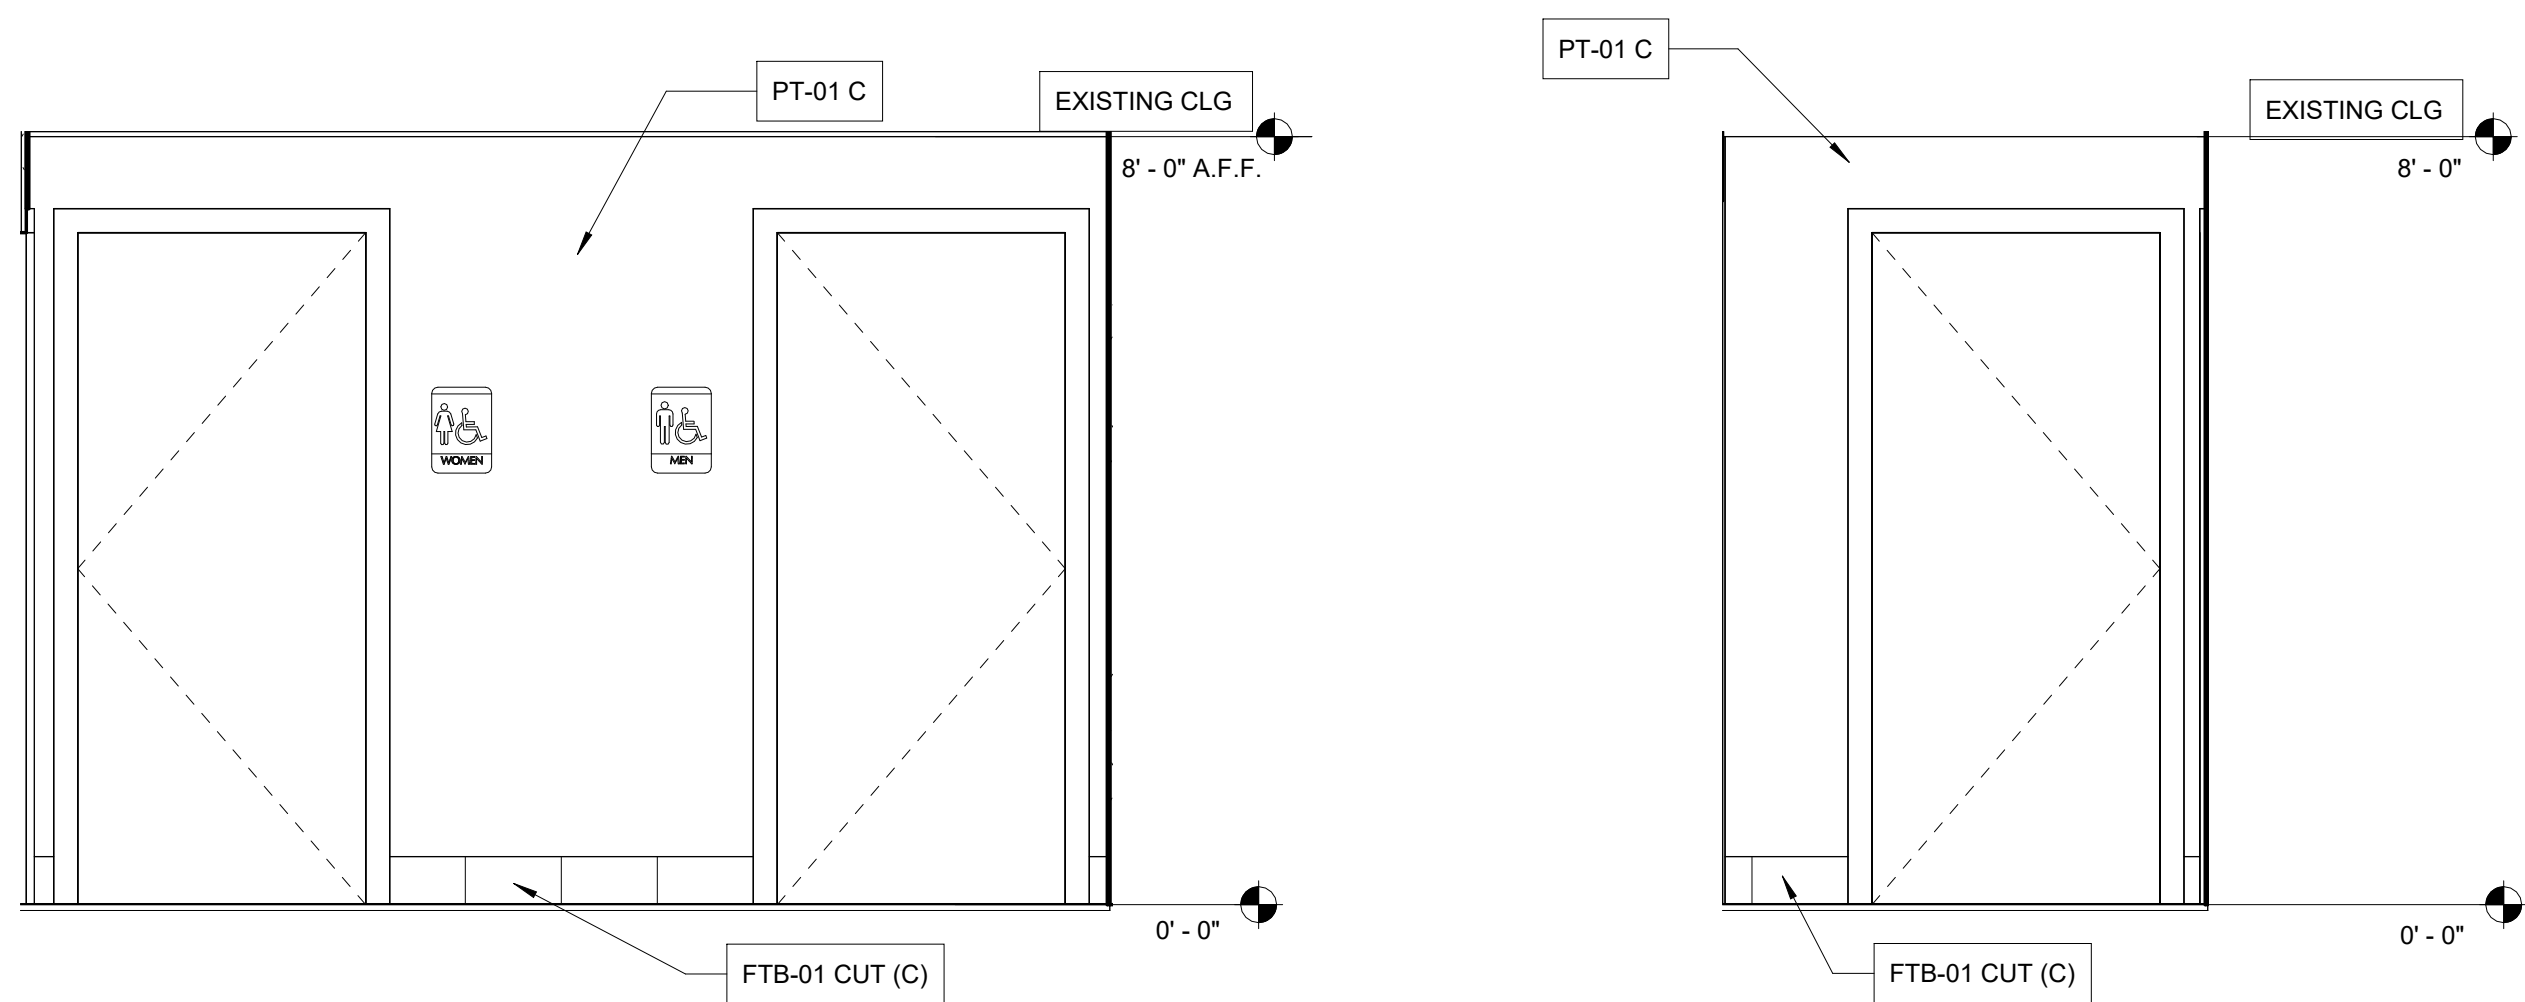


6
A4.1
1/2" = 1'-0"


7
A4.1
1/2" = 1'-0"

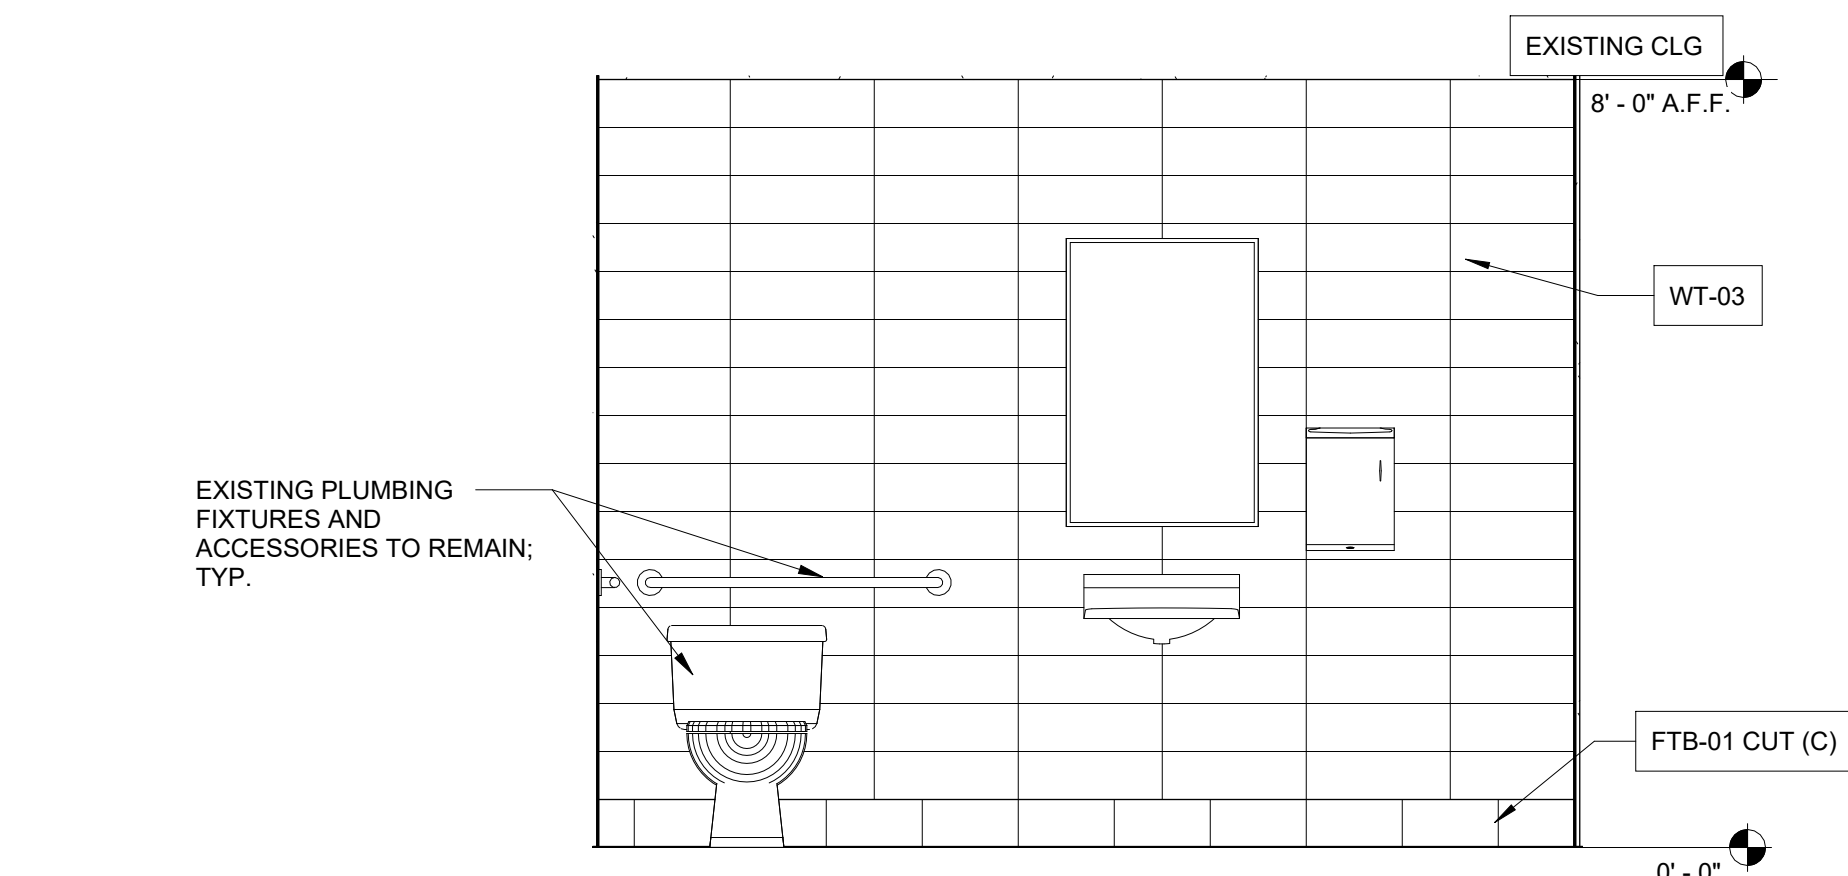


8
A4.1
1/2" = 1'-0"

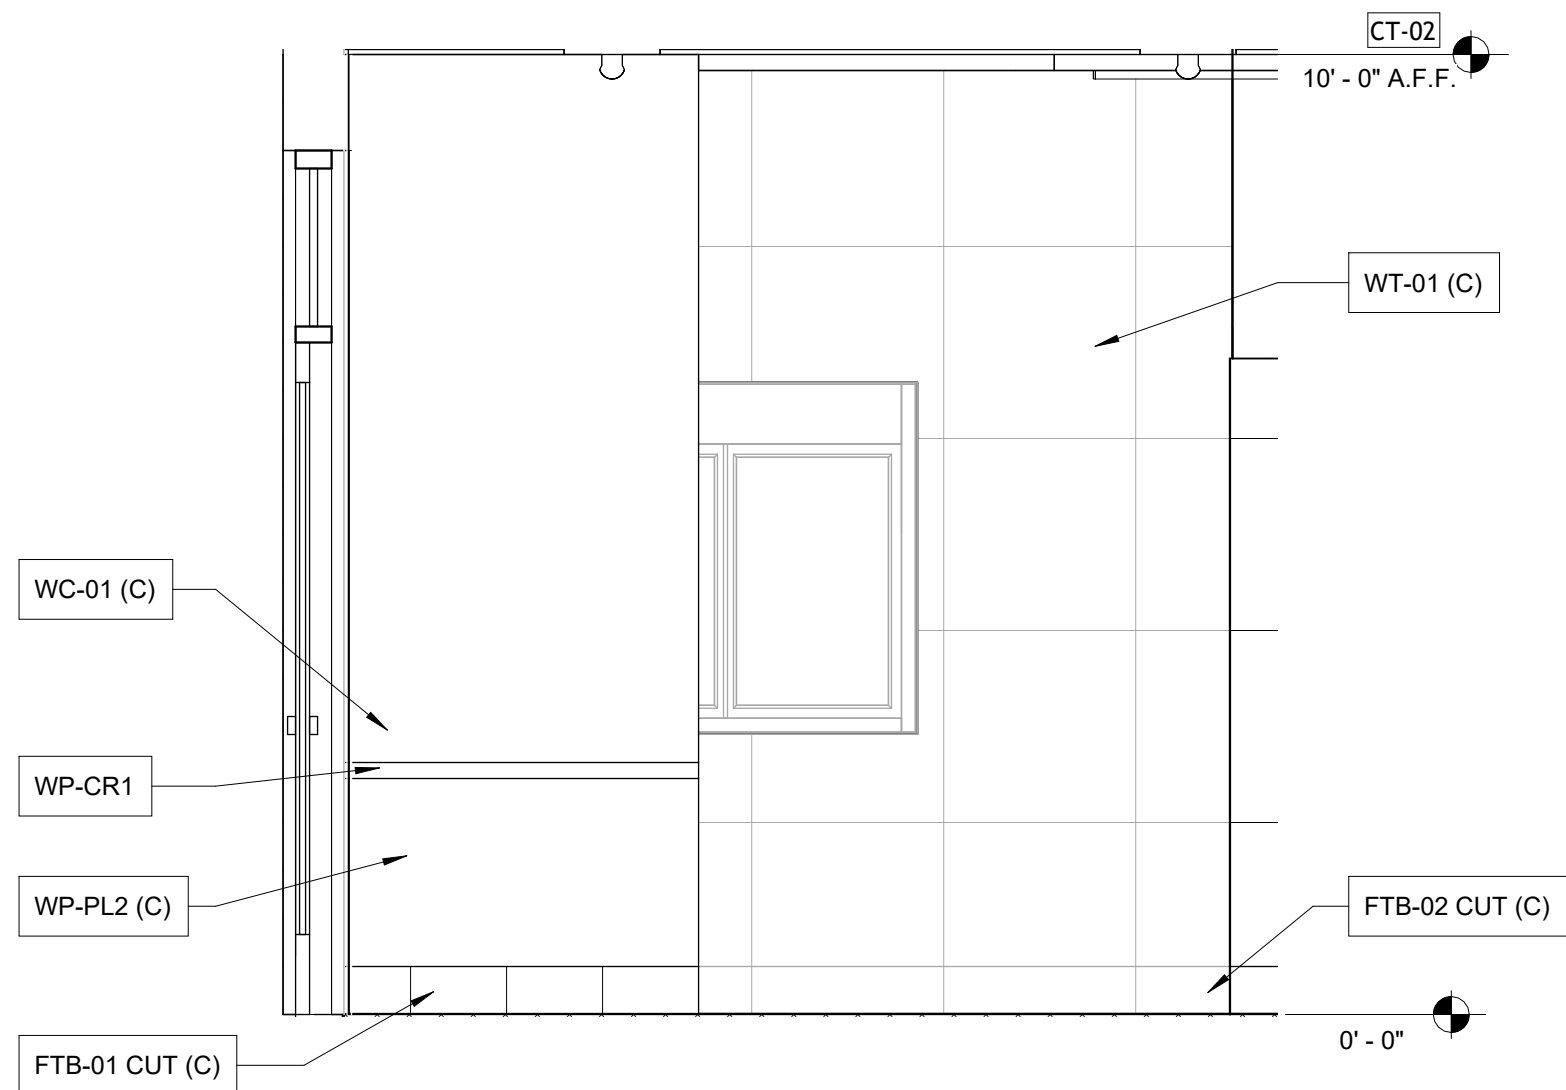


5
A4.1
1/2" = 1'-0"

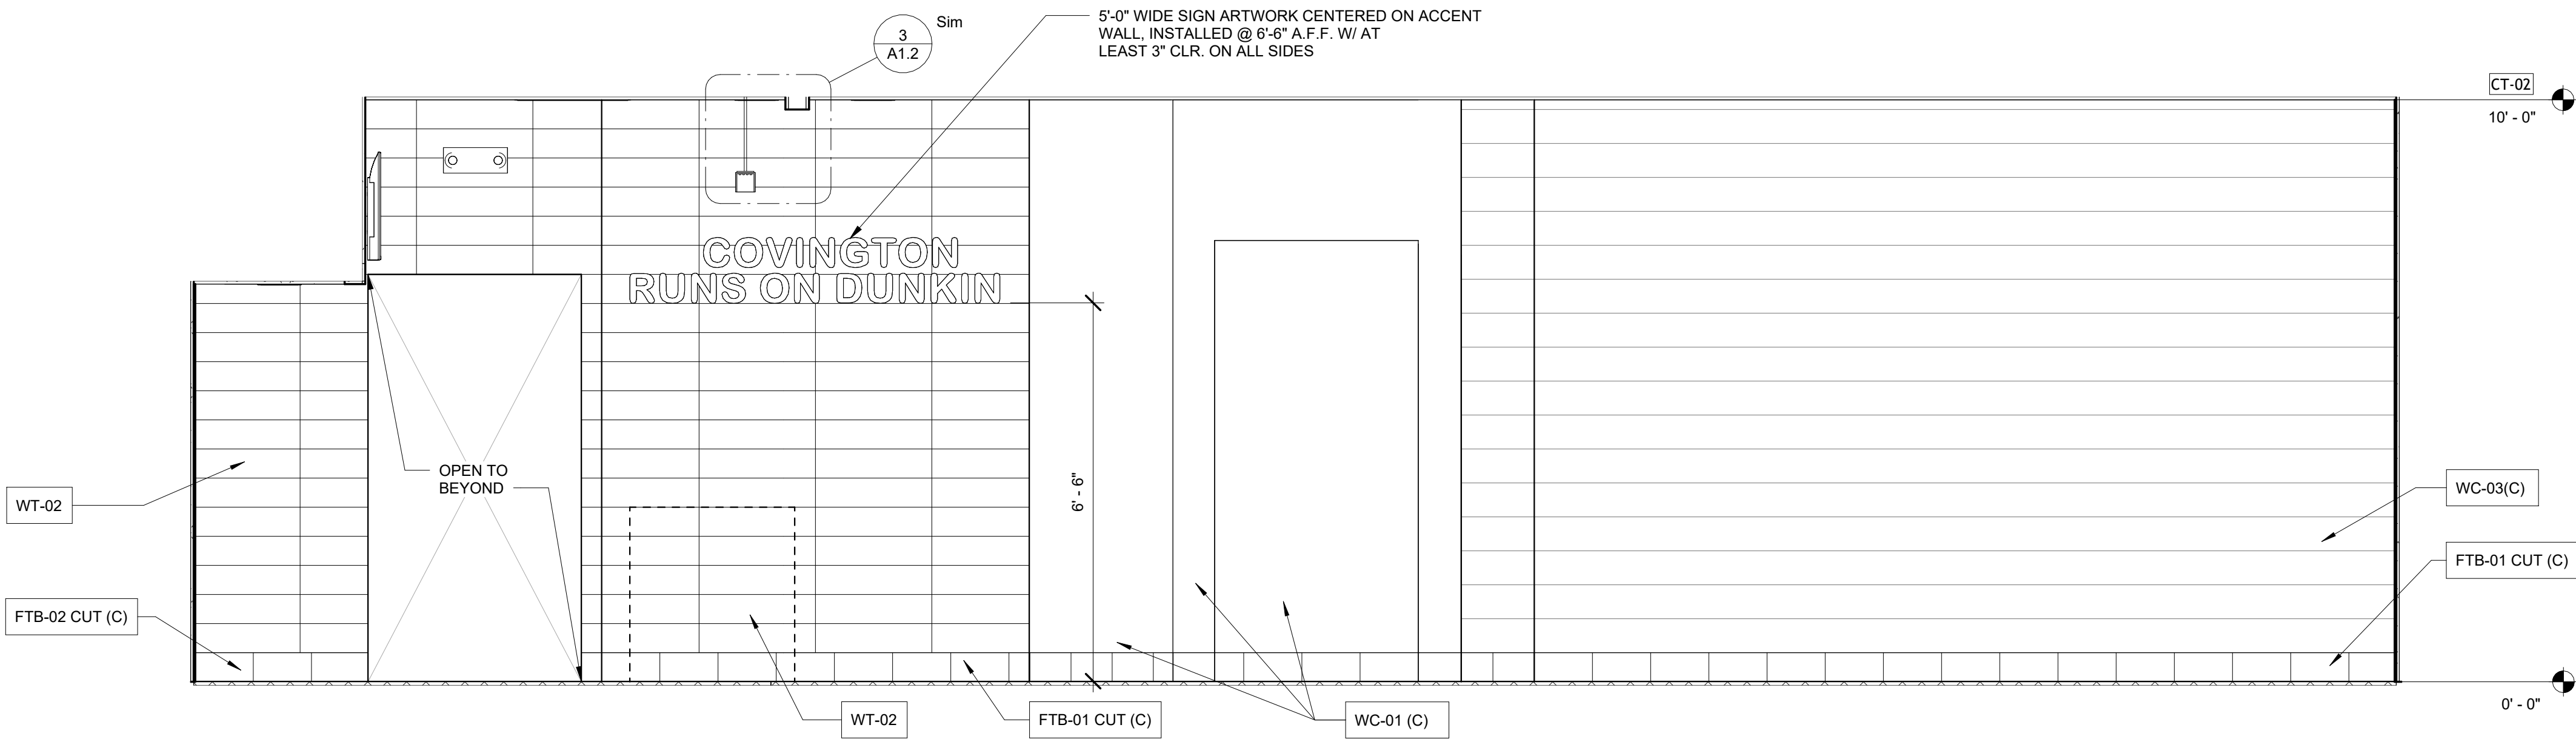


3
A4.1
1/2" = 1'-0"

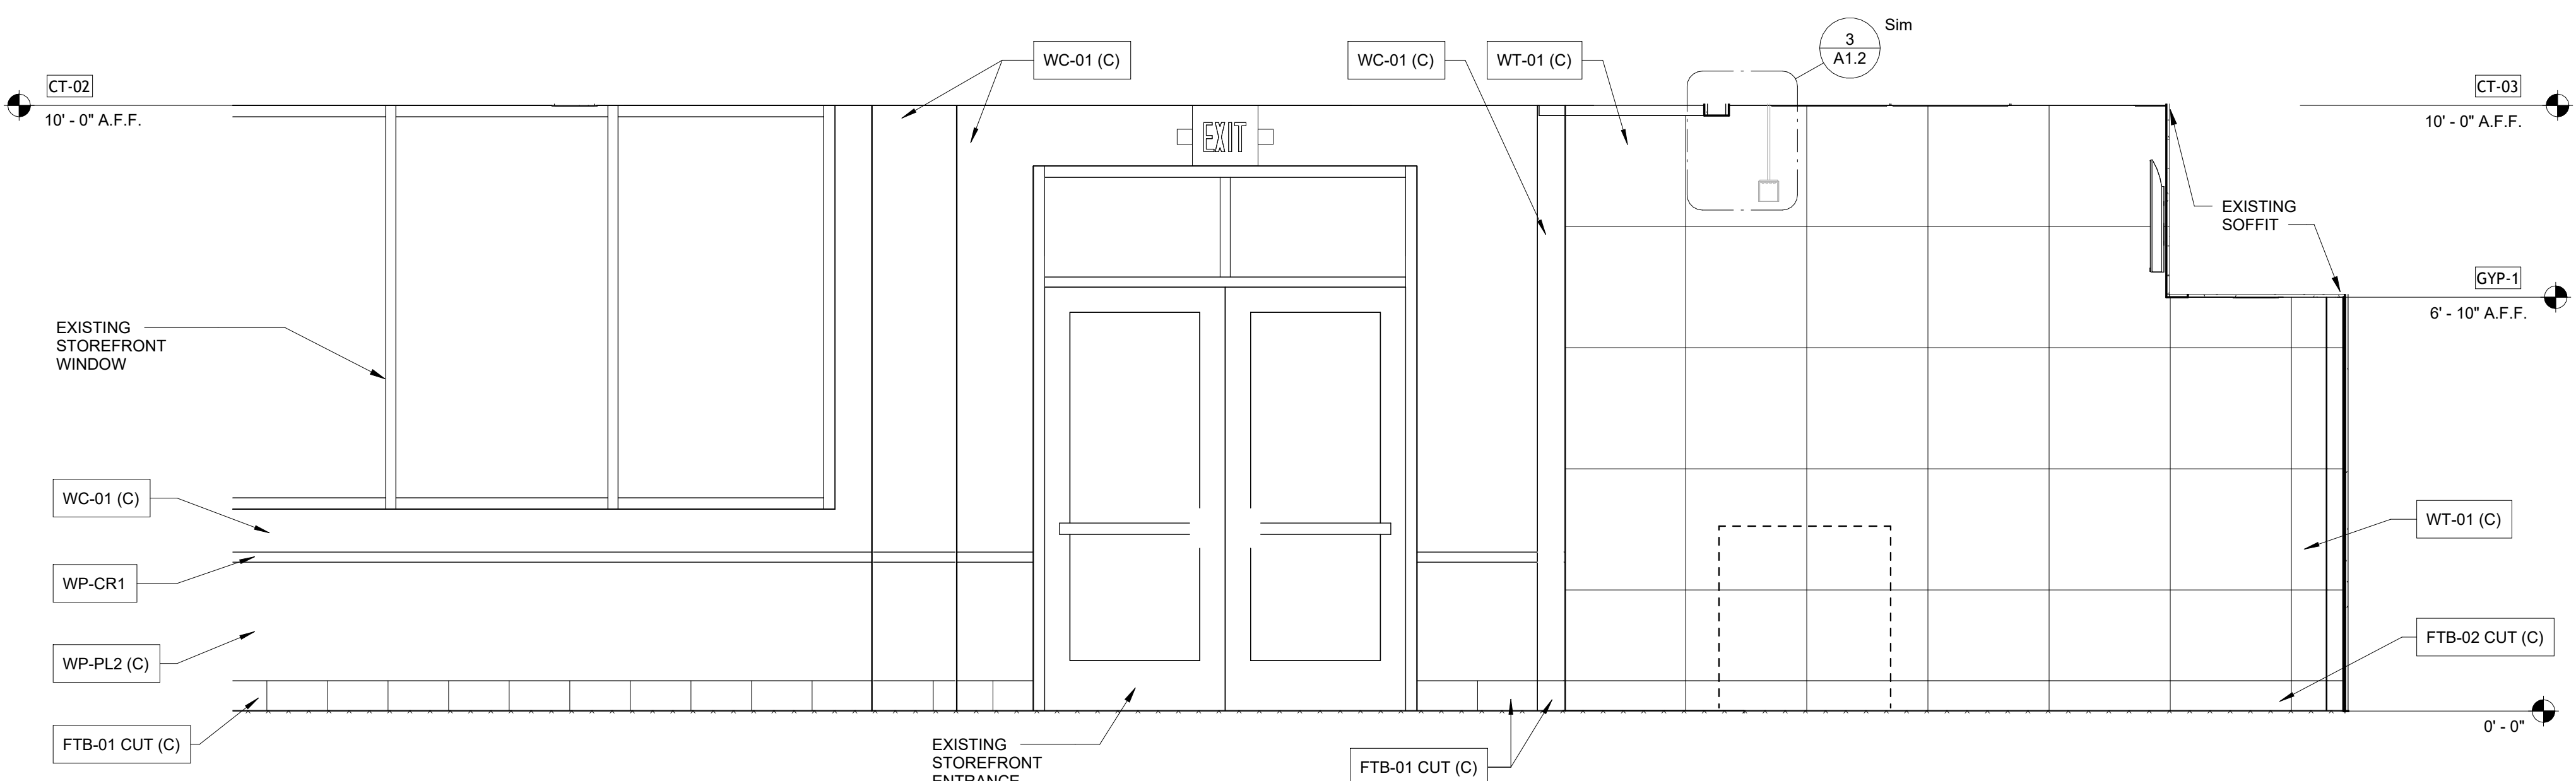


2
A4.1
1/2" = 1'-0"

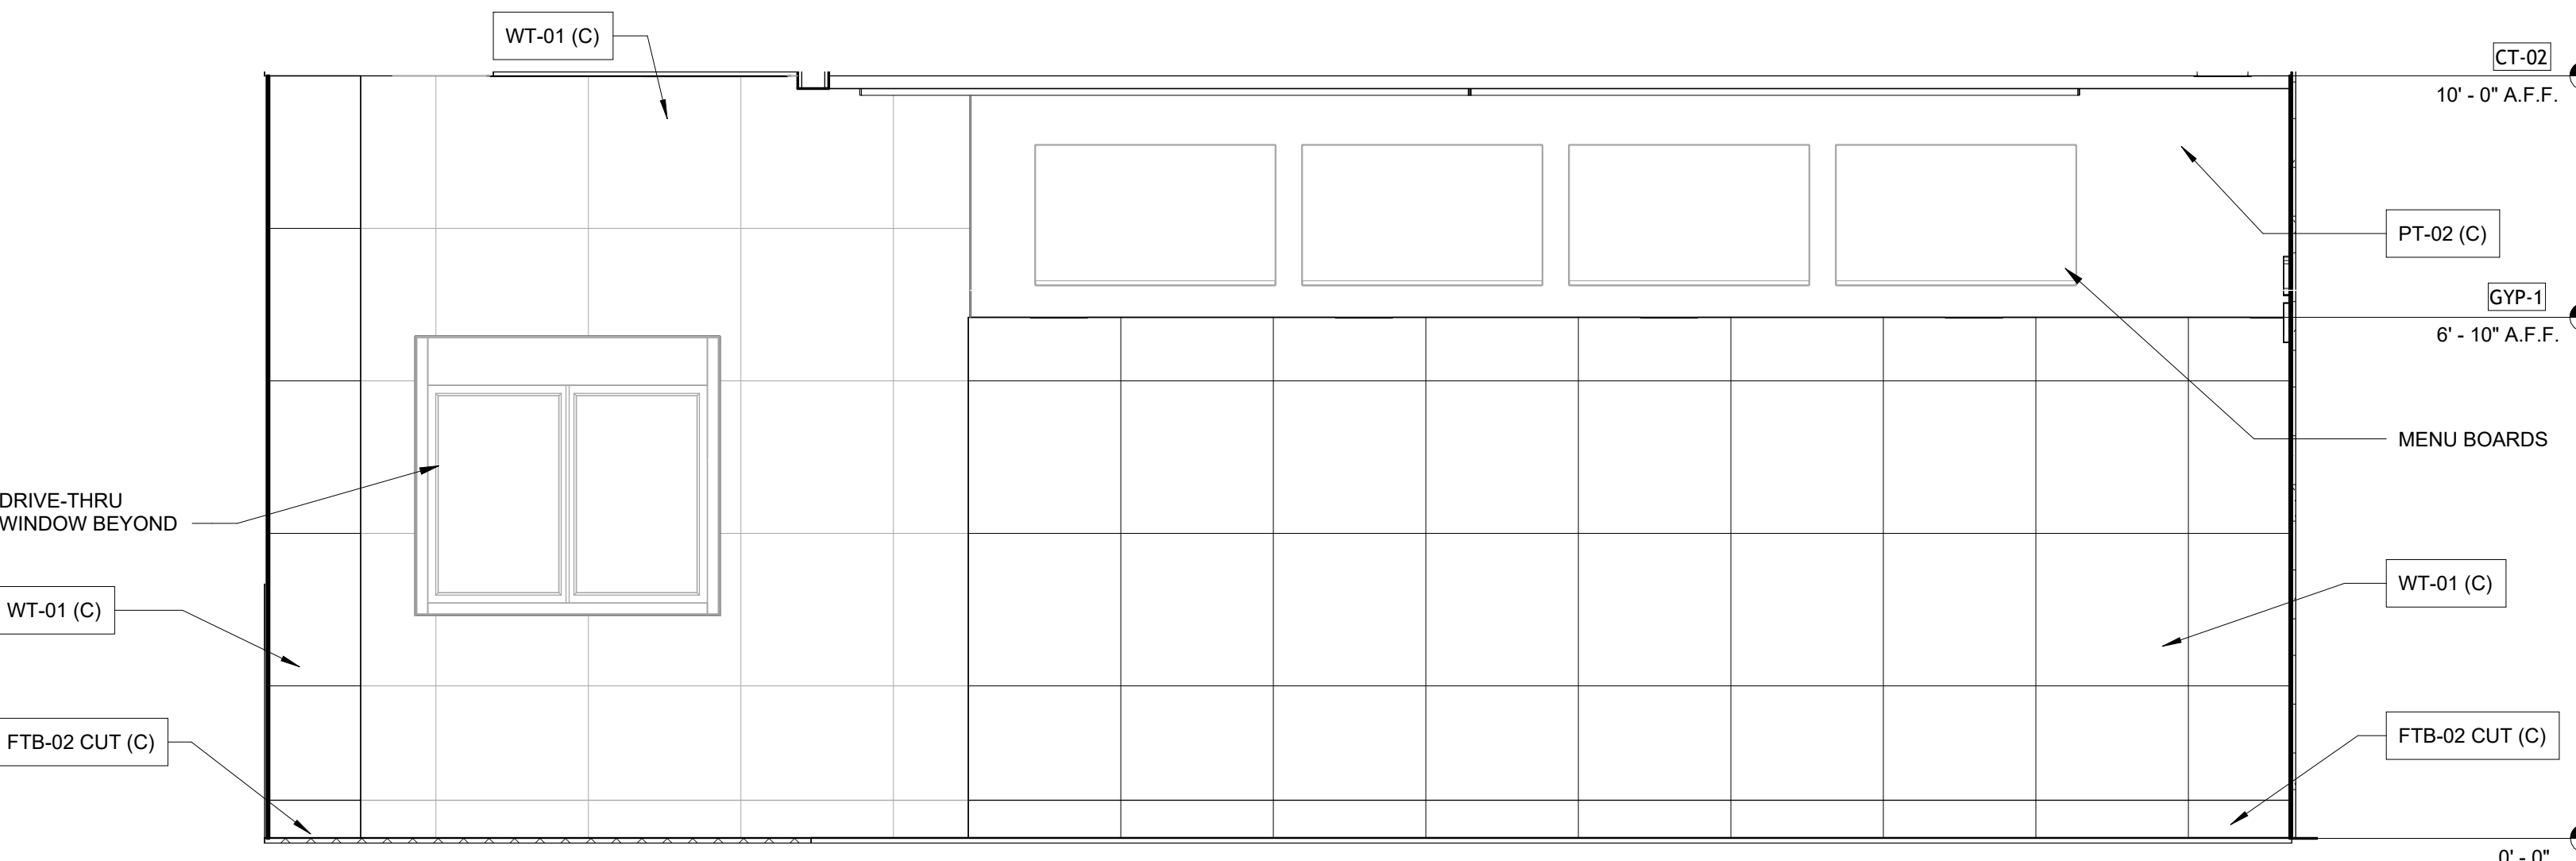

1
A4.1
1/2" = 1'-0"

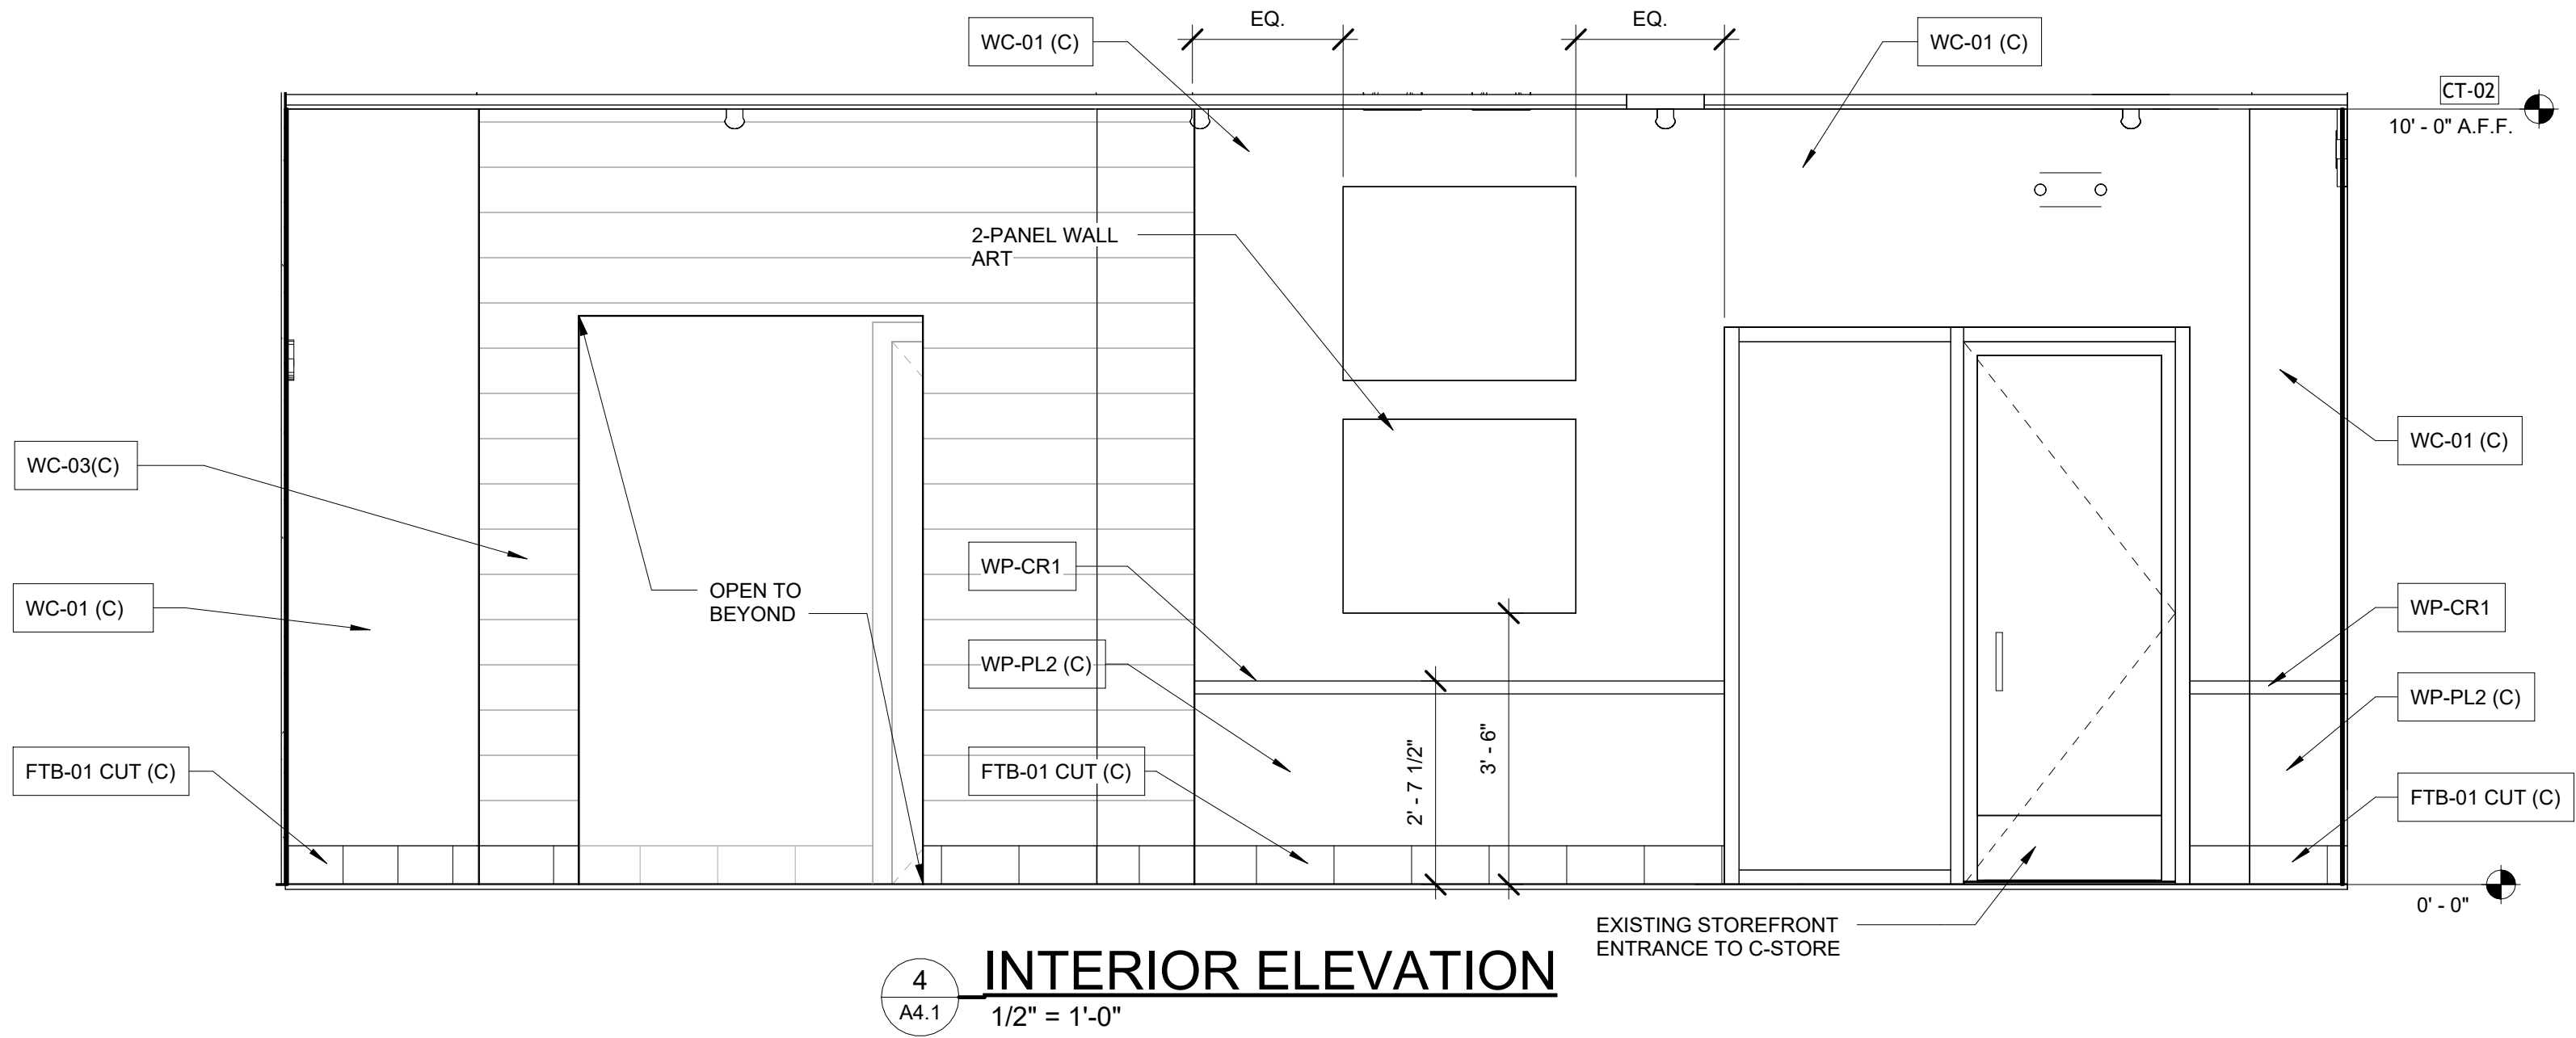


4
A4.1
1/2" = 1'-0"

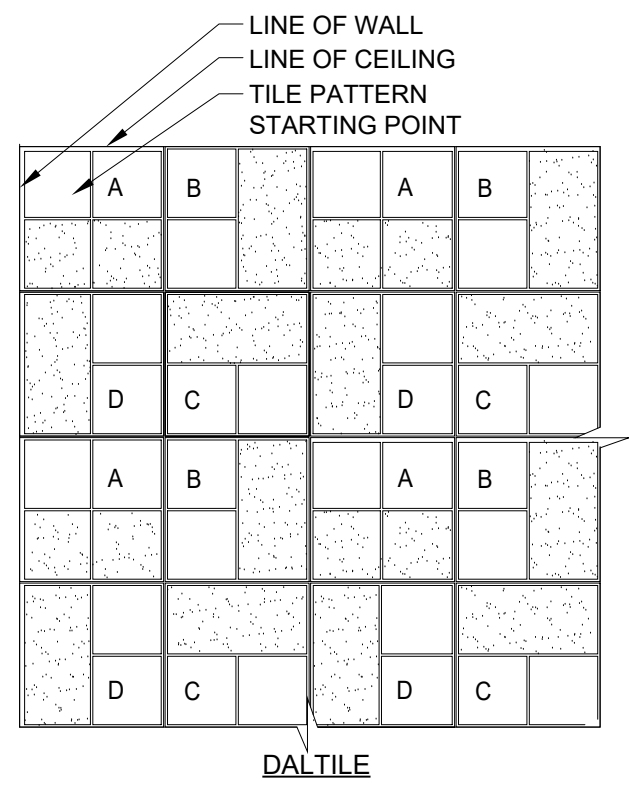

NOTES:
TILE PATTERN TO BE RANDOM.
INSTALL PER THE GUIDELINES BELOW:
• TILE A - START OF TILE PATTERN.
• TILE B = TILE "A" ROTATED COUNTER CLOCKWISE 90 DEG.
• TILE C = TILE "B" ROTATED COUNTER CLOCKWISE 90 DEG.
• TILE D = TILE "C" ROTATED COUNTER CLOCKWISE 90 DEG.

7 ACCENT WALL TILE INSTALL. PATT. @ REST-RM


A5.1 1 1/2" = 1'-0"

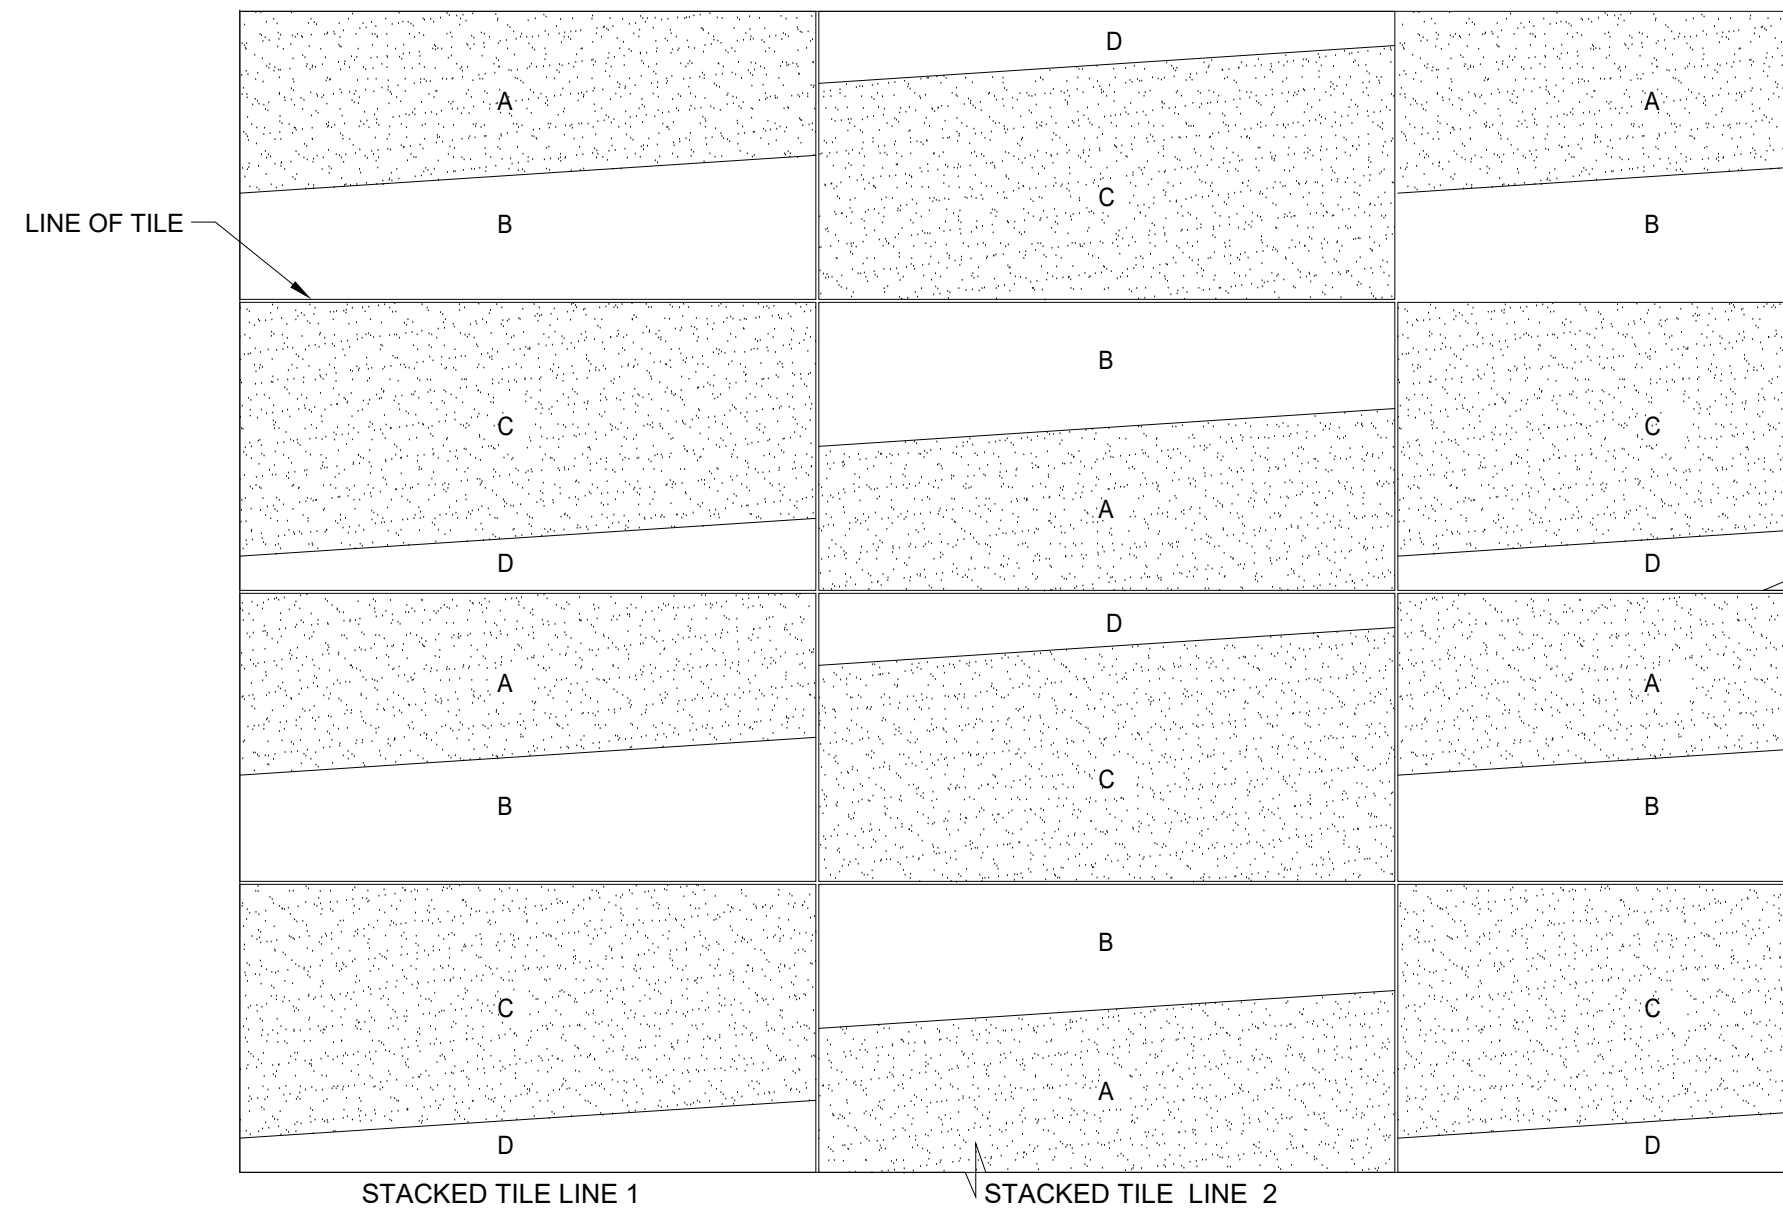

NOTES:
TILE PATTERN TO BE RANDOM.

4 DD TILE PATTERN AT BLACKLINE / SERVICE AREA


A5.1 1 1/2" = 1'-0"

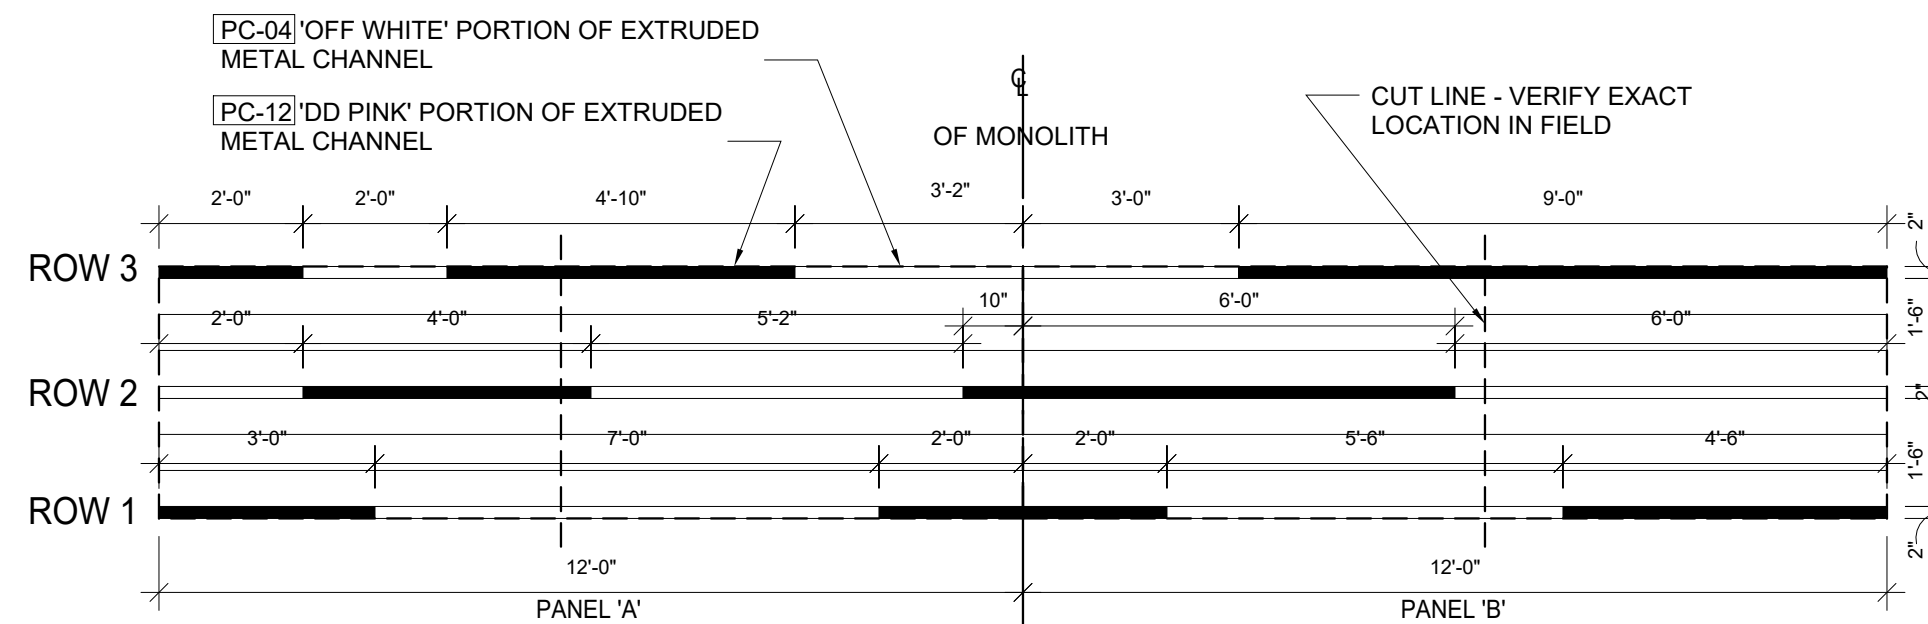

NOTES:
1. ACCENT ELEMENTS ARE 12' BREAK METAL SECTIONS. PRE-FINISHED TO MATCH PATTERN.
2. PANELS TO BE INSTALLED AT THE CENTERLINE OF MONOLITH. INSTALLED OUTWARD AND MITER CUT EACH END IN FIELD.
3. EACH PANEL (A and B) CONSISTS OF 3 UNIQUE ROWS (1, 2, and 3).
4. PANELS SHOULD REPEAT A, B, A, B, ETC. UNTIL DESIRED WIDTH IS MET.


5 DUNKIN MONOLIT PATTERN

A5.1 3/8" = 1'-0"

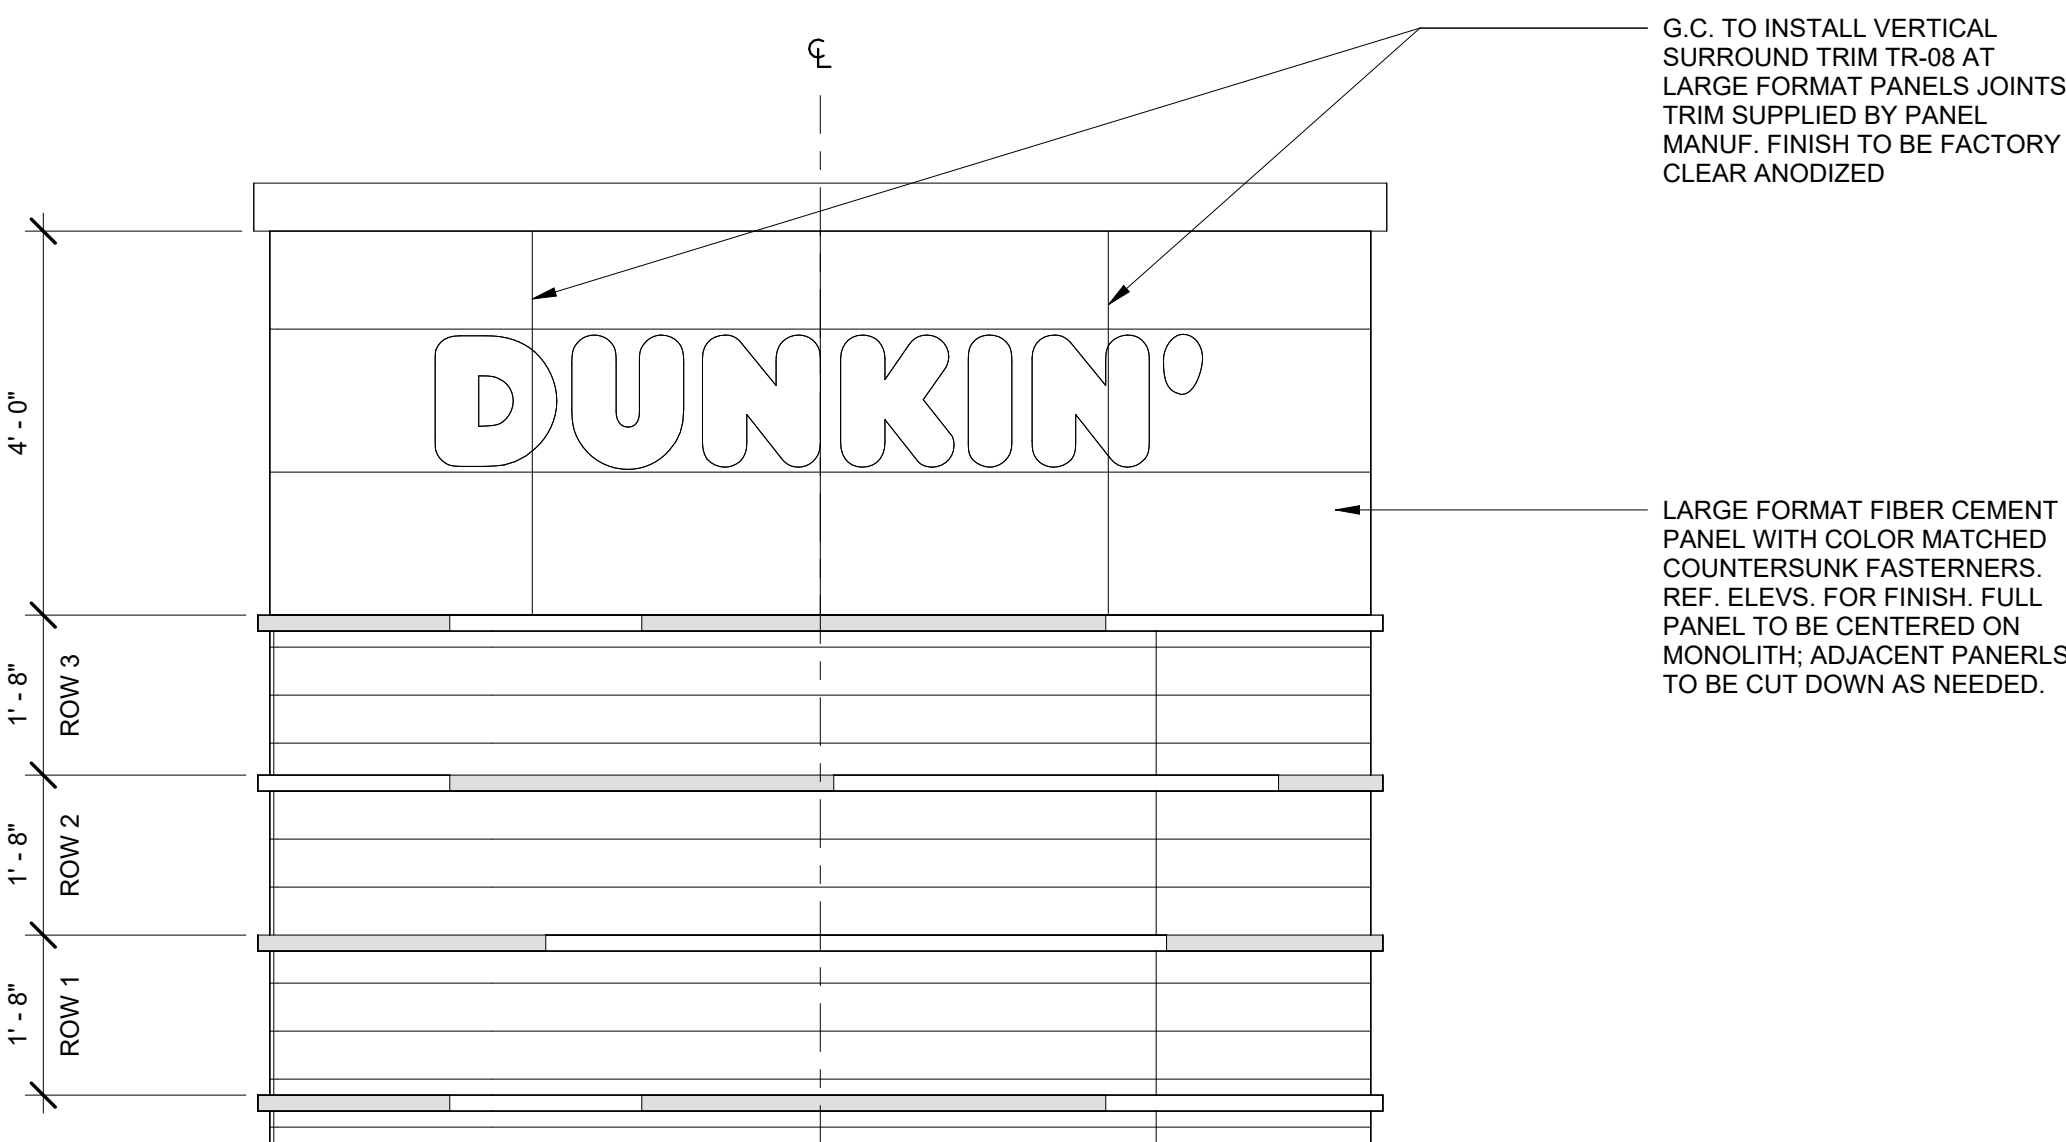


6 MONOLITH ENLARGED ELEVATION

A5.1 1/2" = 1'-0"

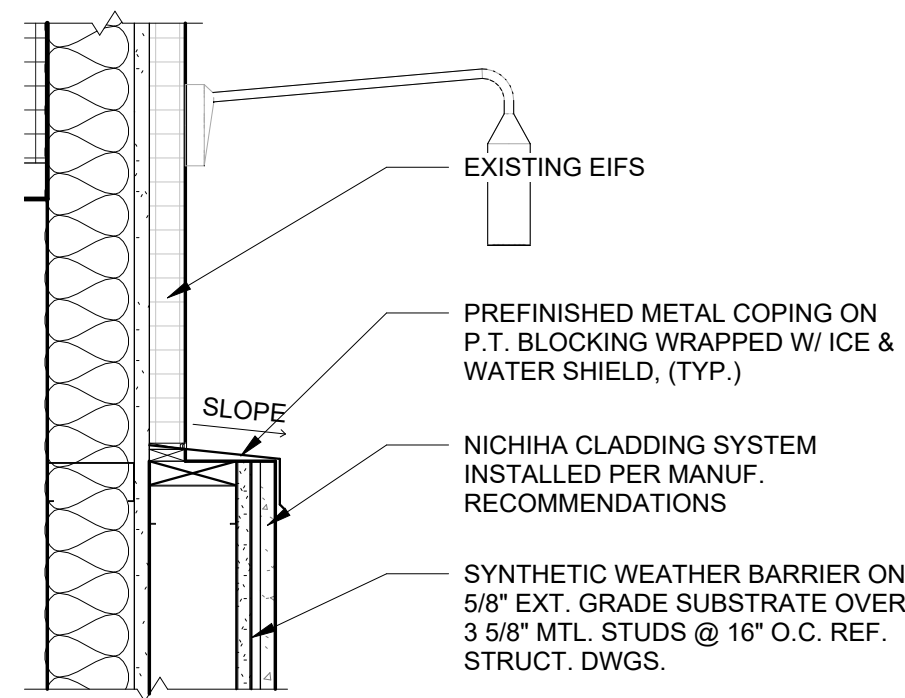


3 FLASHING DETAIL

A5.1 1 1/2" = 1'-0"

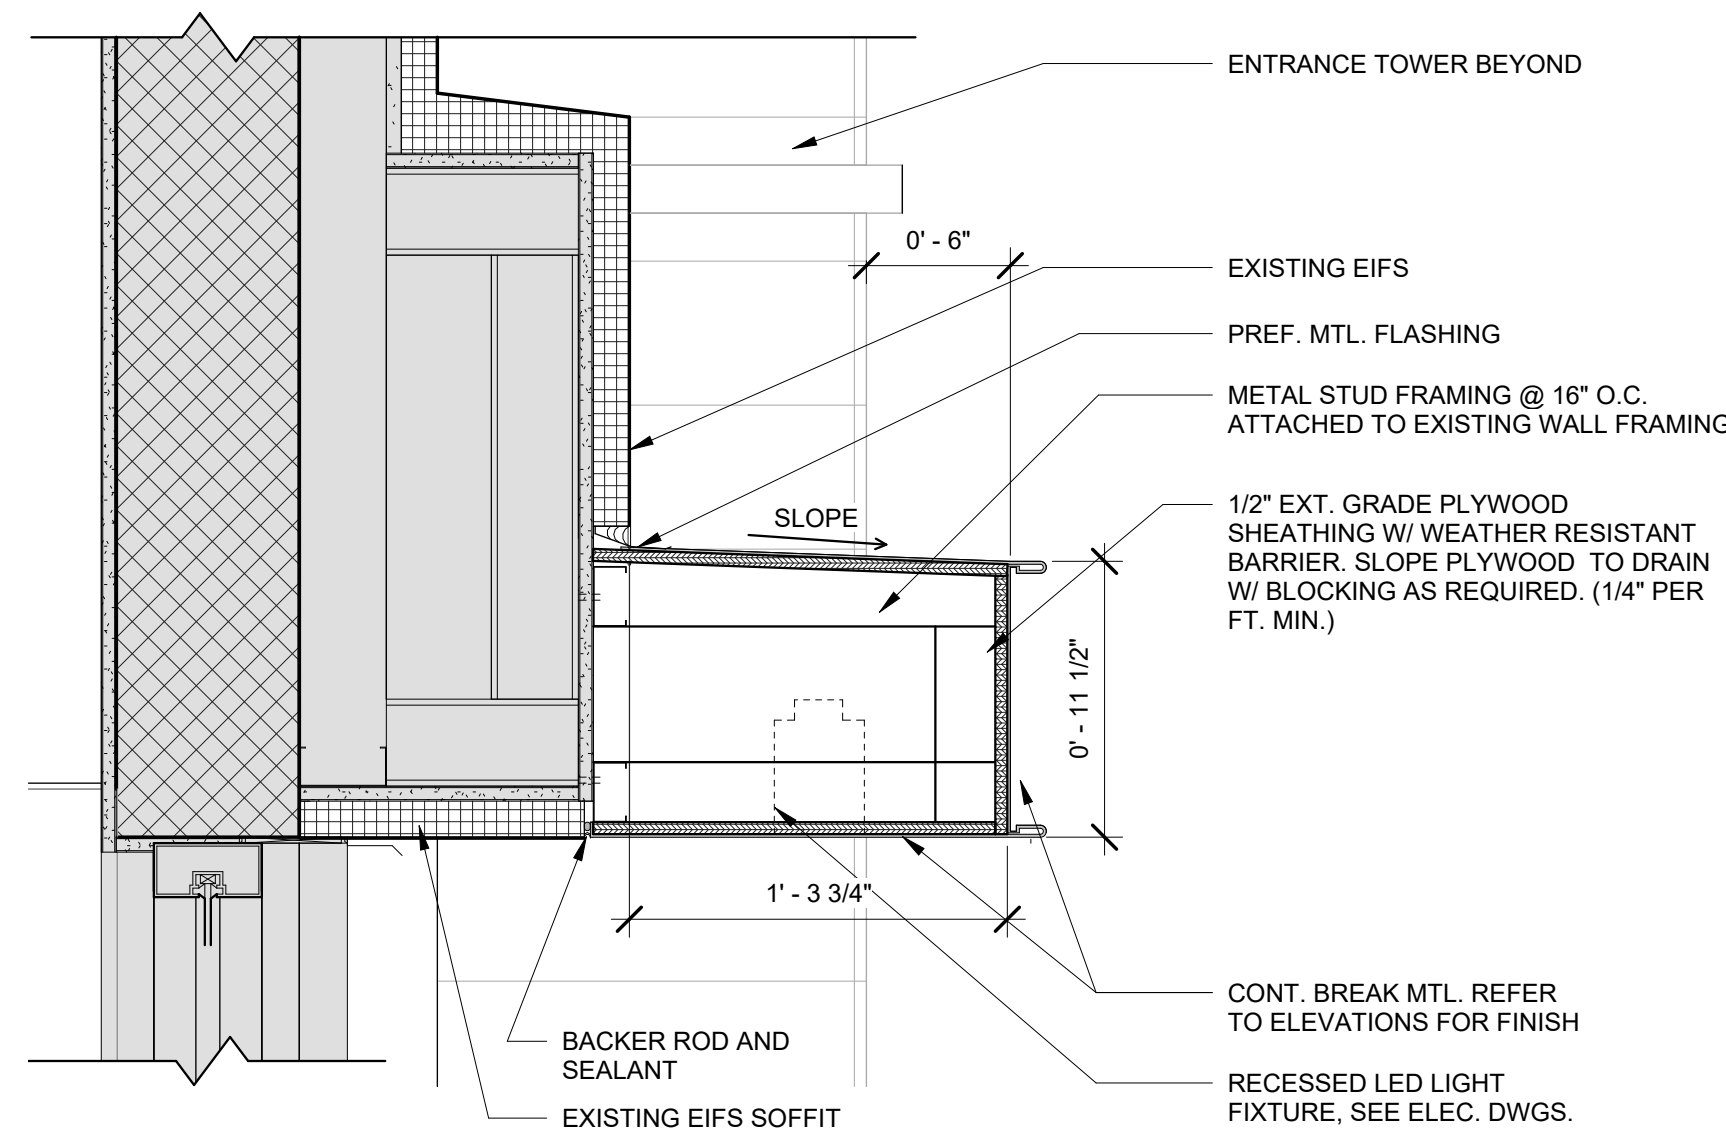

2 ORANGE BEAM DETAIL

A5.1 1 1/2" = 1'-0"

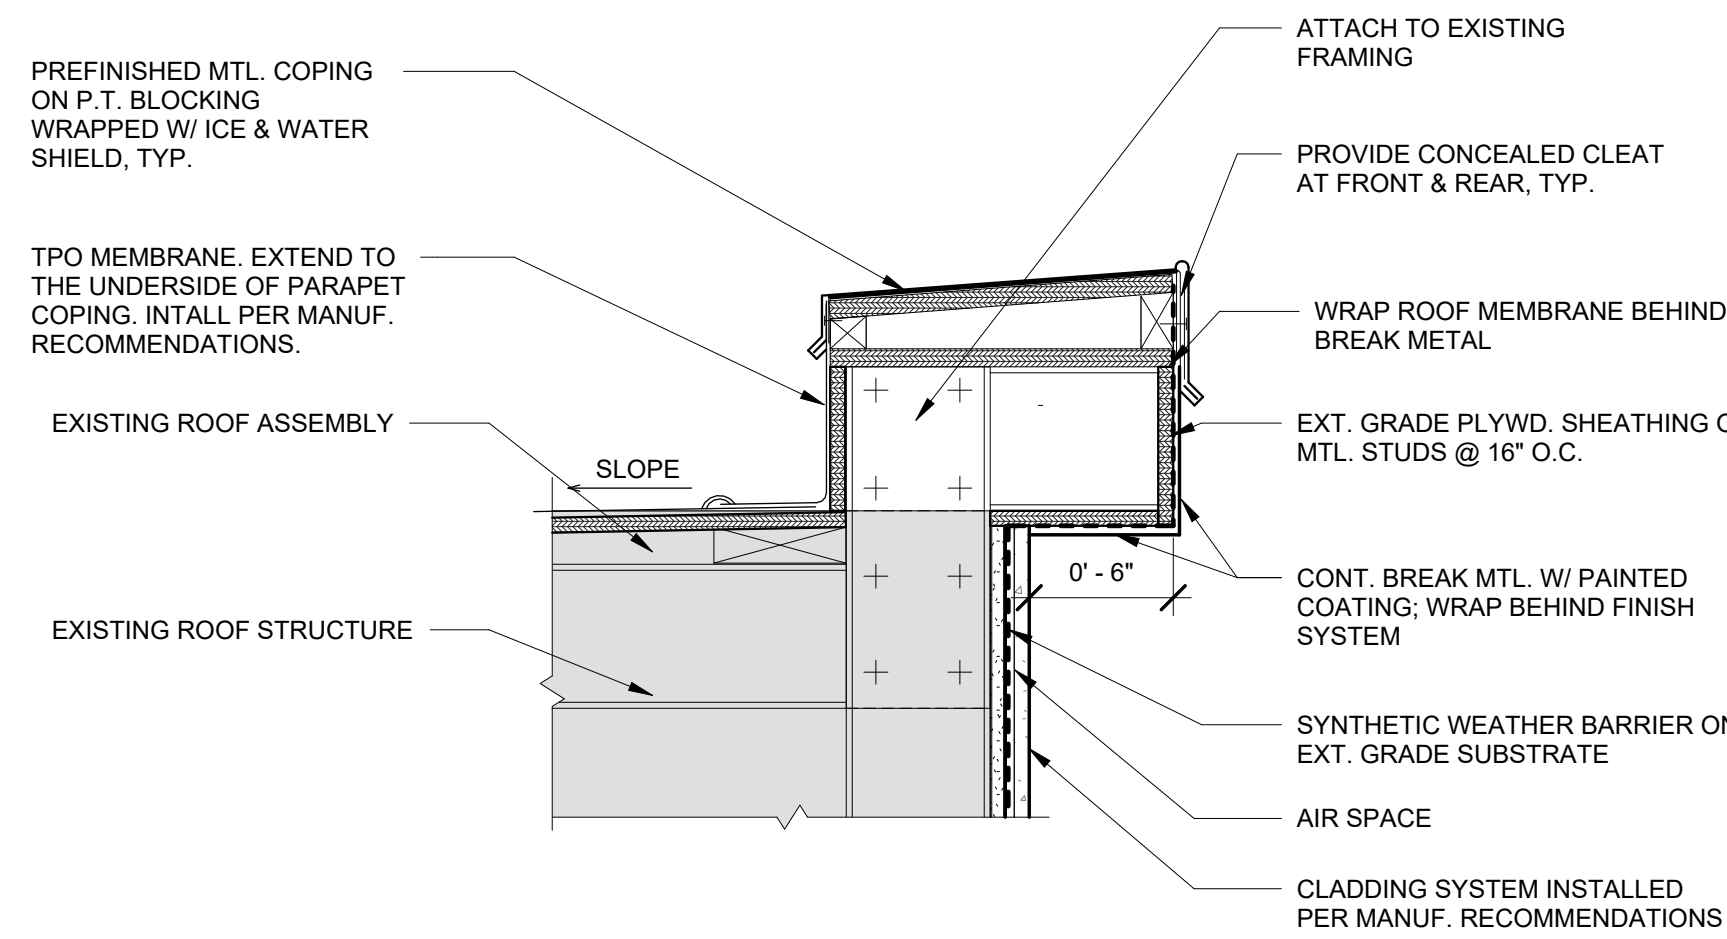

1 COPING DETAIL AT TOWER

A5.1 1 1/2" = 1'-0"

REVISIONS	DESCRIPTION
#	DATE

SECTION DETAILS AND DUNKIN DETAILS

DATE 07/21/2025

PROJECT NUMBER 24163

SHEET NUMBER A5.1


DUNKIN DONUTS REMODEL
2083 CROWELL ROAD
COVINGTON, GA. 30014
FOR: JPC DESIGN & CONSTRUCTION, LLC
PO BOX 710
JACKSON, GA. 30233



ROBERTSON LOIA ROOF ARCHITECTS & ENGINEERS
3460 Preston Ridge Road - Suite 275 - Alpharetta, GA. 30005
770.674.2600 / www.rlrpc.com
GA COA # PEF000562 EXPIRES: 06/30/2026



EQUIPMENT SCHEDULE																						
EQUIPMENT							PLUMBING					ELECTRICAL								GENERAL REMARKS		
ITEM #	QTY.	DESCRIPTION	MANUFACTURER	MODEL #	N.S.F. E.T.L.	U.L. E.T.L.	WATER			WASTE		REMARKS	LOAD					SUPPLIED W/ CORD & PLUG	RECEPT. SPEC			
							H.W.	C.W.	F.W.	DIR.	IND.		VOLTS	PHASE	AMPS	CIRCUIT SIZE	#WIRES W/ GROUND					
DMB-1		DIGITAL MENU BOARDS	TEXAS DIGITAL	V463																		46" LCD MENU BOARD (42" x 24")
OMO		OMO SHELVING UNIT	MILLWORK SUPPLIER	OMO																		Multiple shelving sizes
5WR/5WL		5 WIDE FRONT CASE BAKERY (LR)	MILLWORK	5WR/5WL																		
36COND		36" CONDIMENT STATION ISLAND	MILLWORK SUPPLIER	36COND																		
46.1		HAND SINK - 18"W x 30"D W/ 12" SPLASH GUARDS	JOHN BOOS	PBHS-W-KVMB-SSP			1/2"	1/2"		1-1/2"												
50B		FC TRASH BARREL POS/HOS	RUBBERMAID	2955 WASTEBASKET, SMALL																		
70R		TISSUE BAG AND BOX HOLDER FOR DRIVE THRU RACK	UNIVERSAL	DD-DSPN71435																		
70.5B		MOBILE DONUT/BAKERY CASE - 6 TIER X 3 WIDE	VULCAN	1013776-00U0164								120	1		20							
70.7		REMOVABLE TISSUE BAG AND BOX HOLDER (OPTIONAL) APPLIED TO SIDE OF RACK	VULCAN	1014178																		
82G		BAKERY RACK 4X5	VULCAN	1022648-00U0164								120	1	1	15	2	Y	NEMA 5-15				
96.4		ESPRESSO MACHINE	SHAERER	COFFE ART TOUCHIT					1/2"		1/2"	220	1	24	30	3	Y	NEMA L6-30R		**VERIFY ALL ELECT REQTS w/ MANUF		PROVIDE WATER SHUT-OFF VALVE W/ 3/8" COMPRESSION FITTING
101E																						
101L		PORTION CONTROLLED GRANULAR & POWDER DISPENSER	SURE SHOT	AC2-GP																		
101Q	101Q-2	DUAL HOPPER COFFEE GRINDER	CURTIS	DHG-10-020																		
	101Q-3	MULTI HOPPER COFFEE GRINDER	BUNN-O-MATIC	35600.0011								120	1	11	15	2	Y	NEMA 5-15		BUNN PROVIDED CORD & PLUG INSTALLED BY GENERAL CONTRACTOR		
104A		9 X 6 PUMP STATION	WIREFAB	WF35522																		
116.2A		THE QUIET ONE: 48 OZ. HIGH IMPACT BLENDER	VITAMIX	36019								120			15					50-60 HZ, 3 PEAK OUTPUT HORSEPOWER MOTOR		ALSO AVAILABLE IN 32 OZ. AND 48 OZ. CONTAINER 18.0 X 8.5 X 10.7 IN. (HXXWD) HEIGHT WITH LID OPEN: 24.5 IN.
120		HOT WINTER BEVERAGE SINGLE HOPPER DISPENSER	BUN-O-MATIC	38600.0057																		
122	122-1	UNDERCOUNTER M3 SERIES REFRIGERATOR W/ CASTERS	TURBO AIR	MUR-28-N-1C								115	1	2.2			Y	NEMA 5-15P				REFERENCE MANUFACTURER'S CUTSHEET FOR UTILITY INFORMATION IF SPECIFIED ALTERNATE.
	122-2	UNDERCOUNTER REFRIGERATOR W/ CASTERS	TRAULSEN	UHT27								115	1	7.5			Y	NEMA 5-15P				REFERENCE MANUFACTURER'S CUTSHEET FOR UTILITY INFORMATION IF SPECIFIED ALTERNATE.
	122-3	UNDERCOUNTER REFRIGERATOR W/ CASTERS	DELFIELD	406-CA-SPL	7	SA 4769						115	1	7	15	3	Y	NEMA 5-15				REFERENCE MANUFACTURER'S CUTSHEET FOR UTILITY INFORMATION IF SPECIFIED ALTERNATE.
124A		TWIN SH BREWER	BUNN-O-MATIC	51200.0106					1/2"			120/208	1	38.5	50	3		NEMA 14-50P				
124B		1.5 GAL SH SERVER	BUNN-O-MATIC	27850.0200																		
124E		SINGLE SH BREWER	BUNN-O-MATIC	51100.0105					1/2"			120/208	1	16.8	20	3		NEMA L14-20P				
124G		TWIN SH STAND WITH WIFI	BUNN-O-MATIC	27875.0201								120	1	1.8	20	2	Y	NEMA 5-15P				
130		DONUT/BAKERY RACK AT DRIVE THRU - 35"W x 28"D	UNIVERSAL	DD-36SLC-29-RK-C																		
171B		DRIVE-THRU READY TO GO MAT	TRYAD	2.1																		
200A		ICED COFFEE BREWER - #IC3-DBC W/ ICDD	BUNN-O-MATIC	45100.01		**			1/2"		20.80 PSI MACHINE SUPPLIED WITH 3/8" O.D. MALE FLARE FITTING	120/208	1	19.5	30	4	Y	NEMA L14-30		6' CORD TO BE PROVIDED & INSTALLED BY GC	** E34066	
213A																						
212A-2		DEDICATED HOLDING BIN - 27"W x 14"D x 11"H, CAPACITY OF UP TO (6) 1/3 SIZE PANS	PRINCE CASTLE	DHB2SS-27BDD								120	1	10				NEMA 5-20				
212A-3		(2) TIER MODULAR HOLDING CABINET - 23 7/8"W x 14 11/16"D x 12 1/2"H, CAPACITY OF UP TO (6) 1/3 SIZED PANS - (DEFAULT)	CARTER HOFFMAN	MC212-DD								120	1	15		3		NEMA 5-15				
212A.1		WARMING UNIT FOR APODS	CARTER HOFFMAN	MC1W2S																		
214-2		OVERSHELF: 64"L x 21 1/2"D, REFRIGERATOR MOUNT FOR TOASTER & PACKAGING	DELFIELD	000-B3P-021U																		
215		TORNADO OVEN W/ STONE, PEEL AND (2) TRAYS - EXTENDED WARRANTY INCLUDED	TURBOCHEF	NGC-1180-1-2019								208	1	30	30		Y	NEMA 6-30				
215A		STAINLESS STEEL CART 28"W x 30"L x 17"H REINFORCED TO HOLD (2) TURBO CHEF OVENS	UNIVERSAL	DD-30SLS-3017-C																		
216		MULTI-STAGING WARMER FOR HASHBROWNS	HATCO	GRMW-3DD								120	1	5.9	15		Y	NEMA 5-15				
217		SANDWICH STATION TABLE FOR NGSS - 16"W x 30"D	UNIVERSAL	DD-16SLC-30																		
212A.2		32" REFRIGERATED WORKTOP W/ (2) DRAWERS AND (1) TOP OPENING FOR PRODUCT PANS- USED FOR NGSS	DELFIELD	UCD4432N-6-DD1								115	1	6.5	15		Y	NEMA 5-15				
240		HASH BROWN FREEZER	SILVER KING	SKFS2								115	1	1.6	15		Y	NEMA 5-15				
244A		DUAL LANE TOASTER	HATCO	ITQ-1750-2C-DD								208	1	23.8	30	3	Y	NEMA 6-30P				
257		8 TAP SYSTEM WITH GENERATOR	MICROMATIC	MDD-68G-E-DD					1/2"		1"	115	1	11.1	20	2	Y	NEM 5-15				
292		36" SWING GATE	EQUIPMENT SUPPLIER	CUSTOM MILLWORK																		SEE CUSTOM MILLWORK DRAWINGS FOR DETAILS.
356		MOBILE ORDER METAL SHELVING FOR BOOKCASE	VULCAN																			
357		MILLWORK BASE FOR BOOKCASE - SINGLE	KES SUPPLIER																			
355		MOBILE ORDER ROLLING CART	VULCAN																			
356		MOBILE ORDER METAL SHELVING FOR BOOKCASE	VULCAN																			
357		MILLWORK BASE FOR BOOKCASE - SINGLE	KES SUPPLIER																			
639		60" X 30" LAMINATE COMMUNITY TABLE INCLUDES BASE AND 2 WIRELESS CHARGING MATS.	PLYMOLD																			
641		24" x 24" TABLE TOP	MILLWORK																			
643		30" x 48" ADA TABLE TOP	MILLWORK SUPPLIER																			
876		SQUARE MERCHANDISER	SPECTAS																			
877		WATERFALL MERCHANDISER TABLE	SPECTAS																			ALSO ORDER ITEM 875A, QTY 1
924		DINING CHAIR	ALLERMUIR	DB81																		
925		DINING STOOL	ALLERMUIR	DB81																		
1409		PUMP/SWIRL STATION	WIREFAB	WF35522																		
1422		DT POS CART 42"W	METRO	DD2442CS																		
1423.1		DT CASH CART 48x24	QUANTUM																			
1427		24" HOS CART	METRO																			
1428		MOBILE OMO STAGING CART																				
1433		60" WORKTABLE W/ CASTERS & SHELVING																				
1445		DRIVE THRU CART 14"D X 30"W X 50"H	METRO	DD-DT30OMO																		
1446		14" FC POS CART (ONE 36" POS , ONE 72" POS)	METRO	DD-DT30OMO																		
1500		HVB COFFEE CART (39.5"x30" REVERSIBLE	FRANKE	18017419																		
1504		FIX IN PLACE ICEBIN/INITIATOR -LEFT DEFAULT	FRANKE	1504																		
1507		WORKTOP RISER FOR UCR	STAINLESS	1507																		
1510		TRASH/COMPOST W/ FOOT RELEASE (18x30)	FRANKE	18017833																		
1516		LID HOLDER (1 WIDE 4 TALL)	STAINLESS	1516																		
1517		LID HOLDER (2 WIDE 3 TALL)	STAINLESS	1517																		
1531		22" DUMP SINK TABLE LH	STAINLESS	1531																		
1428		MOBILE OMO STAGING CART																				
LEGS-S-21		21" STAINLESS LEG	FRANKE	18017197																		
LEGS-S-28		28" STAINLESS LEG	FRANKE	18018015																		

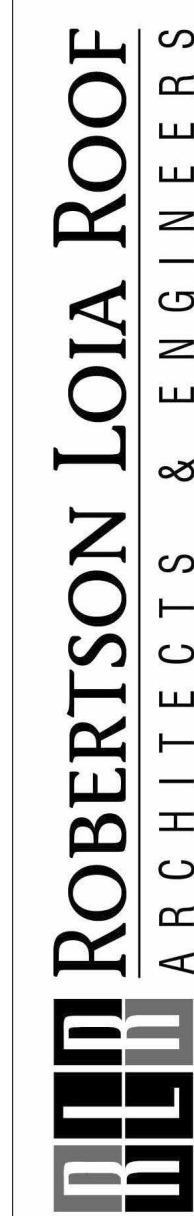

ROBERTSON LOIA ROOF
ARCHITECTS & ENGINEERS
3460 Preston Ridge Road - Suite 275 - Alpharetta, GA. 30005
770.674.2600 / www.rlrpc.com
GA CCA # PEF00952 EXPRES: 06/30/2028



SAMIA M. COKER
REGISTERED ARCHITECT
EXPIRES 12/25

DUNKIN DONUTS REMODEL
2083 CROWELL ROAD
COVINGTON, GA. 30014
FOR:
JPC DESIGN & CONSTRUCTION, LLC
PO BOX 710
JACKSON, GA. 30233

SHEET TITLE

EQUIPMENT SCHEDULE

DATE


07/21/2025

PROJECT NUMBER

24163


SHEET NUMBER

EQ1.2

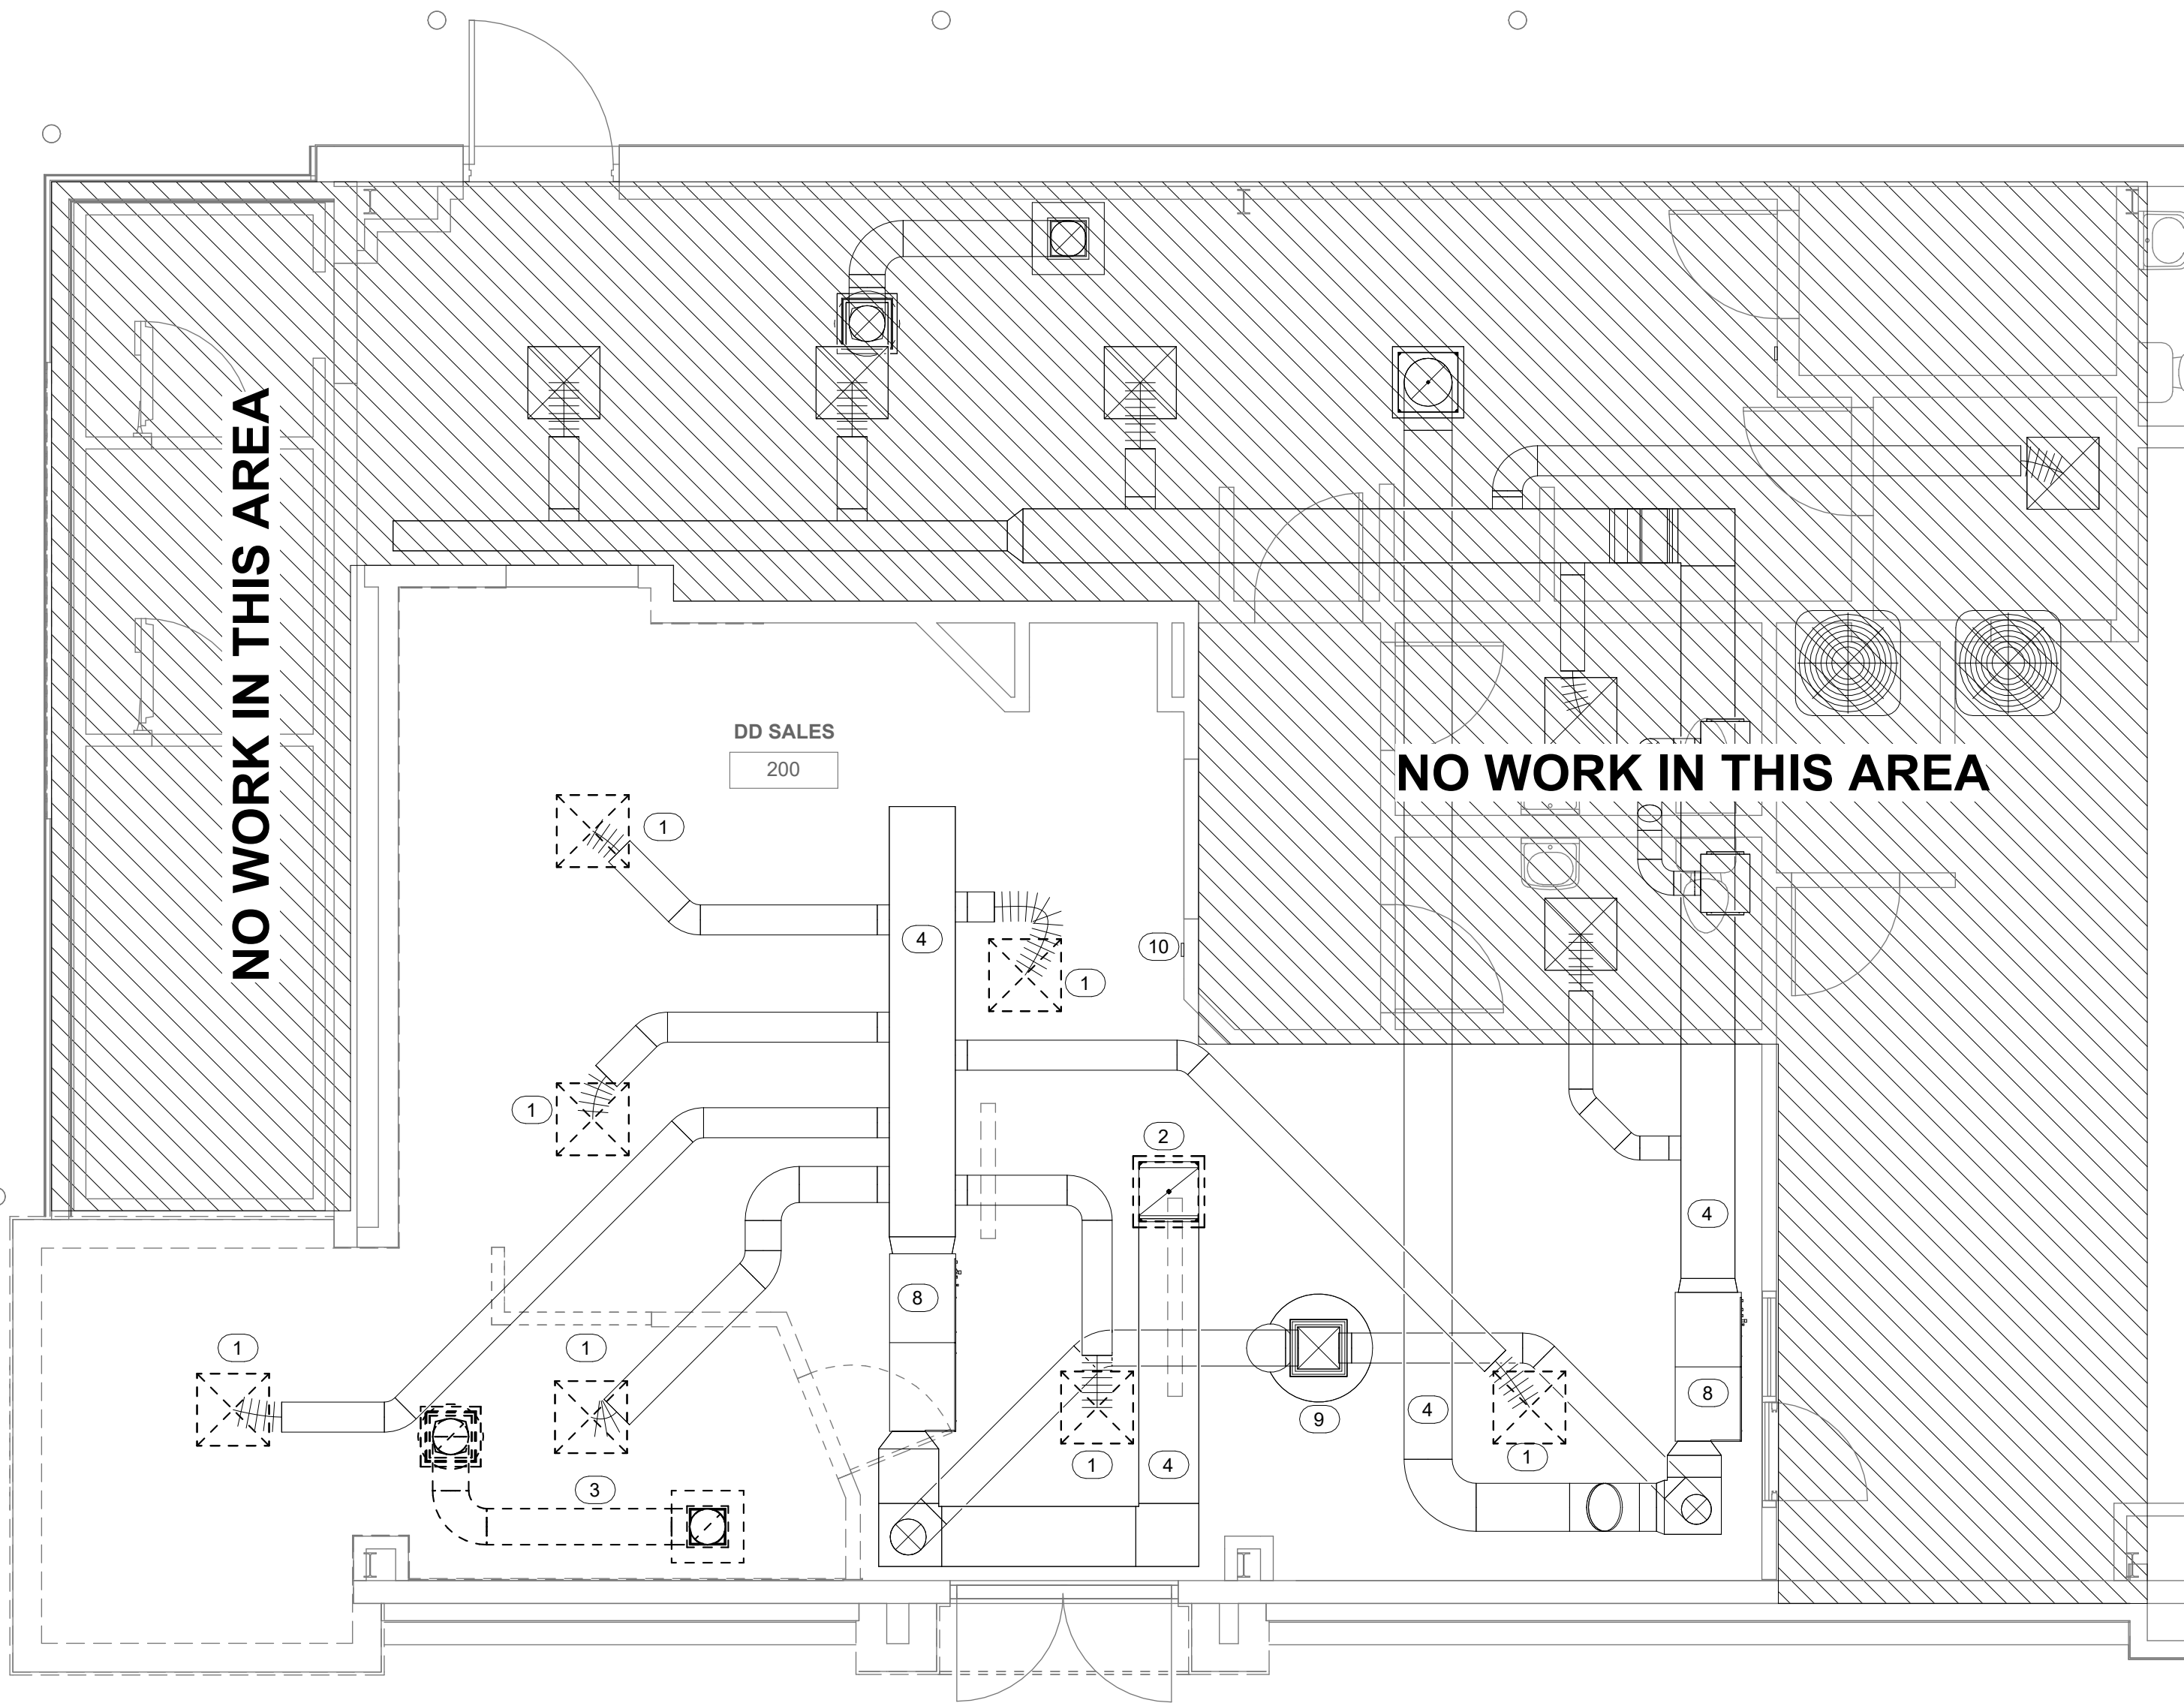

1 HVAC - DEMOLITION FLOOR PLAN
1/4" = 1'-0"

- MECHANICAL KEYNOTES**
- EXISTING DIFFUSER TO BE REPLACED WITH NEW. SEE HVAC - NEW FLOOR PLAN ON THIS SHEET.
 - EXISTING RETURN GRILLE TO BE REPLACED WITH NEW. SEE HVAC - NEW FLOOR PLAN ON THIS SHEET.
 - EXISTING EXHAUST DUCTWORK, GRILLE, AND FAN ON ROOF TO BE DEMOLISHED. SEE HVAC - NEW FLOOR PLAN ON THIS SHEET FOR REVISED LAYOUT.
 - EXISTING DUCTWORK SHALL REMAIN IN PLACE. FIELD VERIFY EXACT LOCATION.
 - NEW ROOF EXHAUST FAN, EF-1, FOR SANDWICH STATION TYPE II HOOD, H-1. CONTRACTOR SHALL FIELD COORDINATE ROUTING OF 10" ROUND METAL DUCT FROM HOOD COLLAR AND CONNECT TO FAN. INSTALL PER MANUFACTURER'S WRITTEN INSTRUCTIONS AND MAINTAIN ALL REQUIRED SERVICE CLEARANCES. SEE HOOD AND FAN DETAILS ON SHEET M3.2 AND M3.3 FOR MORE INFORMATION.
 - CONTRACTOR TO PROVIDE NEW CEILING DIFFUSER. FIELD COORDINATE LOCATION AND CONNECT DIFFUSER TO EXISTING FLEX DUCT. CONTRACTOR SHALL PROVIDE NEW FLEX DUCT IF NEEDED FOR FINAL CONNECTION TO DIFFUSER.
 - CONTRACTOR TO PROVIDE NEW CEILING RETURN GRILLE. FIELD COORDINATE LOCATION AND CONNECT GRILLE TO EXISTING DUCT. CONTRACTOR SHALL PROVIDE NEW FLEX DUCT IF NEEDED FOR FINAL CONNECTION TO GRILLE.
 - EXISTING FAN COIL UNIT ABOVE CEILING SHALL REMAIN IN PLACE. FIELD VERIFY EXACT LOCATION.
 - EXISTING OUTSIDE AIR INTAKE ON ROOF SHALL REMAIN IN PLACE. FIELD VERIFY EXACT LOCATION.
 - EXISTING THERMOSTAT SHALL REMAIN IN PLACE. FIELD VERIFY EXACT LOCATION.
 - INSTALL AIR CURTAIN ABOVE DRIVE THRU WINDOW SERVICE OPENING. FIELD VERIFY LOCATION OF SERVICE OPENING. SEE SCHEDULE ON SHEET M6.1.
 - INSTALL AIR CURTAIN ABOVE DRIVE THRU WINDOW SERVICE OPENING. FIELD VERIFY LOCATION OF SERVICE OPENING. SEE SCHEDULE ON SHEET M6.1.






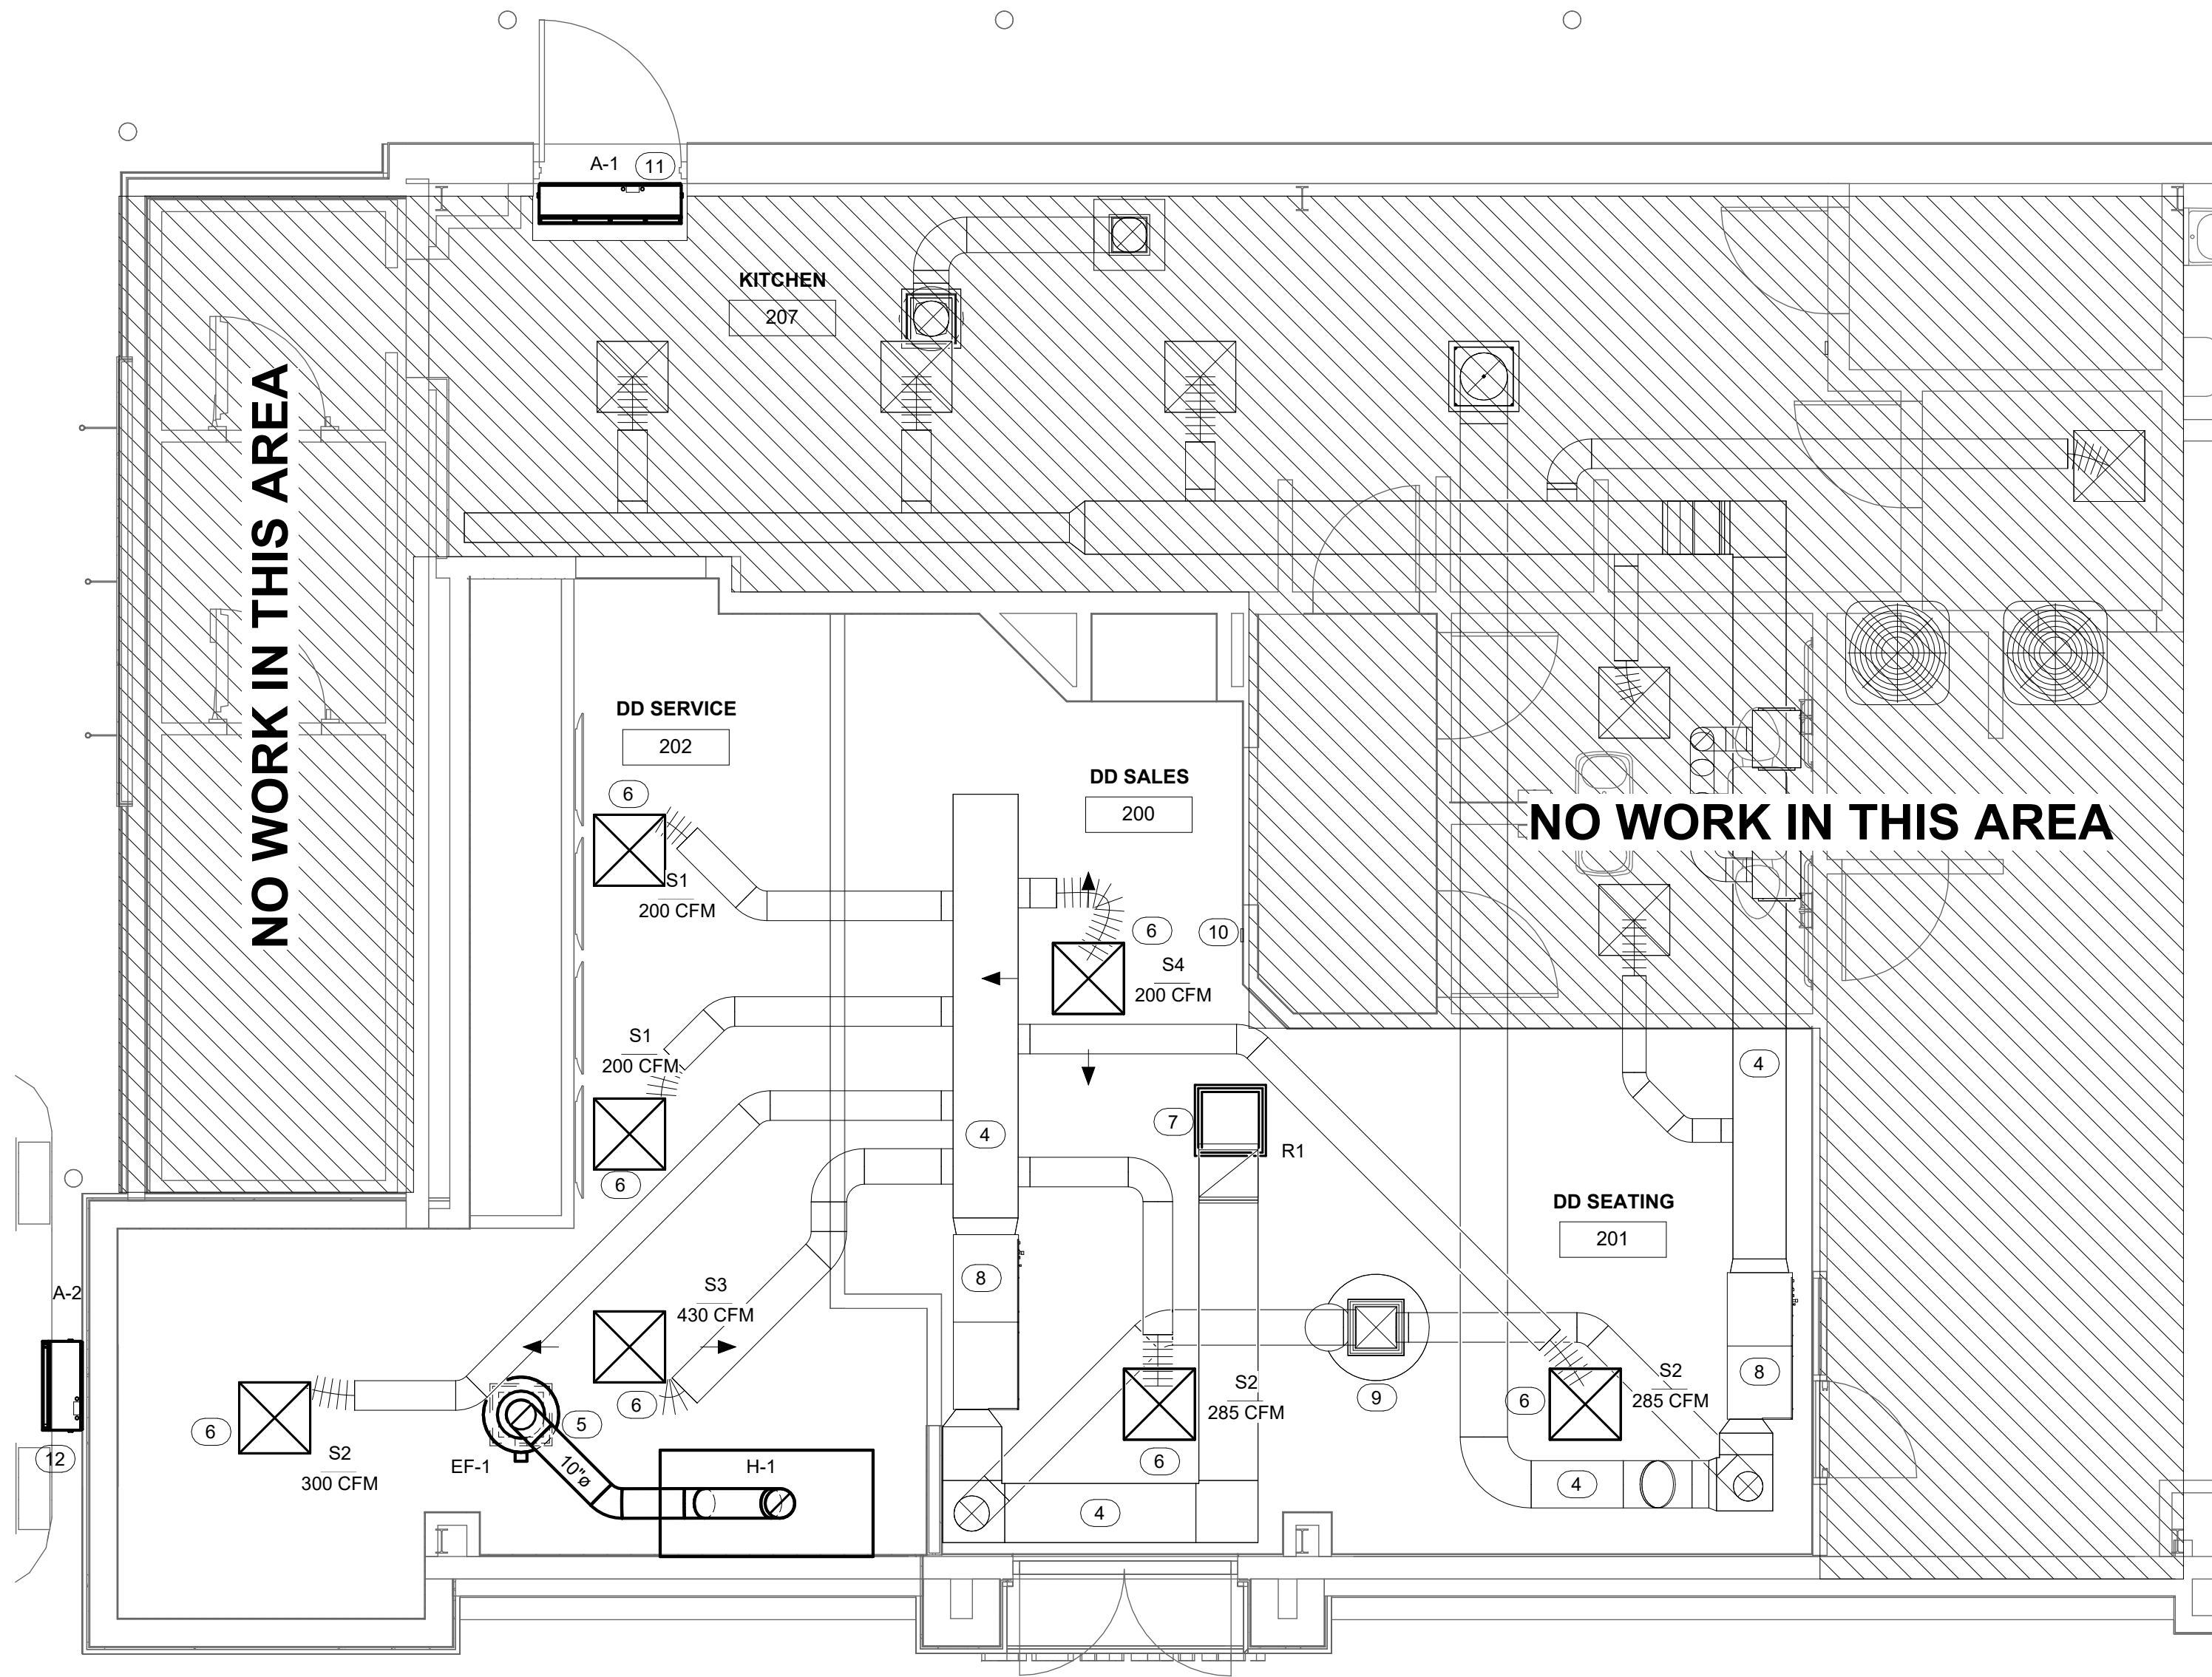


2 HVAC - NEW FLOOR PLAN
1/4" = 1'-0"

DUCTWORK/EQUIPMENT LEGEND	
	DASHED LINES INDICATE EXISTING HVAC EQUIPMENT, DIFFUSERS AND DUCTWORK TO BE DEMOLISHED.
	LIGHT TONE LINES INDICATE EXISTING HVAC EQUIPMENT, DIFFUSERS AND DUCTWORK TO REMAIN/RELOCATE AND REUSED.
	DARK TONE LINES INDICATE NEW HVAC EQUIPMENT, DIFFUSERS AND DUCTWORK TO BE INSTALLED.



NOTE: PORTIONS OF THIS PROJECT ARE RENOVATIONS OF AN EXISTING FACILITY AND OF NECESSITY, PREVIOUS RECORD DRAWINGS FORM THE BASIS FOR MANY OF THESE DRAWINGS. IT IS THEREFORE EVEN MORE IMPORTANT THAN IN NEW CONSTRUCTION THAT ALL DIMENSIONS SHALL BE FIELD VERIFIED BEFORE FABRICATION OR PURCHASE OF DIMENSION CRITICAL EQUIPMENT, MATERIALS, AND ASSEMBLIES. THERE MAY EXIST FIELD CONDITIONS NOT ACCESSIBLE DURING DESIGN WHICH DIFFER FROM THOSE SHOWN ON THE DRAWINGS. ANY SUCH DEVIATIONS SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT AND ENGINEER FOR RESOLUTION BEFORE PROCEEDING WITH ANY CONSTRUCTION, FABRICATION, OR MATERIAL/EQUIPMENT PURCHASES WHICH WOULD BE UNUSABLE UNDER THOSE CIRCUMSTANCES.

 ROBERTSON LOIA ROOF ARCHITECTS & ENGINEERS 3460 Preston Ridge Road - Suite 275 - Alpharetta, GA. 30005 770.674.2600 / www.rlrpc.com GA CCA # PEF000562 EXPIRES 06/30/2026	
DUNKIN DONUTS REMODEL 2083 CROWELL ROAD COVINGTON, GA. 30014 FOR: JPC DESIGN & CONSTRUCTION, LLC PO BOX 710 JACKSON, GA. 30233	
SHEET TITLE HVAC FLOOR PLAN	DATE 07/18/2025
PROJECT NUMBER 24163	SHEET NUMBER M1.1

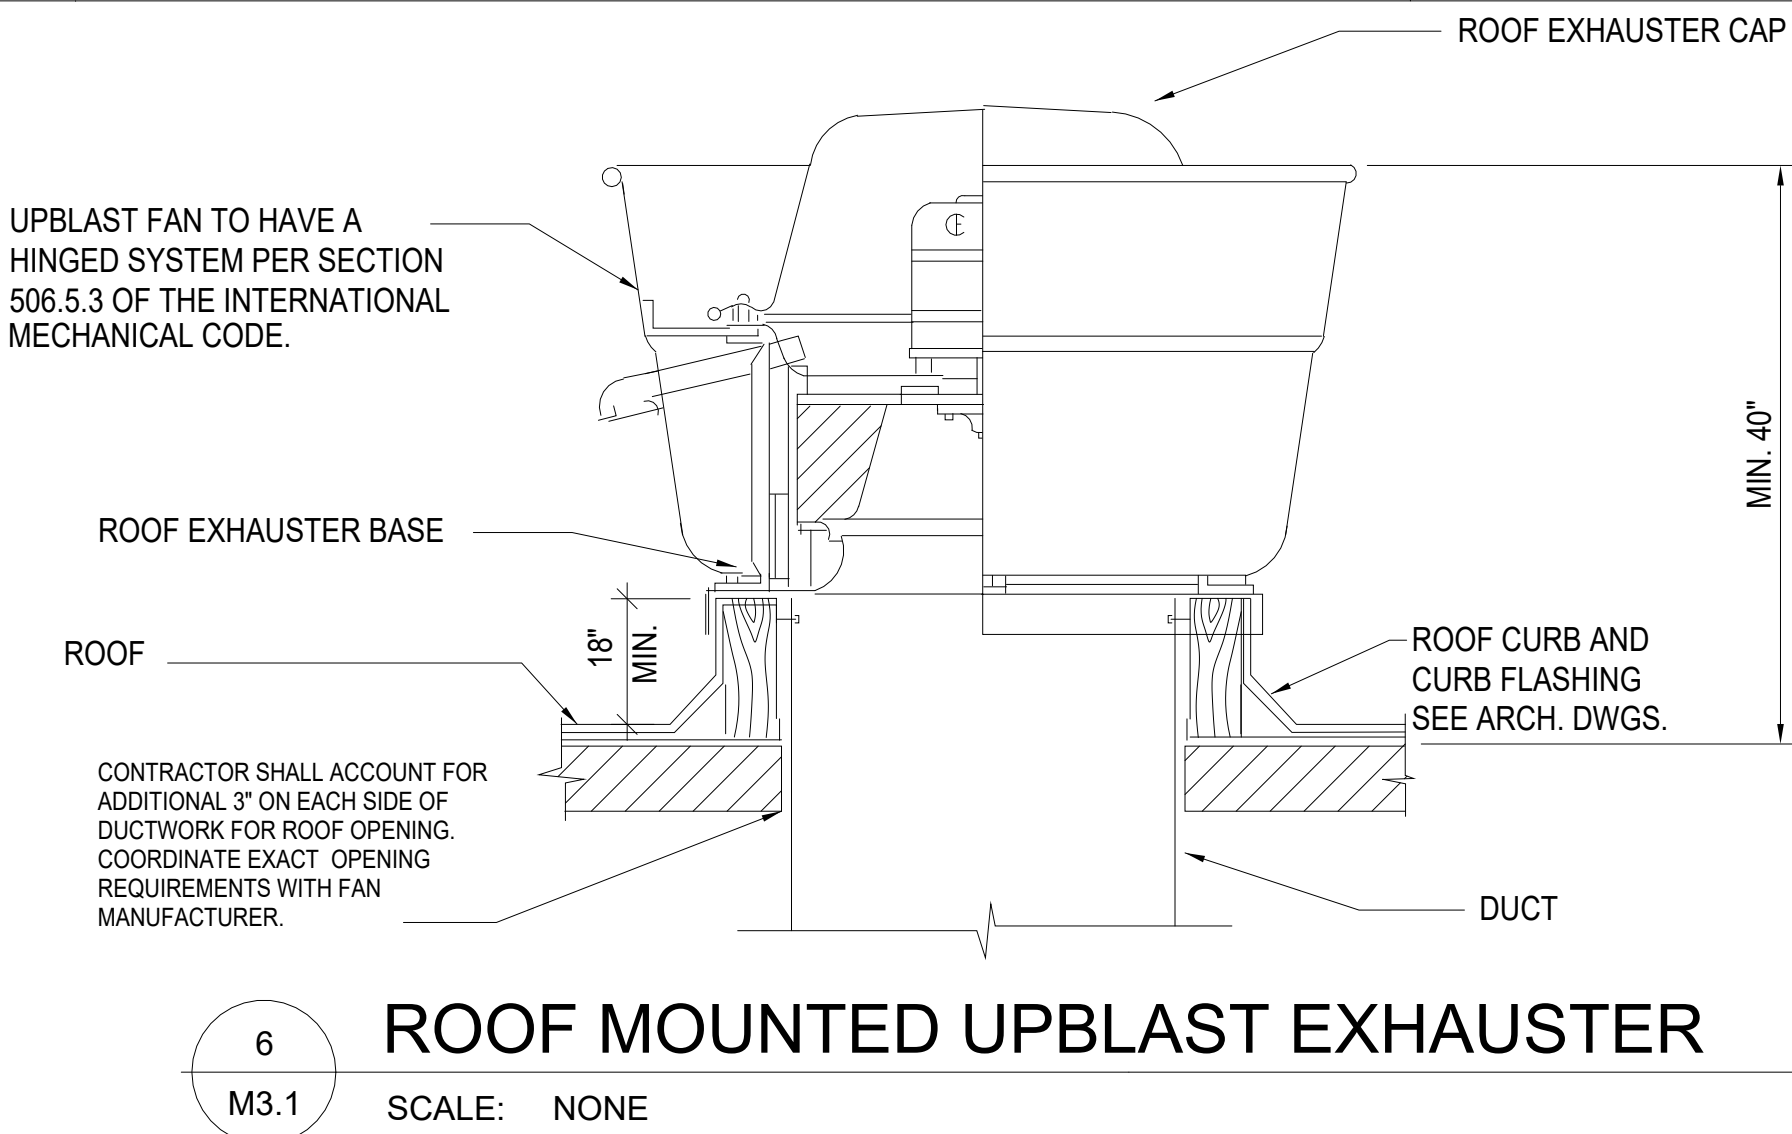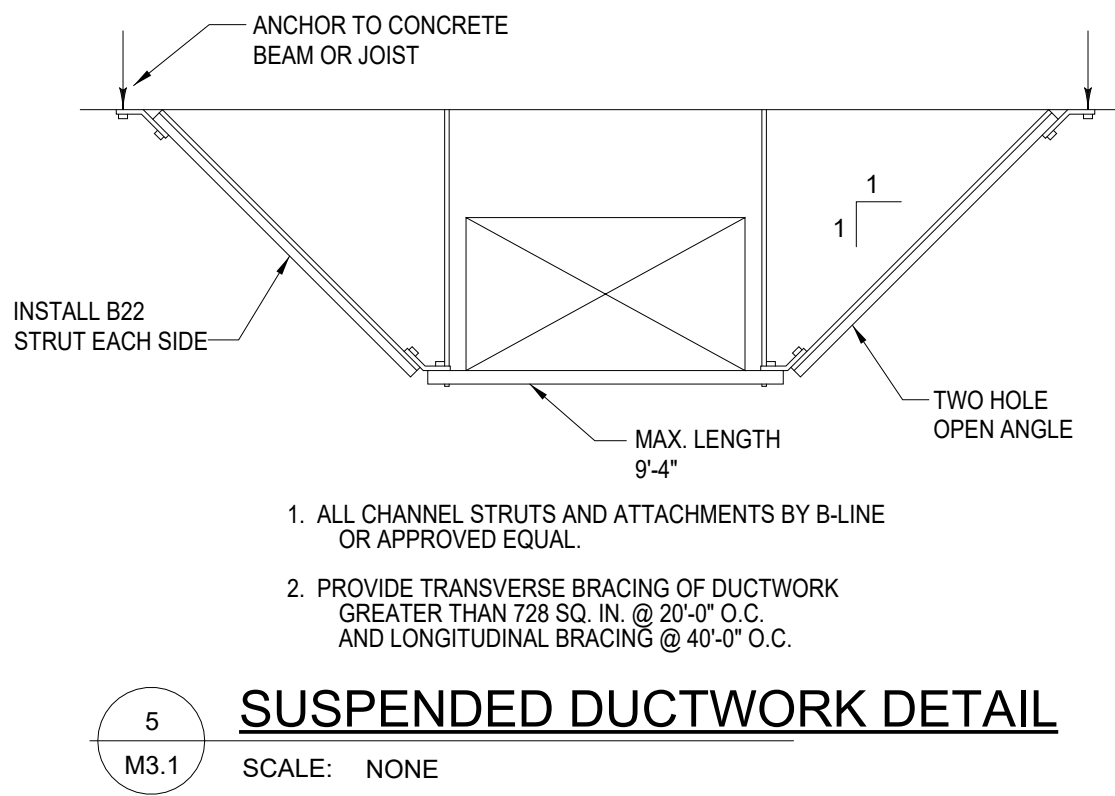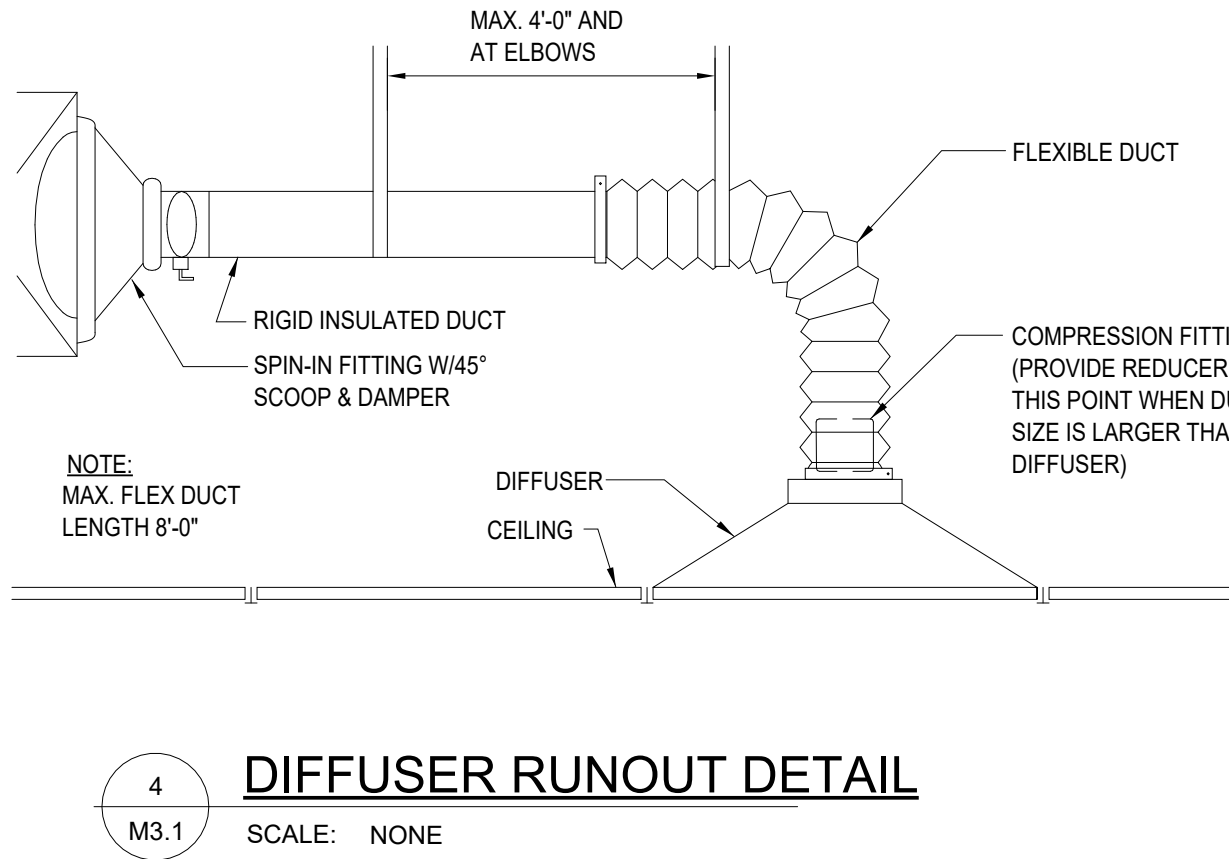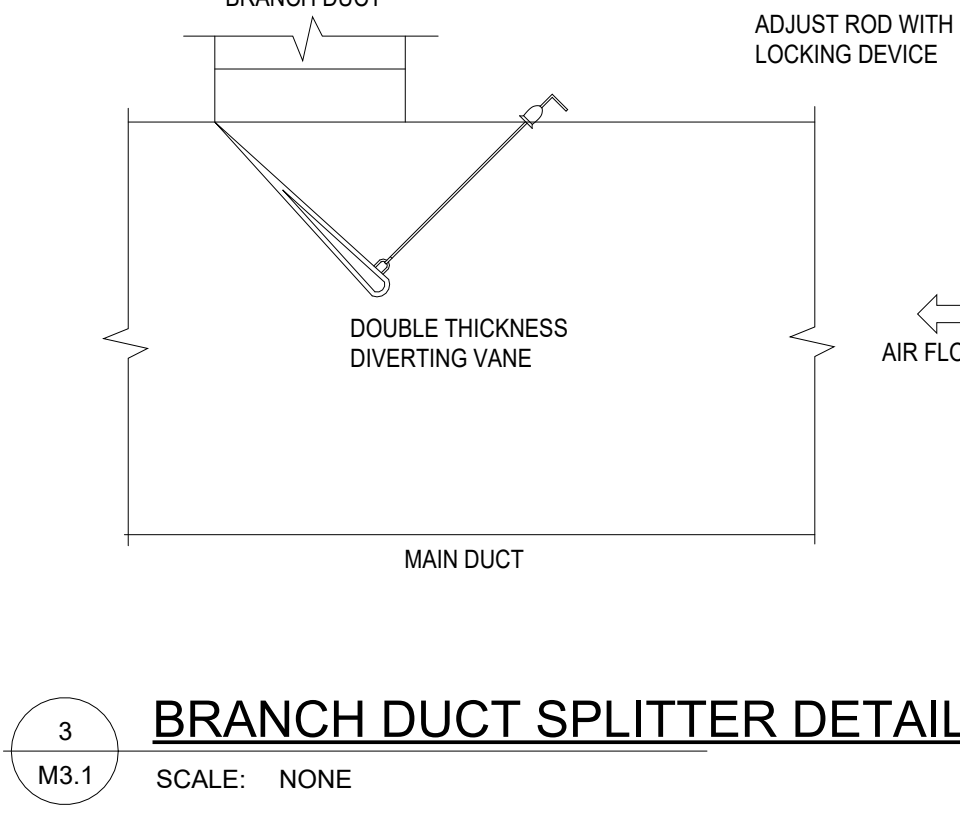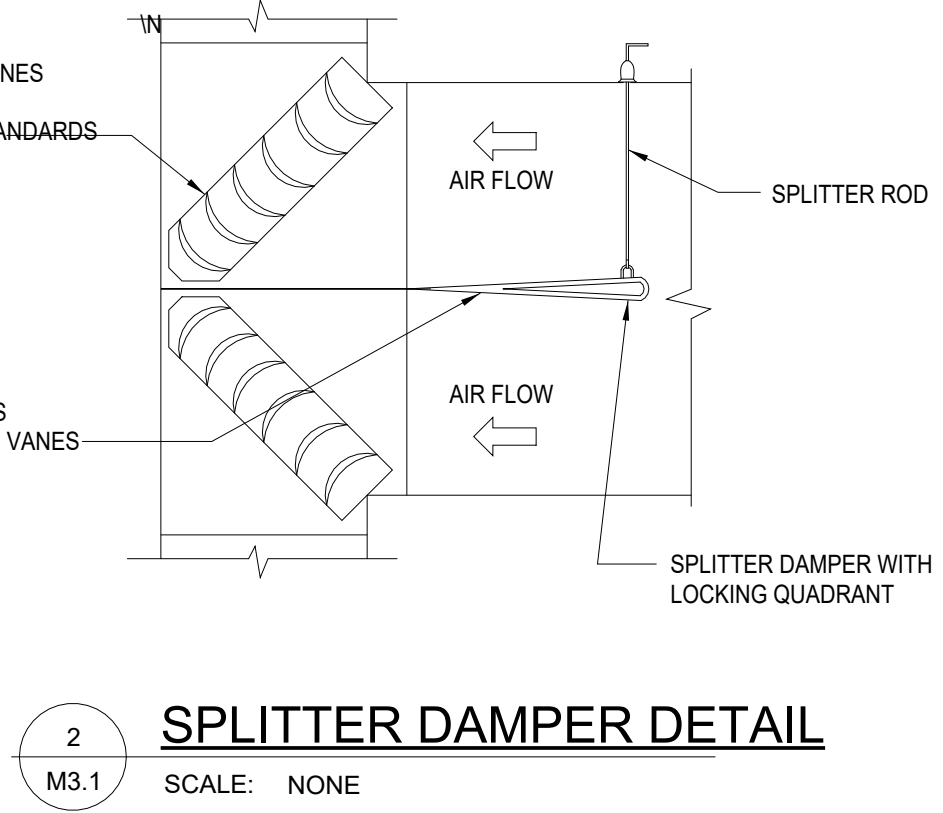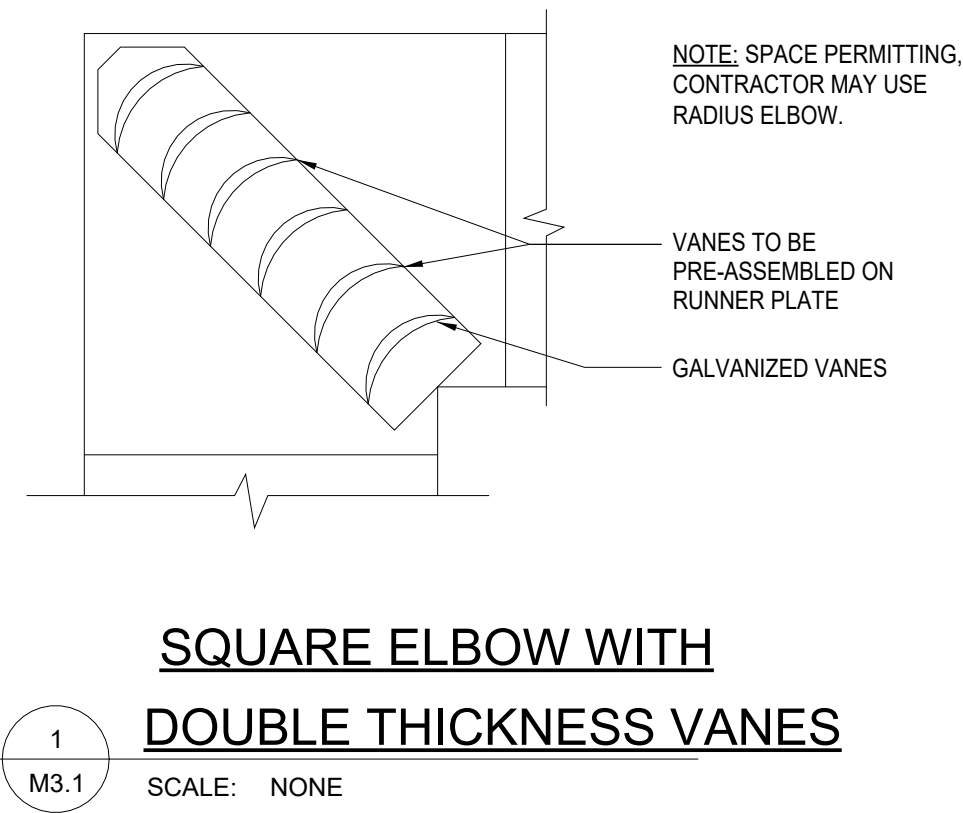

REVISIONS	#	DATE	DESCRIPTION

M3.2

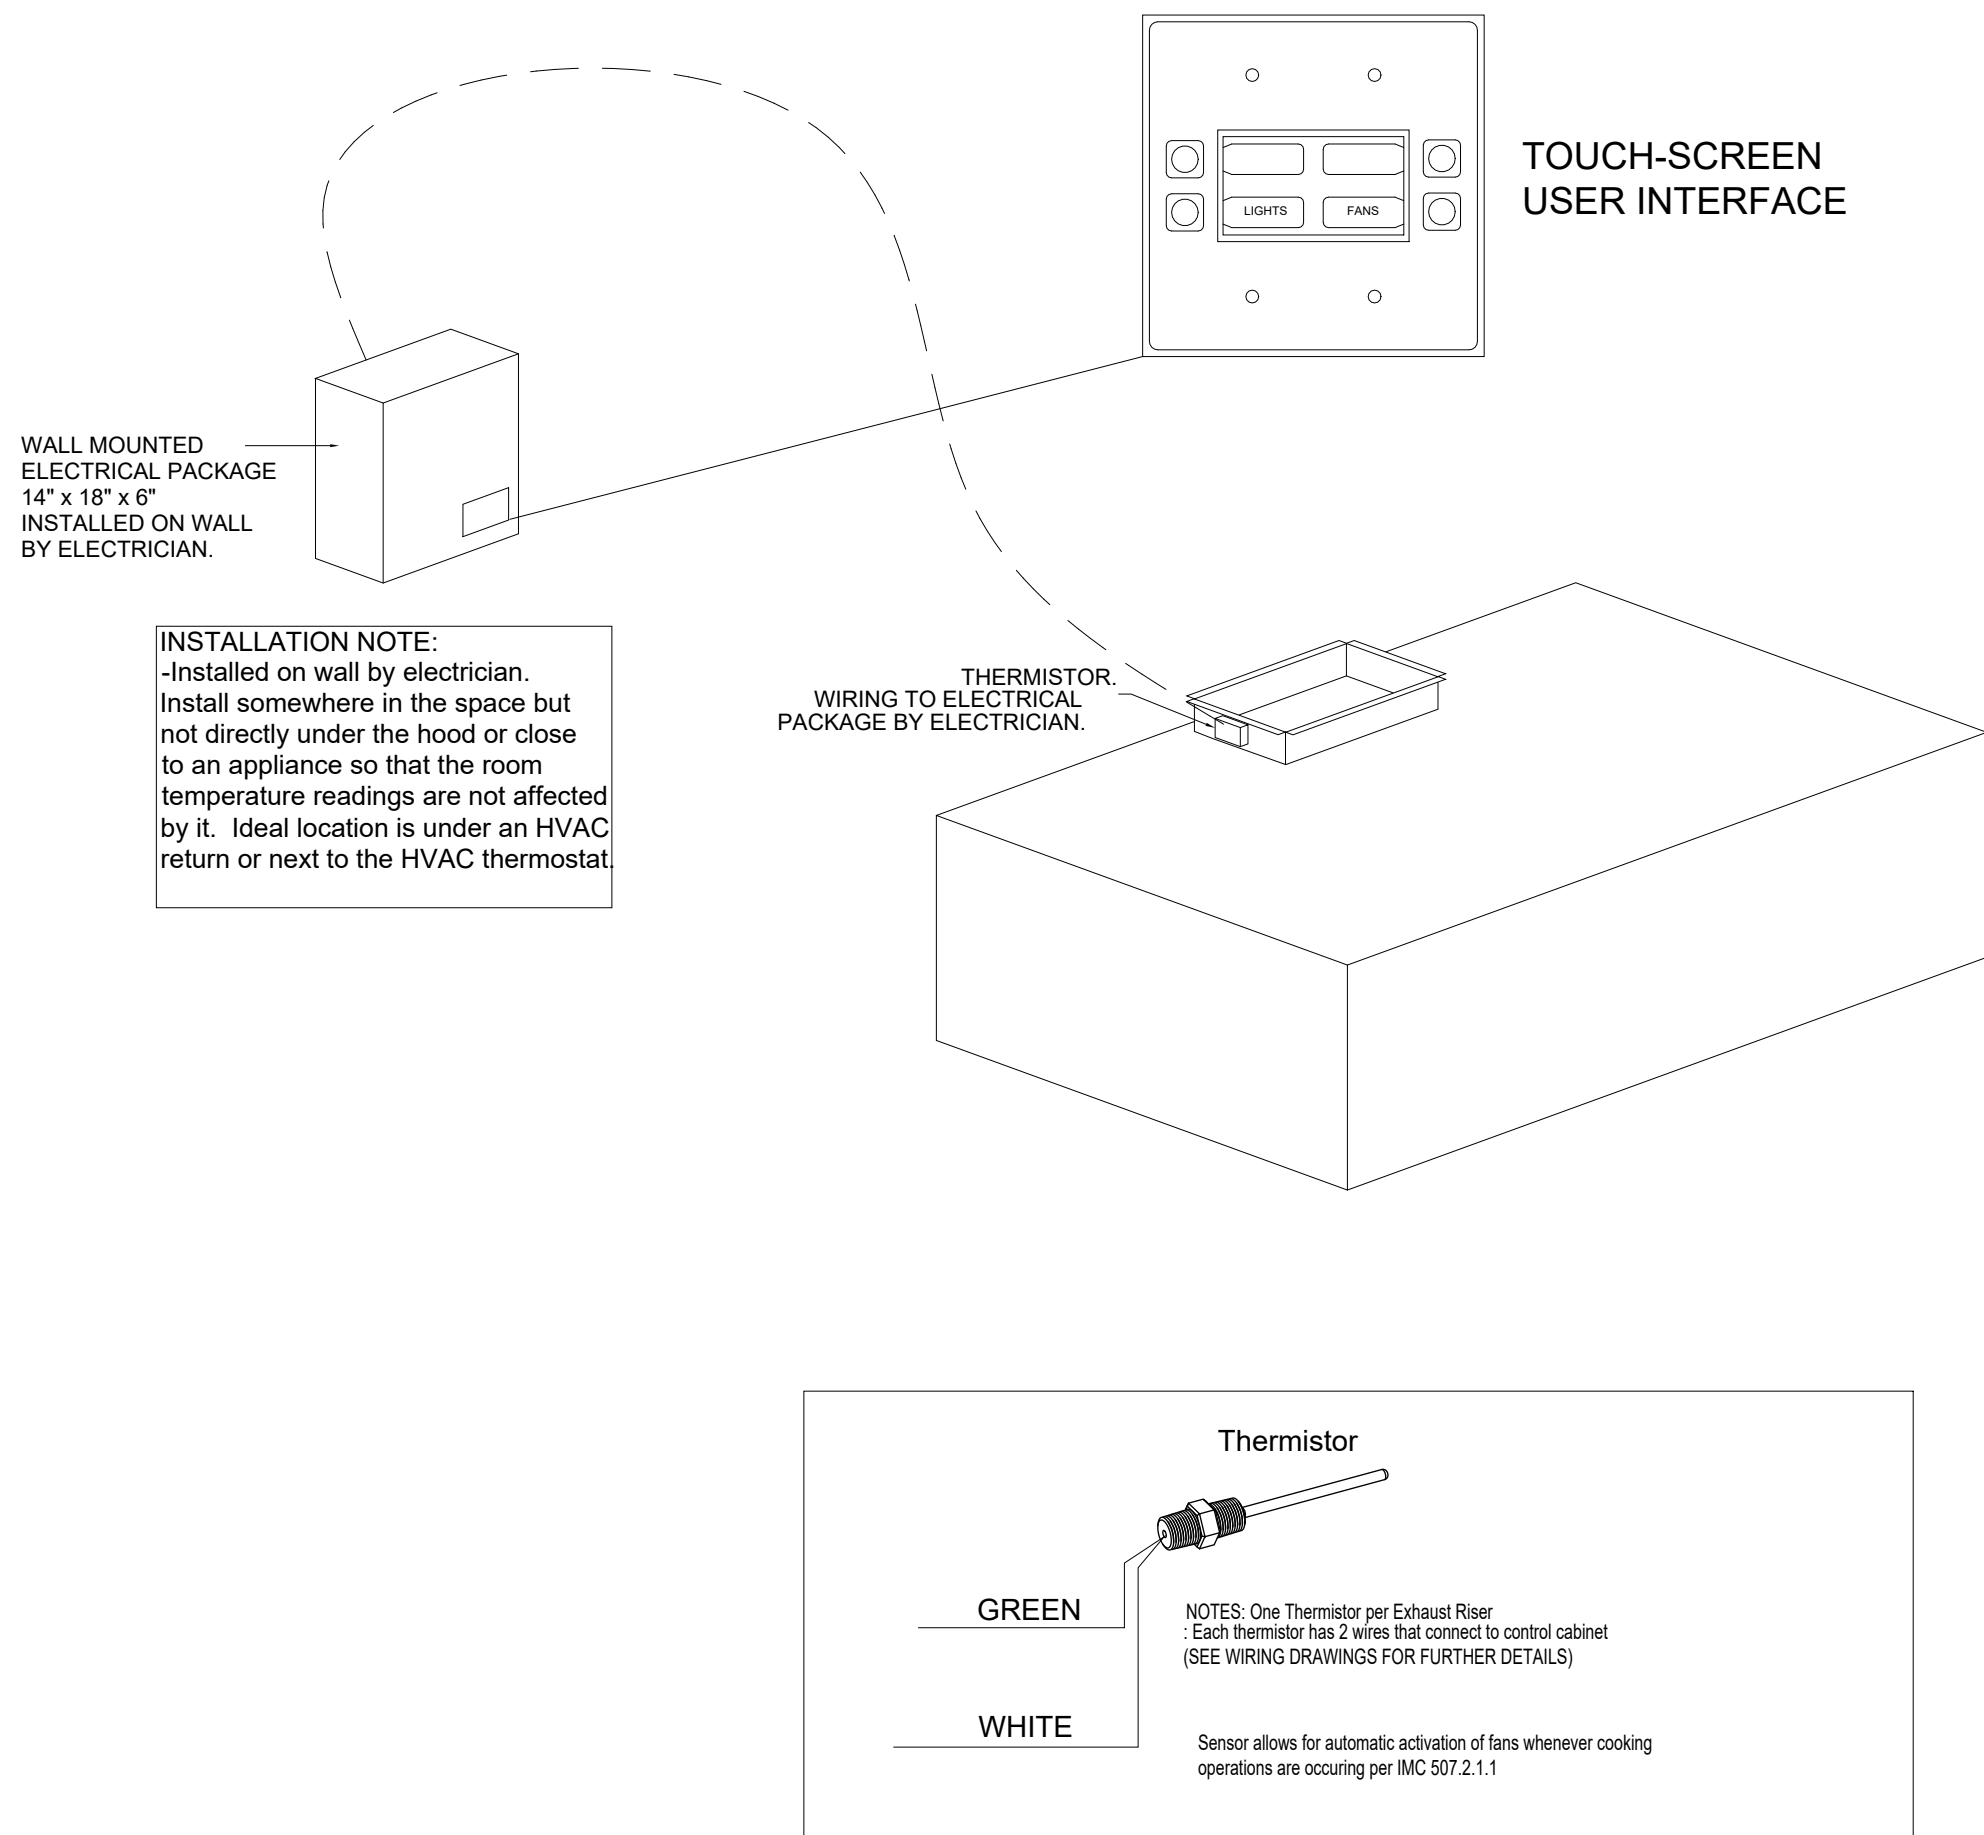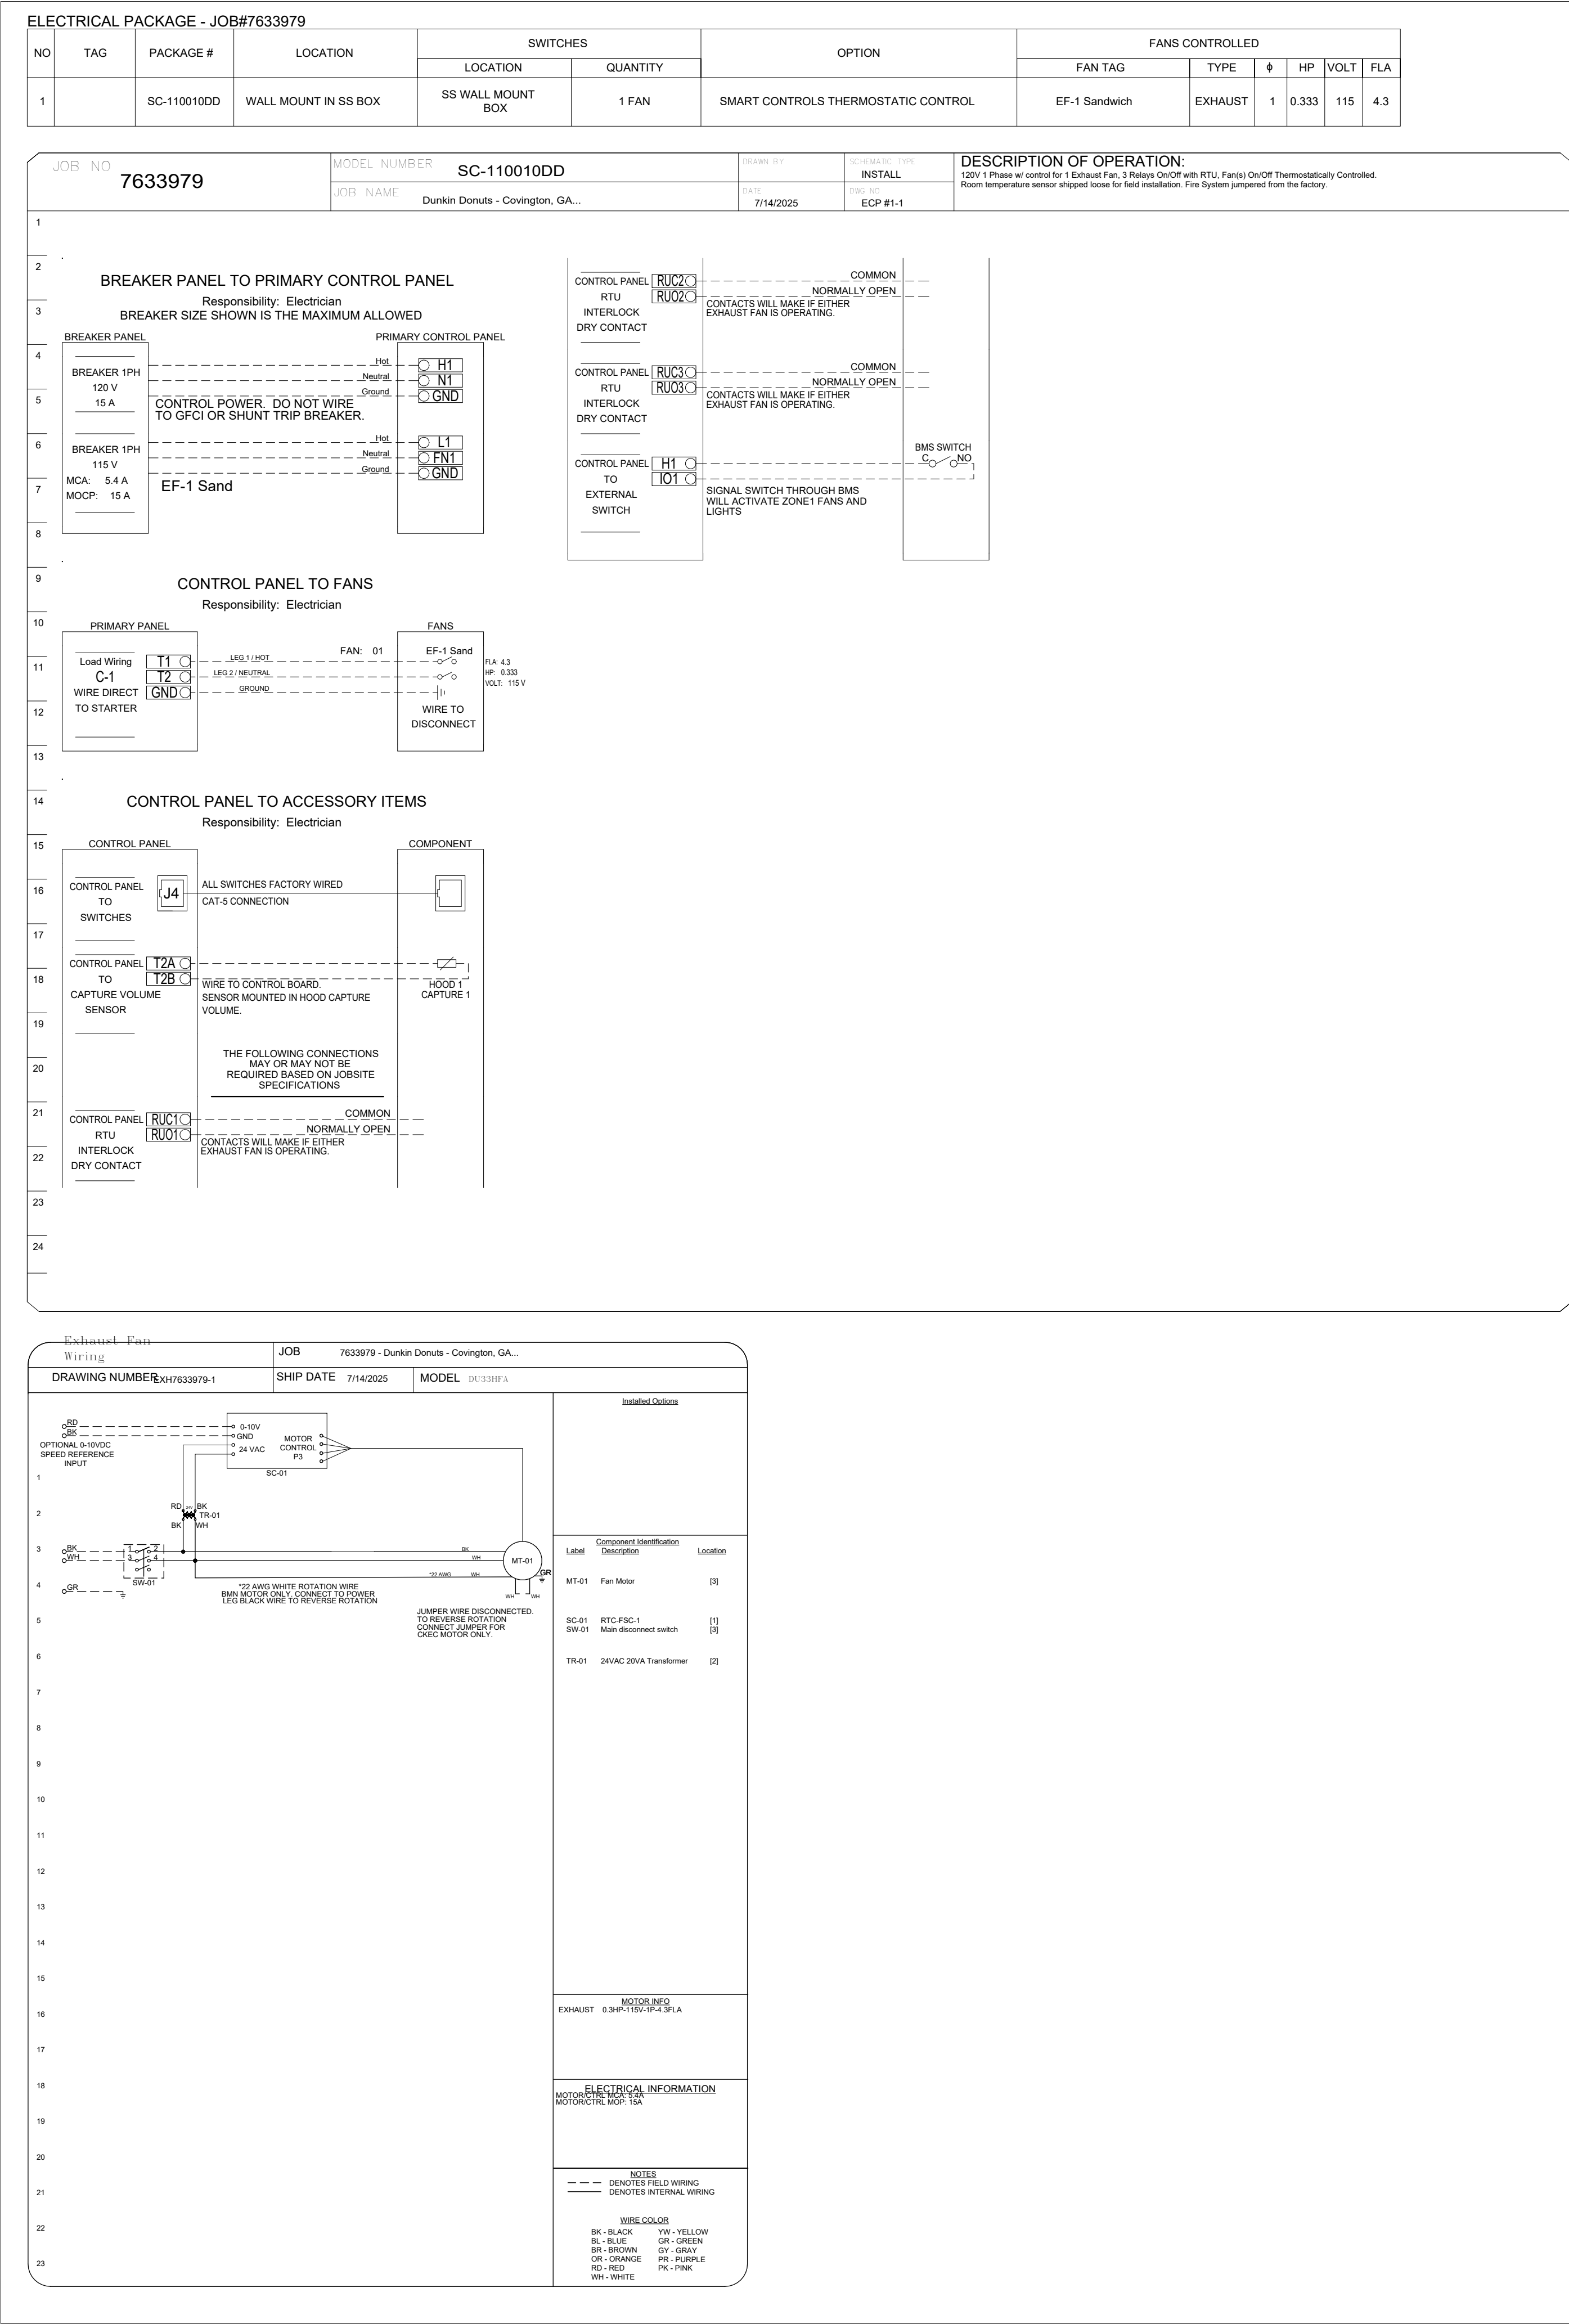

ELECTRICIAN NOTE:
ELECTRICIAN TO PROVIDE AND INSTALL ALL CONNECTIONS AND INTERCONNECTIONS AS REQUIRED BETWEEN HOOD ELECTRICAL PACKAGE AND HOODS, FANS, AND BREAKER PANEL. SEE WIRING DIAGRAM FOR DETAILS.

ELECTRICIAN NOTES -

All Hood/Fan/EMS/UDS/PCU electrical connections and interconnections to be provided and installed by Electrician. Electrician to provide, install, and land wiring between hood lights, hood temp sensors, remote Anslu system microswitches, and any other component requiring an electrical connection to the Captive-Aire electrical package. Failure by the Electrician to make ALL required electrical connections and interconnections will result in the electrical controls not working properly. Any loss or failed test as a result of electrical controls not working properly is the responsibility of the Electrician. Light bulbs for kitchen hoods to be provided and installed by electrician.

CAPTIVE-AIRE

Florida Gulf Coast Office
4519 George Road, Suite 150, Tampa, FL 33634 PHONE: (813) 435-3388 FAX: (813) 435-3388 EMAIL: reg@captivaire.com

Dunkin Donuts - Covington, GA (Crowell Rd)
2083 Crowell Road North,
Covington, GA, 30014

7/14/2025
7633979
JL
3/4" = 1'-0"
MASTER DRAWING
2

ROBERTSON LOIA ROOF ARCHITECTS & ENGINEERS
3460 Preston Ridge Road - Suite 275 - Alpharetta, GA 30005
770.674.2600 / www.rlrc.com
GA CCA # PEF000562 EXPRES: 06/30/2026

GEORGIA REGISTERED ENGINEER
VINAY N. DESAI
07/18/2025

DUNKIN DONUTS REMODEL
2083 CROWELL ROAD
COVINGTON, GA. 30014
FOR:
JPC DESIGN & CONSTRUCTION, LLC
PO BOX 710
JACKSON, GA. 30233

HOOD DETAILS
DATE: 07/18/2025
PROJECT NUMBER: 24163
SHEET NUMBER: M3.3

AIR CURTAIN SCHEDULE					
MARK	CFM	WEIGHT	LOCATION	BASIS OF DESIGN (BERNER)	NOTES
A-1	1,340	48 LBS	DUNKIN KITCHEN	CLC08-1048A	① ② ③ ④ ⑤ ⑥
A-2	200	14 LBS	DUNKIN DRIVE THRU	DTU03-2026A	① ② ③ ④ ⑤ ⑥

- 1 AIR CURTAIN WILL BE PROVIDED BY CONTRACTOR. CONTRACTOR IS RESPONSIBLE FOR SCHEDULING, RECEIPT, AND COMPLETE INSTALLATION OF UNIT
- 2 INTERLOCK SWITCH FOR AUTOMATIC ON/OFF CONTROL WHEN DOOR/WINDOW IS OPENED/CLOSED.
- 3 PROVIDE MOUNTING BRACKETS. INSTALL ABOVE DOORWAY/WINDOW PER MANUFACTURER'S INSTRUCTIONS.
- 4 MUST ORDER BLOWER/MOTOR ASSEMBLY AND CABINET.
- 5 EQUAL SUBSTITUTIONS ALLOWED - PROVIDE SUBMITTAL.
- 6 VERIFY QUANTITY WITH FLOOR PLAN.

MARK	TYPE	SIZE IN INCHES		FINISH	O.B.D.	MOUNTING STYLE	BASIS OF DESIGN (TITUS)	NOTES
		NECK	FACE					
S1	SUPPLY	8"0/18"x18"	24"x24"	WHITE	NO	LAY-IN	TDC	① ② ③
S2	SUPPLY	10"0/18"x18"	24"x24"	WHITE	NO	LAY-IN	TDC	① ② ③
S3	SUPPLY	12"0/18"x18"	24"x24"	WHITE	NO	LAY-IN	TDC-S2	① ② ③
S4	SUPPLY	8"0/18"x18"	24"x24"	WHITE	NO	LAY-IN	TDC-B3	① ② ③
R1	RETURN	20"x20"	24"x24"	WHITE	NO	LAY-IN	50F	① ②

- ① DIFFUSER/GRILLE MOUNTING STYLE SHALL BE CONFIRMED WITH REFLECTED CEILING PLAN. DIFFUSERS/GRILLES PROVIDED AND INSTALLED BY CONTRACTOR. CONTRACTOR IS RESPONSIBLE FOR SCHEDULING, RECEIPT, AND COMPLETE INSTALLATION OF AIR TERMINAL DEVICES.
- ② PROVIDE SQUARE TO ROUND TRANSITION WHEN REQUIRED. CONTRACTOR TO PROVIDE TRANSITION FROM NECK SIZE OF DIFFUSER/GRILLE TO DUCT SIZE INDICATED ON FLOOR PLAN.
- ③ SEE DRAWINGS FOR DIFFUSER THROW PATTERN. PROVIDE 4-WAY THROW DIFFUSER IF NO DIRECTION ARROWS ARE INDICATED.

FAN SCHEDULE																
MARK	CFM	ESP WG	DRIVE	H.P.	TYPE	BASIS OF DESIGN	LOCATION/SERVICE	NOTES/ACCESSORIES (PROVIDE AS LISTED)								
EE-1	525	0.5"	DIRECT	1/3	ROOF MOUNTED	CAPTIVE/ARE #DU33HFA	DUNKIN - SANDWICH STATION HOOD	①	②	③	④	⑤	⑥	⑦	⑧	SEE HOOD DETAIL SHEET M3.2 & M3.3.

- ① FANS INSTALLED AND PROVIDED BY CONTRACTOR. CONTRACTOR IS RESPONSIBLE FOR SCHEDULING, RECEIPT, AND COMPLETE INSTALLATION OF FANS. INSTALL PER MANUFACTURER'S WRITTEN INSTRUCTIONS AND MAINTAIN ALL SERVICE CLEARANCES.
- ② PROVIDE ALUMINUM CURB CAP FOR FAN AND FOR DUCT PENETRATION THROUGH WALL OR ROOF. PROVIDE SLOPED ROOF CURB IF REQUIRED FOR PITCHED ROOF. SEE ARCHITECTURAL ROOF PLAN.
- ③ PROVIDE BACKDRAFT DAMPER.
- ④ NEMA DISCONNECT AND VIBRATION ISOLATION FOR MOTOR/FAN ASSEMBLY.
- ⑤ UL LISTED AND AMCA SEAL. VERIFY VOLTAGE WITH ELECTRICAL PLANS.
- ⑥ FAN TO BE INTERLOCKED WITH CORRESPONDING HOOD OPERATION.

HVAC LEGEND & ABBREVIATIONS	
	SUPPLY DIFFUSER
	RETURN GRILLE
	THERMOSTAT
	THERMOSTAT W/HUMIDITY SENSOR
	MANUAL VOLUME DAMPER
	SPLITTER DAMPER
	FIRE DAMPER
	DOUBLE THICK TURNING VANE
<u>AHU</u>	AIR HANDLING UNIT
<u>EF</u>	EXHAUST FAN

GENERAL

1. ALL MECHANICAL EQUIPMENT SHALL BE INSTALLED IN STRICT ACCORDANCE WITH THE MANUFACTURERS' WRITTEN INSTRUCTIONS AND RECOMMENDATIONS. CONTRACTOR TO COORDINATE ALL CLEARANCES PRIOR TO INSTALLATION OF EQUIPMENT AND MATERIAL.
2. IT IS THE RESPONSIBILITY OF THE GENERAL CONTRACTOR TO RECEIVE, OFFLOAD, AND STORE ALL HVAC MATERIALS WHICH ARRIVE AT THE JOB SITE.
3. GENERAL CONTRACTOR IS TO PROVIDE ANY SCREENING, GUARD RAILS, ETC. FOR ROOF-MOUNTED HVAC EQUIPMENT PER IBC AND LOCAL CODES.
4. OBTAINING ALL REQUIREMENTS AND PAYING ALL ASSOCIATED FEES ARE THE RESPONSIBILITY OF THE CONTRACTOR. ALL WORK SHALL BE DONE IN ACCORDANCE WITH THESE PLANS, SPECIFICATIONS, LOCAL, STATE AND NATIONAL CODES.
5. THE CONTRACTOR SHALL FURNISH ALL LABOR, MATERIALS, EQUIPMENT AND TOOLS TO PERFORM MECHANICAL WORK AS SHOWN, NOTED OR SCHEDULED FOR A COMPLETE INSTALLATION.
6. THE MECHANICAL DRAWINGS ARE DIAGRAMMATIC AND SHOW THE RELATIONSHIP BETWEEN EQUIPMENT AND CONNECTIONS. DO NOT SCALE THE DRAWINGS FOR EXACT SIZE OR LOCATIONS. BUILDING DIMENSIONS SHALL BE TAKEN FROM ARCH. PLANS AND EQUIPMENT DIMENSIONS SHALL BE TAKEN FROM CERTIFIED EQUIPMENT DATA.
7. LOCATION OF ALL EXTERIOR WALL PENETRATIONS SHALL BE COORDINATED WITH ARCHITECTURAL AND STRUCTURAL DRAWINGS.
8. TESTING, ADJUSTING AND BALANCING (TAB) OF MECHANICAL SYSTEM SHALL BE PROVIDED BY CONTRACTOR. THE CONTRACTOR SHALL HIRE AN A.B.C. OR N.E.B.B. CERTIFIED, INDEPENDENT TEST AND BALANCE COMPANY TO CONDUCT A COMPLETE, CERTIFIED TEST AND BALANCE OF ALL HVAC EQUIPMENT AND PROVIDE A WRITTEN REPORT. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL FINAL CONNECTIONS NECESSARY FOR COMPLETE AND FULLY FUNCTIONING SYSTEM INCLUDING INITIAL START-UP AND INSTALLATION OF NEW FILTERS.
9. ALL CONTRACTORS MUST COORDINATE EACH PIECE OF EQUIPMENT WITH ALL OTHER TRADES (GENERAL CONTRACTOR, PLUMBING CONTRACTOR, MECHANICAL CONTRACTOR, SPRINKLER CONTRACTOR, ELECTRICAL CONTRACTOR, ETC.) AFFECTED BY THAT PIECE OF EQUIPMENT (ROOF OPENINGS, WEIGHTS, POWER REQUIREMENTS, VOLTAGES, ETC.) PRIOR TO ORDERING EQUIPMENT AND AGREE PRIOR TO INSTALLATION. (ROOF EQUIPMENT PRIOR TO LIFTING ONTO ROOF). NO EXTRA COMPENSATION WILL BE APPROVED IF COORDINATION IS NOT PERFORMED BY EACH RESPECTIVE CONTRACTOR AND SUBCONTRACTOR.
10. CONTRACTOR SHALL VISIT SITE BEFORE SUBMITTING BID AND MAKE ALL NECESSARY OBSERVATIONS, MEASUREMENTS, AND NOTE CONDITIONS UNDER WHICH HIS WORK IS TO BE PERFORMED. NO EXTRA COMPENSATION WILL BE ALLOWED FOR FAILURE TO DO SO. THIS CONTRACT INVOLVES REMODELING OF EXISTING BUILDING AND THEREFORE SHALL FIELD LOCATE EXISTING DUCTWORK, PIPING, AIR TERMINAL DEVICES, ETC. BEFORE STARTING WORK.
11. ALL OBVIOUS ERRORS AND/OR OMISSIONS IN THE ABOVE MENTIONED DOCUMENTS SHALL BE CALLED TO THE ATTENTION OF THE ARCHITECT / ENGINEER PRIOR TO CONSTRUCTION.
12. ANY MECHANICAL ITEMS IN QUESTION REGARDING REMOVAL/REUSE SHALL BE BROUGHT TO THE ATTENTION OF ARCHITECT/ENGINEER. CONTRACTOR SHALL SUBMIT A REQUEST FOR INFORMATION TO THE ARCHITECT/ENGINEER IN WRITING PRIOR TO REMOVAL OF ANY MECHANICAL ITEMS.
13. SEE MECHANICAL SPECIFICATIONS FOR ADDITIONAL REQUIREMENTS.
14. CONTRACTOR SHALL PATCH ALL HOLES WEATHER TIGHT IN EXISTING WALL DUE TO REMOVAL/ADDITION OF MECHANICAL ITEMS.
15. ALL COSTS INCURRED BY ACCEPTANCE OF SUBSTITUTIONS SHALL BE BORNE BY CONTRACTOR. ANY ADDITIONAL COST/SERVICES RESULTING FROM PROPOSED SUBSTITUTE EQUIPMENT SHALL BE PROVIDED AT NO EXTRA COST TO THE OWNER.
16. EXACT LOCATION OF ALL CEILING DIFFUSERS TO BE COORDINATED WITH LIGHTING LAYOUT AND ARCHITECTURAL REFLECTED CEILING PLAN. CERTAIN CONTRACTOR TO PROVIDE ADEQUATE ACCESS IN CEILING GRID AT DIFFUSER/DAMPER LOCATIONS FOR PURPOSE OF AIR BALANCING.
17. TO PREVENT DIRT/DUST FROM GETTING INSIDE THE HVAC EQUIPMENT DURING CONSTRUCTION, CONTRACTOR SHALL DUCT TAPE A MINIMUM 1" THICK FOAM FILTER TO THE BOTTOM OF ALL AIR RETURNS IN THE BUILDING. FILTERS SHALL BE CHANGED WEEKLY OR AS NEEEDED BASED ON CONDITION UNTIL COMPLETION OF CONSTRUCTION.

18. DUCT SIZES ARE SHOWN AS CLEAR INSIDE FREE AREA DIMENSIONS. PROVIDE FLEXIBLE CONNECTIONS WHERE DUCTS CONNECT TO UNIT (IN RISER). RUN ALL DUCTWORK AS HIGH AS POSSIBLE TO AVOID INTERFERENCE OF INTERSECTING DUCT. ALL DUCTWORK SHALL BE INDEPENDENTLY HUNG FROM STRUCTURAL MEMBERS. COORDINATE ELEVATION AND LOCATION WITH RAIN LEADERS, WATER PIPING, PLUMBING VENTS, AND MAJOR ELECTRICAL CONDUITS OR CABLE TRAY.

19. PORTIONS OF DUCTWORK VISIBLY THROUGH GRILLS, REGISTERS, AND DIFFUSERS IN FINISHED AREAS SHALL BE PAINTED FLAT BLACK.

20. ALL DUCTWORK SHALL BE GALVANIZED SHEET METAL AND SHALL BE FABRICATED AND INSTALLED IN ACCORDANCE WITH SMACNA LOW PRESSURE DUCT CONSTRUCTION STANDARDS (LATEST EDITION).

21. INSULATE ALL SUPPLY AND RETURN DUCT WITH MINIMUM R-8 INSTALLED FIBERGLASS, FOIL BACKED INSULATION OR RIGID BONDED WITH FIRE AND SMOKE RATING [25][50] TO PREVENT CONDENSATION. INSTALL IN ACCORDANCE WITH SMACNA DUCT WRAP APPLICATIONS STANDARDS. ADDITIONALLY, INSTALL DUCT LINER IN THE FIRST TEN FEET OF SUPPLY AND FULL LENGTH OF RETURN DUCTS UNLESS NOTED OTHERWISE. ALL EXPOSED SPRING AND RECTANGULAR DUCT INSIDE THE BUILDING SHALL BE PRIMED, PAINT GRIP WITH R-8 INSTALLED LINER WITHIN. ALL EXTERIOR DUCT OUTSIDE THE BUILDING SHALL WRAPPED WITH MINIMUM R-8 JOHNS MANVILLE XSPCT ISOFOAM APF BOARD INSULATION OR EQUIVALENT. ALL DUCTWORK DIMENSIONS ARE NET INSIDE DIMENSIONS.

22. SPIN-IN TAKE-OFF TO BE MADE WITH GENFLEX MODEL SM-1 DEL OR EQUIVALENT.

23. ALL FLEX DUCT SHALL BE FOIL-BACKED, R-6, U.L. LISTED, CLASSIFIED AS A CLASS 1 AIR DUCT, AND MEET LOCAL CODE REQUIREMENTS. FLEXIBLE DUCT TAKE-OFF TO BE THERMAFLEX TYPE M-KE OR EQUIVALENT.

24. MAXIMUM LENGTH OF FLEXIBLE DUCT IS NOT TO EXCEED 8'-0". RETURN DUCT RUN OUTS TO DIFFUSERS SHALL BE SAME SIZE AS DIFFUSER NECK UNLESS OTHERWISE SPECIFIED.

25. PROVIDE BALANCING DAMPERS AT POINTS ON SUPPLY, RETURN AND EXHAUST SYSTEMS WHERE BRANCHES LEAD FROM LARGE DUCTS AS REQUIRED FOR AIR BALANCING UNLESS INDICATED OTHERWISE. INSTALL A MINIMUM OF TWO DUCT WIDTHS FROM BRANCH TAKEOFF. UNLESS OTHERWISE NOTED, EVERY SUPPLY TAP COLLAR SHALL HAVE A LOCKING MANUAL VOLUME DAMPER, ALL SURFACE MOUNTED DIFFUSERS AND GRILLES SHALL BE PROVIDED WITH DAMPER FOR AIR BALANCING. PROVIDE IDENTIFICATION OF THE LOCATION OF ALL FIRE AND BALANCING DAMPERS. IDENTIFICATION TAGS SHALL BE AFFIXED TO THE WALLS OR CEILINGS AND SHALL BE VISIBLE FROM THE OCCUPIED SPACE.

26. PROVIDE 24"x24" ACCESS PANEL FOR ALL BALANCING DAMPERS, MOTOR OPERATED DAMPERS, FIRE DAMPERS, SMOKE DAMPERS, FIRE/SMOKE COMBINATION DAMPERS LOCATED ABOVE CEILING. PAINT TO MATCH BACKGROUND.

27. PROVIDE TURNING VANES IN ALL RECTANGULAR 45, 60 & 90 DEGREE MITERED ELBOWS.

28. ALL FANS 1/8 H.P. AND ABOVE SHALL HAVE FUSED DISCONNECT SWITCHES MOUNTED AT THE FAN. IF APPROVED BY LOCAL AUTHORITIES, NON-FUSED DISCONNECT SWITCHES MAY BE USED. DISCONNECTS PROVIDED BY ELECTRICAL CONTRACTOR.

29. CONTRACTOR SHALL NOT ROUTE DUCTWORK ABOVE ELECTRICAL EQUIPMENT AND PANELS.

30. ALL CONTROL WIRING SHALL BE RUN INSIDE WALLS OR ABOVE CEILINGS. IN UNFINISHED AREAS, ROUTE CONTROL WIRING INSIDE CONDUIT IN JOIST SPACE. CONTRACTOR IS TO MAKE ALL LOW-VOLTAGE WIRING FINAL CONNECTIONS FOR ALL HVAC EQUIPMENT INCLUDING SENSORS, THERMOSTATS, AUDIO-VISUAL ANNUNCIATORS, ROOF-TOP UNITS, SMOKE DETECTORS, CONTRACTOR PANEL, AND CONTROL PANEL.

31. PROVIDE 1/2" X 1/2" SQUARE SPACES AT 4'0" A.F.F. IN SPACES THAT DO NOT REQUIRE ADA ACCESSIBILITY. MOUNT ALL SENSORS 6'0" A.F.F. UNLESS NOTED OTHERWISE. ANY SENSORS LOCATED ON AN EXTERIOR WALL SHALL BE MOUNTED ON AN INSULATED BASE. PROVIDE LOCK BOX. CONTRACTOR TO FIELD VERIFY LOCATION OF ALL SENSORS, THERMOSTATS, ETC. AND AVOID CONFLICT WITH CABINETS, MILLWORK, CHALKBOARDS, MONITORS, ETC.

32. MECHANICAL DRAWINGS DO NOT INDICATE ELECTRICAL POWER & VOLTAGE REQUIREMENTS OF EQUIPMENT. SEE ELECTRICAL DRAWINGS FOR POWER AND VOLTAGE REQUIREMENTS PRIOR TO ORDERING MECHANICAL EQUIPMENT.

33. CONTRACTOR SHALL TAG ALL HVAC EQUIPMENT FOR IDENTIFICATION. ALL EQUIPMENT ABOVE CEILING SHALL HAVE CLEAR TAGS FOR IDENTIFYING EQUIPMENT DURING MAINTENANCE. SEE SPECIFICATIONS.

34. ALL EQUIPMENT SHALL BE CONSIDERED EXISTING UNLESS OTHERWISE NOTED. EXISTING EQUIPMENT NOT SHOWN SHALL REMAIN UNCHANGED.

35. WHERE ANY EQUIPMENT ON ROOF IS DISTURBED, IT IS THE HVAC CONTRACTOR'S RESPONSIBILITY TO COORDINATE WITH GENERAL CONTRACTOR FOR REPAIR OF ANY ROOFING ITEMS AFTER THE COMPLETION OF WORK.

36. DAMAGED DIFFUSERS/GRILLES: IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO IDENTIFY AND REPAIR ANY DAMAGED DIFFUSERS/GRILLES.

37. PRE-BID: BIDDING CONTRACTOR'S TO LOCATE AND ITEMIZE EXPECTED QUANTITY OF DAMAGED DIFFUSERS/GRILLES TO BE REPLACED

38. EXISTING MATERIALS MAY BE REUSED WHERE PRACTICAL, IF PRIOR APPROVAL IS OBTAINED FROM THE ENGINEER. ALL EXISTING DUCTS THAT ARE TO BE REUSED SHALL BE PATCHED AND SEALED WITHOUT LEAKS; DUCTS EXPOSED TO STRUCTURE SHALL BE PAINTED TO MATCH BACKGROUND.

39. DEMOLISHED HVAC EQUIPMENT, DUCTWORK, AND DIFFUSERS SHALL BE TAKEN DOWN AND PROPERLY DISPOSED.

[illegible]



7. VENT THRU ROOFS THAT ARE NO LONGER IN USE SHALL BE PERMANENTLY CAPPED ABOVE ROOF.

RENOVATION LEGEND

DASHED LINES INDICATE EXISTING PLUMBING, TO BE DEMOLISHED.

LIGHT TONE LINES INDICATE EXISTING PLUMBING, PIPING TO REMAIN/RELOCATE AND REUSED

DARK TONE LINES INDICATE NEW PLUMBING,
TO BE INSTALLED.




6. CONTRACTOR TO MAKE FINAL CONNECTIONS TO ALL OWNER/TENANT PROVIDED EQUIPMENT. CONTRACTOR SHALL SUPPLY ALL NECESSARY ADAPTERS, FITTINGS, ETC TO MAKE CONNECTION TO EQUIPMENT PER MANUFACTURERS WRITTEN INSTRUCTIONS.

NOTE:
SEE GENERAL NOTES ON SHEET
P6.1 FOR ADDITIONAL PLUMBING
REQUIREMENTS.

PORTIONS OF THIS PROJECT ARE RENOVATIONS OF AN EXISTING FACILITY AND OF NECESSITY, PREVIOUS RECORD DRAWINGS FORM THE BASIS FOR MANY OF THESE DRAWINGS. IT IS THEREFORE EVEN MORE IMPORTANT THAN IN NEW CONSTRUCTION THAT ALL DIMENSIONS SHALL BE FIELD VERIFIED BEFORE FABRICATION OR PURCHASE OF DIMENSION CRITICAL EQUIPMENT, MATERIALS, AND ASSEMBLIES. THERE MAY EXIST FIELD CONDITIONS NOT ACCESSIBLE DURING DESIGN WHICH DIFFER FROM THOSE SHOWN ON THE DRAWINGS. ANY SUCH DEVIATIONS SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT FOR RESOLUTION BEFORE PROCEEDING WITH ANY CONSTRUCTION, FABRICATION, OR MATERIAL/EQUIPMENT PURCHASES WHICH WOULD BE UNUSABLE UNDER THOSE CIRCUMSTANCES.

C:\Users\jhatle\Documents\Revit\2024\03 PLUMBING P2.6 - jhatle20WWE.rvt 7/18/2025 5:08:47 PM

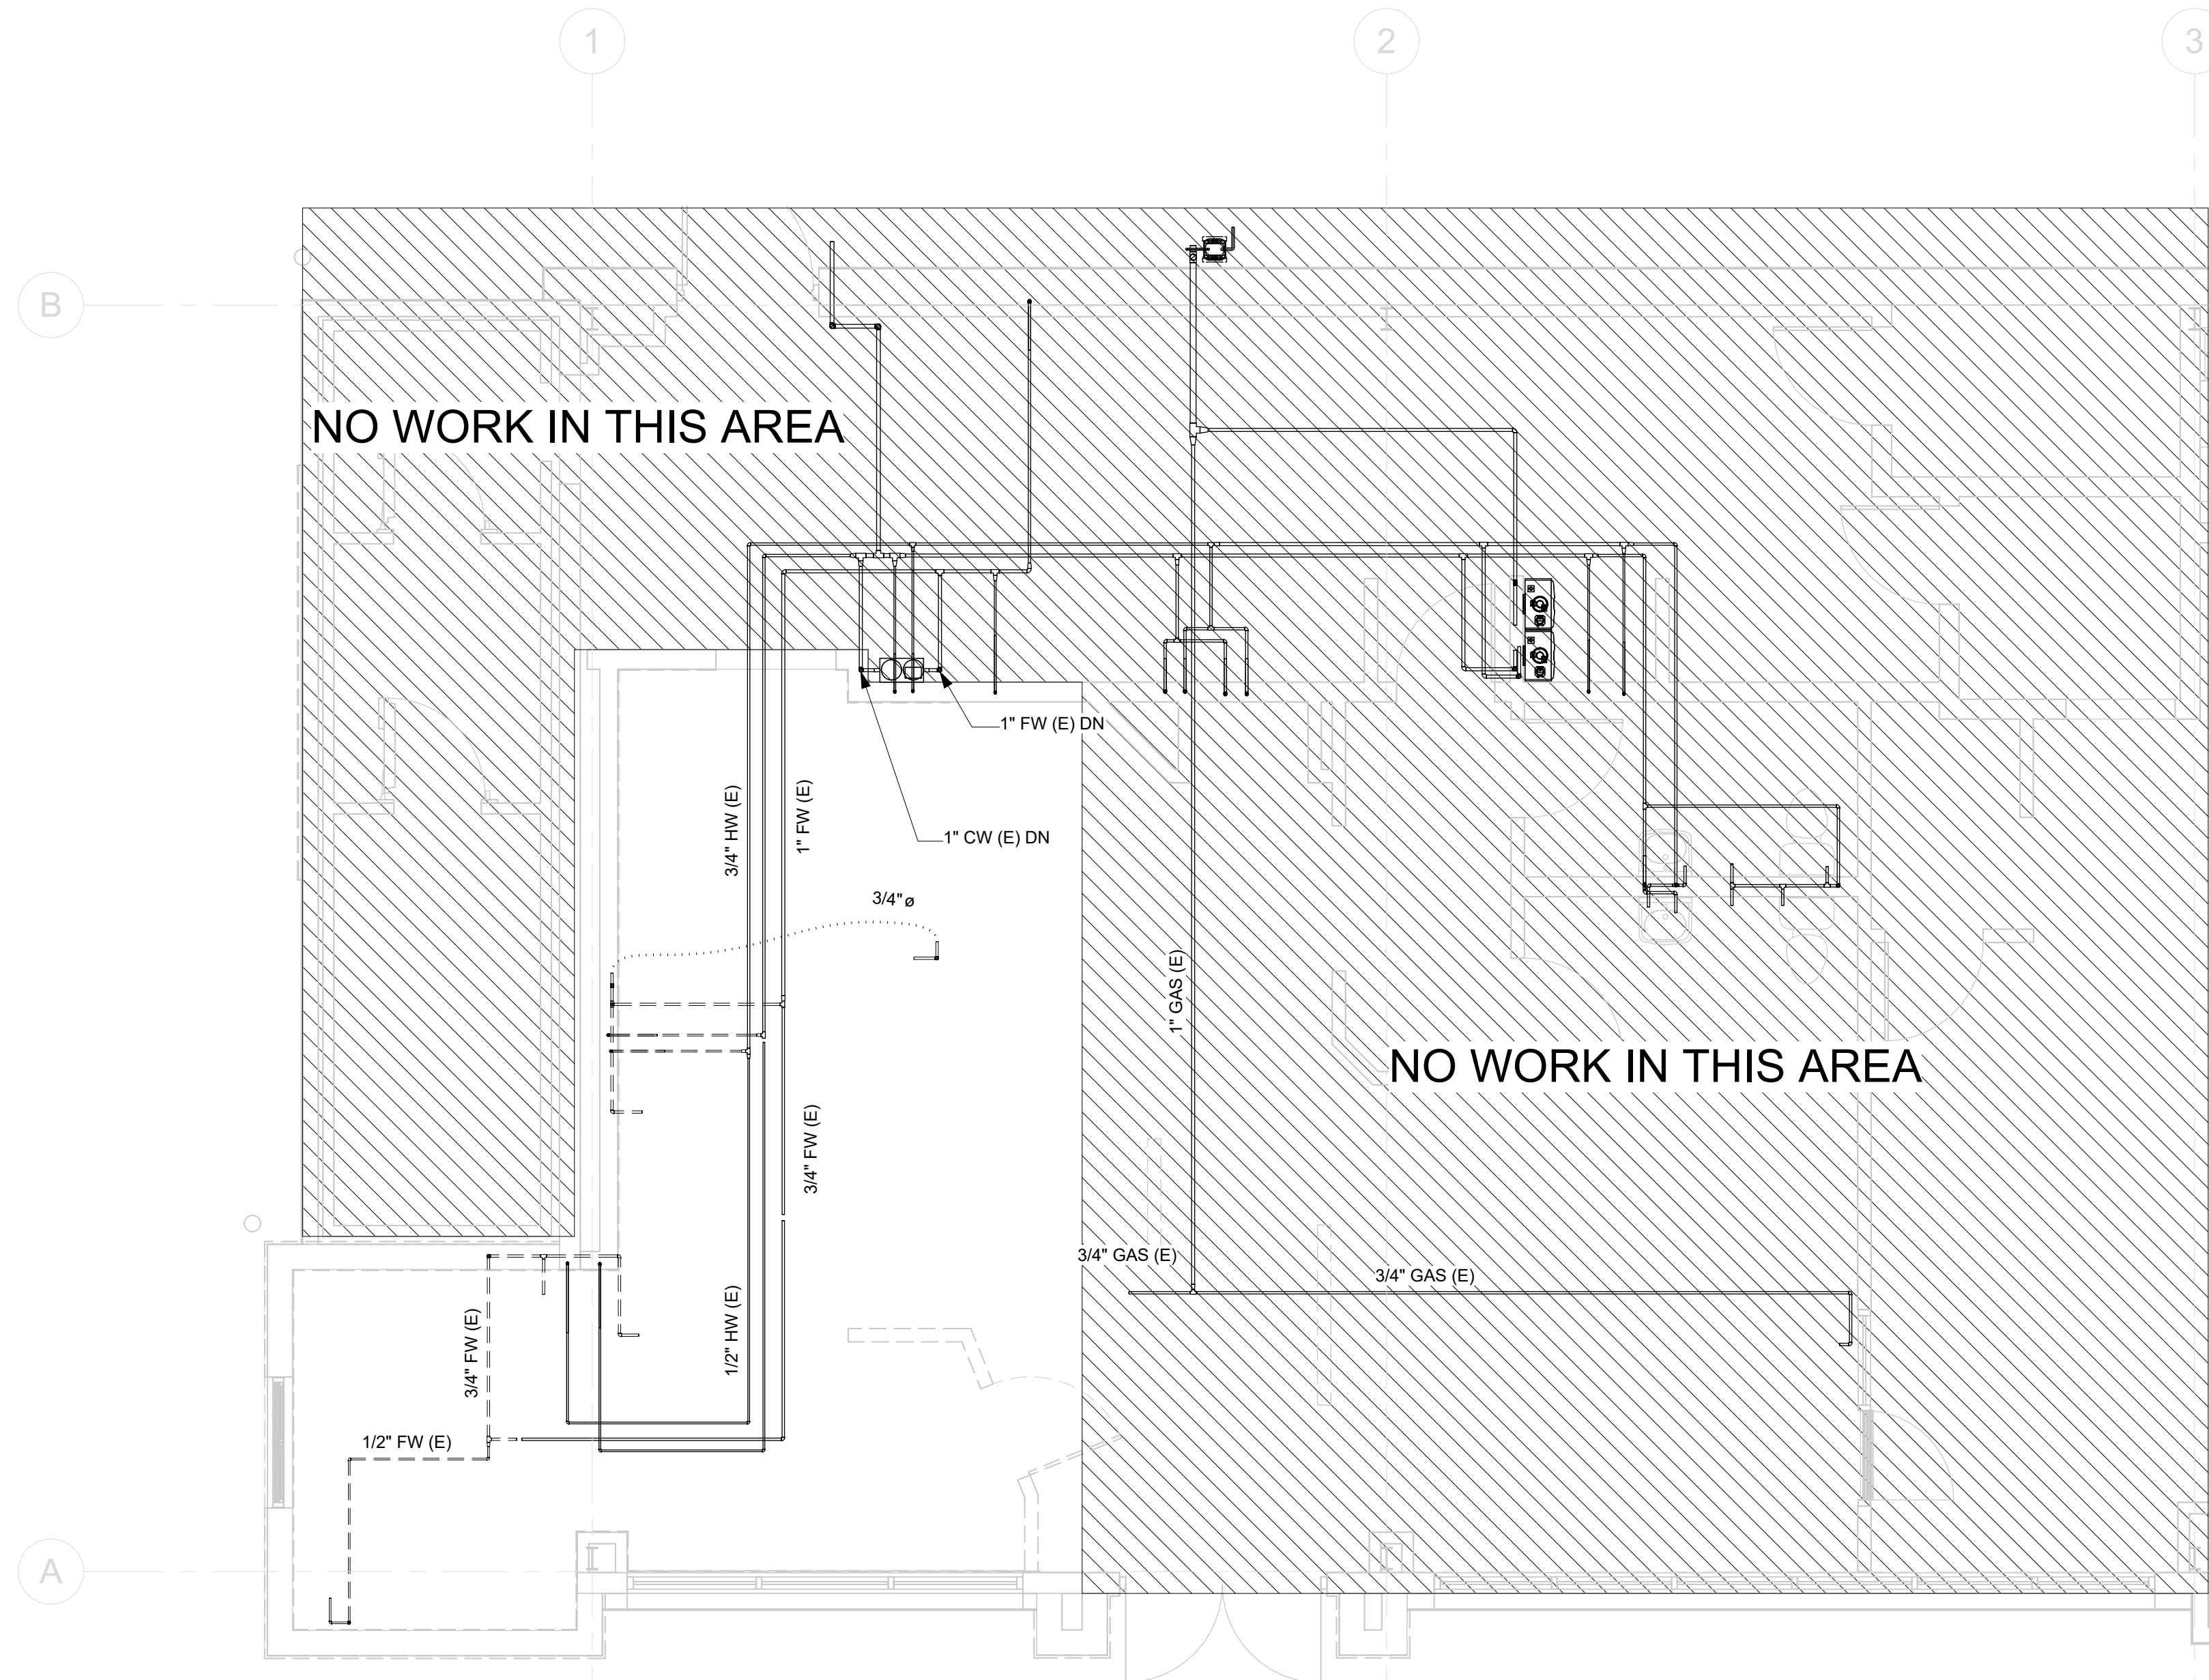


2
P1.2
WATER FLOOR PLAN - DEMOLITION
1/4" = 1'-0"

GENERAL RENOVATION NOTES:

- COORDINATE PHASING OF ALL NEW WORK WITH GENERAL CONTRACTOR. DISPOSE OF ALL DEMOLISHED FIXTURES AS DIRECTED BY GENERAL CONTRACTOR.
- CONTRACTOR SHALL RE-USE EXISTING PIPING WHERE PRACTICAL. CONTRACTOR SHALL ADJUST HEIGHTS AND LOCATIONS OF EXISTING SANITARY AND WATER FOR CONNECTION TO NEW FIXTURE AS REQUIRED.
- NO DEAD ENDS SHALL BE LEFT ON ANY DRAINAGE PIPING UPON COMPLETION OF WORK.
- THE EXISTING SYSTEM(S) TO BE REUSED SHALL BE LEFT IN PERFECT WORKING ORDER UPON COMPLETION OF THE JOB. VERIFY INVERT OF EXISTING SANITARY PIPING PRIOR TO STARTING WORK.
- CONTRACTOR SHALL DETERMINE DIRECTION OF FLOW IN EXISTING LINES AND TIE NEW PIPES IN THE PROPER DIRECTION.
- CONTRACTOR SHALL FIELD VERIFY EXACT LOCATION AND SIZE OF EXISTING PIPING PRIOR TO STARTING CONSTRUCTION TO VERIFY NEW PIPING CAN BE INSTALLED AS SHOWN ON PLANS. CONTRACTOR SHALL BRING ANY CONFLICTS TO THE ATTENTION OF THE ARCHITECT AND ENGINEER FOR RESOLUTION BEFORE PROCEEDING.
- VENT THRU ROOFS THAT ARE NO LONGER IN USE SHALL BE PERMANENTLY CAPPED ABOVE ROOF.

RENOVATION LEGEND
DASHED LINES INDICATE EXISTING PLUMBING, TO BE DEMOLISHED.
LIGHT TONE LINES INDICATE EXISTING PLUMBING, PIPING TO REMAIN/RELOCATE AND REUSED
DARK TONE LINES INDICATE NEW PLUMBING, TO BE INSTALLED.

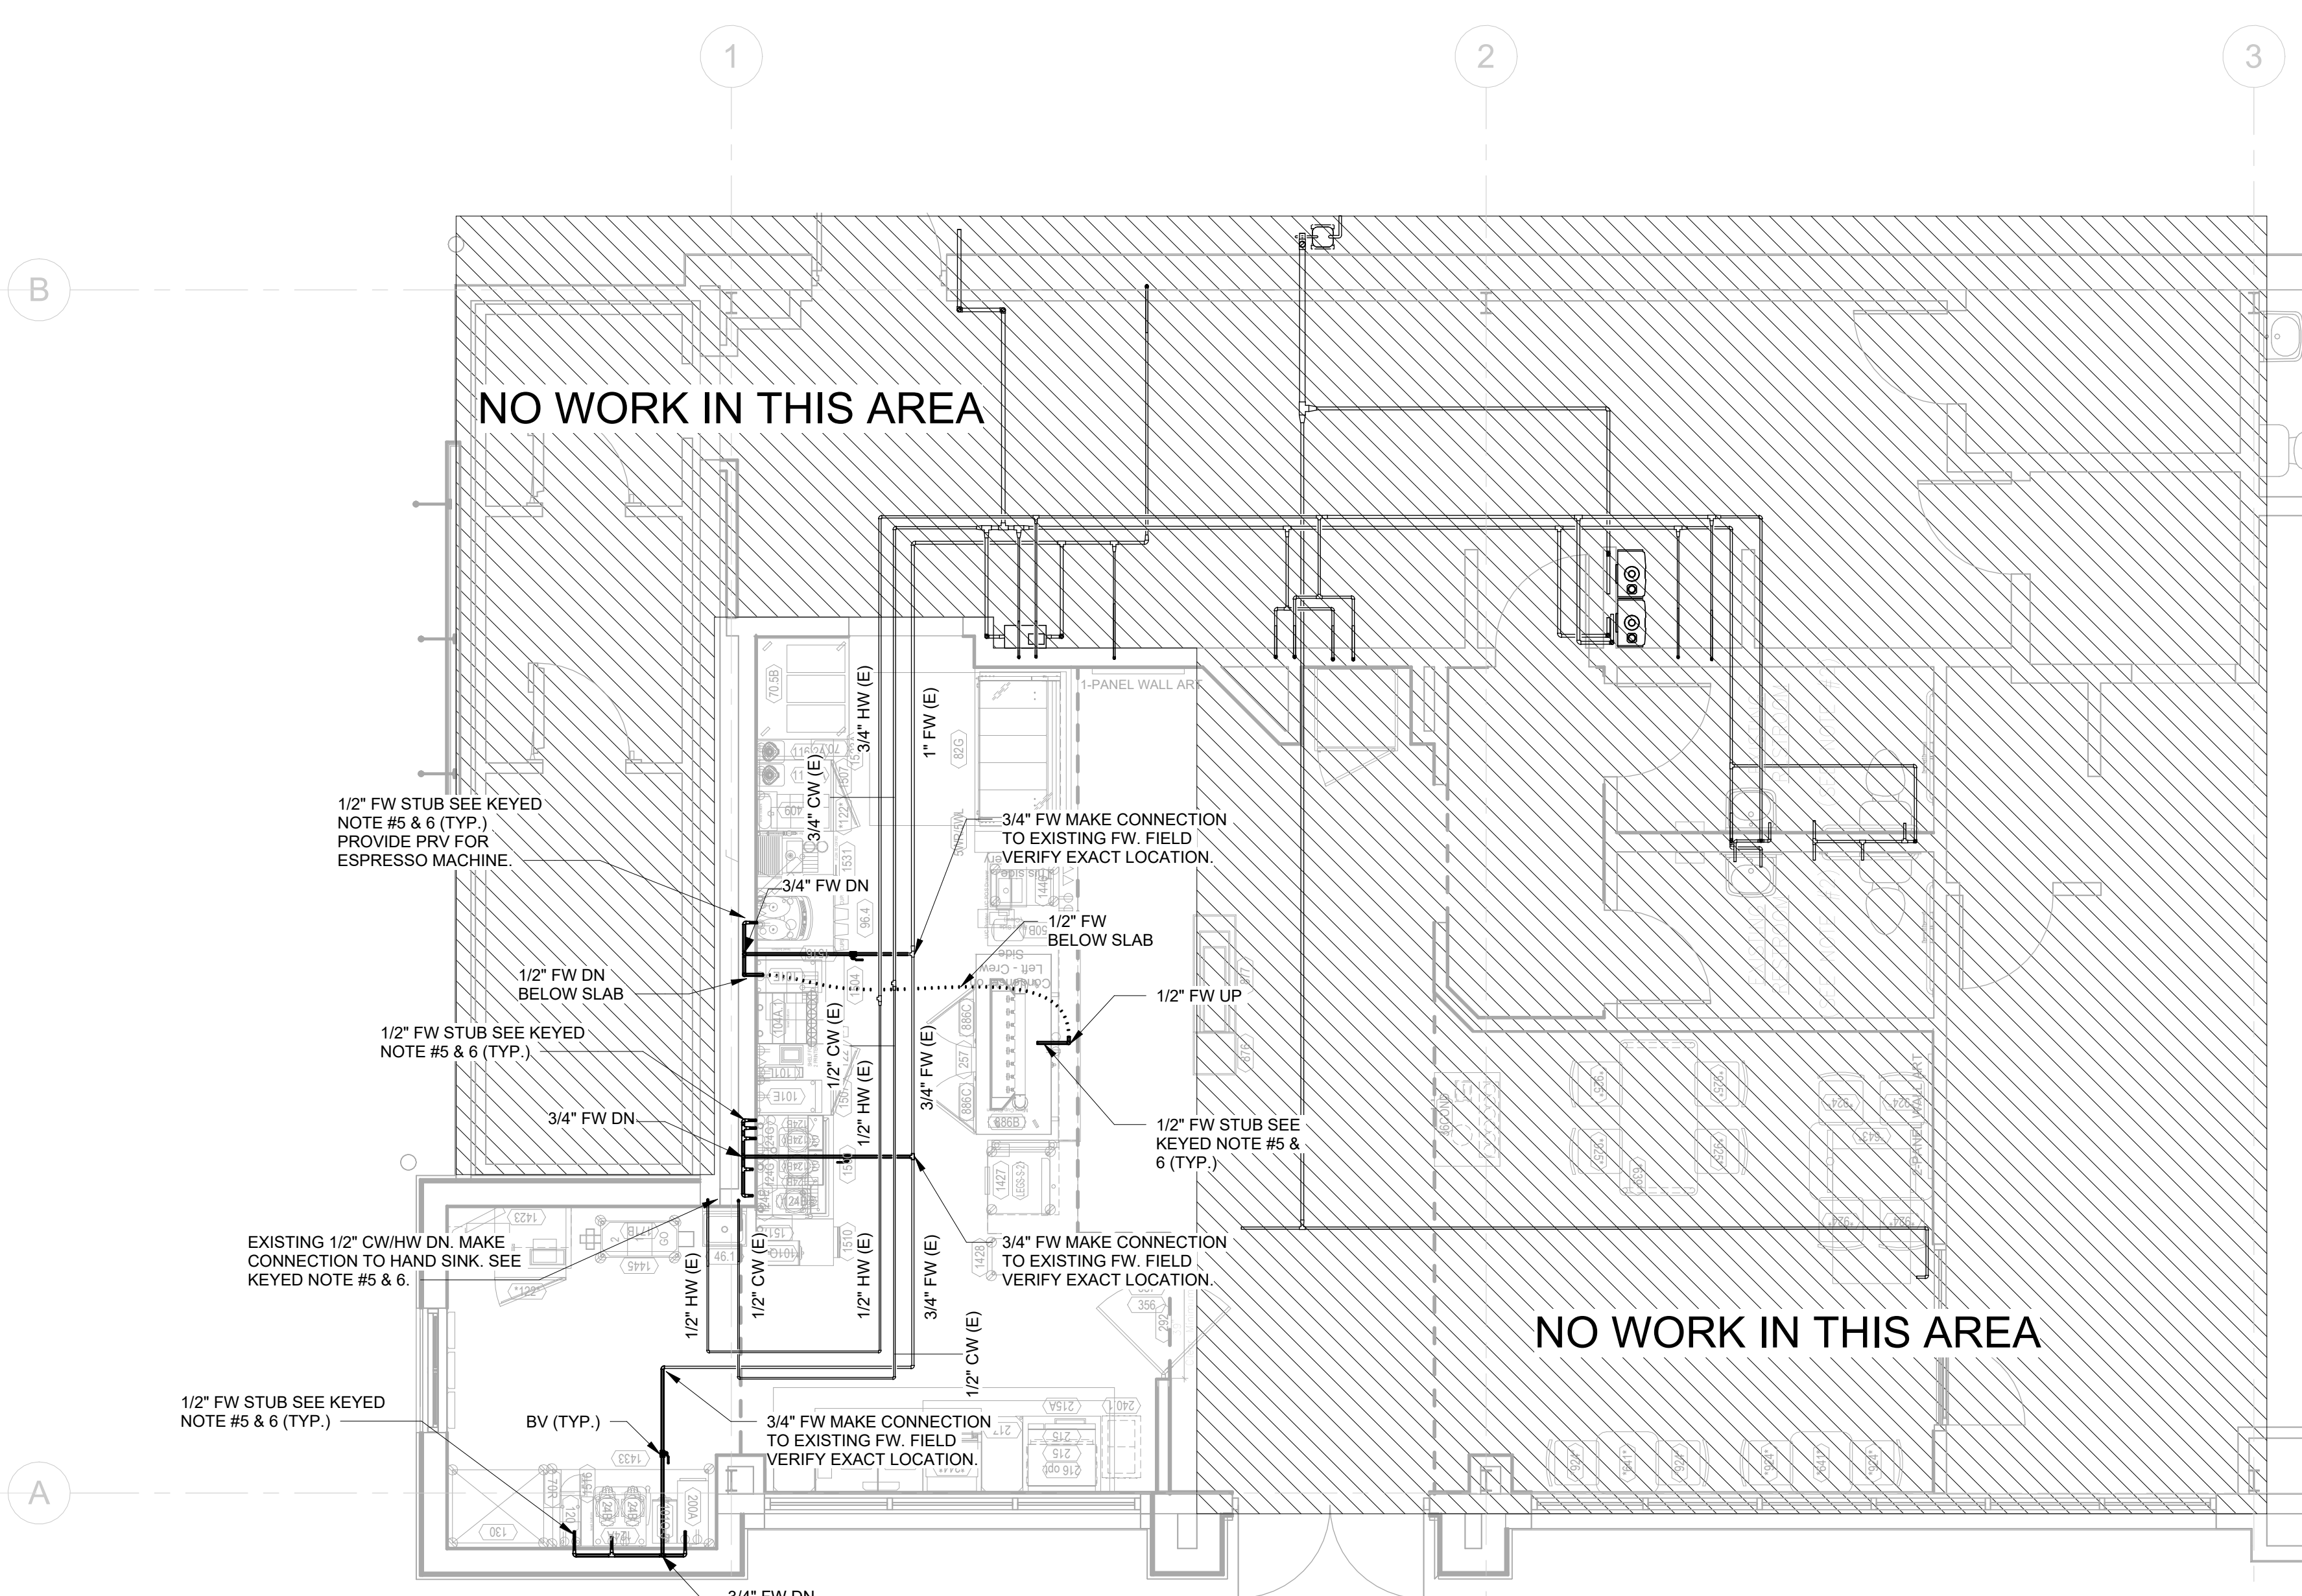

1
P1.2
WATER FLOOR PLAN - NEW
1/4" = 1'-0"

KEYED NOTES:

- MAKE CONNECTION TO EXISTING GREASE WASTE LINE. FIELD VERIFY EXACT SIZE, INVERT, AND LOCATION OF EXISTING PIPING.
- ROUTE NEW VENT UP AND MAKE CONNECTION TO EXISTING VENT THRU ROOF. FIELD VERIFY EXACT SIZE AND LOCATION.
- CONTRACTOR SHALL DEMOLISH EXISTING VENT AND CAP BELOW FLOOR.
- EXISTING VENT UP TO REMAIN. CAP EXISTING GREASE WASTE LINE, NO LONGER IN USE, IN WALL/BELOW FLOOR.
- CONTRACTOR SHALL PROVIDE AND INSTALL STOPS AT ALL EQUIPMENT CONNECTIONS. PROVIDE BFP FOR ALL FILTERED WATER EQUIPMENT.
- CONTRACTOR TO MAKE FINAL CONNECTIONS TO ALL OWNER/TENANT PROVIDED EQUIPMENT. CONTRACTOR SHALL SUPPLY ALL NECESSARY ADAPTERS, FITTINGS, ETC TO MAKE CONNECTION TO EQUIPMENT PER MANUFACTURERS WRITTEN INSTRUCTIONS.

SEE DUNKIN SITE SPECIFIC EQUIPMENT SCHEDULE FOR EQUIPMENT REQUIREMENTS.

NOTE:
SEE GENERAL NOTES ON SHEET P8.1 FOR ADDITIONAL PLUMBING REQUIREMENTS.


RENOVATION NOTE:

PORTIONS OF THIS PROJECT ARE RENOVATIONS OF AN EXISTING FACILITY AND OF NECESSITY, PREVIOUS RECORD DRAWINGS FORM THE BASIS FOR MANY OF THESE DRAWINGS. IT IS THEREFORE EVEN MORE IMPORTANT THAN IN NEW CONSTRUCTION THAT ALL DIMENSIONS SHALL BE FIELD VERIFIED BEFORE FABRICATION OR PURCHASE OF DIMENSION CRITICAL EQUIPMENT, MATERIALS, AND ASSEMBLIES. THERE MAY EXIST FIELD CONDITIONS NOT ACCESSIBLE DURING DESIGN WHICH DIFFER FROM THOSE SHOWN ON THE DRAWINGS. ANY SUCH DEVIATIONS SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT AND ENGINEER FOR RESOLUTION BEFORE PROCEEDING WITH ANY CONSTRUCTION, FABRICATION, OR MATERIAL/EQUIPMENT PURCHASES WHICH WOULD BE UNUSABLE UNDER THOSE CIRCUMSTANCES.

REVISIONS	#	DATE	DESCRIPTION

SWITCH LEGEND

- A SITTING
B SITTING
C PENDANT
D SERVING LINE 2X2 / DOWNLIGHTS
3 KITCHEN 3-WAY

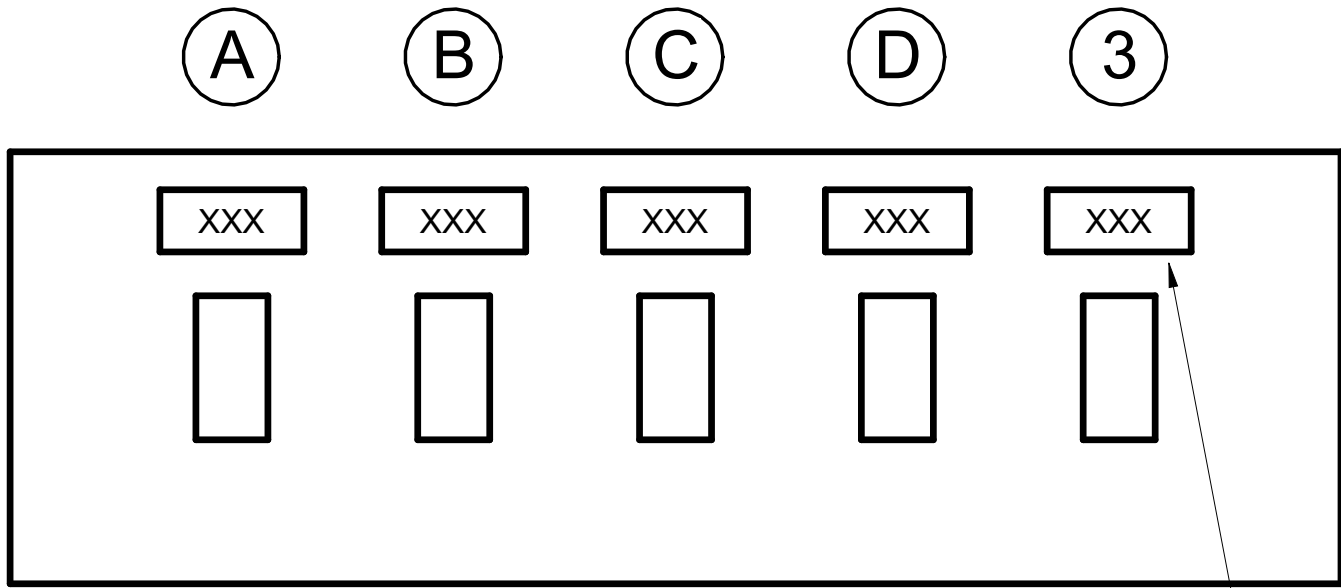

NOTE: MOUNT ALL SWITCHES UNDER COMMON COVERPLATE.

2 SWITCH DETAIL
E1.1 NOT TO SCALE

CODE	DESCRIPTION	MANUFACTURER	PRODUCT
A	WALL-WASH FIXTURE- TO BE USED AT ARTWORK AND LROD SIGN	CONTECH	RL20SA3-35K-12-D/ CTR2002CLR-P
B	PROVIDED BY WALK-IN BOX MANUF.	VARIES	VARIES
C	TRACK LIGHT & HEAD- USED @ WALL W/ ART WORK AND WHERE CEILING IS OPEN	JUNO	R600L-35K-BL
EBU-W	ULTRA COMPACT LED EMERGENCY UNIT (WHITE)	EXITRONIX	EBU-W-LED-51-52
EBU-B	ULTRA COMPACT LED EMERGENCY UNIT- USED ON WT-02 WALL ONLY (BLACK)	EXITRONIX	EBU-BL-LED-51-52
EMR	EXTERIOR COMBO LED REMOTE EXIST LIGHT HEAD- USED ABOVE OR ADJACENT TO EXIT DOORS (GRAY)	EXITRONIX	MLED-2-G-WP
EWS-1	WALL PACK (GRAY) EXTERIOR- USED ON DARK WALL FINISH	WAC	WP-LED227-30-AGH
EWS-2	WALL PACK (WHITE) EXTERIOR- USED ON LIGHT WALL FINISH	WAC	WP-LED227-30-AWT
G	WALL PACK - ABOVE SERVICE DOOR	COOPER	XTOR3A
EX1	COMBO LED EXIT SIGN W/ LIGHT HEADS (WHITE)	EXITRONIX	VLED-U-WH-EL90
BL	BATHROOM SCONCE	LUMENCIA	LLW260D3K-SN
LED 2	EXTERIOR RECESSED LIGHT FIXTURE- USED UNDER ORANGE BEAM/ CANOPY	LUMARK	XTOR2B-W
LED 11	NOT USED		
LED 12	EXTERIOR LIGHT FIXTURE- USED ON TOP OF CHARCOAL TRIM AND FIELD FRAMED ORANGE BEAM	SOLID STATE LUMINARIES SOLUTIONS OF LIGHTING	LSSL-LSSL-5165-400 LUMENS
LED 13	EXTERIOR LIGHT FIXTURE- USED ON TOP OF AND ON THE UNDERSIDE OF THE ORANGE BEAM WHEN USING THE PREFAB OPTION		TO BE PROVIDED BY PREFAB ORANGE BEAM VENDOR
LED 14	EXTERIOR LIGHT FIXTURE - ACCENT LIGHT USED ON TOP OF CHARCOAL TRIM AT BASE OF MONOLITH ONLY	LED POWER	HB308-48"-41K-15D-AC
OC	WALL MOUNTED OCCUPANCY SENSOR	WATTSTOPPER	WS-250-W
P1	8' SUSPENDED LINEAR LIGHT FIXTURE- USED IN SEATING/ SALES AREA	TEXAS FLUORESCENTS	SES-FR-96L-S62W6200L-DMV-35K-BK
P2	4' SUSPENDED LINEAR LIGHT FIXTURE- USED IN SEATING/ SALES AREA	TEXAS FLUORESCENTS	SES-FR-48L-S62W3100L-DMV-35K-BK
P3	PENDANT CHANDELIER- USED ABOVE COMMUNITY TABLE	TECH LIGHTING	700TD-ALVPMC-OS-LED930
PKL3	PARKING LOT LIGHTING	COOPER LIGHTING	LUMARK PRV-PREVAI PRV-A40-UNV-T3-SA-BZ
PKL4	PARKING LOT LIGHTING	COOPER LIGHTING	LUMARK PRV-PREVAI PRV-A40-UNV-T4-SA-BZ
R1	RECESSED LED LIGHT FIXTURE	CREE	RC6/CR6T-1600L-35K
R2	2X2 LAY-IN TROFFER LED LIGHT FIXTURE, USED IN FRONT OF HOUSE	CREE	CR22-32L-35K-S-HD
R3	4" LED ADJ DOWNLIGHT, 400K, 200 LUMEN	NORA	NCH-436-L20-40-D-SF
R4	LED LINEAR LIGHT BAR- USED ABOVE FRONT LINE [NOTE: AVAILABLE IN INCREMENTS OF 1FT WITH A 1FTx1FT CORNER PIECE]	PINNACLE ARCHITECTURAL LIGHTING	EX3D-A-N-835VHO-8-S/AC120ST
R5	2X4 LAY-IN LED LIGHT FIXTURE, USED IN BACK OF HOUSE	LSI	SFP24-LED-50-UE-DIM-35-U
R6	2X2 LAY-IN LED LIGHT FIXTURE, USED OVER SERVICE AREA - REMODELS ONLY	LSI	SFP22-LED-UE-30-DIM-35-U
R7	2X4 LAY-IN TROFFER LED LIGHT FIXTURE, USED IN FRONT OF HOUSE - REMODELS ONLY	CREE	CR24-40L-35K-S-HD
WSCX-2	EXTERIOR SIGN LIGHT FIXTURE - USED AT ACCENT PANELS	HI-LITE MFG INC.	H-HDMR16/18-1-119/ MR16AD1C293010T-10-S1

LIGHTING SCHEDULE NOTES

1. PROVIDE ALL FIXTURES COMPLETE WITH LAMPS. REF. NATIONAL ACCOUNT SOURCE INFO FOR LAMP SPECS & VILLA LIGHTING RE-LAMPING PROGRAM.
2. ALL BALLASTS SHALL BE HIGH POWER FACTOR.
3. PROVIDE HOLD-DOWN CLIPS FOR EACH CORNER OF FLUORESCENT GRID TROFFERS.
4. COORDINATE AND VERIFY ALL FIXTURE INFORMATION, TYPES AND FINAL LOCATIONS WITH THE REFLECTED CEILING PLAN.
5. LAMPS SHALL BE AS MANUFACTURED BY SYLVANIA, WESTINGHOUSE, GENERAL ELECTRIC OR APPROVED EQUAL.

LIGHTING FIXTURE SCHEDULE NOTES


1. VERIFY CATALOG NUMBERS AND MANUFACTURERS LISTED VERSUS THE LIGHT FIXTURE DESCRIPTION. CATALOG NUMBERS FOR EACH FIXTURE TYPE ARE LISTED FOR REFERENCE ONLY. ALTERNATES AND SUBSTITUTIONS SHALL BE PRE-APPROVED.
2. ON ALL LIGHTING FIXTURES WITH ADJUSTABLE OUTPUT AND / OR COLOR, MANUFACTURER / VENDOR / CONTRACTOR SHALL SET THE LIGHTING FIXTURES TO THE VALUES SPECIFIED.
3. MOUNTING HEIGHTS FOR LIGHTING FIXTURES ARE TO THE CENTER OF LIGHT FIXTURE UNLESS OTHERWISE NOTED.
4. VERIFY CEILING TYPES AND PROVIDE LIGHTING COMPONENTS ACCORDINGLY.
5. RECESSED FIXTURES SHALL BE SUITABLE FOR THE CEILING (AND INSULATION IF ANY) IN WHICH INSTALLED.
6. EMERGENCY BATTERY SHALL BE FACTORY INSTALLED.
7. EXIT SIGNS WITH BATTERY PACK SHALL HAVE DUAL VOLTAGE (120/277) AND "LOW BATTERY VOLTAGE DISCONNECT CIRCUIT".
8. EXTERIOR FIXTURES SHALL BE DAMP OR WET LOCATION RATED AS REQUIRED.
9. TROFFERS MOUNTED IN GRID CEILINGS SHALL BE SUPPORTED INDEPENDENT OF THE CEILING SYSTEM.
10. GRID MOUNTED TROFFERS SHALL HAVE "EARTHQUAKE" CLIPS AND ADDITIONAL GRID SUPPORT WIRES.
11. SEE LIGHT FIXTURE CONTROL DIAGRAM FOR CONNECTION OF EXIT AND EMERGENCY LIGHTING FIXTURES.

LIGHTING PLAN NOTES

1. CONTRACTOR SHALL BE RESPONSIBLE FOR DETERMINING NUMBER OF CONDUCTORS IN BRANCH CIRCUITS AND SWITCH LEGS.

ELECTRICAL KEYNOTES


VALUE	NOTE
L1	SWITCH BANK. REFERENCE DETAIL 2/E1.1.
L2	RECONNECT TO EXISTING CIRCUIT AND CONTROLS.
L3	BOTTOM OF SUSPENDED LINEAR LED FIXTURES @10'-0" A.F.F.
L4	CUSTOM LIGHT BAR, MOUNTED @8'-7" A.F.F.
L5	ALL LIGHTING FIXTURES AND CONTROLS IN EXISTING SPACE TO REMAIN.
L6	CONNECT EXISTING LIGHT FIXTURES TO NEW CIRCUIT.

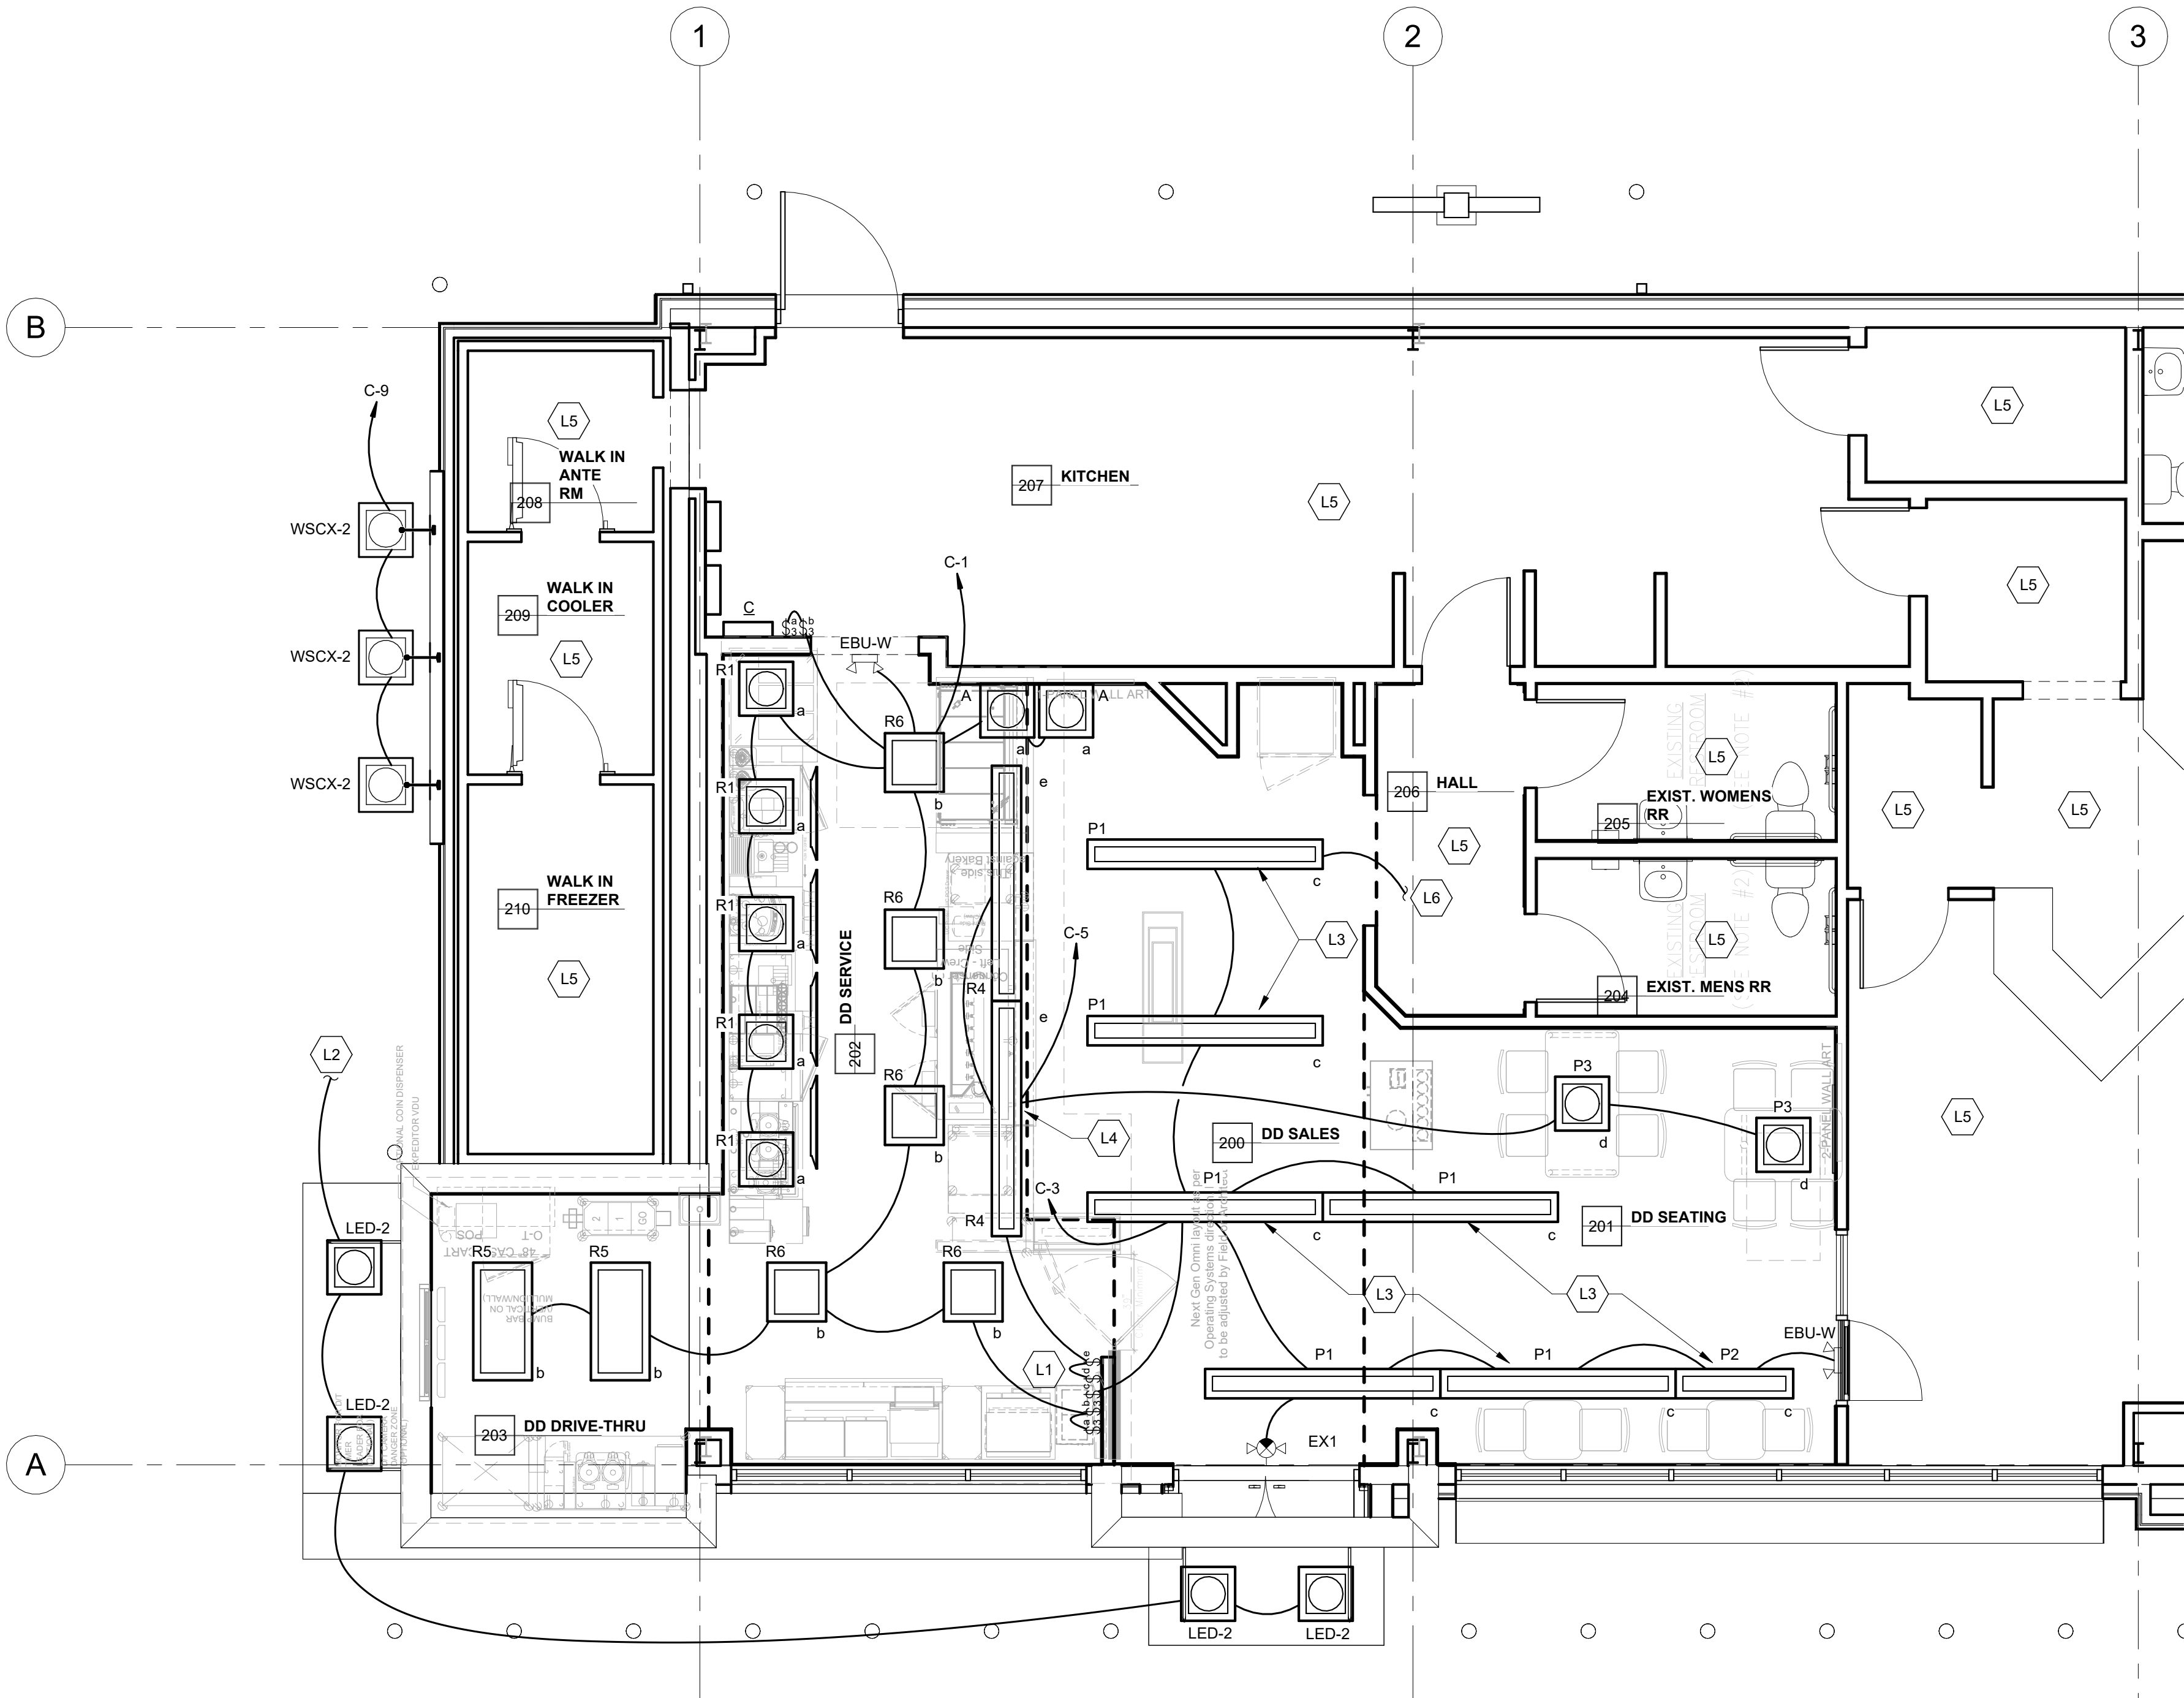

EQUIPMENT SCHEDULE																
EQUIPMENT							ELECTRICAL							GENERAL REMARKS		
ITEM #	QTY.	DESCRIPTION	MANUFACTURER	MODEL #	N.S.F. E.T.L.	U.L. E.T.L.	LOAD				SUPPLIED W/ CORD & PLUG	RECEPT. SPEC	A.F.F.		REMARKS	
							VOLTS	PHASE	AMPS	CIRCUIT SIZE	#WIRES W/ GROUND					
DMB-1		DIGITAL MENU BOARDS	TEXAS DIGITAL	V463												46" LCD MENU BOARD (42" x 24")
70.5B		MOBILE DONUT/BAKERY CASE - 6 TIER X 3 WIDE	VULCAN	1013776-00U0164			120	1		20						
82G		BAKERY RACK 4X5	VULCAN	1022648-00U0164			120	1	1	15	2	Y	NEMA 5-15			
96.4		ESPRESSO MACHINE	SHAERER	COFFE ART TOUCHIT			220	1	24	30	3	Y	NEMA L6-30R		**VERIFY ALL ELECT REQTS w/ MANUF	PROVIDE WATER SHUT-OFF VALVE W/ 3/8" COMPRESSION FITTING
101E		DAIRY DISPENSER	SILVERKING	SKDC12-ESUS2			120	1	1.8	15	2	Y	NEMA 5-15P			
101L		PORTION CONTROLLED GRANULAR & POWDER DISPENSER	SURE SHOT	AC2-GP			120	1	0.5	20	2	Y				
101Q	101Q-2	DUAL HOPPER COFFEE GRINDER	CURTIS	DHG-10-020												
	101Q-3	MULTI HOPPER COFFEE GRINDER	BUNN-O-MATIC	35600.0011			120	1	11	15	2	Y	NEMA 5-15		BUNN PROVIDED CORD & PLUG INSTALLED BY GENERAL CONTRACTOR	
104A		9 X 6 PUMP STATION	WIREFAB	WF35522												
116.2A		THE QUIET ONE: 48 OZ. HIGH IMPACT BLENDER	VITAMIX	36019			120	1	15	15	2	Y	NEMA 5-15		50-60 HZ. 3 PEAK OUTPUT HORSEPOWER MOTOR	ALSO AVAILABLE IN 32 OZ. AND 48 OZ. CONTAINER 18.0 X 8.5 X 10.7 IN. (HXWXD) HEIGHT WITH LID OPEN: 24.5 IN.
120		HOT WINTER BEVERAGE SINGLE HOPPER DISPENSER	BUN-O-MATIC	38600.0057			120	1	15	15	2	Y	NEMA 5-15P			
122	122-1	UNDERCOUNTER M3 SERIES REFRIGERATOR W/ CASTERS	TURBO AIR	MUR-28-N-1C			115	1	2.2			Y	NEMA 5-15P			REFERENCE MANUFACTURER'S CUTSHEET FOR UTILITY INFORMATION IF SPECIFIED ALTERNATE.
	122-2	UNDERCOUNTER REFRIGERATOR W/ CASTERS	TRAULSEN	UHT27			115	1	7.5			Y	NEMA 5-15P			REFERENCE MANUFACTURER'S CUTSHEET FOR UTILITY INFORMATION IF SPECIFIED ALTERNATE.
	122-3	UNDERCOUNTER REFRIGERATOR W/ CASTERS	DELFIELD	406-CA-SPL	7	SA 4769	115	1	7	15	3	Y	NEMA 5-15			REFERENCE MANUFACTURER'S CUTSHEET FOR UTILITY INFORMATION IF SPECIFIED ALTERNATE.
124A		TWIN SH BREWER	BUNN-O-MATIC	51200.0106			120/208	1	38.5	50	3		NEMA 14-50P			
124B		1.5 GAL SH SERVER	BUNN-O-MATIC	27850.0200												
124E		SINGLE SH BREWER	BUNN-O-MATIC	51100.0105			120/208	1	16.8	20	3		NEMA L14-20P			
124G		TWIN SH STAND WITH WIFI	BUNN-O-MATIC	27875.0201			120	1	1.8	20	2	Y	NEMA 5-15P			
200A		ICED COFFEE BREWER - #IC3-DBC W/ ICDD	BUNN-O-MATIC	45100.01		**	120/208	1	19.5	30	4	Y	NEMA L14-30		6' CORD TO BE PROVIDED & INSTALLED BY GC	** E34066
212A-2		DEDICATED HOLDING BIN - 27"W x 14"D x 11"H, CAPACITY OF UP TO (6) 1/3 SIZE PANS	PRINCE CASTLE	DHB2SS-27BDD			120	1	10	20			NEMA 5-20			
212A-3		(2) TIER MODULAR HOLDING CABINET - 23 7/8"W x 14 11/16"D x 12 1/2"H, CAPACITY OF UP TO (6) 1/3 SIZED PANS - (DEFAULT)	CARTER HOFFMAN	MC212-DD			120	1	15	15	3		NEMA 5-15			
215		TORNADO OVEN W/ STONE, PEEL AND (2) TRAYS - EXTENDED WARRANTY INCLUDED	TURBOCHEF	NGC-1180-1-2019			208	1	30	30		Y	NEMA 6-30			
216		MULTI-STAGING WARMER FOR HASHBROWNS	HATCO	GRMW-3DD			120	1	5.9	15		Y	NEMA 5-15			
240		HASH BROWN FREEZER	SILVER KING	SKFS2			115	1	1.6	15		Y	NEMA 5-15			
244A		DUAL LANE TOASTER	HATCO	ITQ-1750-2C-DD			208	1	23.8	30	3	Y	NEMA 6-30P			
1510		TRASH/COMPOST W/ FOOT RELEASE (18x30)	FRANKE	18017833			120	1		20	2	Y	NEMA 5-20			
257		8 TAP SYSTEM WITH GENERATOR	MICROMATIC	MDD-68G-E-DD			115	1	11.1	20	2	Y	NEM 5-15			

POWER PLAN NOTES	
1.	CONTRACTOR SHALL BE RESPONSIBLE FOR DETERMINING NUMBER OF CONDUCTORS IN BRANCH CIRCUITS.
2.	SEE MECHANICAL EQUIPMENT SCHEDULE FOR LOAD INFORMATION AND BRANCH CIRCUIT REQUIREMENTS FOR ALL MECHANICAL EQUIPMENT.

POWER PLAN KEYNOTES	
VALUE	NOTE
P1	RECONNECT TO EXISTING CIRCUIT
P2	ALL ELECTRICAL ITEMS AND CIRCUITS IN EXISTING SPACE TO REMAIN.
P3	(3) 1" CONDUIT TO BASE OF DRIVE-THRU ORDER STATION FOR DRIVE-THRU COMMUNICATIONS SYSTEM. SOUND, DATA AND POWER. SEE SITE ELECTRICAL PLAN FOR MORE INFORMATION.
P4	DUPLEX RECEPTACLE MOUNTED ABOVE STOREFRONT WINDOW. FIELD COORDINATE EXACT LOCATION.

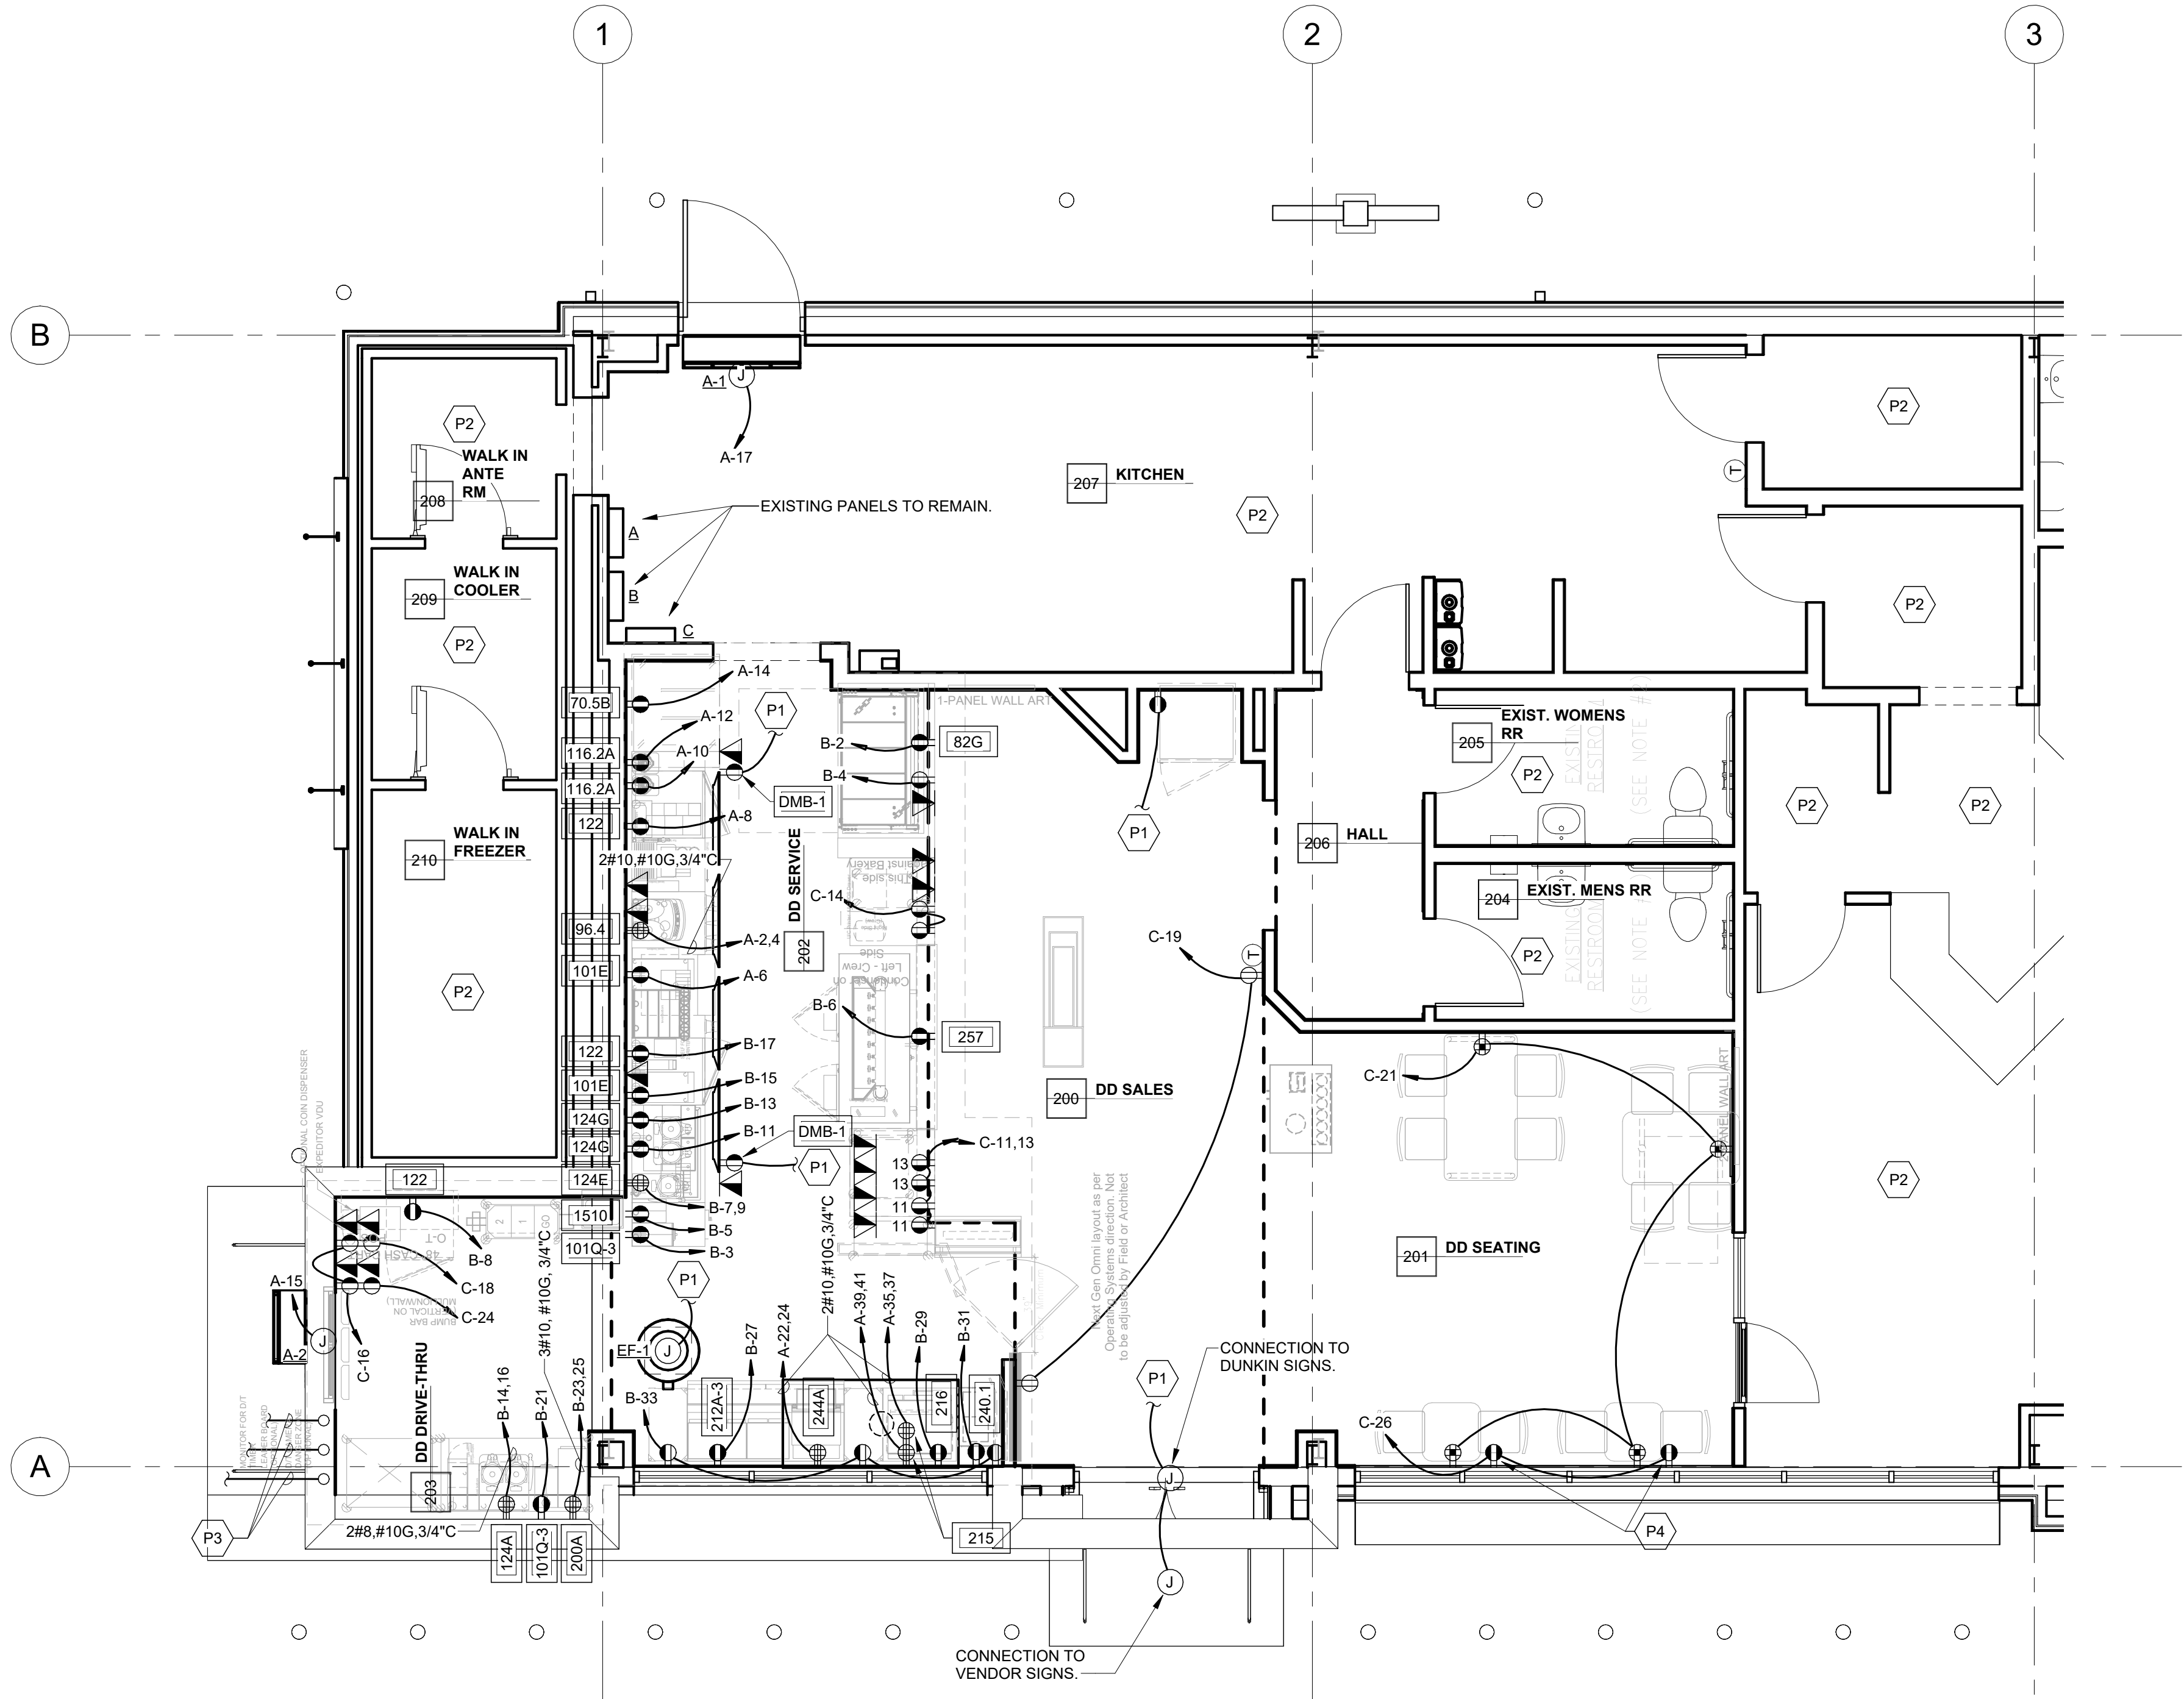

1 POWER PLAN
E2.1 1/4" = 1'-0"

EXISTING											
A											
LOCATION: KITCHEN 207				VOLTS: 208Y/120			A.I.C. RATING:				
SUPPLY FROM:				PHASES: 3			MAINS TYPE: MLO				
MOUNTING: SURFACE				WIRES: 4			MAINS RATING: 400 A				
ENCLOSURE: TYPE 1				FEED-THRU LUGS: No			BUS RATING: 400 A				
#	CIRCUIT DESCRIPTION	TRIP	POLES	A	B	C	POLES	TRIP	CIRCUIT DESCRIPTION	#	
1				0	2500			2	30 A 96.4 - ESPRESSO MACHINE #	2	
3	EXISTING CIRCUIT	30 A	3			0	2500			4	
5							0	216	1	15 A 101E - DAIRY DISPENSER #	
7				0	840			1	15 A 122 - UNDERCOUNTER REFRIGERATOR #	8	
9	EXISTING CIRCUIT	30 A	3			0	1800	1	15 A 116.2A - HIGH IMPACT BLENDER #	10	
11							0	1800	1	15 A 116.2A - HIGH IMPACT BLENDER #	
13	EXISTING CIRCUIT	20 A	1	0	180			1	20 A 70.8B MOBILE BAKERY CASE #	12	
15	DIT AIR CURTAIN A-2 #	20 A	1		192	0		1	20 A SPARE	16	
17	AIR CURTAIN A-1 #	20 A	1				408	0		18	
19	EXISTING CIRCUIT	20 A	1	0	0			2	30 A EXISTING CIRCUIT	20	
21					0	2475				22	
23	EXISTING CIRCUIT	30 A	3			0	2475	2	30 A 244 - DUAL LINE TOASTER #	24	
25				0	0			1	20 A EXISTING CIRCUIT	26	
27					0	0		2	30 A EXISTING CIRCUIT	28	
29	EXISTING CIRCUIT	30 A	2				0	0		30	
31				0	0					32	
33	EXISTING CIRCUIT	30 A	2		0	0				34	
35	215 - TORNADO OVEN #	30 A	2				3120	0		36	
37				3120	1936					38	
39	215 - TORNADO OVEN #	30 A	2			3120	14509			40	
41							3120	12762	3	125 A PANEL DDC	42
TOTAL CONNECTED LOAD:				17783 VA	35723 VA	29205 VA					
TOTAL CONNECTED AMPS:				148 A	312 A	258 A					
LOAD CLASSIFICATION											
				CONNECTED LOAD	DEMAND FACTOR	ESTIMATED DEMAND	PANEL TOTALS				
HVAC				600 VA	100.00%	600 VA	TOTAL CONNECTED LOAD: 82711 VA				
Kitchen Equipment - Non-Dwelling Unit				52004 VA	65.00%	33803 VA	TOTAL ESTIMATED DEMAND: 55392 VA				
Receptacle				28860 VA	67.33%	19430 VA	TOTAL CONNECTED AMPS: 230 A				
Lighting				1247 VA	125.00%	1559 VA	CALCULATED DEMAND AMPS: 154 A				
NOTES:											
# - PROVIDE NEW CIRCUIT BREAKER.											
## - REUSE THE EXISTING CIRCUIT BREAKER.											

EXISTING										B									
LOCATION: KITCHEN 207										VOLTS: 208Y/120									
SUPPLY FROM: A										PHASES: 3									
MOUNTING: SURFACE										WIRES: 4									
ENCLOSURE: TYPE 1										FEED-THRU LUGS: No									
										A.I.C. RATING:									
										MAINS TYPE: MLO									
										MAINS RATING: 400 A									
										BUS RATING: 400 A									
#	CIRCUIT DESCRIPTION	TRIP	POLES	A	B	C	POLES	TRIP	CIRCUIT DESCRIPTION	#									
1	EXISTING CIRCUIT	20 A	1	0	180			1	15 A 82G - BAKERY DISPLAY CASE #	2									
3	101Q-3 - GRINDER #	15 A	1		1320	180		1	20 A REC - SERVING #	4									
5	151D - TRASH TABLE	20 A	1			180	1332	1	20 A 297 - 8 TAP SYSTEM #	2									
7								1	15 A 122 - UNDERCOUNTER REFRIGERATOR #	6									
9	124E - SINGLE SH BREWER #	20 A	2	1747	840			2	20 A EXISTING CIRCUIT	10									
11					1747	0		2	20 A EXISTING CIRCUIT	12									
13	124G - TWIN SH STAND WITH WIFI #	20 A	1			216	0	1	20 A EXISTING CIRCUIT	14									
15	124G - TWIN SH STAND WITH WIFI #	20 A	1	216	4004			2	50 A 124A - TWIN SH BREWER #	16									
17	101E - DAIRY DISPENSER #	15 A	1		216	4004		1	20 A EXISTING CIRCUIT	18									
19	122 - UNDERCOUNTER REFRIGERATOR #	15 A	1			840	0	1	20 A EXISTING CIRCUIT	20									
21	EXISTING CIRCUIT	20 A	1	0	0			1	20 A EXISTING CIRCUIT	22									
23	101Q-3 - GRINDER #	15 A	1		1320	0		1	20 A EXISTING CIRCUIT	24									
25								2	20 A EXISTING CIRCUIT	26									
27	200A - ICE COFFEE BREWER #	30 A	2	2028	0		2028	0	2	20 A EXISTING CIRCUIT	28								
29											30								
31	212A-3 TIER MODULAR HOLDING CABINET #	15 A	1		1800	0		1	20 A EXISTING CIRCUIT	32									
33	216 - WARMER FOR HASHBROWNS #	15 A	1			708	0	1	20 A EXISTING CIRCUIT	34									
35	240.1 - HASH BROWN FREEZER #	15 A	1	192	0						36								
37	RECS - SANDWICH STATION #	20 A	1		540	0		3	30 A EXISTING CIRCUIT	38									
39	EXISTING CIRCUIT	20 A	1			0	0				40								
41				0	0			1	20 A EXISTING CIRCUIT	42									
43	EXISTING CIRCUIT	30 A	3		0	0	0	1	20 A EXISTING CIRCUIT	44									
TOTAL CONNECTED LOAD:		9207 VA		11127 VA		5304 VA													
TOTAL CONNECTED AMPS:		82 A		98 A		44 A													
LOAD CLASSIFICATION																			
										CONNECTED LOAD		DEMAND FACTOR		ESTIMATED DEMAND		PANEL TOTALS			
Kitchen Equipment - Non-Dwelling Unit										24738 VA		65.00%		16080 VA		TOTAL CONNECTED LOAD: 25638 VA			
Receptacle										900 VA		100.00%		900 VA		TOTAL ESTIMATED DEMAND: 16980 VA			
																TOTAL CONNECTED AMPS: 71 A			
																CALCULATED DEMAND AMPS: 47 A			

EXISTING										
C										
LOCATION: KITCHEN 207				VOLTS: 208Y/120			A.I.C. RATING:			
SUPPLY FROM: A				PHASES: 3			MAINS TYPE: MLO			
MOUNTING: SURFACE				WIRES: 4			MAINS RATING: 125 A			
ENCLOSURE: TYPE 1				FEED-THRU LUGS: No			BUS RATING: 125 A			
#	CIRCUIT DESCRIPTION	TRIP	POLES	A	B	C	POLES	TRIP	CIRCUIT DESCRIPTION	#
1	LTGS - FOOD PREP #	20 A	1	496	0			1	20 A EXISTING CIRCUIT	2
3	LTGS - SEATING #	20 A	1		562	0		1	20 A EXISTING CIRCUIT	4
5	LTGS - EATING DECOR #	20 A	1			42	0	1	20 A EXISTING CIRCUIT	6
7	EXISTING CIRCUIT	20 A	1	0	0			1	20 A EXISTING CIRCUIT	8
9	BUILDING SIGN SIDE #	20 A	1		147	0		1	20 A EXISTING CIRCUIT	10
11	RECS - SERVING #	20 A	1			360	0	1	20 A EXISTING CIRCUIT	12
13	RECS - SERVING #	20 A	1	360	360			1	20 A FRONT POS #	14
15	EXISTING CIRCUIT	20 A	1		0	360		1	20 A D.T. POS/VISU #	16
17	EXISTING CIRCUIT	20 A	1			0	180	1	20 A DIT POS TVSS #	18
19	RECS - SEATING GENERAL #	20 A	1	360	0			1	20 A EXISTING CIRCUIT	20
21	RECS - SEATING TABLES #	20 A	1		1440	0		1	20 A EXISTING CIRCUIT	22
23	EXISTING CIRCUIT	20 A	1			0	180	1	20 A ORDER TAKER #	24
25	EXISTING CIRCUIT	20 A	1	0	360			1	20 A RECS- STOREFRONT #	26
27	DIT MENUBOARD #	20 A	1		12000	0		1	20 A EXISTING CIRCUIT	28
29	DIT CANOPY #	20 A	1			12000	0	1	20 A EXISTING CIRCUIT	30
TOTAL CONNECTED LOAD:				1936 VA	14509 VA	12762 VA				
TOTAL CONNECTED AMPS:				16 A	135 A	120 A				
LOAD CLASSIFICATION										
				CONNECTED LOAD	DEMAND FACTOR	ESTIMATED DEMAND	PANEL TOTALS			
Receptacle				27960 VA	67.88%	18980 VA	TOTAL CONNECTED LOAD: 29207 VA			
Lighting				1247 VA	125.00%	1559 VA	TOTAL ESTIMATED DEMAND: 20539 VA			
							TOTAL CONNECTED AMPS: 81 A			
							CALCULATED DEMAND AMPS: 57 A			
NOTES:										
# - PROVIDE NEW CIRCUIT BREAKER.										
## - REUSE THE EXISTING CIRCUIT BREAKER.										


MECHANICAL EQUIPMENT SCHEDULE (OTHER)						
TAG	VOLTAGE	Ø	LOAD	DISCONNECT	BRANCH CIRCUIT	NOTES
A-1	120 V	1	3.4 A		2#12.#12G.3/4"C	
A-2	120 V	1	1.6 A		2#12.#12G.3/4"C	
EF-1	120 V	1	4.3 A		2#12.#12G.3/4"C	

MECHANICAL EQUIPMENT SCHEDULE NOTES	
1. CIRCUITS FOR POWER, CONTROL, ETC. THROUGH THE ROOF SHALL BE INSIDE THE UNIT CURB.	
2. PROVIDE RECEPTACLE (WP, GFCI) FOR MAINTENANCE PER NEC. CIRCUIT AS INDICATED ON DRAWINGS.	
3. SEE WATER HEATER CONNECTION DETAIL.	


MECHANICAL EQUIPMENT SCHEDULE GENERAL NOTES	
A. VERIFY ELECTRICAL REQUIREMENTS OF PURCHASED UNITS PRIOR TO ROUGH-IN.	
B. PROVIDE DISCONNECT SWITCH INDICATED.	
C. EXTERIOR FLEXIBLE CONDUIT SHALL BE "SEALTITE" OR EQUAL.	

ELECTRICAL LEGEND	
SYMBOL	DESCRIPTION
	LIGHTING FIXTURE. REFER TO LIGHTING FIXTURE SCHEDULE. MOUNT AS SCHEDULED OR INDICATED. SHADED SYMBOL INDICATES LIGHTING FIXTURE IS CONNECTED TO EMERGENCY GENERATOR OR BATTERY SYSTEM.
	LIGHTING FIXTURE, RECESSED. REFER TO LIGHTING FIXTURE SCHEDULE. MOUNT AS SCHEDULED OR INDICATED. SHADED SYMBOL INDICATES LIGHTING FIXTURE IS CONNECTED TO EMERGENCY GENERATOR OR BATTERY SYSTEM.
	EXIT SIGN / EMERGENCY LIGHTING COMBINATION. WALL MOUNTED. WITH BATTERY BACKUP AND ON CIRCUIT BREAKER WITH LOCK-ON DEVICE NUMBER OF FACES AND CHEVRONS AS INDICATED.
	EMERGENCY LIGHTING FIXTURE. WALL MOUNTED. WITH BATTERY BACKUP AND ON CIRCUIT BREAKER WITH LOCK-ON DEVICE NUMBER OF FACES AND CHEVRONS AS INDICATED.
	SWITCH, SINGLE POLE. MOUNT BOTTOM OF BOX AT 3'-8" AFF.
	SWITCH, THREE-WAY. MOUNT BOTTOM OF BOX AT 3'-8" AFF.
	RECEPTACLE, DUPLEX. MOUNT BOTTOM OF BOX AT 1'-4" AFF OR AS NOTED.
	RECEPTACLE, DOUBLE DUPLEX WITH USB PORTS. MOUNT BOTTOM OF BOX AT 1'-4" AFF OR AS NOTED.
	RECEPTACLE, DUPLEX WITH ISOLATED GROUND. MOUNT BOTTOM OF BOX AT 1'-4" AFF OR AS NOTED.
	JUNCTION BOX OR OUTLET BOX WITH COVER PLATE. SEE DRAWINGS FOR REQUIREMENTS.

ELECTRICAL CONDUIT / WIRE LEGEND	
SYMBOL	LEGEND INFORMATION
	CONDUIT (WITH CONDUCTORS) CONCEALED IN WALL, ABOVE CEILING, OR BELOW SLAB. DEFAULT BRANCH CIRCUIT IS 2#12.#12G.3/4"C. NUMBER BESIDE WIRE INDICATES LARGER CONDUCTOR SIZE FOR VOLTAGE DROP OR LOAD REQUIREMENTS. SIZE CONDUIT PER NEC. EQUIPMENT GROUND REQUIRED IN PVC CONDUIT. CONDUIT (WITH CONDUCTORS) CAN BE EXPOSED IN JOIST AREA IF NO CEILING IS PRESENT.
	INDICATES CONDUIT (WITH CONDUCTORS) WIRE CONCEALED BELOW GRADE OR

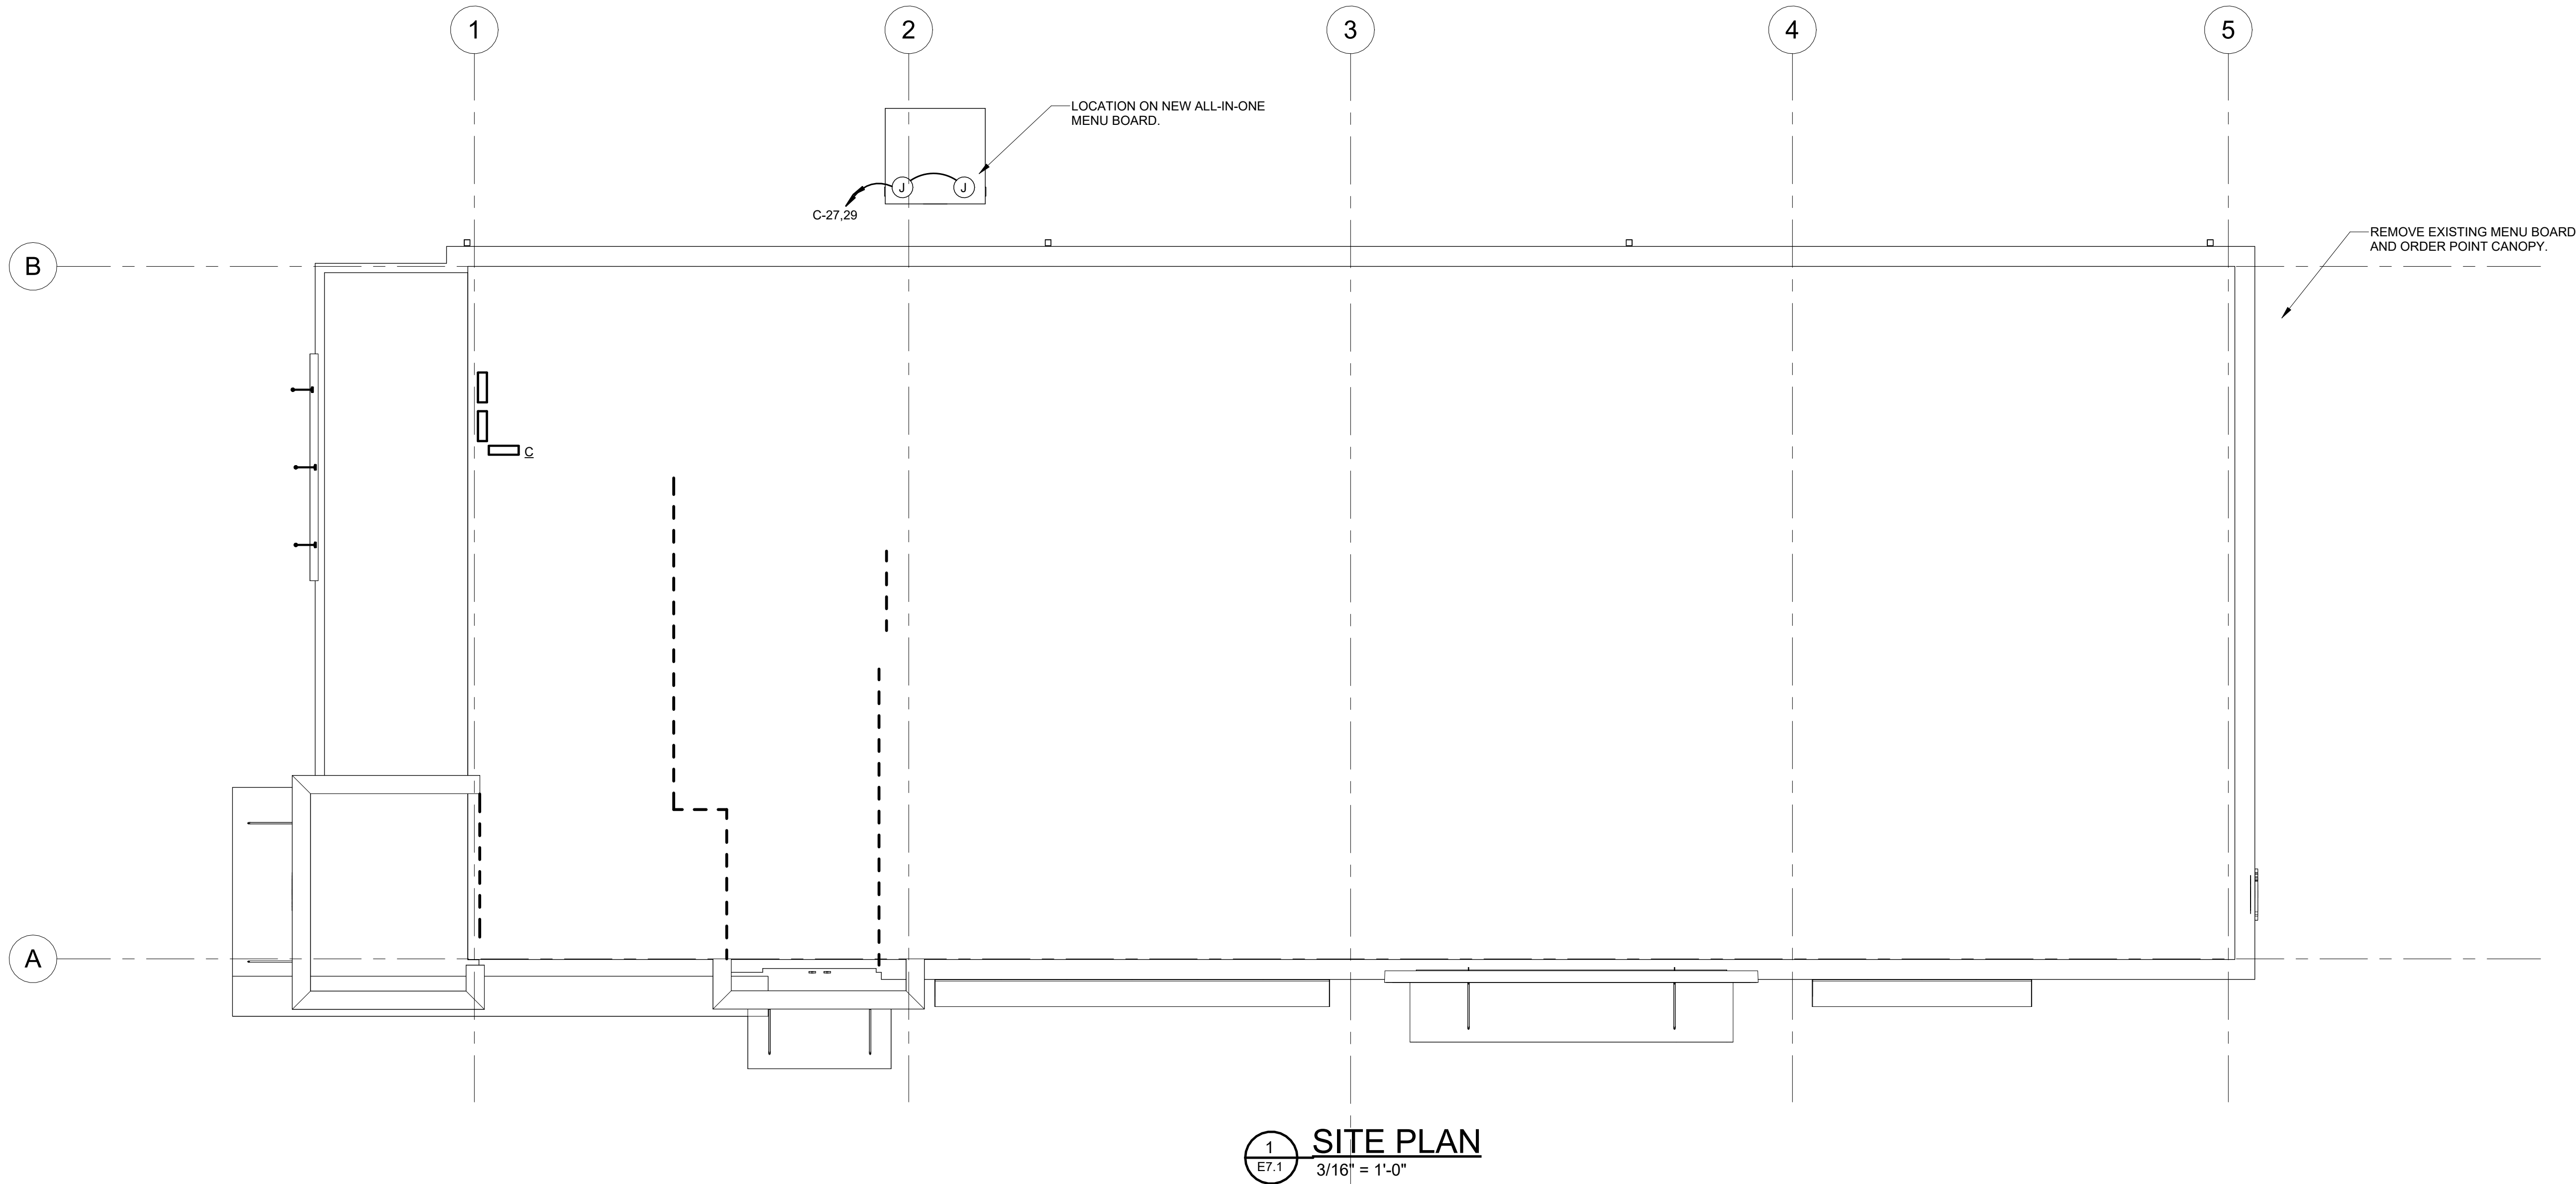

1 SITE PLAN
E7.1 3/16" = 1'-0"

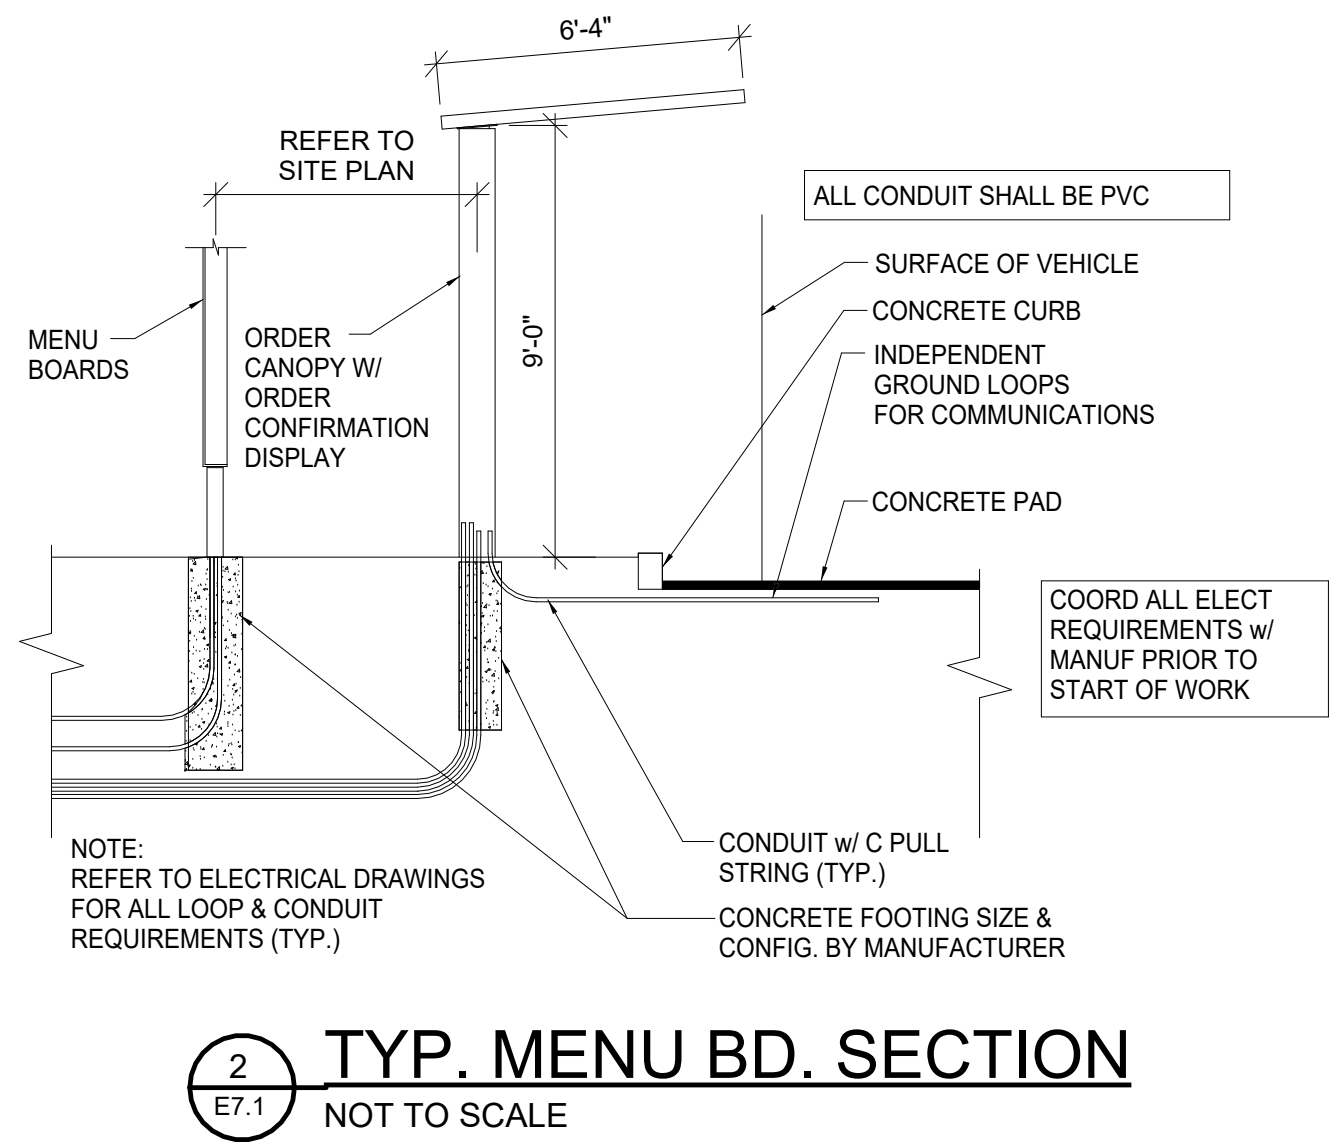

2 TYP. MENU BD. SECTION
E7.1 NOT TO SCALE

DRIVE-THRU CONDUIT REQUIREMENTS

PROVIDE CONDUITS AS INDICATED BELOW. FIELD COORDINATE EQUIPMENT QUANTITIES AND LOCATIONS WITH OWNER. SEE BUILDING PLANS FOR MORE INFORMATION.

SPEAKER POST - (4) 1" CONDUITS

- (1) POWER - POWER CONDUCTOR
- (1) DATA - ORDER CONFIRMATION WIRING
- (1) VOICE DATA - 1 SPEAKER WIRE
- (1) FUTURE - PULL STRING

2-PANEL DIGITAL DRIVE-THRU MENU BOARD - (3) 1" CONDUITS

- (1) POWER - POWER CONDUCTOR
- (1) DATA - 2 DMB WIRES
- (1) FUTURE - PULL STRING

ALL-IN-ONE DIGITAL DRIVE-THRU MENU BOARD - (4) 1" CONDUITS

- (1) POWER - POWER CONDUCTOR
- (1) DATA - (1) ORDER CONFIRMATION WIRE, (2) DMB WIRES
- (1) VOICE DATA - 1 SPEAKER WIRE
- (1) FUTURE - PULL STRING

STATIC DRIVE-THRU MENU BOARD - (3) 1" CONDUITS

- (1) POWER - POWER CONDUCTOR
- (2) FUTURE - PULL STRING

DIGITAL PREVIEW BOARD - (3) 1" CONDUITS

- (1) POWER - POWER CONDUCTOR
- (1) DATA - PREVIEW BOARD WIRE
- (1) FUTURE - PULL STRING

STATIC PREVIEW BOARD - (3) 1" CONDUITS

- (1) POWER - POWER CONDUCTOR
- (2) FUTURE - PULL STRING

CLEARANCE BAR - (1) 1" CONDUIT

- (1) POWER - POWER CONDUCTOR

UTILITY NOTE

UTILITIES EXIST WHICH ARE NOT SHOWN ON THE PLANS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR CONTRACTING ALL UTILITY COMPANIES HAVING UTILITIES WITHIN OR ADJACENT TO THE WORK AREA. THE CONTRACTOR SHALL HAVE THE UTILITIES FIELD LOCATED AND COORDINATE WITH UTILITY COMPANIES TO HAVE THEM RELOCATED WHEN NECESSARY OR ADAPTED FOR TIE-INS.

SITE ELECTRICAL LEGEND

- CONDUIT AND WIRE UNDERGROUND OR BELOW SLAB.
- HOMERUN TO PANEL.
- SLASH MARKS INDICATE NUMBER OF #12 WIRES IN CONDUIT. EXTENDED SLASH IS NEUTRAL AND / OR GROUND. ABSENCE OF SLASHES IS 2#12. SIZE CONDUIT PER NEC. EQUIPMENT GROUND REQUIRED IN PVC CONDUIT BUT NOT SHOWN.
- INDICATES REQUIRED WIRE SIZE FOR VOLTAGE DROP OR LOAD REQUIREMENTS. INCREASE GROUND SIZE ACCORDINGLY.
- PAD MOUNT UTILITY COMPANY TRANSFORMER. PROVIDE PAD PER UTILITY COMPANY REQUIREMENTS. PROVIDE BOLLARDS AS DETAILED ON ARCHITECTURAL OR CIVIL PLANS AND LOCATE PER UTILITY REQUIREMENTS.
- TELEPHONE CABINET.
- LIGHT POLE. SEE FIXTURE SCHEDULE AND POLE BASE DETAIL.

SITE ELECTRICAL NOTES

- REFER TO CIVIL PLANS FOR NAMES / ADDRESSES OF OWNER AND UTILITIES. REFER TO CIVIL PLANS FOR TYPES OF PAVING.
- PROVIDE PERMANENT WEATHERPROOF LABELS FOR ALL ELECTRICAL EQUIPMENT. SEE SPECIFICATIONS.
- TRENCHING AND/OR DUCT WORK SHALL NOT EXTEND BEYOND PROPERTY LINES EXCEPT FOR UTILITY CONNECTIONS.
- COORDINATE THE WORK SHOWN ON THIS PLAN WITH UTILITIES AND OTHER TRADES TO AVOID INTERFERENCE AND TO ASSURE A SUITABLE INSTALLATION. ADDITIONAL COST TO THE OWNER WILL NOT BE ALLOWED FOR FAILURE TO COORDINATE.
- ALL OPEN CONDUIT ENDS SHALL BE SEALED UNTIL USED. PROVIDE PULL CORD IN EMPTY CONDUIT.
- REFER TO ELECTRICAL BUILDING PLANS FOR STUB UP LOCATIONS OF CONDUITS FOR LOW VOLTAGE SYSTEMS.

REVISIONS	#	DATE	DESCRIPTION