ARCHITECT

CONSULTANTS

M/E/P ENGINEER

STRUCTURAL ENGINEER (FOUNDATION)

BUILDING SHELL PRE-FAB + SHELL STRUCTURAL ENGINEER

UTILITY SERVICE REQUIREMENTS

ELECTRICAL: (PROVIDING AGENCY)
POWER: 208V / 3-PHASE / 4W / 600 AMPS TOTAL
CONNECTION LOAD: 220.53 KVA TOTAL
NOTE: SEE SHEET E3 FOR BREAKDOWN OF THE ELECTRICAL SERVICE CONNECTED LOAD.

TELEPHONE: (PROVIDING AGENCY)
2" CONDUIT 25 PAIR WIRE - (OWNER REQUIREMENT)

WATER: (PROVIDING AGENCY)
WATER SERVICE: 11.5 DIAM
7.5 GPM

IRRIGATION: (PROVIDING AGENCY)
LANDSCAPING: (VERIFY WITH OWNER IF USED).
SIZE PER ZONE - REFER TO PLAN FOR DESIGN

SEWER: (PROVIDING AGENCY)
WASTE SERVICE: SANITARY LINE: 4" DIAM.
GREASE LINE: 4" DIAM.

GAS: (PROVIDING AGENCY)
NATURAL GAS SERVICE: 3" GAS LINE, 7" TO 8" WC
OUTLET GAS LOAD: 1,700 MBH
NOTE: SEE SHEET P3 FOR A BREAKDOWN OF THE GAS LOADS.

GENERAL NOTE:
VERIFY ALL SERVICE REQUIREMENTS WITH THE LOCAL UTILITY CITY AGENCIES.

LOUISIANA KITCHEN

DTGO PROTOTYPE
ADDRESS
CITY, STATE

DESIGNER NOTES:
MODIFY PER SPECIFIC PROJECT

PROJECT RESPONSIBILITY CHART

ITEM	SUPPLY OWNER	SUPPLY GC	INSTALL OWNER	INSTALL GC
EQUIPMENT	●		●	
SMALLWARE	●		●	
EXTERIOR SIGNS (DIRECT., PYLON)	●		●	
BLDG. SIGN INTERNALLY ILLUMINATED	●		●	
DRINK SYSTEM	●		●	
CO TANK (IF APPLICABLE)	●		●	
SECURITY SYSTEMS	●		●	
DRIVE THRU SYSTEM	●		●	
POINT OF SALE SYSTEM	●		●	
POPEYES RADIO - MUZAK / RETAIL RADIO	●		●	
FLAT SCREEN TV (ORDER READY BRD.)	●			●
METAL PACKAGE: CLEARANCE BAR, DUMPSTER GATE, RAILING, SHUTTERS, AWNINGS, INTERIOR ROOF LADDER, DRIVE-THRU WINDOW CANOPY, AND REAR ENCLOSURE GATE.	●			●
CORNER GUARDS	●			●
BUILDING SIGN (VERIFY WITH OWNER)	●		●	
FRONT COUNTERS/SOLID SURFACES AND MATCHING BACKSPLASH	●			●
DRIVE-THRU WINDOW		●		●
RESTROOM FIXTURES & ACCESSORIES - SEE SHEET A9.3		●		●
HVAC SYSTEM		●		●
LIGHTING PACKAGE		●		●
ROOFING		●		●
INT'R DECOR/FURNITURE SUPPLIER: SEATING PACKAGE, ARTWORK, OFFICE CABINETS, WD. WALL FRAMES, WINDOW SILLS, AND P - RING	●			●
STOREFRONT		●		●
FACE BRICK/THIN BRICK		●		●
NICHIHA VENEER		●		●
EIFS/STUCCO		●		●
PAINT/STAINS		●		●
FRYER GREASE REMOVAL SYSTEM (IF NEW) (VERIFY WITH OWNER)	●		●	
WATER HEATER		●		●
20 GA S/S AT DRIVE THRU		●		●
S/S CEILING PANELS AND TRIM (VERIFY SIZE WITH LOCAL AUTHORITY)		●		●
MENUBOARDS (DIGITAL.)	●		●	
MENUBOARDS (D.T., PREVIEW BD.)	●			●
DRIVE-THRU LOOP SYSTEM	●			●
INTERIOR SIGNS	●			●
INTERIOR TILE		●		●
DOOR AND DOOR HARDWARE		●		●

RESPONSIBILITY MATRIX NOTES:
1. GC PROJECT RESPONSIBILITIES TO BE VERIFIED AND FINALIZED WITH OWNER PRIOR TO BIDDING AND AT PRE-CONSTRUCTION MEETING.
2. TYPE OF BUILDING SIGN TO BE DECIDED DURING THE PRE-CONSTRUCTION MEETING.
3. FURNITURE SUPPLIER TO INCLUDE ALL WINDOW SILLS AND WOOD CORNER GUARDS IN DINING AREA.
4. PAPER TOWELS AND SOAP REPLENISHMENT ARE THE RESPONSIBILITY OF THE OWNER UNDER A SEPARATE AGREEMENT WITH A SUPPLIER.

CODE INFORMATION

FIRM NAME:

NAME OF PROJECT:
POPEYES - DTGO MODEL

LOCATION:
ADDRESS

THE ARCHITECT NOTED ABOVE HAS EXERCISED RESPONSIBLE CONTROL WITH RESPECT TO DESIGN ACTIVITIES.

1	**APPLICABLE CODES**	BUILDING :	2024 INTERNATIONAL BUILDING CODE
		PLUMBING :	2024 INTERNATIONAL PLUMBING CODE
		FIRE :	2024 INTERNATIONAL FIRE CODE
		MECHANICAL :	2024 INTERNATIONAL MECHANICAL CODE
		ELECTRICAL :	2023 NATIONAL ELECTRICAL CODE, NFPA 70
		ACCESSIBILITY :	2017 ICC/A117.1 ACCESSIBILITY
		ENERGY :	2024 INTERNATIONAL ENERGY CONSERVATION CODE
2	**ZONING CLASSIFICATION**	C1 - COMMERCIAL	
3	**OCCUPANCY CLASSIFICATION**	B - (COMMERCIAL KITCHEN) WITH NO MIXED USE OCCUPANCIES	
4	**CONSTRUCTION TYPE**	V-B	COMBUSTIBLE MATERIALS, UNPROTECTED
5	**BUILDING AREA**	ALLOWED : 9,000 SQ FT.	PROVIDED : 1,626 SQ FT.
6	**BUILDING HEIGHT**	ALLOWED : 40'-0" HIGH	PROVIDED : 18'-0" HIGH
7	**SCOPE OF WORK STATMENT**	NEW BUILD CONSTRUCTION	

8 **OCCUPANCY CALCULATIONS**

FLOOR	USE	SQUARE FOOTAGE	OCCUPANT LOAD FACTOR	NUMBER OF OCCUPANTS
1 OF 1	KITCHEN	1183 SQ. FT	200 GROSS	6
1 OF 1	TOILET ROOM	56 SQ. FT	150 GROSS	1
1 OF 1	STORAGE	140 SQ. FT	300 GROSS	1
		TOTAL NUMBER OF OCCUPANTS:		8

9	**EGRESS CALCULATION**	**TOTAL OCCUPANTS**	**CALCULATED MIN. EGRESS (1005.1)**	**MIN. EGRESS WIDTH REQUIRED** / **TOTAL EGRESS WIDTH PROVIDED**
		8	.20" X _8_ = _1.6_"	(32" MIN.) / 78"
10	**EXITS**	TOTAL REQUIRED : 1	TOTAL PROVIDED : 2	EGRESS WIDTH PER EXIT : 33" CLEAR & 45" CLEAR
		LOSS OF ONE REQUIRED MEANS OF EGRESS SHALL NOT REDUCE THE EGRESS CAPACITY TO LESS THAN 50% OF REQUIRED		
11	**FIRE RESISTIVE REQUIREMENTS**	EXTERIOR BEARING WALL :	(0 HOUR)	
		ROOF CONSTRUCTION :	(0 HOUR)	
		CEILING :	(0 HOUR)	
12	**SPRINKLER SYSTEM**	____ ENTIRE BUILDING (EXISTING)	____ IN LIEU OF ROOF RATING	
		____ BASEMENT ONLY	_X_ NOT REQUIRED / NOT PROVIDED	
13	**FIRE ALARM**	NOT REQUIRED		
14	**MAX. TRAVEL DISTANCE**	200'		

15 **PLUMBING REQUIREMENT**

	MALE	FEMALE
WATER CLOSETS	1 PER 25 FOR THE FIRST 50 & 1 PER 50 FOR THE REMAINDER EXCEEDING 50 - 1 REQUIRED	
LAVATORIES	1 PER 40 FOR THE FIRST 80 & 1 PER 80 FOR THE REMAINDER EXCEEDING 80 - 1 REQUIRED	
SERVICE SINK	1 SERVICE SINK REQUIRED	
DRINKING FOUNTAIN	NOT REQUIRED	NOT REQUIRED
PUBLIC ACCESS	NA	NA
UNISEX IS PERMITTED	YES	YES

DESIGNER NOTES:
MODIFY CODE AND SECTION AS REQUIRED PER SPECIFIC PROJECT

DESIGNER NOTES:
ADD KEY PLAN PER SPECIFIC PROJECT

N

KEY PLAN

N.T.S.

CONTRACTORS NOTE

CONTRACTORS ARE TO CONTACT THE CONSTRUCTION PROJECT MANAGER AS INDICATED IN THE WRITTEN SCOPE OF WORK FOR BIDDERS LIST. FOR APPROVED SUPPLIERS LIST, NATIONAL ACCOUNT PHONE NUMBERS AND CONTRACTORS REFER TO SPECIFICATION DRAWINGS.

PROJECT NO.: XXXXXX
POPEYES NO.: RN.XXXXX

DESIGNER NOTES:
MODIFY PER SPECIFIC PROJECT

DESIGNER NOTES:
ANY REQUEST OR REQUIREMENTS FOR DESIGN REVISIONS THAT DEVIATE FROM THE PROVIDED PROTOTYPE DRAWING SET WILL REQUIRE THE ARCHITECT OR ENGINEER OF RECORD TO SUBMIT THE REQUESTED REVISIONS TO THE POPEYE'S DESIGN TEAM AT (DESIGNTEAM@POPEYES.COM) FOR REVIEW AND APPROVAL PRIOR TO SUBMISSION FOR PERMITS.

DESIGNER NOTES:
THESE DOCUMENTS ARE NOT FOR PERMIT OR CONSTRUCTION.

THESE DOCUMENTS MUST BE COMPLETED AND/OR MODIFIED BY A LICENSED ARCHITECT AND ENGINEER TO CONFORM TO ALL LOCAL AND APPLICABLE CODES AND SPECIFIC SITE CONDITIONS. THERE IS NO WARRANTY, WHETHER IMPLIED OR EXPRESSED, THAT THESE DOCUMENTS MEET THE APPLICABLE CODE REQUIREMENTS. LIABILITY FOR THE DESIGN AND ANY USE OF DOCUMENTS IS THE SOLE RESPONSIBILITY OF THE ARCHITECT AND ENGINEER OF RECORD.

DRAWING INDEX

CS	COVER PAGE
LS1	LIFE SAFETY PLAN
AS1.1	ARCHITECTURAL SITE PLAN
AS2.1	MENU SIGN DETAILS SINGLE/DOUBLE DRIVE-THRU
AS2.2	SITE DETAILS - TRASH ENCLOSURE CMU
AS2.3	SITE DETAILS
AS2.4	SITE DETAILS
A1	FLOOR PLAN AND SCHEDULES
A2	EQUIPMENT PLAN AND SCHEDULE
A3	REFLECTED CEILING PLAN
A4	ROOF PLAN AND DETAILS
A4.1	ROOF DETAILS
A5	EXTERIOR ELEVATIONS
A5.1	EXTERIOR ELEVATIONS
A6	BUILDING SECTIONS
A6.1	WALL SECTIONS
A6.2	WALL SECTIONS
A6.3	WALL SECTIONS
A7	SECTION DETAILS
A7.1	SECTION DETAILS
A7.2	PLAN DETAILS
A8	DETAILS
A9	N/A
A9.1	INTERIOR ELEVATIONS
A9.2	INTERIOR ELEVATIONS
A9.3	WASHROOM DETAILS
A10	TILE PLAN AND FINISHING SCHEDULE
A11	DOOR AND WINDOW SCHEDULES
SP1	ARCHITECTURAL SPECIFICATIONS
SP2	ARCHITECTURAL SPECIFICATIONS
SP3	ARCHITECTURAL SPECIFICATIONS
SP4	ARCHITECTURAL SPECIFICATIONS
SP5	ARCHITECTURAL SPECIFICATIONS
SP6	ARCHITECTURAL SPECIFICATIONS
SP7	ARCHITECTURAL SPECIFICATIONS
FAB1	ELEVATIONS
FAB2	BUILDING SECTIONS
FAB3	WALL SECTIONS
FBS0	COVER SHEET
FBS1	BOLT PLAN
FBS2	WALL FRAMING PLAN
FBS3	ROOF FRAMING PLAN
FBS4	DETAILS
FBS4.1	DETAILS
S0.1	STRUCTURAL NOTES
S0.2	SPECIAL INSPECTIONS
S1.1	FOUNDATION PLAN
S1.2	STRUCTURAL FOUNDATION SECTIONS
E1.0	ELECTRICAL GENERAL NOTES AND LEGEND
E1.1	ELECTRICAL LIGHTING PLAN
E1.2	ELECTRICAL POWER PLAN
E1.3	ELECTRICAL ROOF PLAN
E1.4	ELECTRICAL POS PLAN
E1.5	ELECTRICAL SECURITY PLAN
E1.6	ELECTRICAL FIRE ALARM PLAN
ES0.1	ELECTRICAL SITE PLAN
E2.1	ELECTRICAL SCHEDULES
E2.1OPT	ELECTRICAL SCHEDULES
E3.1	ELECTRICAL DETAILS
E3.2	ELECTRICAL DETAILS
E4.1	ELECTRICAL ENERGY CALCS
E4.2	ELECTRICAL ENERGY CALCS
ES.1	ELECTRICAL SPECIFICATIONS
ES.2	ELECTRICAL SPECIFICATIONS
M1.1	MECHANICAL PLAN
M1.2	MECHANICAL ROOF PLAN
M2.1	MECHANICAL SCHEDULE
M3.1	MECHANICAL HOOD DRAWINGS
M3.2	MECHANICAL HOOD DRAWINGS
M4.1	MECHANICAL DETAILS
MS.1	MECHANICAL SPECIFICATIONS
P1.1	PLUMBING SCHEDULES AND NOTES
P2.1	PLUMBING PLAN - SANITARY WASTE & VENT PLAN
P2.2	PLUMBING PLAN - DOMESTIC WATER
P2.3	PLUMBING PLAN - NATURAL GAS
P2.4	PLUMBING PLAN - STORM PIPING
P3.1	PLUMBING RISERS
P4.1	PLUMBING DETAILS
P4.2	PLUMBING DETAILS
PS.1	PLUMBING SPECIFICATIONS

DESIGNER NOTES:
FAB SHEETS INCLUDED FOR REFERENCE. SHEETS TO BE REPLACED WITH SITE SPECIFIC PRE-FAB VENDOR DRAWINGS.

ABBREVIATIONS

BOH:	BACK OF HOUSE	N/A:	NOT APPLICABLE
C/W:	COMPLETE WITH	O.C.	ON CENTER
CL:	CENTER LINE	OH.:	OPPOSITE
CONC:	CONCRETE	P-LAM:	PLASTIC LAMINATE
CPM:	CONSTRUCTION PROJECT MANAGER	S.F.C:	STORE FIXTURE COMPANY
CT:	CERAMIC TILE	SPEC:	SPECIFICATION
DMB:	DIGITAL MENU BOARD	SIM.:	SIMILAR
EQ:	EQUAL	T/O:	TOP OF
FOH:	FRONT OF HOUSE	T.B.A.	TO BE DETERMINED
G.C:	GENERAL CONTRACTOR	TYP.:	TYPICAL
MAX.:	MAXIMUM	U/S:	UNDERSIDE
MIN.:	MINIMUM	WRM.:	WASHROOM

ISSUE TABLE

No.	Date (mm/dd/yy)	Description
01	09-26-25	DTGO PROTOTYPE DOCUMENTS

REVISIONS

No.	Date	Description

DRAWINGS REVISED AS PER DESIGN BULLETIN

No.	Date	Description

THIS DRAWING IS OWNED BY OR LICENSED FOR USE BY POPEYES LOUISIANA KITCHEN (OR ITS AFFILIATED OR RELATED COMPANIES) AND MAY NOT BE REPRODUCED, USED, DOWNLOADED, DISSEMINATED, PUBLISHED, OR TRANSFERRED IN ANY FORM OR BY ANY MEANS, EXCEPT WITH THE PRIOR WRITTEN CONSENT OF POPEYES LOUISIANA KITCHEN. COPYRIGHT INFRINGEMENT IS A VIOLATION OF FEDERAL LAW SUBJECT TO CRIMINAL AND CIVIL PENALTIES.

THE CONTRACTOR IS TO VERIFY ALL DIMENSIONS AND CONDITIONS ON THE PROJECT AND TO REPORT ANY DISCREPANCIES TO THE POPEYES LOUISIANA KITCHEN REPRESENTATIVE PRIOR TO COMMENCING WORK. THESE DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION PURPOSES UNLESS INDICATED BY POPEYES LOUISIANA KITCHEN AS "ISSUED FOR CONSTRUCTION".

Professional Seal

DESIGNER NOTES:
DESIGN GUIDELINE ONLY - NOT FOR PERMIT OR CONSTRUCTION

THESE DOCUMENTS MUST BE COMPLETED AND / OR MODIFIED BY A LICENSED ARCHITECT AND ENGINEER TO CONFORM TO ALL APPLICABLE CODES, AND SPECIFIC SITE CONDITIONS. THERE IS NO WARRANTY, WHETHER IMPLIED OR EXPRESSED THAT THESE DOCUMENTS MEET THE APPLICABLE CODE REQUIREMENTS. LIABILITY FOR THE DESIGN AND ANY USE OF THE DOCUMENTS IS THE SOLE RESPONSIBILITY OF THE ARCHITECT AND ENGINEER OF RECORD.

Company Logo

Project

Store Type
US DTGO PROTOTYPE

Location
PROTOTYPE
DTGO (U.S.)
CITY, STATE

Drawing Title
COVER PAGE

Drawn	Checked
XX	XX
Scale	**Date**
1/4"=1'-0"	##.##.####
Project No.	**Drawing No.**
XX	CS

POPEYES LOUISIANA KITCHEN MODEL DTGO, ADDRESS, CITY, STATE: DTGO PROTOTYPE DOCUMENTS (OCTOBER, 2025) STORE NO. XXXXX

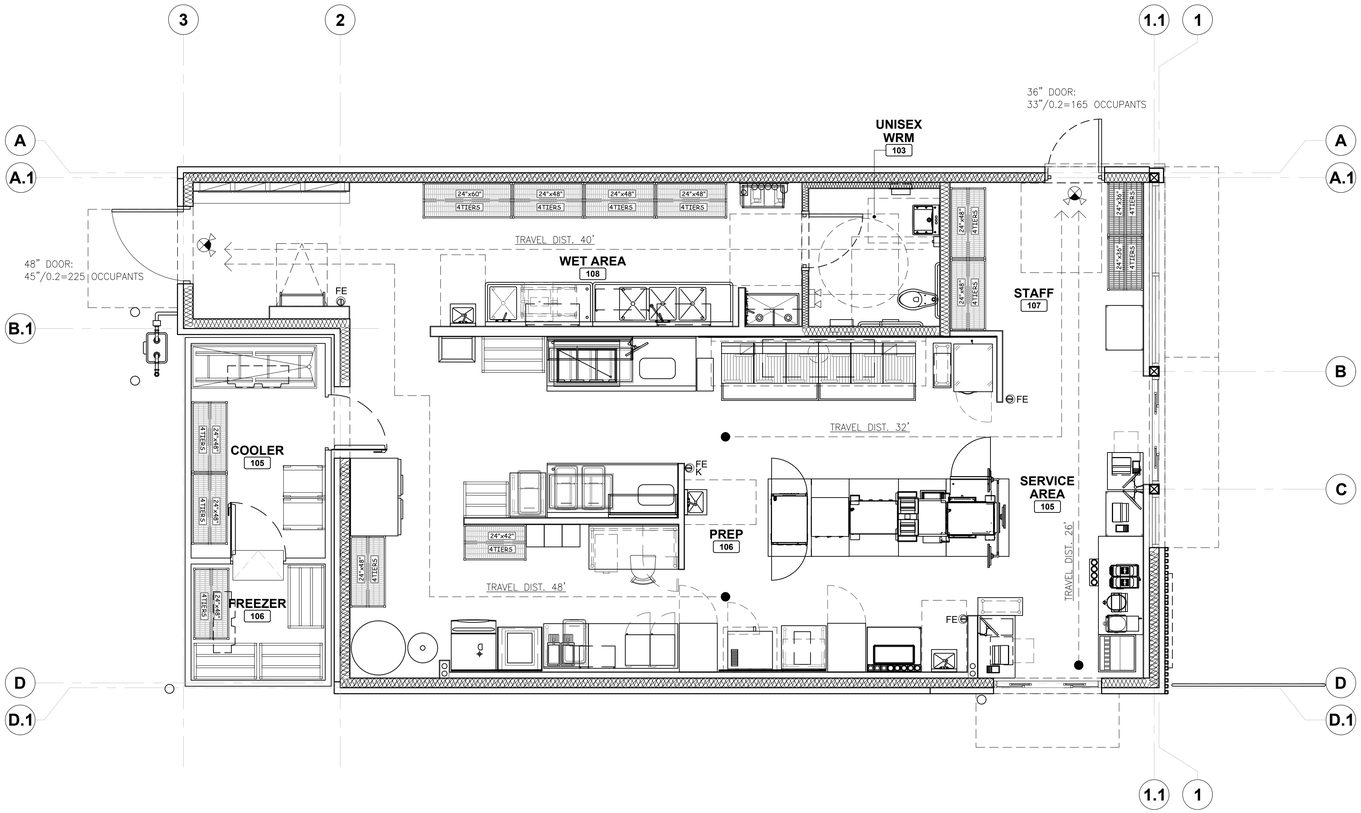

1 LS1 **LIFE SAFETY FLOOR PLAN**

SCALE: 1/4"=1'-0"

LEGEND

	ILLUMINATED EXIT SIGN, ARROW (IF REQUIRED) DENOTES DIRECTION OF EGRESS
FE	WALL MOUNTED FIRE EXTINGUISHER. FINAL LOCATION BY FIRE INSPECTOR. (K TAG DENOTES K-TYPE EXTINGUISHER)
	EMERGENCY BATTERY PACKS
	PATH OF EGRESS & DISTANCE TO EXIT DOOR

FIRE EXTINGUISHER NOTES

GENERAL PURPOSE FIRE EXTINGUISHER TO BE PROVIDED IN BUILDING, AND WITHIN 75 FEET MAX. TRAVEL DISTANCE FROM ANY POINT.

COOKING EQUIPMENT TYPE FIRE EXTINGUISHER, CLASS K-RATED, TO BE PROVIDED WITHIN 30 FEET MAX. TRAVEL DISTANCE FROM COOKING EQUIPMENT.

FIRE EXTINGUISHER TO BE PROVIDED AS PER THE APPLICABLE NFPA 101 FIRE CODE, APPLICABLE INTERNATIONAL BUILDING CODE (SECTION 906), AND LOCAL JURISDICTIONAL AMENDMENTS, WHICHEVER IS MOST STRINGENT. SEE COVER SHEET FOR CODES.

BASIS OF DESIGN:
GENERAL PURPOSE:
ACTION AIR, SENTRY 10, MODEL AA10S (436500), 10-LB ABC
COOKING EQUIPMENT:
ACTION AIR, K-GUARD, MODEL K01-3 (434909), 6-L ANSULEX LO pH.

FIRE PROTECTION

N/A

FIRE ALARM SYSTEM

FIRE ALARM TO BE PROVIDED. FIRE ALARM SHALL BE EXECUTED AS A DESIGN BUILD COMPONENT FOR THE PROJECT IN ITS ENTIRETY. THE FIRE ALARM CONTRACTOR TO WORK WITH THE GENERAL CONTRACTOR FOR COORDINATING FULL SCOPE OF THE SYSTEM. THE CONTRACTOR SHALL PROVIDE COMPLETE SHOP DRAWINGS AND SPECIFICATIONS FOR THE FIRE ALARM SYSTEM AND BE SUBMITTED TO THE AHJ (AUTHORITY HAVING JURISDICTION) FOR ALL APPROVAL PRIOR TO ANY INSTALLATION.

EMERGENCY LIGHTING

SEE ELECTRICAL SHEETS FOR EMERGENCY LIGHTING AND LAYOUT.

DOORS

1. ALL EGRESS DOORS DISCHARGE TO THE EXTERIOR AT GRADE LEVEL.
2. ALL DOORS REQUIRED AS EXITS SWING IN THE DIRECTION OF EGRESS, WHERE THERE IS AN OCCUPANT LOAD OF 50 OR MORE (IBC 1010.1.2.1).
3. THE MANUAL PUSH OR PULL ON AN INTERIOR DOOR IN ROUTE OF TRAVEL, OTHER THAN FIRE DOORS, SHALL NOT EXCEED 5 LBS TO OPERATE DOOR (IBC 101.1.3).

PARTIAL ACCESSIBILITY NOTES

1. ALL AREAS WITHIN PROJECT SCOPE TO BE 100% HANDICAP ACCESSIBLE PER 2017 ICC/A117.1 ACCESSIBILITY CODE.
2. PROJECT HAS TWO (2) FULLY ACCESSIBLE MEANS OF EGRESS.
3. EACH REQUIRED MEANS OF EGRESS SHALL BE CONTINUOUS TO A PUBLIC WAY COMPLYING WITH IBC SECTION 1104.
4. PROJECT HAS FULLY ACCESSIBLE ROUTE FROM MAIN ENTRY TO ALL ACCESSIBLE AREAS (PER IBC 1009.2).
5. PROJECT HAS ONE (1) ACCESSIBLE TOILET ROOMS.

CALCULATIONS

OCCUPANCY CALCULATIONS

FLOOR	USE	SQUARE FOOTAGE	OCCUPANT LOAD FACTOR	NUMBER OF OCCUPANTS
1 OF 1	KITCHEN	1183 SQ. FT	200 GROSS	6
1 OF 1	TOILET ROOM	56 SQ. FT	150 GROSS	1
1 OF 1	STORAGE	140 SQ. FT	300 GROSS	1
TOTAL NUMBER OF OCCUPANTS:				8

EGRESS CALCULATION

TOTAL OCCUPANTS	CALCULATED MIN. EGRESS (1005.1)	MIN. EGRESS WIDTH REQUIRED	TOTAL EGRESS WIDTH PROVIDED
8	.20" X _8_ = _1.6_"	1.6" (32" MIN.)	78"
TOTAL REQUIRED : 1	TOTAL PROVIDED : 2	EGRESS WIDTH PER EXIT :	33" CLEAR (REAR DOOR) 45" CLEAR (SIDE DOOR)

LOSS OF ONE REQUIRED MEANS OF EGRESS SHALL NOT REDUCE THE EGRESS CAPACITY TO LESS THAN 50% OF REQUIRED

ISSUE TABLE

No.	Date (mm/dd/yy)	Description
01	09-26-25	DTGO PROTOTYPE DOCUMENTS

REVISIONS

No.	Date	Description

DRAWINGS REVISED AS PER DESIGN BULLETIN

No.	Date	Description

NOT FOR CONSTRUCTION

THIS DRAWING IS OWNED BY OR LICENSED FOR USE BY POPEYES LOUISIANA KITCHEN (OR ITS AFFILIATED OR RELATED COMPANIES) AND MAY NOT BE REPRODUCED, USED, DOWNLOADED, DISSEMINATED, PUBLISHED, OR TRANSFERRED IN ANY FORM OR BY ANY MEANS ,EXCEPT WITH THE PRIOR WRITTEN CONSENT OF POPEYES LOUISIANA KITCHEN . COPYRIGHT INFRINGEMENT IS A VIOLATION OF FEDERAL LAW SUBJECT TO CRIMINAL AND CIVIL PENALTIES.

THE CONTRACTOR IS TO VERIFY ALL DIMENSIONS AND CONDITIONS ON THE PROJECT AND TO REPORT ANY DISCREPANCIES TO THE POPEYES LOUISIANA KITCHEN REPRESENTATIVE PRIOR TO COMMENCING WORK. THESE DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION PURPOSES UNLESS INDICATED BY POPEYES LOUISIANA KITCHEN AS "ISSUED FOR CONSTRUCTION".

Professional Seal

DESIGNER NOTES:
DESIGN GUIDELINE ONLY - NOT FOR PERMIT OR CONSTRUCTION

THESE DOCUMENTS MUST BE COMPLETED AND / OR MODIFIED BY A LICENSED ARCHITECT AND ENGINEER TO CONFORM TO ALL APPLICABLE CODES, AND SPECIFIC SITE CONDITIONS. THERE IS NO WARRANTY, WHETHER IMPLIED OR EXPRESSED THAT THESE DOCUMENTS MEET THE APPLICABLE CODE REQUIREMENTS.
LIABILITY FOR THE DESIGN AND ANY USE OF THE DOCUMENTS IS THE SOLE RESPONSIBILITY OF THE ARCHITECT AND ENGINEER OF RECORD.

Company Logo

Project

Store Type
US DTGO PROTOTYPE

Location
PROTOTYPE
DTGO (U.S.)

CITY, STATE

Drawing Title
LIFE SAFETY
FLOOR PLAN

Drawn	Checked
XX	XX
Scale: 1/4"=1'-0"	Date: ##.##.####
Project No.: XX	Drawing No.: LS1

POPEYES LOUISIANA KITCHEN MODEL DTGO, ADDRESS, CITY, STATE: DTGO PROTOTYPE DOCUMENTS (OCTOBER, 2025) STORE NO. XXXXX

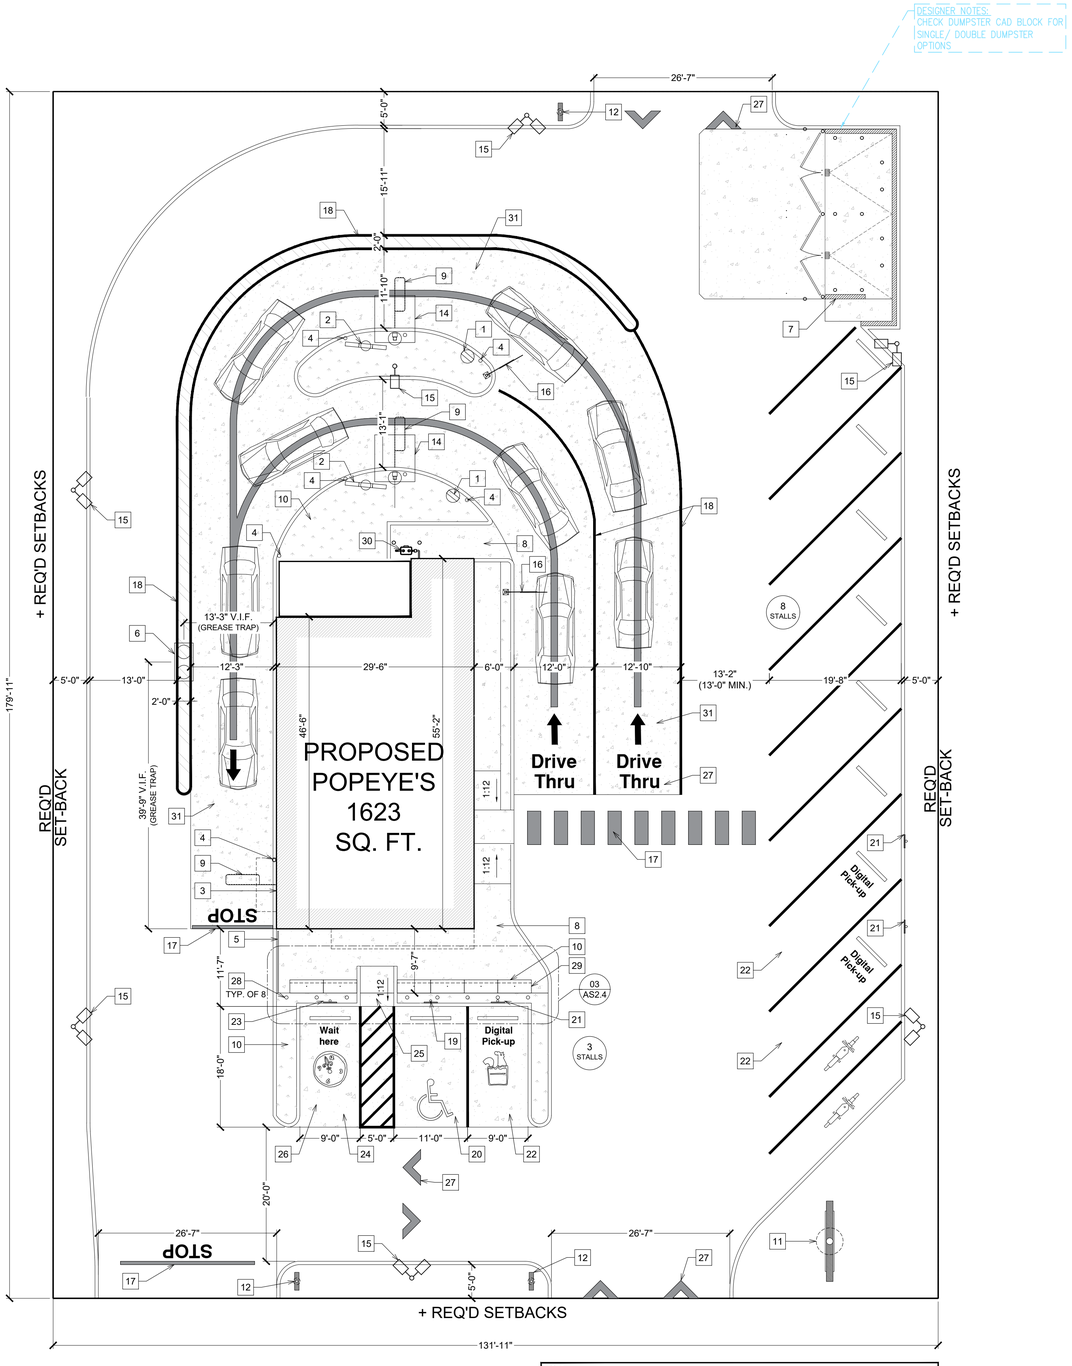

NOTE:
SIGNAGE, LANDSCAPING, AND CIVIL DRAWINGS; ALL SUBMITTED UNDER SEPARATE COVERS.

MAIN ROAD

23,734 sqft = 0.544 acre

1 AS1.1 **SITE PLAN**
SCALE: 3/32" = 1'-0"

N

GENERAL NOTE

ARCHITECTURAL SITE PLAN IS TO BE USED FOR GUIDELINE REFERENCE ONLY. ALL SITE SPECIFIC INFORMATION AND REQUIREMENTS IS TO BE COORDINATED WITH ARCHITECT, MECHANICAL, ELECTRICAL, PLUMBING, STRUCTURAL AND CIVIL ENGINEER OF RECORD.

NOTES

1. DT DIGITAL PRE-SELL MENU BOARD LOCATION. REFER TO DETAILS ON SHEET 2/AS2.1.
2. DT DIGITAL MENU BOARD LOCATION. REFER TO DETAILS ON SHEET 3/AS2.1.
3. POPEYE'S RESTAURANT DRIVE THRU WINDOW LOCATION. SEE FLOOR PLAN ON SHEET A1 FOR ADDITIONAL INFORMATION.
4. 6"Φ STEEL PIPE BOLLARD. REFER TO DETAIL 14/AS2.3.
5. PATIO RAILING - REFER TO DETAIL 2/A8.
6. APPROXIMATE LOCATION OF GREASE INTERCEPTOR BELOW SITE PAVING. COORDINATE EXACT LOCATOIN WITH PLUMBING & CIVIL DRAWINGS. REF: 3/AS2.3.
7. POPEYE'S DUMPSTER ENCLOSURE. COORDINATE EXACT LOCATION WITH CIVIL DRAWINGS. REFER TO ARCHITECTURAL SITE DETAILS AS2.2 FOR CONSTRUCTION.
8. SIDEWALK / SLAB. REFER TO CIVIL SITE PLAN DRAWINGS FOR LOCATION AND DIMENSIONS.
9. VEHICLE DETECTOR LOOP. REFER TO 5/AS2.1 FOR DETAIL.
10. ALL SITE PLAN ELEMENTS SHOWN MUST BE IN COMPLIANCE WITH POPEYES DESIGN TEAM APPROVED SITE PLAN, ARCHITECT OF RECORD, ENGINEERS OF RECORD, AND CIVIL ENGINEER OF RECORD ARE RESPONSIBLE FOR THIS COORDINATION AND COMPLIANCE.
11. MONUMENT SIGN / SIGN BASE. REFER TO SIGNAGE PACKAGE DRAWINGS.
12. DRIVE THRU DIRECTIONAL SIGNAGE BOARD. REFER TO DETAIL 9/AS2.1.
13. NOT USED.
14. DRIVE THRU CANOPY W/ INTEGRAL SPEAKER POST. REFER TO 1/AS2.1.
15. LIGHT POLE. REFER TO CIVIL SITE PLAN DRAWINGS FOR LOCATION AND DIMENSIONS. REFER TO 8/AS2.1
16. CLEARANCE BAR. REFER TO DETAIL ON SHEET 6/AS2.1
17. PEDESTRIAN WALKWAY MARKING AND STOP BAR MARKINGS. DESIGN BY CIVIL ENGINEER TO BE APPROVED BY POPEYE'S DESIGN. REFER TO 2/AS2.4
18. PAVEMENT STRIPPING. ADD BOLLARDS AS NECESSARY.
19. ACCESSIBLE PARKING SIGNAGE. SIGNAGE TO BE INSTALLED AS PER LOCAL JURISDICTION CODES.
20. ACCESSIBLE PARKING STALLS.
21. DIGITAL PARKING SIGNAGE.
22. DIGITAL PARKING STALLS.
23. PULL FORWARD PARKING SIGNAGE.
24. PULL FORWARD PARKING STALLS.
25. TACTILE WARNING PLATE/PAD AT CONCRETE SURFACE CURB RAMP. CURB RAMP SLOPE @ 1:12 MAX. REFER TO CIVIL + LOCAL JURISDICTION REQUIREMENTS.
26. DRIVE SURFACE AT THE ADA STALL + ADJACENT PARKING STALLS IN ROW TO BE CONCRETE. DESIGN BY CIVIL ENGINEER TO BE APPROVED BY POPEYE'S DESIGN.
27. PAVEMENT DIRECTIONAL MARKINGS, LETTERING, AND GRAPHICS. REFER TO 1/AS2.4
28. 6"Φ STEEL PIPE BOLLARD AT FRONT OF BUILDING, PARKING STALLS FROM THE WALKWAY / BENCH SEATING, SPACED AT 4'-0"O.C.. REFER TO DETAIL 15/AS2.3.
29. NEW CONCRETE SEAT WALL BENCH (LIGHTED) TO BE INSTALLED AT THE FRONT OF THE BUILDING. BENCHES TO BE GC PROVIDED (FROM POPEYES APPROVED VENDOR) AND GC INSTALLED. COORDINATE W/ ELECT SHEETS FOR CONDUIT AND FEEDER FOR LIGHTED BENCHES.
30. GAS METER. REFER TO MECHANICAL DRAWINGS. COORDINATE LOCATION WITH CIVIL DRAWINGS AND LOCAL UTILITY COMPANY. G.C TO COORDINATE WITH UTILITY COMPANIES FOR PLACEMENT / LOCATION OF BOLLARDS AT THE GAS METER. G.C TO PROVIDE 6" DIA. METAL BOLLARD FILL W/ CONCRETE AND PAINTED.
31. DRIVE SURFACE AT THE DRIVE-THRU LANES TO BE CONCRETE. DESIGN BY CIVIL ENGINEER TO BE APPROVED BY POPEYE'S DESIGN.

ISSUE TABLE

No.	Date (mm/dd/yy)	Description
01	09-26-25	DTGO PROTOTYPE DOCUMENTS

REVISIONS

No.	Date	Description

DRAWINGS REVISED AS PER DESIGN BULLETIN

No.	Date	Description

THIS DRAWING IS OWNED BY OR LICENSED FOR USE BY POPEYES LOUISIANA KITCHEN (OR ITS AFFILIATED OR RELATED COMPANIES) AND MAY NOT BE REPRODUCED, USED, DOWNLOADED, DISSEMINATED, PUBLISHED, OR TRANSFERRED IN ANY FORM OR BY ANY MEANS, EXCEPT WITH THE PRIOR WRITTEN CONSENT OF POPEYES LOUISIANA KITCHEN. COPYRIGHT INFRINGEMENT IS A VIOLATION OF FEDERAL LAW SUBJECT TO CRIMINAL AND CIVIL PENALTIES.

THE CONTRACTOR IS TO VERIFY ALL DIMENSIONS AND CONDITIONS ON THE PROJECT AND TO REPORT ANY DISCREPANCIES TO THE POPEYES LOUISIANA KITCHEN REPRESENTATIVE PRIOR TO COMMENCING WORK. THESE DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION PURPOSES UNLESS INDICATED BY POPEYES LOUISIANA KITCHEN AS "ISSUED FOR CONSTRUCTION".

Professional Seal

DESIGNER NOTES:
DESIGN GUIDELINE ONLY - NOT FOR PERMIT OR CONSTRUCTION

THESE DOCUMENTS MUST BE COMPLETED AND / OR MODIFIED BY A LICENSED ARCHITECT AND ENGINEER TO CONFORM TO ALL APPLICABLE CODES, AND SPECIFIC SITE CONDITIONS. THERE IS NO WARRANTY, WHETHER IMPLIED OR EXPRESSED THAT THESE DOCUMENTS MEET THE APPLICABLE CODE REQUIREMENTS. LIABILITY FOR THE DESIGN AND ANY USE OF THE DOCUMENTS IS THE SOLE RESPONSIBILITY OF THE ARCHITECT AND ENGINEER OF RECORD.

Company Logo

Project

Store Type
US DTGO PROTOTYPE

Location
PROTOTYPE
DTGO (U.S.)
CITY, STATE

Drawing Title
ARCHITECTURAL SITE PLAN

Drawn	Checked
XX	XX
Scale	**Date**
AS NOTED	##.##.####
Project No.	**Drawing No.**
XX	AS1.1

POPEYES LOUISIANA KITCHEN MODEL DTGO, ADDRESS, CITY, STATE, DTGO PROTOTYPE DOCUMENTS (OCTOBER, 2025) STORE NO. XXXXX

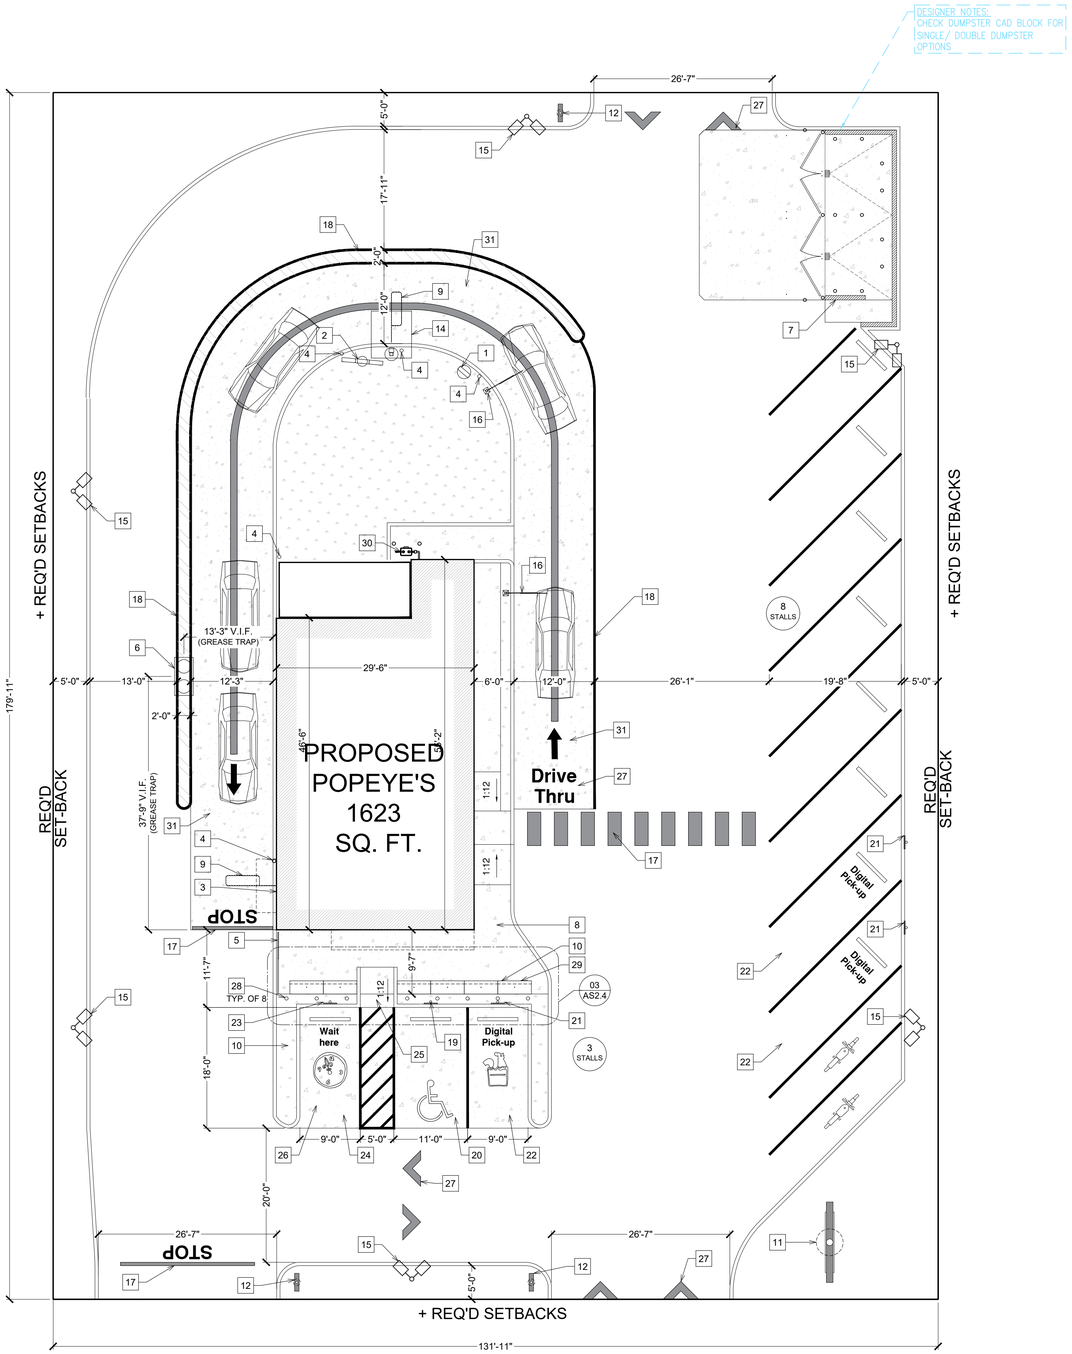

NOTE:
SIGNAGE, LANDSCAPING, AND CIVIL DRAWINGS; ALL SUBMITTED UNDER SEPARATE COVERS.

MAIN ROAD

23,734 sqft = 0.544 acre

1 AS1.1 **SITE PLAN**
SCALE: 3/32" = 1'-0"

N

GENERAL NOTE

ARCHITECTURAL SITE PLAN IS TO BE USED FOR GUIDELINE REFERENCE ONLY. ALL SITE SPECIFIC INFORMATION AND REQUIREMENTS IS TO BE COORDINATED WITH ARCHITECT, MECHANICAL, ELECTRICAL, PLUMBING, STRUCTURAL AND CIVIL ENGINEER OF RECORD.

NOTES

1. DT DIGITAL PRE-SELL MENU BOARD LOCATION. REFER TO DETAILS ON SHEET 2/AS2.1.
2. DT DIGITAL MENU BOARD LOCATION. REFER TO DETAILS ON SHEET 3/AS2.1.
3. POPEYE'S RESTAURANT DRIVE THRU WINDOW LOCATION. SEE FLOOR PLAN ON SHEET A1 FOR ADDITIONAL INFORMATION.
4. 6"Φ STEEL PIPE BOLLARD. REFER TO DETAIL 14/AS2.3.
5. PATIO RAILING - REFER TO DETAIL 2/A8.
6. APPROXIMATE LOCATION OF GREASE INTERCEPTOR BELOW SITE PAVING. COORDINATE EXACT LOCATOIN WITH PLUMBING & CIVIL DRAWINGS. REF: 3/AS2.3.
7. POPEYE'S DUMPSTER ENCLOSURE. COORDINATE EXACT LOCATION WITH CIVIL DRAWINGS. REFER TO ARCHITECTURAL SITE DETAILS AS2.2 FOR CONSTRUCTION.
8. SIDEWALK / SLAB. REFER TO CIVIL SITE PLAN DRAWINGS FOR LOCATION AND DIMENSIONS.
9. VEHICLE DETECTOR LOOP. REFER TO 5/AS2.1 FOR DETAIL.
10. ALL SITE PLAN ELEMENTS SHOWN MUST BE IN COMPLIANCE WITH POPEYES DESIGN TEAM APPROVED SITE PLAN, ARCHITECT OF RECORD, ENGINEERS OF RECORD, AND CIVIL ENGINEER OF RECORD ARE RESPONSIBLE FOR THIS COORDINATION AND COMPLIANCE.
11. MONUMENT SIGN / SIGN BASE. REFER TO SIGNAGE PACKAGE DRAWINGS.
12. DRIVE THRU DIRECTIONAL SIGNAGE BOARD. REFER TO DETAIL 9/AS2.1.
13. NOT USED.
14. DRIVE THRU CANOPY W/ INTEGRAL SPEAKER POST. REFER TO 1/AS2.1.
15. LIGHT POLE. REFER TO CIVIL SITE PLAN DRAWINGS FOR LOCATION AND DIMENSIONS. REFER TO 8/AS2.1
16. CLEARANCE BAR. REFER TO DETAIL ON SHEET 6/AS2.1
17. PEDESTRIAN WALKWAY MARKING AND STOP BAR MARKINGS. DESIGN BY CIVIL ENGINEER TO BE APPROVED BY POPEYE'S DESIGN. REFER TO 2/AS2.4
18. PAVEMENT STRIPPING. ADD BOLLARDS AS NECESSARY.
19. ACCESSIBLE PARKING SIGNAGE. SIGNAGE TO BE INSTALLED AS PER LOCAL JURISDICTION CODES.
20. ACCESSIBLE PARKING STALLS.
21. DIGITAL PARKING SIGNAGE.
22. DIGITAL PARKING STALLS.
23. PULL FORWARD PARKING SIGNAGE.
24. PULL FORWARD PARKING STALLS.
25. TACTILE WARNING PLATE/PAD AT CONCRETE SURFACE CURB RAMP. CURB RAMP SLOPE @ 1:12 MAX. REFER TO CIVIL + LOCAL JURISDICTION REQUIREMENTS.
26. DRIVE SURFACE AT THE ADA STALL + ADJACENT PARKING STALLS IN ROW TO BE CONCRETE. DESIGN BY CIVIL ENGINEER TO BE APPROVED BY POPEYE'S DESIGN.
27. PAVEMENT DIRECTIONAL MARKINGS, LETTERING, AND GRAPHICS. REFER TO 1/AS2.4
28. 6"Φ STEEL PIPE BOLLARD AT FRONT OF BUILDING, PARKING STALLS FROM THE WALKWAY / BENCH SEATING, SPACED AT 4'-0"O.C.. REFER TO DETAIL 15/AS2.3.
29. NEW CONCRETE SEAT WALL BENCH (LIGHTED) TO BE INSTALLED AT THE FRONT OF THE BUILDING. BENCHES TO BE GC PROVIDED (FROM POPEYES APPROVED VENDOR) AND GC INSTALLED. COORDINATE W/ ELECT SHEETS FOR CONDUIT AND FEEDER FOR LIGHTED BENCHES.
30. GAS METER. REFER TO MECHANICAL DRAWINGS. COORDINATE LOCATION WITH CIVIL DRAWINGS AND LOCAL UTILITY COMPANY. G.C TO COORDINATE WITH UTILITY COMPANIES FOR PLACEMENT / LOCATION OF BOLLARDS AT THE GAS METER. G.C TO PROVIDE 6" DIA. METAL BOLLARD FILL W/ CONCRETE AND PAINTED.
31. DRIVE SURFACE AT THE DRIVE-THRU LANES TO BE CONCRETE. DESIGN BY CIVIL ENGINEER TO BE APPROVED BY POPEYE'S DESIGN.

ISSUE TABLE

No.	Date (mm/dd/yy)	Description
01	09-26-25	DTGO PROTOTYPE DOCUMENTS

REVISIONS

No.	Date	Description

DRAWINGS REVISED AS PER DESIGN BULLETIN

No.	Date	Description

THIS DRAWING IS OWNED BY OR LICENSED FOR USE BY POPEYES LOUISIANA KITCHEN (OR ITS AFFILIATED OR RELATED COMPANIES) AND MAY NOT BE REPRODUCED, USED, DOWNLOADED, DISSEMINATED, PUBLISHED, OR TRANSFERRED IN ANY FORM OR BY ANY MEANS, EXCEPT WITH THE PRIOR WRITTEN CONSENT OF POPEYES LOUISIANA KITCHEN. COPYRIGHT INFRINGEMENT IS A VIOLATION OF FEDERAL LAW SUBJECT TO CRIMINAL AND CIVIL PENALTIES.

THE CONTRACTOR IS TO VERIFY ALL DIMENSIONS AND CONDITIONS ON THE PROJECT AND TO REPORT ANY DISCREPANCIES TO THE POPEYES LOUISIANA KITCHEN REPRESENTATIVE PRIOR TO COMMENCING WORK. THESE DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION PURPOSES UNLESS INDICATED BY POPEYES LOUISIANA KITCHEN AS "ISSUED FOR CONSTRUCTION"

Professional Seal

DESIGNER NOTES:
DESIGN GUIDELINE ONLY - NOT FOR PERMIT OR CONSTRUCTION

THESE DOCUMENTS MUST BE COMPLETED AND / OR MODIFIED BY A LICENSED ARCHITECT AND ENGINEER TO CONFORM TO ALL APPLICABLE CODES, AND SPECIFIC SITE CONDITIONS. THERE IS NO WARRANTY, WHETHER IMPLIED OR EXPRESSED THAT THESE DOCUMENTS MEET THE APPLICABLE CODE REQUIREMENTS. LIABILITY FOR THE DESIGN AND ANY USE OF THE DOCUMENTS IS THE SOLE RESPONSIBILITY OF THE ARCHITECT AND ENGINEER OF RECORD.

Company Logo

Project

Store Type
US DTGO PROTOTYPE

Location
PROTOTYPE
DTGO (U.S.)
CITY, STATE

Drawing Title
ARCHITECTURAL SITE PLAN

Drawn	Checked
XX	XX
Scale	**Date**
AS NOTED	##.##.####
Project No.	**Drawing No.**
XX	AS1.1

POPEYES LOUISIANA KITCHEN MODEL DTGO, ADDRESS, CITY, STATE: DTGO PROTOTYPE DOCUMENTS (OCTOBER, 2025) STORE NO. XXXXX

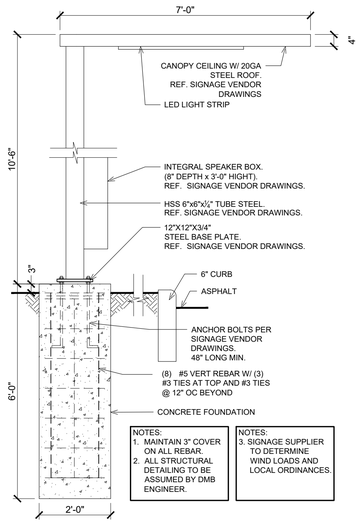

NOTES:
1. MAINTAIN 3" COVER ON ALL REBAR.
2. ALL STRUCTURAL DETAILING TO BE ASSUMED BY DMB ENGINEER.

NOTES:
3. SIGNAGE SUPPLIER TO DETERMINE WIND LOADS AND LOCAL ORDINANCES.

1 AS2.1 FOUNDATION AT DRIVE-THRU CANOPY POST

SCALE: 1/2" = 1'-0"

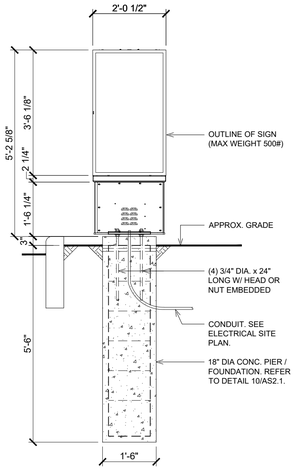

2 AS2.1 DT DIGITAL PRE-SELL MENU BOARD

SCALE: 1/2" = 1'-0"

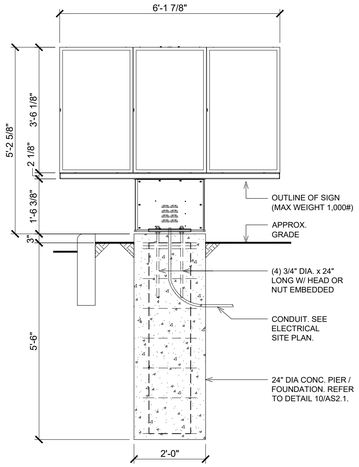

3 AS2.1 DT DIGITAL MENU BOARD

SCALE: 1/2" = 1'-0"

NOTES

ODMB, SPEAKER POST AND PRESELL MENU BOARD ALL COME FROM PLK APPROVED VENDOR. SHIPPED TO SITE FROM VENDOR
TO BE ORDERED AHEAD OF INSTALL.
ORDER DIGITAL MENU BOARD (ODMB), SPEAKER POST AND PRESELL MENU BOARD ARE TO ALL COME FROM A PLK APPROVED VENDOR. CHECK LEAD TIME WITH VENDOR TO SCHEDULE INSTALL.

SCHEDULED BY GC AND INSTALLED BY VENDOR OR GC. INSTALL TO BE SCHEDULE A MIN OF 4 WEEKS BEFORE DESIRED DATE

FOUNDATION, DATA AND ELECTRICAL BY CIVIL/GC. FOUNDATION MUST BE 2"-4" ABOVE GRADE. CONFIRM WITH VENDOR.

ANCHOR BOLTS TO BE IN AN 8X8 PATTERN UNLESS OTHERWISE NOTED, INSTALL BY GC. TO BE COMPLETED PRIOR TO HAVING BAILIWICK ON SITE.

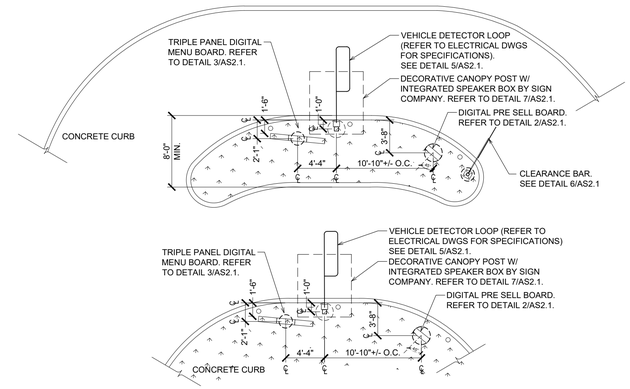

NOTE
1. THE DISTANCE FROM THE PICK UP WINDOW TO THE CENTER OF THE ORDER STATION MAY NEED TO BE INCREASED TO ACCOMMODATE 6/7TH CAR ORDER, IF SPACING PERMITS.
2. THE DRIVE-ASLE WIDTHS MAY NEED TO BE INCREASED TO ACCOMMODATE TURNING MOVEMENTS.
3. DISTANCE BETWEEN THE CANOPY POST AND THE PRESALE MENU BOARD MAY NEED TO BE ADJUSTED DUE TO SITE SPECIFIC CONDITIONS.

4 AS2.1 TYPICAL DOUBLE DT MENU BOARD LAYOUT (COORDINATE FOR SITE ADAPT).

SCALE: 1/8" = 1'-0"

NOTE:

LOOP DETECTOR IS NOT INCLUDED ON SCHEDULE A

OWNER ORDERS THIS FROM HME AND GC COORDINATES THE INSTALL

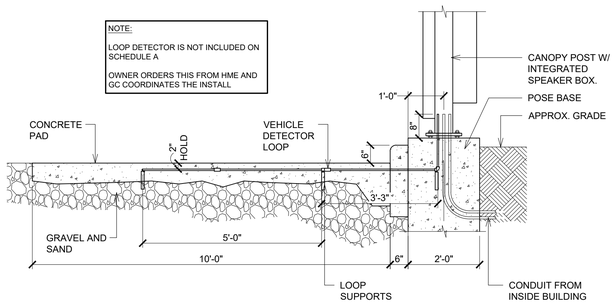

5 AS2.1 VEHICLE DETECTOR LOOP SECTION

SCALE: 1/2" = 1'-0"

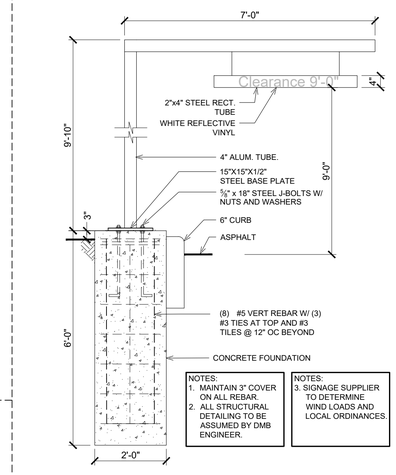

NOTES:
1. MAINTAIN 3" COVER ON ALL REBAR.
2. ALL STRUCTURAL DETAILING TO BE ASSUMED BY DMB ENGINEER.

NOTES:
3. SIGNAGE SUPPLIER TO DETERMINE WIND LOADS AND LOCAL ORDINANCES.

6 AS2.1 FOUNDATION AT CLEARANCE BAR

SCALE: 1/2" = 1'-0"

7 AS2.1 NOT USED

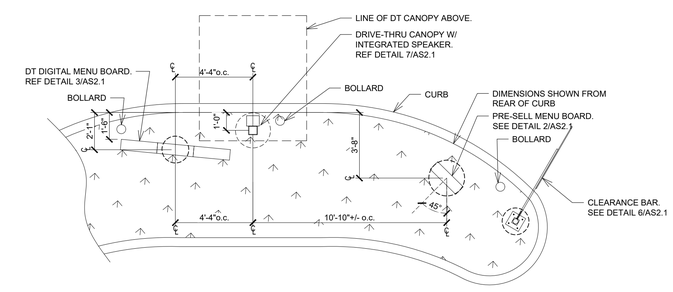

11 AS2.1 TYPICAL ODMB SPACING PLAN DETAIL (COORDINATE FOR SITE ADAPT).

SCALE: 1/4" = 1'-0"

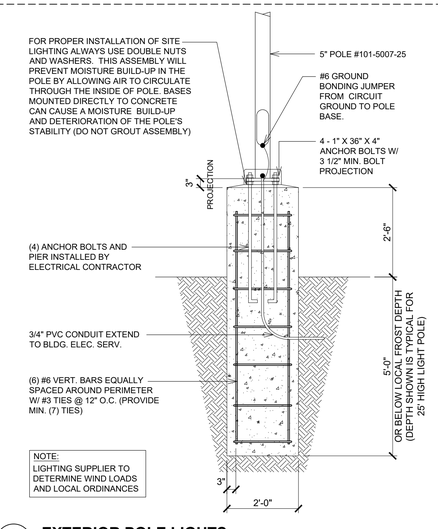

NOTE:
LIGHTING SUPPLIER TO DETERMINE WIND LOADS AND LOCAL ORDINANCES

8 AS2.1 EXTERIOR POLE LIGHTS

SCALE: 1/2" = 1'-0"



9 AS2.1 SIGNAGE BOARD DETAIL

SCALE: 1/2" = 1'-0"

SOIL CLASS 5

WIND LOAD: 90 MPH (ASCE 7-05) 115 MPH (ASCE 7-10)	WIND LOAD: 120 MPH (ASCE 7-05) 153 MPH (ASCE 7-10)	WIND LOAD: 150 MPH (ASCE 7-05) 192 MPH (ASCE 7-10)
DESIGN PARAMETERS: 2009 INTERNATION BUILDING CODE ASCE 7-05 WIND SPEED DATA: 1. BASIC WIND SPEED = 90 MPH (3 SEC. GUST) 2. WIND IMPORTANCE FACTOR 1.0 3. WIND EXPOSURE C 4. INTERNAL PRESSURE COEF. N/A 4. COMPNENT AND CLADDING N/A ASCE 7-10 SPEC RATED APPX. 28% HIGHER OVER ASCE 7-05 SPEC MATERIALS: GRADE F1554 Gr 36 ANCHOR BOLTS GRADE A615 60 KSI REBAR 3000 PSI CONCRETE @ 28 DAYS CLASS 5 SOIL: 1500 PSF SOIL BEARING 100 PSF/LF SOIL LATERAL BEARING UNDISTURBED SOIL	DESIGN PARAMETERS: 2009 INTERNATION BUILDING CODE ASCE 7-05 WIND SPEED DATA: 1. BASIC WIND SPEED = 120 MPH (3 SEC. GUST) 2. WIND IMPORTANCE FACTOR 1.0 3. WIND EXPOSURE C 4. INTERNAL PRESSURE COEF. N/A 4. COMPNENT AND CLADDING N/A ASCE 7-10 SPEC RATED APPX. 28% HIGHER OVER ASCE 7-05 SPEC MATERIALS: GRADE F1554 Gr 36 ANCHOR BOLTS GRADE A615 60 KSI REBAR 3000 PSI CONCRETE @ 28 DAYS CLASS 5 SOIL: 1500 PSF SOIL BEARING 100 PSF/LF SOIL LATERAL BEARING UNDISTURBED SOIL	DESIGN PARAMETERS: 2009 INTERNATION BUILDING CODE ASCE 7-05 WIND SPEED DATA: 1. BASIC WIND SPEED = 150 MPH (3 SEC. GUST) 2. WIND IMPORTANCE FACTOR 1.0 3. WIND EXPOSURE C 4. INTERNAL PRESSURE COEF. N/A 4. COMPNENT AND CLADDING N/A ASCE 7-10 SPEC RATED APPX. 28% HIGHER OVER ASCE 7-05 SPEC MATERIALS: GRADE F1554 Gr 36 ANCHOR BOLTS GRADE A615 60 KSI REBAR 3000 PSI CONCRETE @ 28 DAYS CLASS 5 SOIL: 1500 PSF SOIL BEARING 100 PSF/LF SOIL LATERAL BEARING UNDISTURBED SOIL

FOUNDATION DETAIL:

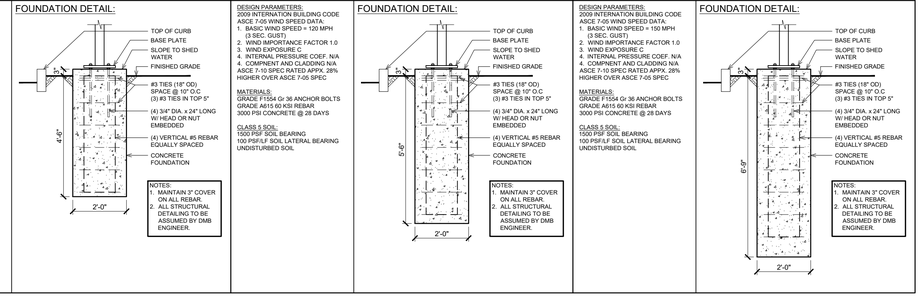

10 AS2.1 FOUNDATION DETAIL @ DIGITAL MENU BOARD

SCALE: 3/8" = 1'-0"

GENERAL NOTES

1. ALL SIGNS SHALL BE ERECTED IN ACCORDANCE WITH ALL LOCAL CODES AND SOIL CONDITIONS.

2. VERIFY LOCAL WIND AND SOIL CONDITIONS FOR PSF WIND LOADS.

GENERAL NOTES

GC TO COORDINATE THIS SHEET WITH SIGNAGE VENDOR SHEETS/DOCUMENTS.

GC TO COORDINATE W/ ARCHITECT IF DISCREPANCIES IDENTIFIED BETWEEN THIS SHEET AND THE SIGNAGE VENDOR SHEETS.

SIGNAGE VENDOR TO CONFIRM MINIMAL FOUNDATION REQUIREMENTS PROVIDED ON THIS SHEET, PER THE ACTUAL SIGNAGE EQUIPMENT DESIGN. STRICTER DESIGN BETWEEN THIS SHEET AND THE SIGNAGE VENDOR SHOP DRAWINGS TO BE UTILIZED.

ISSUE TABLE

No.	Date (mm/dd/yy)	Description
01	09-26-25	DTGO PROTOTYPE DOCUMENTS

REVISIONS

No.	Date	Description

DRAWINGS REVISED AS PER DESIGN BULLETIN

No.	Date	Description

THIS DRAWING IS OWNED BY OR LICENSED FOR USE BY POPEYES LOUISIANA KITCHEN (OR ITS AFFILIATED OR RELATED COMPANIES) AND MAY NOT BE REPRODUCED, USED, DOWNLOADED, DISSEMINATED, PUBLISHED, OR TRANSFERRED IN ANY FORM OR BY ANY MEANS, EXCEPT WITH THE PRIOR WRITTEN CONSENT OF POPEYES LOUISIANA KITCHEN. COPYRIGHT INFRINGEMENT IS A VIOLATION OF FEDERAL LAW SUBJECT TO CRIMINAL AND CIVIL PENALTIES.

THE CONTRACTOR IS TO VERIFY ALL DIMENSIONS AND CONDITIONS ON THE PROJECT AND TO REPORT ANY DISCREPANCIES TO THE POPEYES LOUISIANA KITCHEN REPRESENTATIVE PRIOR TO COMMENCING WORK. THESE DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION PURPOSES UNLESS INDICATED BY POPEYES LOUISIANA KITCHEN AS "ISSUED FOR CONSTRUCTION".

Professional Seal

DESIGNER NOTES:
DESIGN GUIDELINE ONLY - NOT FOR PERMIT OR CONSTRUCTION

THESE DOCUMENTS MUST BE COMPLETED AND / OR MODIFIED BY A LICENSED ARCHITECT AND ENGINEER TO CONFORM TO ALL APPLICABLE CODES, AND SPECIFIC SITE CONDITIONS. THERE IS NO WARRANTY, WHETHER IMPLIED OR EXPRESSED THAT THESE DOCUMENTS MEET THE APPLICABLE CODE REQUIREMENTS. LIABILITY FOR THE DESIGN AND ANY USE OF THE DOCUMENTS IS THE SOLE RESPONSIBILITY OF THE ARCHITECT AND ENGINEER OF RECORD.

Company Logo

Project

Store Type
US DTGO PROTOTYPE

Location
PROTOTYPE
DTGO (U.S.)
CITY, STATE

Drawing Title
MENU SIGN DETAILS
SINGLE / DOUBLE
DRIVE-THRU

Drawn	Checked
XX	XX
Scale: AS NOTED	Date: ##.##.####
Project No.: XX	Drawing No.: AS2.1

POPEYES LOUISIANA KITCHEN MODEL DTGO, ADDRESS, CITY, STATE: DTGO PROTOTYPE DOCUMENTS (OCTOBER, 2025) STORE NO. XXXXX



4 / AS2.2 DROP ROD DETAIL
SCALE: 3/4" = 1'-0"

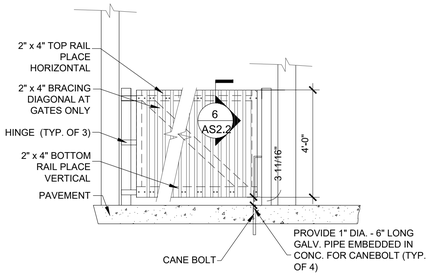

5 / AS2.2 GATE DETAIL AT REAR ENCLOSURE
SCALE: 3/8" = 1'-0"



6 / AS2.2 FLASHING DETAIL
SCALE: 3/8" = 1'-0"

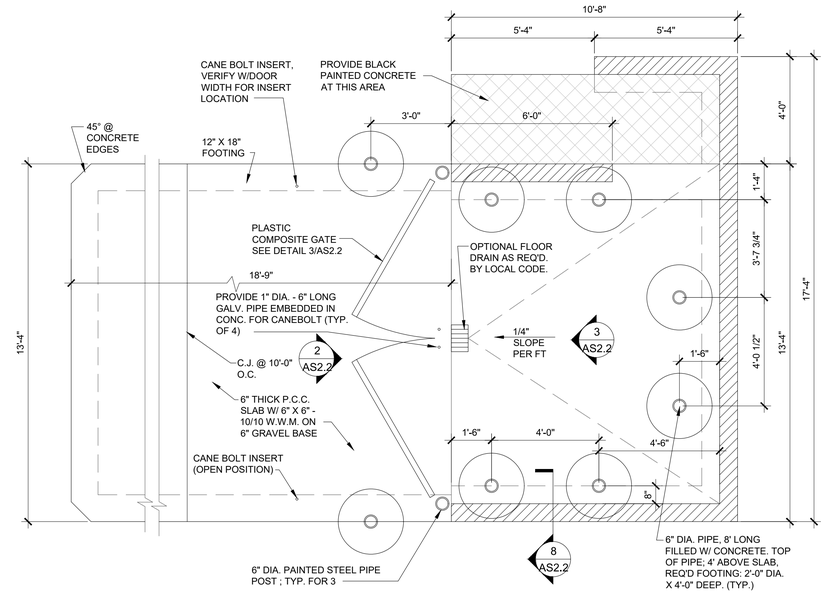

1 / AS2.2 STANDARD DUMPSTER ENCLOSURE (SINGLE)
SCALE: 3/8" = 1'-0"

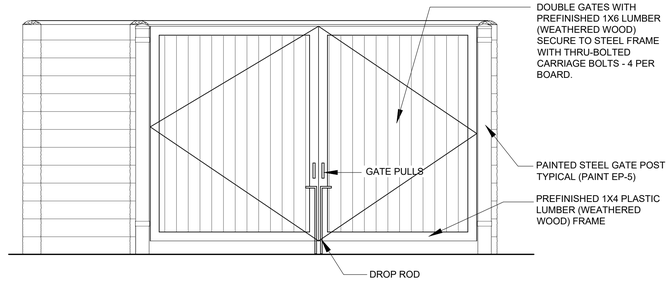

2 / AS2.2 DUMPSTER ENCLOSURE & GATE EXT. ELEV.
SCALE: 3/8" = 1'-0"

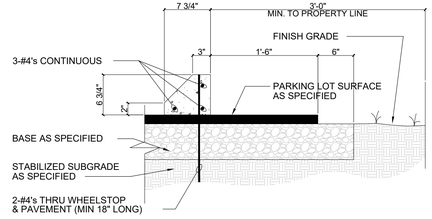

7 / AS2.2 WHEELSTOP (PRECAST)
SCALE: 1" = 1'-0"

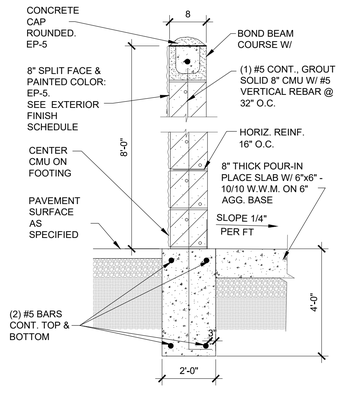

8 / AS2.2 DUMPSTER WALL SECTION
SCALE: 3/8" = 1'-0"

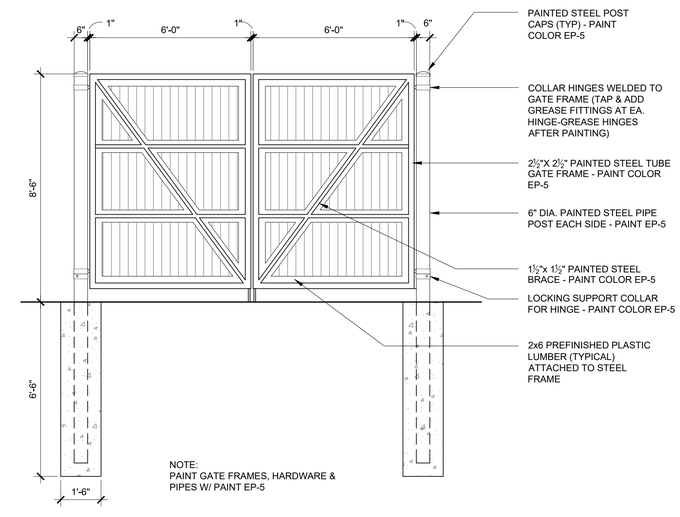

3 / AS2.2 DUMPSTER ENCLOSURE & GATE INT. ELEV.
SCALE: 3/8" = 1'-0"

DESIGNER NOTES:
REMOVE/KEEP SHEET PER SPECIFIC PROJECT DESIGN OPTIONS

ISSUE TABLE

No.	Date (mm/dd/yy)	Description
01	09-26-25	DTGO PROTOTYPE DOCUMENTS

REVISIONS

No.	Date	Description

DRAWINGS REVISED AS PER DESIGN BULLETIN

No.	Date	Description

THIS DRAWING IS OWNED BY OR LICENSED FOR USE BY POPEYES LOUISIANA KITCHEN (OR ITS AFFILIATED OR RELATED COMPANIES) AND MAY NOT BE REPRODUCED, USED, DOWNLOADED, DISSEMINATED, PUBLISHED, OR TRANSFERRED IN ANY FORM OR BY ANY MEANS, EXCEPT WITH THE PRIOR WRITTEN CONSENT OF POPEYES LOUISIANA KITCHEN. COPYRIGHT INFRINGEMENT IS A VIOLATION OF FEDERAL LAW SUBJECT TO CRIMINAL AND CIVIL PENALTIES.

THE CONTRACTOR IS TO VERIFY ALL DIMENSIONS AND CONDITIONS ON THE PROJECT AND TO REPORT ANY DISCREPANCIES TO THE POPEYES LOUISIANA KITCHEN REPRESENTATIVE PRIOR TO COMMENCING WORK. THESE DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION PURPOSES UNLESS INDICATED BY POPEYES LOUISIANA KITCHEN AS "ISSUED FOR CONSTRUCTION".

Professional Seal

DESIGNER NOTES:
DESIGN GUIDELINE ONLY - NOT FOR PERMIT OR CONSTRUCTION

THESE DOCUMENTS MUST BE COMPLETED AND / OR MODIFIED BY A LICENSED ARCHITECT AND ENGINEER TO CONFORM TO ALL APPLICABLE CODES, AND SPECIFIC SITE CONDITIONS. THERE IS NO WARRANTY, WHETHER IMPLIED OR EXPRESSED THAT THESE DOCUMENTS MEET THE APPLICABLE CODE REQUIREMENTS. LIABILITY FOR THE DESIGN AND ANY USE OF THE DOCUMENTS IS THE SOLE RESPONSIBILITY OF THE ARCHITECT AND ENGINEER OF RECORD.

Company Logo

Project

Store Type
US DTGO PROTOTYPE

Location
PROTOTYPE
DTGO (U.S.)
CITY, STATE

Drawing Title
SITE DETAILS - SINGLE TRASH ENCLOSURE - CMU

Drawn	Checked
XX	XX
Scale	**Date**
AS NOTED	##.##.####
Project No.	**Drawing No.**
XX	AS2.2 (OPT)

POPEYES LOUISIANA KITCHEN MODEL DTGO, ADDRESS, CITY, STATE: DTGO PROTOTYPE DOCUMENTS (OCTOBER, 2025) STORE NO. XXXXX



4 AS2.2 **DROP ROD DETAIL**
SCALE: 3/4" = 1'-0"

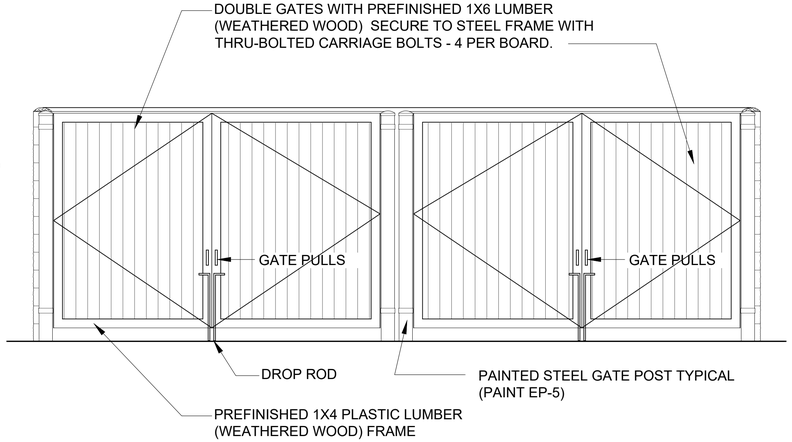

2 AS2.2 **DUMPSTER ENCLOSURE & GATE EXT. ELEV.**
SCALE: 3/8" = 1'-0"

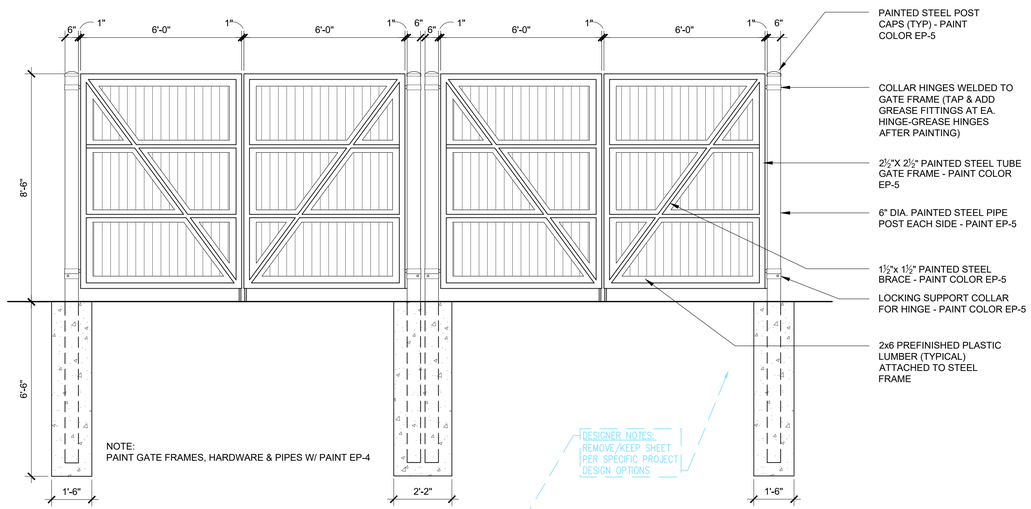

3 AS2.2 **DUMPSTER ENCLOSURE & GATE INT. ELEV.**
SCALE: 3/8" = 1'-0"

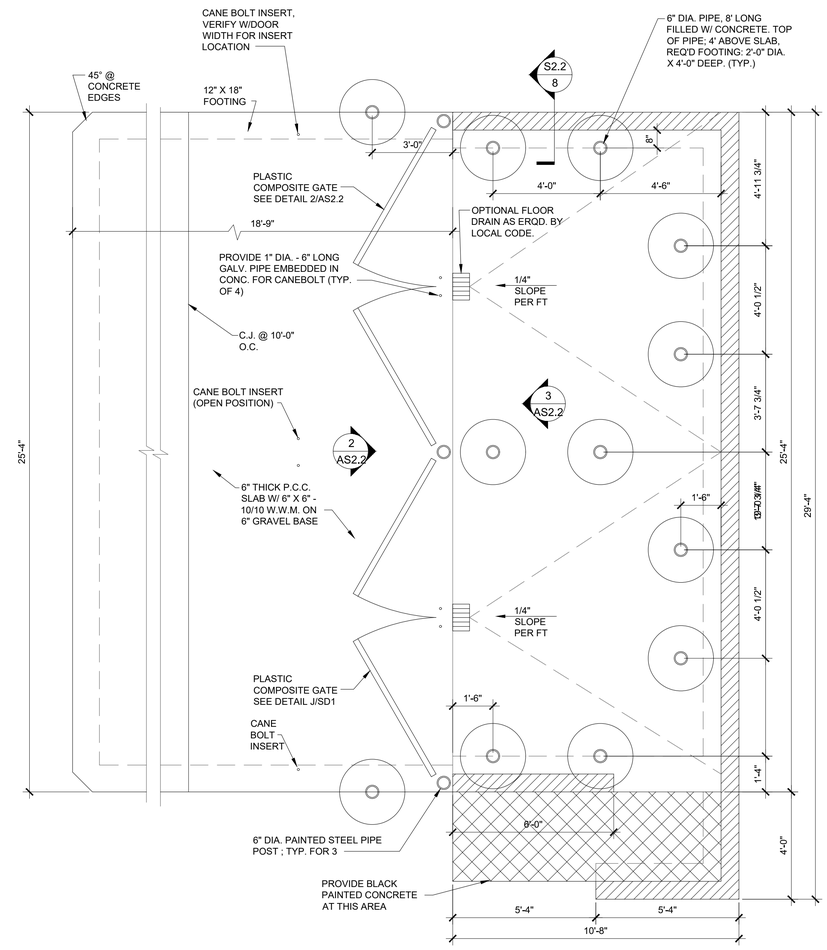

1 AS2.2 **STANDARD DUMPSTER ENCLOSURE (DOUBLE)**
SCALE: 3/8" = 1'-0"



5 AS2.2 **GATE DETAIL AT REAR ENCLOSURE**
SCALE: 3/8" = 1'-0"



6 AS2.2 **FLASHING DETAIL**
SCALE: 3/8" = 1'-0"

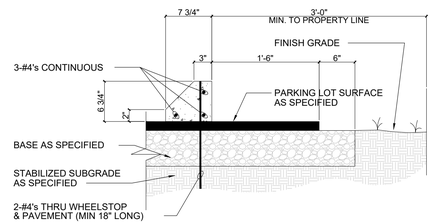

7 AS2.2 **WHEELSTOP (PRECAST)**
SCALE: 1" = 1'-0"

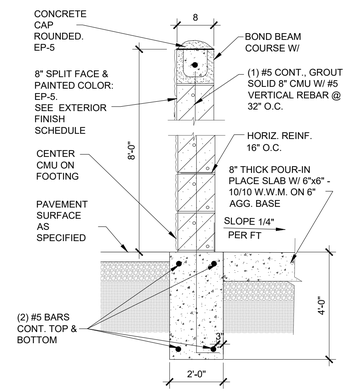

8 AS2.2 **DUMPSTER WALL SECTION**
SCALE: 3/8" = 1'-0"

ISSUE TABLE

No.	Date (mm/dd/yy)	Description
01	09-26-25	DTGO PROTOTYPE DOCUMENTS

REVISIONS

No.	Date	Description

DRAWINGS REVISED AS PER DESIGN BULLETIN

No.	Date	Description

THIS DRAWING IS OWNED BY OR LICENSED FOR USE BY POPEYES LOUISIANA KITCHEN (OR ITS AFFILIATED OR RELATED COMPANIES) AND MAY NOT BE REPRODUCED, USED, DOWNLOADED, DISSEMINATED, PUBLISHED, OR TRANSFERRED IN ANY FORM OR BY ANY MEANS, EXCEPT WITH THE PRIOR WRITTEN CONSENT OF POPEYES LOUISIANA KITCHEN. COPYRIGHT INFRINGEMENT IS A VIOLATION OF FEDERAL LAW SUBJECT TO CRIMINAL AND CIVIL PENALTIES.

THE CONTRACTOR IS TO VERIFY ALL DIMENSIONS AND CONDITIONS ON THE PROJECT AND TO REPORT ANY DISCREPANCIES TO THE POPEYES LOUISIANA KITCHEN REPRESENTATIVE PRIOR TO COMMENCING WORK. THESE DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION PURPOSES UNLESS INDICATED BY POPEYES LOUISIANA KITCHEN AS "ISSUED FOR CONSTRUCTION"

Professional Seal

DESIGNER NOTES:
DESIGN GUIDELINE ONLY - NOT FOR PERMIT OR CONSTRUCTION

THESE DOCUMENTS MUST BE COMPLETED AND / OR MODIFIED BY A LICENSED ARCHITECT AND ENGINEER TO CONFORM TO ALL APPLICABLE CODES, AND SPECIFIC SITE CONDITIONS. THERE IS NO WARRANTY, WHETHER IMPLIED OR EXPRESSED THAT THESE DOCUMENTS MEET THE APPLICABLE CODE REQUIREMENTS.
LIABILITY FOR THE DESIGN AND ANY USE OF THE DOCUMENTS IS THE SOLE RESPONSIBILITY OF THE ARCHITECT AND ENGINEER OF RECORD.

Company Logo

Project

Store Type
US DTGO PROTOTYPE

Location
PROTOTYPE
DTGO (U.S.)
CITY, STATE

Drawing Title
SITE DETAILS - DOUBLE TRASH ENCLOSURE CMU

Drawn	Checked
XX	XX
Scale	**Date**
AS NOTED	##.##.####
Project No.	**Drawing No.**
XX	AS2.2

POPEYES LOUISIANA KITCHEN MODEL DTGO, ADDRESS, CITY, STATE: DTGO PROTOTYPE DOCUMENTS (OCTOBER, 2025) STORE NO. XXXXX



15 / AS2.3 BOLLARD DETAIL
SCALE: 3/8" = 1'-0"



14 / AS2.3 BOLLARD DETAIL
SCALE: 3/8" = 1'-0"



11 / AS2.3 CURB DETAIL
SCALE: 3/8" = 1'-0"

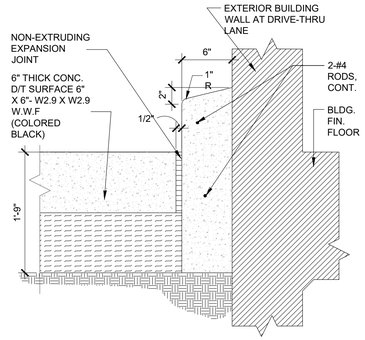

5 / AS2.3 6" BARRIER CURB @ DRIVE-THRU WINDOW
SCALE: 3/8" = 1'-0"



NOTE:
STEEL REQUIREMENTS PER LOCAL CODE

4 / AS2.3 EXTRUDED CURB & GUTTER
SCALE: 3/8" = 1'-0"



NOTE
1. ALL LUMBER TO BE SOUTHERN YELLOW PINE #1 OR EQUAL COMMON GRADE TREATED WITH ONE COAT CURPINOLOR APPROVED PRESERVATIVE AFTER FABRICATION AND BEFORE ASSEMBLY. AFTER ASSEMBLY APPLY OLYMPIC SEMI-TRANSPARENT STAIN #709

1 / AS2.3 SHADOW BOX WOOD FENCE
SCALE: 3/8" = 1'-0"







NOTE: TYP. JOINT AND CURB DETAILS SEE CIVIL DWGS. FOR ACTUAL DETAILS.

13 / AS2.3 TYPICAL JOINT DETAILS
SCALE: 3/8" = 1'-0"



9 / AS2.3 SIDEWALK DETAIL
SCALE: 3/8" = 1'-0"



10 / AS2.3 THRUST BLOCKS
SCALE: 3/8" = 1'-0"

NOTE:
CONCRETE TO HAVE A MIN. 28 DAY STRENGTH OF 3000 PSI

BLOCKING DIMENSIONS						
		X	A	B	C	D
DEAD END AND TEES		8"	10"	2'-3"	3'-3"	2'-0"
		12"	12"	3'-0"	4'-6"	3'-0"
BENDS	90°	8"	10"	2'-9"	4'-0"	2'-3"
		12"	12"	4'-3"	6'-0"	3'-3"
	45°	8"	10"	1'-6"	2'-6"	2'-0"
		12"	12"	2'-9'	4'-3"	2'-6"
	22 1/2°	8"	10"	1'-0"	2'-0"	1'-3"
		12"	12"	1'-9"	3'-0"	1'-9"
	11 1/4°	8"	10"	0'-6"	1'-4"	1'-0"
		12"	12"	0'-6"	1'-9"	1'-6"

X= DIAMETER OF PIPE TO BE BLOCKED NOTE: BLOCKING SHALL BE CONSTRUCTED AS PER AWWA STD. 0600, SECTION 12.3, OR LATEST REVISION

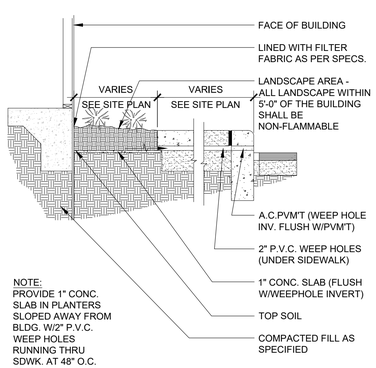

NOTE:
PROVIDE 1" CONC. SLAB IN PLANTERS SLOPED AWAY FROM BLDG. W/2" P.V.C. WEEP HOLES RUNNING THRU SDWK. AT 48" O.C. (TYP.)

7 / AS2.3 PLANTER SIDEWALK
SCALE: 3/8" = 1'-0"

KEY TO TYPICAL PAVEMENT SECTIONS

1. 2" ASPHALTIC CONCRETE.
2. BITUMINOUS PRIME COAT AND TOPPING.
3. 6" BASE COURSE, REFER TO GEOTECHNICAL REPORT.
4. CONCRETE SIDEWALK.



NOTE: VERIFY GEOTECHNICAL REPORT AS WELL AS LOCAL GUIDELINES FOR PAVEMENT REQUIREMENTS AND RECOMMENDATIONS

8 / AS2.3 TYP. ASPHALT PAVEMENT DETAIL
SCALE: 3/8" = 1'-0"

GREASE TRAP SIZE TABLE		
G.T. SIZE	DIM "A"	DIM "B"
1000 GALLON	8'-2"	5'-1"
1200 GALLON	8'-6"	5'-9"
VERIFY PER LOCAL CODE		



TOP VIEW







45° PARKING



PARALLEL PARKING



12 / AS2.3 HANDICAP SYMBOL
SCALE: 3/8" = 1'-0"

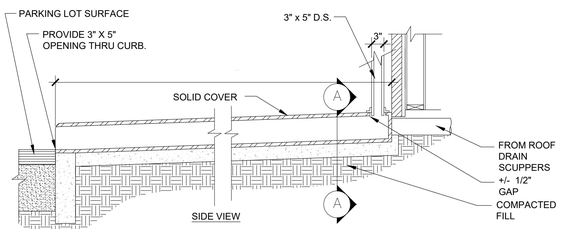



6 / AS2.3 ROOF DRAIN FLUME
SCALE: 3/8" = 1'-0"

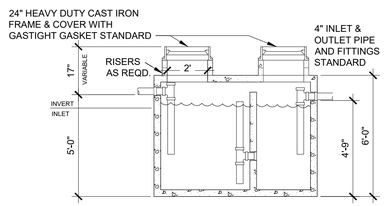

3 / AS2.3 EXTERIOR GREASE TRAP
SCALE: 3/8" = 1'-0"



PARKING AGAINST SIDEWALK

NOTES:
1. WHEEL STOPS NOT TO BE USED UNLESS REQ'D FOR SAFETY REASONS.
2. USE 90 DEGREE PARKING WHENEVER POSSIBLE.
3. DIMENSIONS SHOWN ABOVE ARE BASED ON 9'X18' STALLS.

VERIFY DIMENSIONS WITH LOCAL REGULATORY AGENCY.



CURBED PARKING STALL AGAINST SIDEWALK

2 / AS2.3 PARKING STALL STANDARDS
SCALE: 3/8" = 1'-0"

ISSUE TABLE

No.	Date (mm/dd/yy)	Description
01	09-26-25	DTGO PROTOTYPE DOCUMENTS

REVISIONS

No.	Date	Description

DRAWINGS REVISED AS PER DESIGN BULLETIN

No.	Date	Description

THIS DRAWING IS OWNED BY OR LICENSED FOR USE BY POPEYES LOUISIANA KITCHEN (OR ITS AFFILIATED OR RELATED COMPANIES) AND MAY NOT BE REPRODUCED, USED, DOWNLOADED, DISSEMINATED, PUBLISHED, OR TRANSFERRED IN ANY FORM OR BY ANY MEANS, EXCEPT WITH THE PRIOR WRITTEN CONSENT OF POPEYES LOUISIANA KITCHEN. COPYRIGHT INFRINGEMENT IS A VIOLATION OF FEDERAL LAW SUBJECT TO CRIMINAL AND CIVIL PENALTIES.

THE CONTRACTOR IS TO VERIFY ALL DIMENSIONS AND CONDITIONS ON THE PROJECT AND TO REPORT ANY DISCREPANCIES TO THE POPEYES LOUISIANA KITCHEN REPRESENTATIVE PRIOR TO COMMENCING WORK. THESE DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION PURPOSES UNLESS INDICATED BY POPEYES LOUISIANA KITCHEN AS "ISSUED FOR CONSTRUCTION".

Professional Seal

DESIGNER NOTES:
DESIGN GUIDELINE ONLY - NOT FOR PERMIT OR CONSTRUCTION

THESE DOCUMENTS MUST BE COMPLETED AND / OR MODIFIED BY A LICENSED ARCHITECT AND ENGINEER TO CONFORM TO ALL APPLICABLE CODES, AND SPECIFIC SITE CONDITIONS. THERE IS NO WARRANTY, WHETHER IMPLIED OR EXPRESSED THAT THESE DOCUMENTS MEET THE APPLICABLE CODE REQUIREMENTS. LIABILITY FOR THE DESIGN AND ANY USE OF THE DOCUMENTS IS THE SOLE RESPONSIBILITY OF THE ARCHITECT AND ENGINEER OF RECORD.

Company Logo

Project

Store Type
US DTGO PROTOTYPE

Location
PROTOTYPE DTGO (U.S.)
CITY, STATE

Drawing Title
SITE DETAILS

Drawn	Checked
XX	XX
Scale: AS NOTED	Date: ##.##.####
Project No.: XX	Drawing No.: AS2.3

POPEYES LOUISIANA KITCHEN MODEL DTGO, ADDRESS, CITY, STATE: DTGO PROTOTYPE DOCUMENTS (OCTOBER, 2025) STORE NO. XXXXX

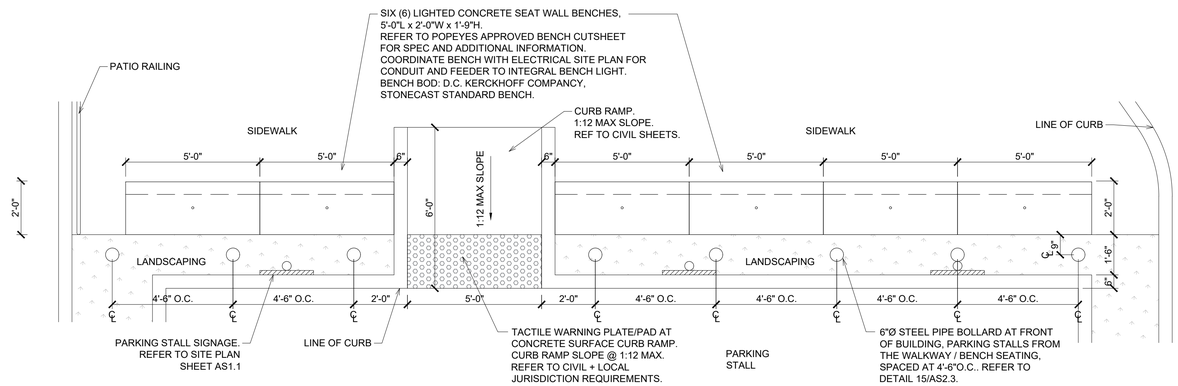

3 / AS2.4 ENGLARGED BENCH AREA PLAN
SCALE: NTS



CROSS WALK

ALL SITE SIGNAGE AND PAVEMENT MARKINGS MUST MATCH THE POPEYES DESIGN TEAM APPROVED SITE PLAN DRAWING. ANY DEVIATIONS FROM THE PROTOTYPE DRAWINGS OR THE APPROVED SITE PLAN DRAWING MUST HAVE A SUBMITTED AND APPROVED EXCEPTION REQUEST FORM FROM POPEYES DESIGN TEAM.

STOP BAR

LETTERING FOR PARKING BAYS BY G.C. GRAPHICS BY G.C. MUST USED APPROVED STENCIL FROM SIGNAGE PACKAGE PROVIDER



WAIT HERE GRAPHIC

DIGITAL PICK-UP GRAPHIC

ALL SITE SIGNAGE AND PAVEMENT MARKINGS MUST MATCH THE POPEYES DESIGN TEAM APPROVED SITE PLAN DRAWING. ANY DEVIATIONS FROM THE PROTOTYPE DRAWINGS OR THE APPROVED SITE PLAN DRAWING MUST HAVE A SUBMITTED AND APPROVED EXCEPTION REQUEST FORM FROM POPEYES DESIGN TEAM.



ARROWS



DRIVE-THRU

NOTE:
PAVEMENT MARKINGS TO BE REFLECTIVE, WATERBORNE, LIQUID PAVEMENT MARKING MATERIAL.

2 / AS2.4 PAVEMENT MARKINGS
SCALE: NTS

1 / AS2.4 PAVEMENT MARKINGS / GRAPHICS
SCALE: NTS

ISSUE TABLE

No.	Date (mm/dd/yy)	Description
01	09-26-25	DTGO PROTOTYPE DOCUMENTS

REVISIONS

No.	Date	Description

DRAWINGS REVISED AS PER DESIGN BULLETIN

No.	Date	Description

THIS DRAWING IS OWNED BY OR LICENSED FOR USE BY POPEYES LOUISIANA KITCHEN I (OR ITS AFFILATED OR RELATED COMPANIES) AND MAY NOT BE REPRODUCED, USED, DOWNLOADED, DISSEMINATED, PUBLISHED, OR TRANSFERRED IN ANY FORM OR BY ANY MEANS, EXCEPT WITH THE PRIOR WRITTEN CONSENT OF POPEYES LOUISIANA KITCHEN. COPYRIGHT INFRINGEMENT IS A VIOLATION OF FEDERAL LAW SUBJECT TO CRIMINAL AND CIVIL PENALTIES.

THE CONTRACTOR IS TO VERIFY ALL DIMENSIONS AND CONDITIONS ON THE PROJECT AND TO REPORT ANY DISCREPANCIES TO THE POPEYES LOUISIANA KITCHEN REPRESENTATIVE PRIOR TO COMMENCING WORK. THESE DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION PURPOSES UNLESS INDICATED BY POPEYES LOUISIANA KITCHEN AS "ISSUED FOR CONSTRUCTION".

Professional Seal

DESIGNER NOTES:
DESIGN GUIDELINE ONLY - NOT FOR PERMIT OR CONSTRUCTION

THESE DOCUMENTS MUST BE COMPLETED AND / OR MODIFIED BY A LICENSED ARCHITECT AND ENGINEER TO CONFORM TO ALL APPLICABLE CODES, AND SPECIFIC SITE CONDITIONS. THERE IS NO WARRANTY, WHETHER IMPLIED OR EXPRESSED THAT THESE DOCUMENTS MEET THE APPLICABLE CODE REQUIREMENTS. LIABILITY FOR THE DESIGN AND ANY USE OF THE DOCUMENTS IS THE SOLE RESPONSIBILITY OF THE ARCHITECT AND ENGINEER OF RECORD.

Company Logo

Project

Store Type
US DTGO PROTOTYPE

Location
PROTOTYPE
DTGO (U.S.)
CITY, STATE

Drawing Title
SITE DETAILS

Drawn	Checked
XX	XX
Scale: AS NOTED	Date: ##.##.####
Project No.: XX	Drawing No.: AS2.4

POPEYES LOUISIANA KITCHEN MODEL DTGO, ADDRESS, CITY, STATE: DTGO PROTOTYPE DOCUMENTS (OCTOBER, 2025) STORE NO. XXXXX

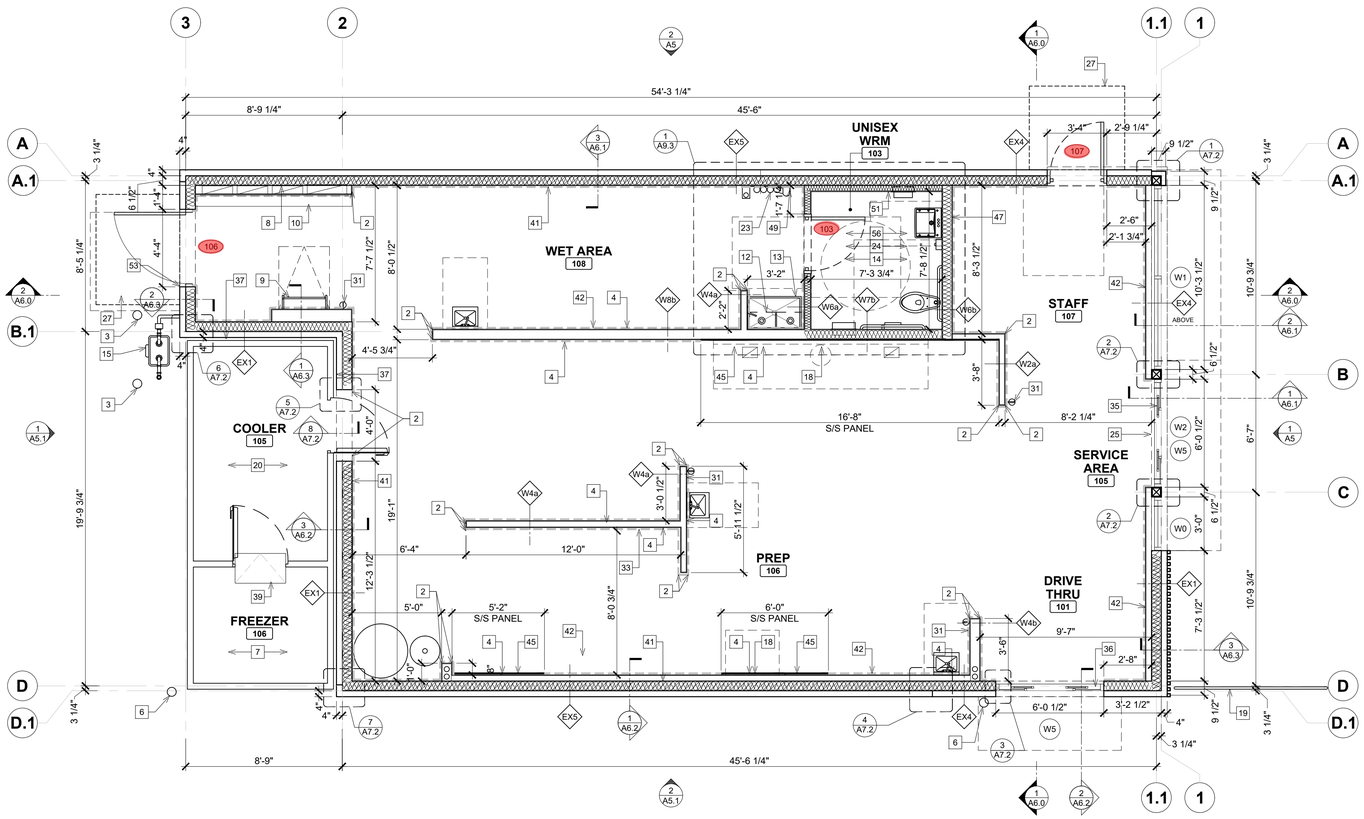

1 A1 **PRELIMINARY FLOOR PLAN**

SCALE: 1/4"=1'-0"

EX1 — EXTERIOR WALL AT STUCCO (EIFS):

TYP. EXTERIOR WALL ASSEMBLY IS A PRE-FABRICATED WALL SYSTEM BY THE PRE-FABRICATOR VENDOR. SEE SHEETS LABELED 'FAB' FOR EXTERIOR WALL SYSTEM CONSTRUCTION AND DETAILS.
PRE-FAB WALL CONSTRUCTION LIMITS: OUTSIDE FACE OF EXTERIOR FINISH TO INTERIOR FACE OF STUD.
PRE-FAB EXTERIOR WALL CONSTRUCTION (EXTERIOR TO INTERIOR) (FOR REFERENCE):
- STOTHERM CI LOTUSAN EXTERIOR INSULATION FINISHING SYSTEM (EIFS): 3" EXPANDED POLYSTYRENE INSULATION BOARD (2X 1-1/2" STAGGERED BOARD LAYERS) W/ 1/4" BASE COAT, REINFORCING MESH AND 3/32" FINISH.
- STO GOLD COAT FLUID APPLIED MEMBRANE AIR BARRIER. ALL TRANSITIONS AT FOUNDATION, ROUGH OPENINGS, SHEATHING JOINTS, FLASHINGS, WALL PENETRATIONS AND PARAPETS TO BE SEALED W/ STO RAPID GUARD PER MANUFACTURERS SPECS PRIOR TO APPLICATION OF FLUID APPLIED MEMBRANE AIR BARRIER.
- 1 LAYER 1/2" EXTERIOR GRADE PLYWOOD
- 2"X6" WOOD STUDS @16" O.C.

ADDITIONAL WALL COMPONENTS:
- UNFACED BATT INSULATION (R-20) UP TO 10'-0" MAX C/W 2"X6" FIRE STOP.
- FSK FOIL FACED FLAME SPREAD 25 BATT INSULATION (R-20) FROM 10'-0" TO U/S OF DECK C/W 2"X6" FIRE STOP.
- UNFACED BATT INSULATION (R-20) FROM U/S OF DECK TO 18" MIN. ABOVE DECK.
- 1 LAYER OF 1/2" GYPSUM BOARD SHEATHING ON CONTINUOUS 6 MIL. POLYETHYLENE VAPOR BARRIER TO (U/S OF DECK).
- PROVIDE 1/2" CEMENTITIOUS BACKER BOARD INSTEAD OF GYPSUM SHEATHING TO 12" ABOVE FLOOR SLAB C/W ACOUSTICAL SEALANT AT BASE.

NOTE:
1. PROVIDE DOUBLE LAYER OF REINFORCING MESH TO MIN. 2'-0" ABOVE GRADE AT ALL EIFS LOCATIONS.
2. G.C TO ENSURE DARK COLOURED EIFS NOT TO BE INSTALLED IN DIRECT SUNLIGHT (COORDINATE WITH MANUFACTURER)

EX2 — NOT USED

EX3 — NOT USED

EX4 — EXTERIOR WALL AT VERTICAL ORIENTATION FIBER CEMENT WALL PANEL:

TYP. EXTERIOR WALL ASSEMBLY IS A PRE-FABRICATED WALL SYSTEM BY THE PRE-FABRICATOR VENDOR. SEE SHEETS LABELED 'FAB' FOR EXTERIOR WALL SYSTEM CONSTRUCTION AND DETAILS.
PRE-FAB WALL CONSTRUCTION LIMITS: OUTSIDE FACE OF EXTERIOR FINISH TO INTERIOR FACE OF STUD.
PRE-FAB EXTERIOR WALL CONSTRUCTION (EXTERIOR TO INTERIOR) (FOR REFERENCE):
- FIBER CEMENT WALL PANEL SYSTEM, NICHIHA LATURA V GROOVE, VERTICAL ORIENTATION.
- 3" CONTINUOUS EPS RIGID INSULATION (2 LAYERS OF 1.5" RIGID INSULATION, STAGGERED SEAMS).
- STO GOLD COAT FLUID APPLIED MEMBRANE AIR BARRIER. ALL TRANSITIONS AT FOUNDATION, ROUGH OPENINGS, SHEATHING JOINTS, FLASHINGS, WALL PENETRATIONS AND PARAPETS TO BE SEALED W/ STO RAPID GUARD PER MANUFACTURERS SPECS PRIOR TO APPLICATION OF FLUID APPLIED MEMBRANE AIR BARRIER.
- 1 LAYER 1/2" EXTERIOR GRADE PLYWOOD
- 2"X6" WOOD STUDS @16" O.C.

ADDITIONAL WALL COMPONENTS (OUTSIDE OF PRE-FABRICATED COMPONENTS):
- UNFACED BATT INSULATION (R-20) UP TO 10'-0" MAX C/W 2"X6" FIRE STOP.
- FSK FOIL FACED FLAME SPREAD 25 BATT INSULATION (R-20) FROM 10'-0" TO U/S OF DECK C/W 2"X6" FIRE STOP.
- UNFACED BATT INSULATION (R-20) FROM U/S OF DECK TO 18" MIN. ABOVE DECK.
- 1 LAYER OF 1/2" GYPSUM BOARD SHEATHING ON CONTINUOUS 6 MIL. POLYETHYLENE VAPOR BARRIER TO (U/S OF DECK).
- PROVIDE 1/2" CEMENTITIOUS BACKER BOARD INSTEAD OF GYPSUM SHEATHING TO 12" ABOVE FLOOR SLAB C/W ACOUSTICAL SEALANT AT BASE.

EX5 — EXTERIOR WALL AT BRICK VENNER:

TYP. EXTERIOR WALL ASSEMBLY IS A PRE-FABRICATED WALL SYSTEM BY THE PRE-FABRICATOR VENDOR. SEE SHEETS LABELED 'FAB' FOR EXTERIOR WALL SYSTEM CONSTRUCTION AND DETAILS.
PRE-FAB WALL CONSTRUCTION LIMITS: OUTSIDE FACE OF EXTERIOR FINISH TO INTERIOR FACE OF STUD.
PRE-FAB EXTERIOR WALL CONSTRUCTION (EXTERIOR TO INTERIOR) (FOR REFERENCE):
- THIN BRICK VENEER SYSTEM. MORTAR SETTING PER PRE-FABRICATION VENDOR.
- 3" CONTINUOUS EPS RIGID INSULATION (2 LAYERS OF 1.5" RIGID INSULATION, STAGGERED SEAMS).
- STO GOLD COAT FLUID APPLIED MEMBRANE AIR BARRIER. ALL TRANSITIONS AT FOUNDATION, ROUGH OPENINGS, SHEATHING JOINTS, FLASHINGS, WALL PENETRATIONS AND PARAPETS TO BE SEALED W/ STO RAPID GUARD PER MANUFACTURERS SPECS PRIOR TO APPLICATION OF FLUID APPLIED MEMBRANE AIR BARRIER.
- 1 LAYER 1/2" EXTERIOR GRADE PLYWOOD
- 2"X6" WOOD STUDS @16" O.C.

ADDITIONAL WALL COMPONENTS (OUTSIDE OF PRE-FABRICATED COMPONENTS):
- UNFACED BATT INSULATION (R-20) UP TO 10'-0" MAX C/W 2"X6" FIRE STOP.
- FSK FOIL FACED FLAME SPREAD 25 BATT INSULATION (R-20) FROM 10'-0" TO U/S OF DECK C/W 2"X6" FIRE STOP.
- UNFACED BATT INSULATION (R-20) FROM U/S OF DECK TO 18" MIN. ABOVE DECK.
- 1 LAYER OF 1/2" GYPSUM BOARD SHEATHING ON CONTINUOUS 6 MIL. POLYETHYLENE VAPOR BARRIER TO (U/S OF DECK).
- PROVIDE 1/2" CEMENTITIOUS BACKER BOARD INSTEAD OF GYPSUM SHEATHING TO 12" ABOVE FLOOR SLAB C/W ACOUSTICAL SEALANT AT BASE.

*NOTE:
"a" DENOTES 2 X 4 METAL STUDS
"b" DENOTES 2 X 6 METAL STUDS

NOT USED

W2 — - 1/2" DUROCK NEXT GEN CEMENT BOARD UP TO 2'-0" A.F.F. AND 1/2" MOLD RESISTANT GYPSUM BOARD FROM 2'-0" A.F.F. TO U/S OF CEILING (SERVICE AREA SIDE)
- METAL STUDS @ 16" O.C. REFER TO STRUCTURAL (SHEAR WALL).
- 1/2" PLYWOOD BACKING (BETWEEN STUDS @ LOCATION OF WALL MOUNTED EQUIPMENTS)
- 1/2" DUROCK NEXT GEN CEMENT BOARD UP TO 2'-0" A.F.F. AND 1/2" MOLD RESISTANT GYPSUM BOARD FROM 2'-0" A.F.F. TO U/S OF CEILING (KITCHEN SIDE)

DOTTED LINE INDICATES LOCATION OF FIBREGLASS REINFORCED PANEL (FRP) LOCATION.
HIDDEN LINE INDICATES LOCATION OF BLOCKING IN BETWEEN THE STUDS FOR THE MILLWORK

EXTERIOR NICHIHA PANEL FURRING / FASTENER NOTES:
- STRUCTURAL ENGINEER TO DESIGN/MODIFY THE FURRING SYSTEM TO MANAGE THE NICHIHA PANEL SYSTEM DEAD LOAD OF MINIMUM 5 PSF AND ALSO MEET THE REQUIRED LOCAL PROJECT WIND LOAD CRITERIA. FURRING AND THE ASSOCIATED FASTENERS AND FASTENER SPACING TO BE PER IBC SECTION 2603.13, UNLESS NOTED OTHERWISE BY STRUCTURAL ENGINEER.
- ALL SYSTEM FASTENERS TO BE CORROSION RESISTANT IN ACCORDANCE WITH IBC SECTION 2304.10.6.
- ALL METAL FURRING AT THE EXTERIOR WALLS SHALL HAVE MINIMUM G60 GALVANIZED COATING.
- EPS RIGID FOAM SHEATHING (INSULATION) TO HAVE A MINIMUM COMPRESSIVE STRENGTH OF 15 PSI.
- COORDINATE LOCAL BUILDING JURISDICTIONAL REQUIREMENTS WITH NICHIHA MANUFACTURER REQUIREMENTS.

*NOTE:
"a" DENOTES 2 X 4 METAL STUDS
"b" DENOTES 2 X 6 METAL STUDS
"c" DENOTES 2 X 8 METAL STUDS

W3 — NOT USED

W4 — - 1/2" DUROCK NEXT GEN CEMENT BOARD UP TO 2'-0" A.F.F. AND 1/2" MOLD RESISTANT GYPSUM BOARD FROM 2'-0" A.F.F. (KITCHEN SIDE)
- 1/2" PLYWOOD BACKING (BETWEEN STUDS @ LOCATION OF WALL MOUNTED EQUIPMENTS)
- METAL STUDS @ 16" O.C.
- 1/2" PLYWOOD BACKING (BETWEEN STUDS @ LOCATION OF WALL MOUNTED EQUIPMENTS)
- 1/2" DUROCK NEXT GEN CEMENT BOARD UP TO 2'-0" A.F.F. AND 1/2" MOLD RESISTANT GYPSUM BOARD FROM 2'-0" A.F.F. (KITCHEN SIDE)

W5 — NOT USED

W6 — - 1/2" DUROCK NEXT GEN CEMENT BOARD (WASHROOM SIDE)
- 1/2" PLYWOOD BACKING (BETWEEN STUDS @ LOCATION OF WALL MOUNTED EQUIPMENTS)
- METAL STUDS @ 24" O.C.
- 1/2" PLYWOOD BACKING (BETWEEN STUDS @ LOCATION OF WALL MOUNTED EQUIPMENTS)
- 1/2" DUROCK NEXT GEN CEMENT BOARD UP TO 2'-0" A.F.F. AND 1/2" MOLD RESISTANT GYPSUM BOARD FROM 2'-0" A.F.F. (KITCHEN SIDE)

W7 — - 1/2" DUROCK NEXT GEN CEMENT BOARD UP TO 6" ABOVE CEILING. (WASHROOM SIDE)
- 1/2" FIRE-RATED GYPSUM WALL BOARD EXTEND UP TO U/S OF DECK.
- METAL STUDS @ 16" O.C. EXTEND UP TO U/S OF DECK
- 1/2" FIRE-RATED GYPSUM WALL BOARD EXTEND UP TO U/S OF DECK.
- 1/2" DUROCK NEXT GEN CEMENT BOARD UP TO 6" ABOVE CEILING. (KITCHEN SIDE)

W8 — - 1/2" DUROCK NEXT GEN CEMENT BOARD UP TO 6" ABOVE CEILING. (KITCHEN SIDE)
- 1/2" FIRE-RATED GYPSUM WALL BOARD EXTEND UP TO U/S OF DECK.
- METAL STUDS @ 16" O.C. EXTEND UP TO U/S OF DECK
- 1/2" FIRE-RATED GYPSUM WALL BOARD EXTEND UP TO U/S OF DECK.
- 1/2" DUROCK NEXT GEN CEMENT BOARD UP TO 6" ABOVE CEILING. (KITCHEN SIDE)

GENERAL NOTES:

1. ALL INTERIOR NON-STRUCTURAL PARTITION SHALL BE 2 X 4 METAL STUDS @ 16" O.C. FROM SLAB TO 6" ABOVE FINISHED CEILING, UNLESS NOTED OTHERWISE. DIAGONALLY BRACE TOP OF WALL TO ROOF STRUCTURE AS REQUIRED TO SUPPORT ADDITIONAL LOADS.
2. REFER TO SITE PLAN FOR LOCATION & EXTENTS OF SIDEWALKS ETC.
3. ALL EXTERIOR WALLS SHALL BE FRAMED WITH 2 X6 STUDS @ 16" O.C. REFER TO STRUCTURAL DRAWINGS AND SPECIFICATIONS FOR LAYOUT, DIMENSIONS, DETAILS, MATERIAL INFORMATION & SPECIFIC STRUCTURAL DESIGN REQUIREMENTS.
4. G.C TO PROVIDE SOLID WOOD BLOCKING BEHIND ALL WALL MOUNTED FIXTURES AND ACCESSORIES.
5. FOR ANOMALIES, REFER TO WALL SECTIONS REFERENCE KEYED ON PLANS.
6. LOCATION OF CEMENTITIOUS BACKER BOARD INDICATES LOCATION OF WALL TILE FINISH. VERIFY WITH INT. ELEVATIONS ON SHEET A9 & A9.1 FOR WALL TILE LOCATIONS.
7. GYPSUM BOARD, PLYWOOD & CEMENTITIOUS BACKER BOARD TO EXTEND TO 4" ABOVE T-BAR CEILING & TO U/S OF CEILING IN LOCATIONS WITH GYPSUM BOARD CEILING.
8. REFER TO MANUFACTURE SPECIFICATIONS FOR ALL INSTALLATION PROCEDURE.
9. G.C TO PERFORM AN AIR BARRIER TEST (LEAKAGE TEST) ON THE BUILDING ENVELOPE PRIOR TO THE COMPLETION OF CONSTRUCTION, IN ACCORDANCE WITH THE NYS ENERGY CODE.
10. G.C TO SEAL/CAULK ALL BUILDING PENETRATIONS PRIOR TO PERFORMING AN AIR BARRIER TEST.
11. PROVIDE FIRE CAULKING ALL PIPES, CONDUITS, WIRES AND FRAMING PENETRATIONS THROUGH FIRE RATED SEPARATIONS. FIRE CAULK TOP & BOTTOM OF FIRE RATED SEPARATIONS. HILTI USA FS-ONE MAX FIRESTOP INTUMESCENT SEALANT, HILTI USA 1-800-879-8000 FIRE CAULK TOP & BOTTOM OF FIRE RATED SEPARATIONS.
12. G.C TO PROVIDE & INSTALL 1/2" CEMENTITIOUS BACKER BOARD INSTEAD OF GYPSUM BOARD TO 2-0" ABOVE FLOOR SLAB (FOR ALL INTERIOR PARTITIONS).
13. REFER TO STRUCTURAL DRAWINGS FOR SHEAR WALL LOCATIONS.

NOTE:

1. PROVIDE FULL PLYWOOD BACKING INSTEAD OF DRYWALL IN BACK OF HOUSE WHERE PERMITTED BY CODE.
2. G.C TO ENSURE THE FOLLOWING SHOP DRAWINGS ARE SUBMITTED:
- ROOF ACCESS LADDER/CAGE/ROOF HATCH (P. ENG. STAMPED)
- CURTAIN WALL (P. ENG. STAMPED)
- LIST OF HARDWARE / DOORS
- DRIVE THRU WINDOW
- ROOFING MATERIALS
REFER ALSO TO SPECIFICATION SECTIONS FOR SHOP DRAWINGS REQUIREMENTS.
3. PRIME CONSULTANT TO REQUEST THE FOLLOWING SHOP DRAWINGS TO THE RELATED VENDOR FOR REVIEW:
- REFRIGERATION BOXES
- MILLWORK
- GRAPHICS
4. REFER TO MECHANICAL, ELECTRICAL AND STRUCTURAL DRAWINGS FOR MECHANICAL, ELECTRICAL AND STRUCTURAL REQUIREMENTS.

FLOOR PLAN NOTES

1. N/A.
2. G.C TO PROVIDE AND INSTALL 2" X 2" (4FT LIGHT DUTY 20 GAUGE "#4 BRUSHED") S/S CORNER GUARDS FROM 4" A.F.F AND 1 1/2" X 1 1/2" PLASTIC CORNER GUARDS (FROM FRP SUPPLIER) FROM 4'-4" TO U/S OF CEILINGS AND BULKHEADS ON ALL OUTSIDE CORNERS.
3. G.C TO COORDINATE WITH UTILITY COMPANIES FOR PLACEMENT / LOCATION OF BOLLARDS . G.C TO PROVIDE 6" DIA. METAL BOLLARD FILL W/ CONCRETE AND PAINTED. REFER TO DETAIL 15/AS2.3 & EXTERIOR ELEVATIONS A5/A5.1.
4. PROVIDE PLYWOOD BACKING / BLOCKING IN WALL AS REQUIRED TO SUPPORT WALL MOUNTED ITEM.
5. N/A.
6. 6" DIA. METAL BOLLARD FILL W/ CONCRETE AND PAINTED. REFER TO DETAIL 14/AS2.3 & EXTERIOR ELEVATIONS A5/A5.1.
7. NO TILE REQUIRED ON FLOOR AT FREEZER. FREEZER TO HAVE INSULATED FLOOR. G.C TO PROVIDE & INSTALL 2" RIGID INSULATION UNDER SLAB FOR ENTIRE AREA OF COOLER / FREEZER. G.C TO COORDINATE SIZE WITH WALK-IN MANUFACTURER.
8. PROVIDE 1/2" FIRE RATED PLYWOOD FROM FINISHED FLOOR TO 8'-0" BEHIND ELECTRICAL PANEL. PAINT PLYWOOD W/ 1 COAT OF PRIMERX PEEL BONDING PRIMER & 2 FINISH COATS OF WHITE LATEX PAINT W/ CLASS A RATING (BY SHERWIN WILLIAMS).
9. INTERIOR ROOF ACCESS LADDER AND ROOF HATCH. REFER TO DETAIL 1/A6.3.
10. 8" DEEP x 6" HIGH CONCRETE HOUSE KEEPING PAD @ LOCATION OF ELECTRICAL PANELS. PROVIDE TILE FINISH ON HORIZONTAL & VERTICAL SURFACES.
11. N/A.
12. HOT WATER TANK C/W EXPANSION TANK (IF REQUIRED) MOUNTED ABOVE MOP SINK. REFER TO MECHANICAL DRAWINGS.
13. G.C TO PROVIDE AND INSTALL SURFACE MOUNTED MOP SINK. WALLS AROUND MOP SINK TO RECEIVE 1/2" CEMENTITIOUS BACKER BOARD FROM FLOOR TO 4'-0" A.F.F. REFER TO MECHANICAL DWGS.
14. G.C. TO SUPPLY AND INSTALL SOUND BATT INSULATION ON ALL PUBLIC WASHROOM WALLS.
15. GAS METER. REFER TO MECHANICAL DRAWINGS. COORDINATE LOCATION WITH CIVIL DRAWINGS AND LOCAL UTILITY COMPANY.
16. N/A.
17. N/A
18. PROVIDE PROPER NON-COMBUSTIBLE SUPPORT IN WALL AS REQUIRED TO SUPPORT EXHAUST HOOD. IMPLEMENTATION OF EXHAUST HOOD TO FOLLOW LOCAL GUIDELINES.
19. METAL RAILING SUPPLIED AND INSTALLED BY G.C (ONLY IF REQUIRED) ARCHITECT TO COORDINATE WITH CIVIL ENGINEER ON THE SITE PLAN. REFER TO DETAIL 2/A8.
20. INSTALL FLOOR TILE AFTER INSTALLATION OF COOLER UNIT. G.C TO COORDINATE WITH COOLER/ FREEZER MANUFACTURER.
21. N/A.
22. N/A
23. WATER FILTRATION SYSTEM BY EQUIPMENT SUPPLIER. REFER TO MEP DRAWINGS. WATER FILTRATION SYSTEM TO BE INSTALLED TIGHT AGAINST THE CORNER.
24. REFER TO SHEET A9.3 FOR WASHROOM ELEVATIONS.
25. PROVIDE BLOCKING IN CEILING AS REQUIRED TO SUPPORT CEILING HUNG LED SCREEN(S).
26. N/A.
27. DASHED LINE INDICATES LOCATION OF FROST SLAB (FOR COLDER CLIMATE REGIONS). REFER TO STRUCTURAL DRAWINGS FOR SIZE.
28. N/A.
29. N/A.
30. N/A.
31. WALL MOUNTED FIRE EXTINGUISHER TO BE SUPPLIED BY G.C. AND INSTALLED BY G.C. GC TO VERIFY LOCATION WITH FIRE MARSHALL.
32. N/A.
33. PROVIDE PLYWOOD BEHIND PORTAL OFFICE CABINET. REFER TO INTERIOR ELEVATION.
34. N/A.
35. WALK-UP WINDOW SUPPLY AND INSTALL BY G.C..
36. DRIVE THRU WINDOW SUPPLY AND INSTALL BY G.C.
37. PROVIDE MIN. 2" AIR SPACE BETWEEN COOLER / FREEZER AND FACE OF WALL.
38. N/A.
39. COOLER / FREEZER UNIT PROVIDED & INSTALLED BY MANUFACTURER. INTERIOR RAMP TO BE PROVIDED INSIDE FREEZER UNIT BY MANUFACTURER. G.C TO COORDINATE.
40. NOT USED.
41. CROSS HATCH INDICATES LOCATION OF SHEAR WALLS. REFER TO STRUCTURAL DRAWINGS.
42. 3 5/8" METAL STUD @ 16" O.C. FUT-OUT WALL. WALL COMPLETE WITH 1/2" CEMENT BOARD EXTEND 24" A.F.F. AND 1/2" GWB EXTEND TO 6" ABOVE CEILING. PROVIDE PLYWOOD SHEATHING IN BETWEEN STUDS WHERE EQUIPMENT TO BE WALL MOUNTED.
43. N/A.
44. N/A.
45. G.C TO PROVIDE AND INSTALL S/S PANELS BEHIND AND BESIDE FRY STATION AS INDICATED. REFER TO DETAIL 1/A8 AND INTERIOR ELEVATIONS 4/A9.1.
46. N/A
47. TELEPHONE PANEL BOARD. REFER TO ELECTRICAL DRAWINGS.
48. N/A.
49. WATER METER AND BACK FLOW PREVENTER. REFER TO PLUMBING DRAWINGS.
50. N/A.
51. FURR-OUT WALL WITH 1 LAYER OF 1/2" DUROCK NEXT GEN CEMENT BOARD UP TO 6" ABOVE CEILING ON 2" X 4" METAL STUDS @ 24" O.C.. CARRY STUDS AND GYPSUM BOARD TO 6" ABOVE CEILING.
52. N/A.
53. HOSE BIB. REFER TO EXTERIOR ELEVATIONS AND MECHANICAL DRAWINGS. LOCATION TO BE COORDINATED AND VERIFIED WITH CIVIL PLAN AND OWNER.
54. G.C. TO PROVIDE FIRE ALARM ANNUNCIATOR PANEL ONLY IF REQUIRED BY AUTHORITY HAVING JURISDICTION. REFER TO ELECTRICAL DRAWINGS. (NOT SHOWN)
55. N/A.
56. WALL COVERING ON ALL WALLS IN WASHROOM VESTIBULE. GC TO SUPPLY AN INSTALL THROUGH MAXXIT SYSTEMS. GC TO ENSURE TO PROVIDE LEVEL 5 DRYWALL FINISH. REFER TO INTERIOR ELEVATIONS ON SHEET A9.1 AND FINISH SCHEDULE ON SHEET A10.

ISSUE TABLE

No.	Date (mm/dd/yy)	Description
01	09-26-25	DTGO PROTOTYPE DOCUMENTS

REVISIONS

No.	Date	Description

DRAWINGS REVISED AS PER DESIGN BULLETIN

No.	Date	Description

THIS DRAWING IS OWNED BY OR LICENSED FOR USE BY POPEYES LOUISIANA KITCHEN (OR ITS AFFILIATED OR RELATED COMPANIES) AND MAY NOT BE REPRODUCED, USED, DOWNLOADED, DISSEMINATED, PUBLISHED, OR TRANSFERRED IN ANY FORM OR BY ANY MEANS, EXCEPT WITH THE PRIOR WRITTEN CONSENT OF POPEYES LOUISIANA KITCHEN . COPYRIGHT INFRINGEMENT IS A VIOLATION OF FEDERAL LAW SUBJECT TO CRIMINAL AND CIVIL PENALTIES.

THE CONTRACTOR IS TO VERIFY ALL DIMENSIONS AND CONDITIONS ON THE PROJECT AND TO REPORT ANY DISCREPANCIES TO THE POPEYES LOUISIANA KITCHEN REPRESENTATIVE PRIOR TO COMMENCING WORK. THESE DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION PURPOSES UNLESS INDICATED BY POPEYES LOUISIANA KITCHEN AS "ISSUED FOR CONSTRUCTION".

Professional Seal

DESIGNER NOTES:
DESIGN GUIDELINE ONLY - NOT FOR PERMIT OR CONSTRUCTION

THESE DOCUMENTS MUST BE COMPLETED AND / OR MODIFIED BY A LICENSED ARCHITECT AND ENGINEER TO CONFORM TO ALL APPLICABLE CODES, AND SPECIFIC SITE CONDITIONS. THERE IS NO WARRANTY, WHETHER IMPLIED OR EXPRESSED THAT THESE DOCUMENTS MEET THE APPLICABLE CODE REQUIREMENTS. LIABILITY FOR THE DESIGN AND ANY USE OF THE DOCUMENTS IS THE SOLE RESPONSIBILITY OF THE ARCHITECT AND ENGINEER OF RECORD.

Company Logo

Project

Store Type
US DTGO PROTOTYPE

Location
PROTOTYPE
DTGO (U.S.)
CITY, STATE

Drawing Title
FLOOR PLAN AND SCHEDULES

Drawn	Checked
XX	XX
Scale	Date
1/4"=1'-0"	##.##.####
Project No.	Drawing No.
XX	A1

POPEYES LOUISIANA KITCHEN MODEL DTGO, ADDRESS, CITY, STATE: DTGO PROTOTYPE DOCUMENTS (OCTOBER, 2025) STORE NO. XXXXX

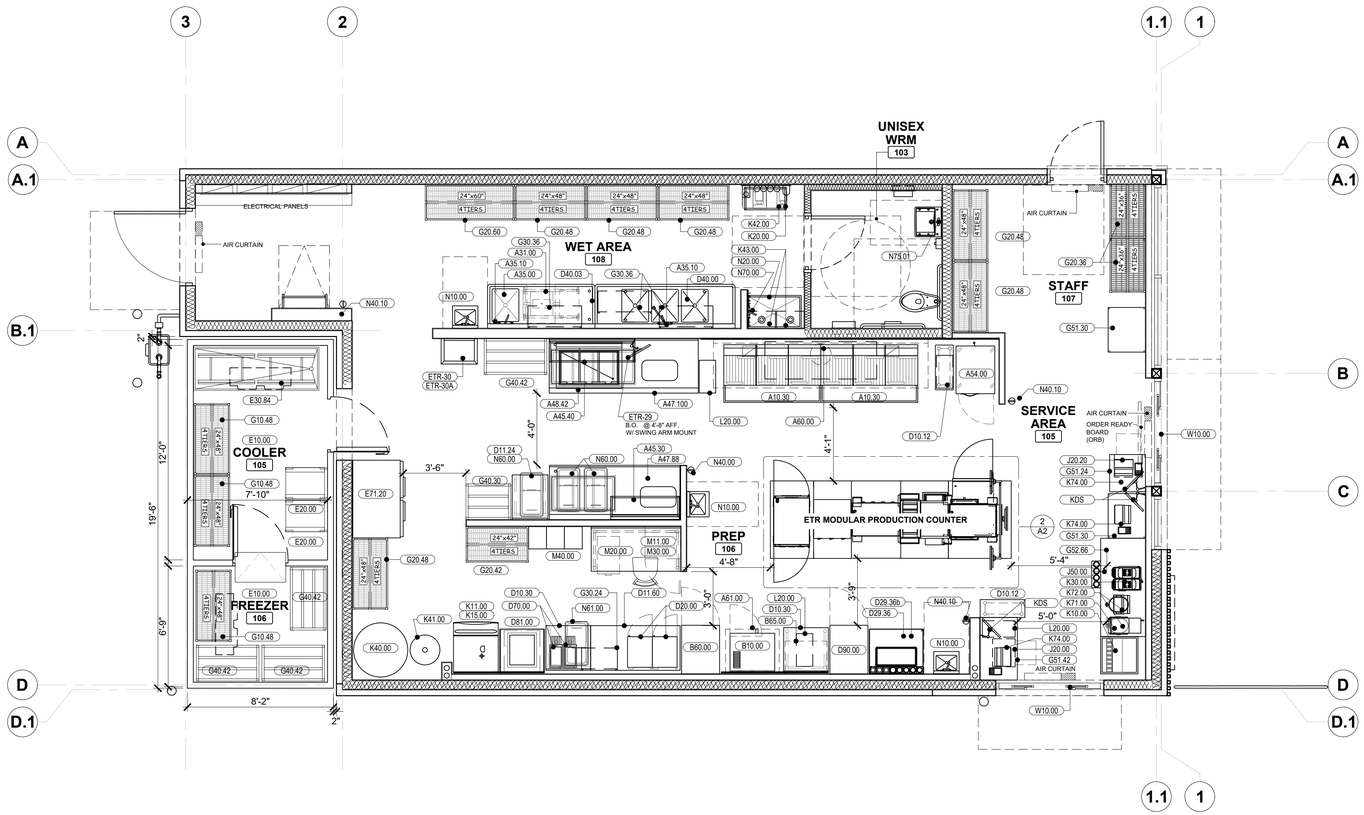

1 A2 EQUIPMENT PLAN

SCALE: 1/4"=1'-0"

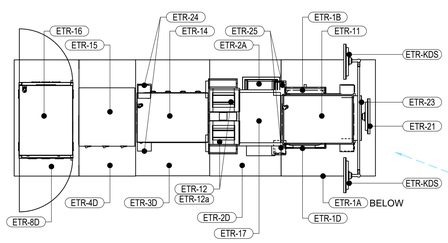

DESIGNER NOTES:
COORDINATE ETR MODULAR PRODUCTION COUNTER WITH THE KITCHEN VENDOR EQUIPMENT DRAWINGS + THE LATEST POPEYES MASTER EQUIPMENT SCHEDULE. + THE APPLICABLE PRODUCTION COUNTER CUTSHEETS.

2 A2 ETR MODULAR PRODUCTION COUNTER PLAN

SCALE: 3/8"=1'-0"

NOTE

1. IT IS RESPONSIBILITY OF THE G.C. TO COORDINATE DELIVERY, UNCRATING, POSITIONING, FINAL HOOK UP AND REMOVAL OF TRASH OF ALL OWNER SUPPLIED KITCHEN EQUIPMENT.

2. ALL KITCHEN EQUIPMENT TO BE INSTALLED AS PER MANUFACTURER'S SPECIFICATIONS.

3. ARCHITECT OF RECORD TO ENSURE AND COORDINATE THAT ALL INTERIOR AND EXTERIOR COMPLIES WITH ADA REQUIREMENTS AS WELL AS LOCAL JURISDICTIONS.

4. CO2 MONITOR TO BE PROVIDED AT THE C02 TANK. GC TO COORDINATE WITH CO2 TANK VENDOR AND POPEYES FOR MONITOR AND SPEC.

NEW KITCHEN EQUIPMENT SCHEDULE

NOTE:
CONTRACTOR SHOULD REFER TO MANUFACTURER SPECIFICATIONS FOR ALL SERVICE REQUIREMENTS AND PROPER CONNECTIONS.

	ITEM NO.	QTY.	DESCRIPTION	MFR.	MODEL	REMARKS
	A10.30	2	MULTIPLE FRYER SYSTEM, GAS	ULTRAFRYER	FQG120T	
	A10.50	2	SHORTENING DISPOSAL UNIT	ULTRAFRYER	DISPOSAL	NOT SHOWN IN PLAN
	A10.50	2	BOILOUT HOSE	ULTRAFRYER	BOILOUT	NOT SHOWN IN PLAN
	A31.00	1	MARINATOR	AYRKING	M101-120D2	
	A35.00	1	ONE COMPARTMENT SINK	WINHOLT	1143828	
	A35.10	2	PRE-RINSE FAUCET ASSEMBLY	T & S	B2180	
	A45.30	1	PROTEIN RAIL FOR 3 PAN BATTER STATION	AYRKING	PSR461410	
	A45.40	1	PROTEIN RAIL FOR 4 PAN BATTER STATION	AYRKING	PSR581410	
	A47.88	1	BATTER STATION 88"	AYRKING	BBS-U-8835	
	A47.100	1	BATTER STATION 100"	AYRKING	BBS-U-10032	
	A48.42	1	UNDER-COUNTER ICE, 3-PAN	AYRKING	IB4224B2415	
	A54.00	1	REACH-IN FREEZER	DELFIELD	GBF1P-S	
	A60.00	1	12' HOOD (SIZE TO BE CONFIRMED)	FRANKE	3347 FR-BD-2	
	A61.00	1	36' HOOD (SIZE TO BE CONFIRMED)	FRANKE	-	
	B10.00	1	CONVECTION OVEN, DOUBLE STACKED	DUKE	59-E4P	
	B60.00	1	REACH-IN REFRIGERATOR	DELFIELD	GBR1P-S	
	B65.00	1	BISCUIT HOLDING UNIT	NWS	D32853040ON	
	D10.12	2	WORK TABLE - 12"	KES	CUSTOM	
	D10.24	2	WORK TABLE - 24"	KES	CUSTOM	
	D10.30	2	WORK TABLE - 30"	KES	CUSTOM	
	D11.60	1	WORK TABLE - 60"	KES	CUSTOM	
	D20.00	2	MICROWAVE OVEN	PANASONIC	NE-17523	
	D29.36	1	14 GA STAINLESS STEEL WORK TABLE W/REAR RISER MODIFIED TO 6'	DUKE	T314S-3048-5R	
	D29.36b	1	DUKE DROP-IN 4/3RD WATERLESS WELL BUILT-IN STYLE	DUKE	230899	
	D40.00	1	3-BOWL SINK	KES	CUSTOM	
	D40.03	1	SPLASH DIVIDER	KES	CUSTOM	
	D41.00	1	CLEAN DISH TABLE	ADVANCE TABCO	DTC-S60-24R	
	D70.00	2	HOT WATER DISPENSER	BUNN	HSE	
	D81.00	1	RETHERMALIZER, WATER TANK, ELECTRIC	ULTRAFRYER	REO-1620-X	
	D90.00	1	HOLDING UNIT / CVAP	WINSTON	HOV-3	
ETR MODULAR PRODUCTION COUNTER	ETR-1A	1	UNDER-COUNTER REFRIGERATOR	SILVER KING	SKRS28-ES	PART OF CENTERLINE
	ETR-1B	1	DROP-IN FRY HOLDING UNIT	H&K	POP279	PART OF CENTERLINE
	ETR-1D	1	LANDING ZONE MODULE	DUKE	-	PART OF CENTERLINE
	ETR-2A	1	REFRIGERATOR SANDWICH STATION	DUKE	-	PART OF CENTERLINE
	ETR-2D	1	SANDWICH STATION MODULE	DUKE	-	PART OF CENTERLINE
	ETR-3D	1	MULTI-PROTEIN STATION MODULE	DUKE	-	PART OF CENTERLINE
	ETR-4D	1	BONE-IN CHICKEN STATION MODULE	DUKE	-	PART OF CENTERLINE
	ETR-8D	1	EXTENDED HOLDING MODULE	DUKE	-	PART OF CENTERLINE
	ETR-11	1	SIDE ITEMS HOLDING UNIT	DUKE	RFHU-32F	PART OF CENTERLINE
	ETR-12	2	VERTICAL CONTACT TOASTER + BUTTERWHEEL	ANTUNES	VCT-2	PART OF CENTERLINE
	ETR-12a	2	VERTICAL CONTACT TOASTER BUTTERWHEEL	ANTUNES	-	PART OF CENTERLINE
	ETR-14	1	PRODUCT HOLDING UNIT - MULTI PROTEIN	DUKE	RFHU-52	PART OF CENTERLINE
	ETR-15	1	BONE-IN BIRDCAGE - 1x3 FORCED AIR PHU	CARTER-HOFFMAN	FFS3V-25T1	PART OF CENTERLINE
	ETR-16	1	EXTENDED HOLDING CABINET (EHU)	DUKE	EHU-4	PART OF CENTERLINE
	ETR-17	1	READYFLEX HOT HOLDING CABINET - SANDWICH PHU	DUKE	RFHU-31F	PART OF CENTERLINE
	ETR-21	1	LANDING ZONE MONITOR	ZEBRA	ET40/ET45	CENTERLINE MTD.
	ETR-KDS	1	SIDE KDS MONITORS	ZEBRA	ET40/ET45	CENTERLINE MTD.
	ETR-23	1	LANDING ZONE LABEL PRINTER	EPSON	TM-L90	CENTERLINE MTD.
	ETR-24	2	MULTI-PROTEIN PRINTER	EPSON	TM-L90	CENTERLINE MTD.
	ETR-25	2	SANDWICH PRINTER	EPSON	TM-L90	CENTERLINE MTD.
	ETR-29	1	I-SERIES 4 FOR ANDROID TABLET	ELO	E390263	B.O. @ 4'-8" A.F.F.
	ETR-30	1	BATTER MAKER STATION - WATER CHILLER	H&K	POP450	W/ FILTERED WATER LINE
	ETR-30A	1	BATTER MAKER STATION - DISPENSER	AYRKING	SMB8G360-PLK	
	E10.00	1	WALK-IN COOLER / FREEZER COMBO	KOLPAK	CUSTOM	
	E20.00	2	CHICKEN RACKS	SPG	4H1286	
	E30.84	1	CHICKEN CRATE	NWS	CUSTOM	
	E71.20	1	DOUBLE EVEN-THAW REFRIGERATOR	TRAULSEN	RE232N-1	
	G10.48	3	COATED WIRE SHELVING - 4 TIERS	METRO	2448NK3	
	G20.36	2	WIRE SHELVING	METRO	TTE24C	
	G20.42	1	WIRE SHELVING	METRO	TTE24C	
	G20.48	6	WIRE SHELVING	METRO	TTE24C	
	G20.60	1	WIRE SHELVING	METRO	TTE24C	
	G30.24	1	WIRE SHELVING WALL MOUNTED - 2 TIERS	METRO	1436NK3	
	G30.36	3	WIRE SHELVING WALL MOUNTED - 2 TIERS	METRO	1436NK3	
	G40.30	1	DUNNAGE RACK	KES	CUSTOM	
	G40.42	4	DUNNAGE RACK	KES	CUSTOM	
	G51.30	2	DRIVE THRU TABLE 30"	METRO	CUSTOM	
	G51.42	1	DRIVE THRU TABLE 42"	METRO	CUSTOM	
	G52.66	1	DRIVE THRU TABLE 66"	KES	CUSTOM	
	J20.00	2	CASH CONTROLLER	-	-	
	J50.00	1	DISPOSABLE CUP DISPENSER	-	-	
	K10.00	2	SODA MACHINE	MANITOWOC	IBF0620C	
	K11.00	1	ICE MAKER, CUBE-STYLE	MANITOWOC	IYF0900N	
	K15.00	1	ICE BIN	MANITOWOC	D570 8POP	
	K20.00	1	WATER FILTER SYSTEM	EVERPURE	EV9443710	
	K30.00	1	FROZEN LEMONADE	BUNN	58000	
	K40.00	1	GREASE TANK			
	K41.00	1	CO2 TANK			PROVIDE MONITOR
	K42.00	1	BAG N BOX			BY OTHERS
	K43.00	2	WATER HEATERS	RINNAI	CU199IN	
	K71.00	1	TEA BREWER	BUNN	ITCB	
	K72.00	2	TEA DISPENSER	BUNN	TDO40	
	K74.00	3	POS			BY OTHERS
	L20.00	4	TRASH BINS			-
	LP45.00	1	OUTSIDE TRASH RECEPTACLE	WAUSAU	TF1015	NOT SHOWN IN PLAN
	LP46.00	1	OUTSIDE TRASH RECEPTACLE	WAUSAU	TF1021	NOT SHOWN IN PLAN
	M11.00	1	MANAGERS DESK	KES	CUSTOM	
	M20.00	1	OFFICE CABINET DRAWERS	WASSER	106053	
	M30.00	1	SAFE	FIRE KING	BSD2920	
	M40.00	3	LOCKERS W/ 6 HIGH UNIT	KELMAX	EL SERIES	
	N10.00	3	HAND SINK (INCLUDING FAUCET)	KROWNE	HS-68	
	N20.00	1	MOP (24"x36")	FIAT	MSB3624	
	N40.00	1	FIRE EXTINGUISHER	ACTION	436500	CLASS K
	N40.10	3	FIRE EXTINGUISHER	ACTION	434909	
	N60.00	3	INGREDIENTS BIN	RUBBERMAID	FG360288WHT	
	N61.00	1	INGREDIENTS BIN	RUBBERMAID	FG360288WHT	
	N70.00	1	MOP HANGER	ADVANCED	K242	
	N75.01	1	FAUCET	KROWNE	16-197	
	W10.00	2	DRIVE THROUGH WINDOW	QUICKSERV	BP-72x	

ISSUE TABLE

No.	Date (mm/dd/yy)	Description
01	09-26-25	DTGO PROTOTYPE DOCUMENTS

REVISIONS

No.	Date	Description

DRAWINGS REVISED AS PER DESIGN BULLETIN

No.	Date	Description

NOT FOR CONSTRUCTION

THIS DRAWING IS OWNED BY OR LICENSED FOR USE BY POPEYES LOUISIANA KITCHEN (OR ITS AFFILIATED OR RELATED COMPANIES) AND MAY NOT BE REPRODUCED, USED, DOWNLOADED, DISSEMINATED, PUBLISHED, OR TRANSFERRED IN ANY FORM OR BY ANY MEANS, EXCEPT WITH THE PRIOR WRITTEN CONSENT OF POPEYES LOUISIANA KITCHEN . COPYRIGHT INFRINGEMENT IS A VIOLATION OF FEDERAL LAW SUBJECT TO CRIMINAL AND CIVIL PENALTIES.

THE CONTRACTOR IS TO VERIFY ALL DIMENSIONS AND CONDITIONS ON THE PROJECT AND TO REPORT ANY DISCREPANCIES TO THE POPEYES LOUISIANA KITCHEN REPRESENTATIVE PRIOR TO COMMENCING WORK. THESE DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION PURPOSES UNLESS INDICATED BY POPEYES LOUISIANA KITCHEN AS "ISSUED FOR CONSTRUCTION".

Professional Seal

DESIGNER NOTES:
DESIGN GUIDELINE ONLY - NOT FOR PERMIT OR CONSTRUCTION

THESE DOCUMENTS MUST BE COMPLETED AND / OR MODIFIED BY A LICENSED ARCHITECT AND ENGINEER TO CONFORM TO ALL APPLICABLE CODES, AND SPECIFIC SITE CONDITIONS. THERE IS NO WARRANTY, WHETHER IMPLIED OR EXPRESSED THAT THESE DOCUMENTS MEET THE APPLICABLE CODE REQUIREMENTS. LIABILITY FOR THE DESIGN AND ANY USE OF THE DOCUMENTS IS THE SOLE RESPONSIBILITY OF THE ARCHITECT AND ENGINEER OF RECORD.

Company Logo

Project

Store Type
US DTGO PROTOTYPE

Location
PROTOTYPE
DTGO (U.S.)
CITY, STATE

Drawing Title
EQUIPMENT PLAN AND SCHEDULE

Drawn	Checked
XX	XX
Scale	Date
1/4"=1'-0"	##.##.####
Project No.	Drawing No.
XX	A2

POPEYES LOUISIANA KITCHEN MODEL DTGO, ADDRESS, CITY, STATE, DTGO PROTOTYPE DOCUMENTS (OCTOBER, 2025) STORE NO. XXXXX

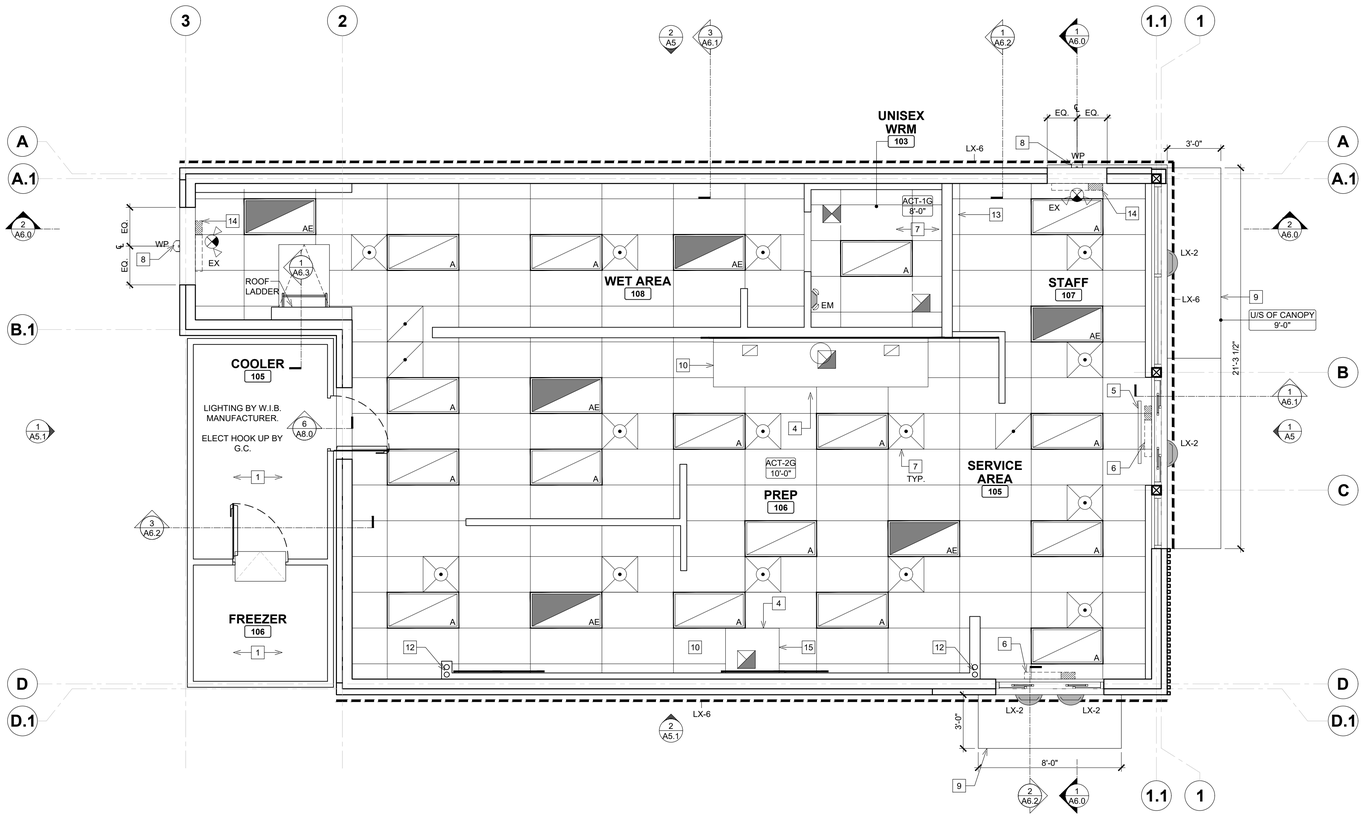

1 A3 **REELECTED CEILING PLAN**

SCALE: 1/4"=1'-0"

GRAPHIC SYMPOLES

TYPE	DESCRIPTION
1 A1	SECTION NUMBER DRAWING NUMBER
	NOTE REFERENCE
SACT 2800	DENOTES CEILING HT & MATERIAL

RCP PLAN LEGEND

TYPE	DESCRIPTION
	24"X24" OR 12"X12" SUPPLY AIR GRILLE. REFER TO MECHANICAL DRAWINGS.
	24"X24" OR 12"X12" RETURN AIR GRILLE. REFER TO MECHANICAL DRAWINGS.
	EXHAUST FAN
	AIR TRANSFER DUCT. REFER TO MECHANICAL DRAWINGS.

LIGHT FIXTURE LEGEND

TYPE	DESCRIPTION
A	2'-0" X 4'-0" RECESSED LED TROFFER
AE	2'-0" X 4'-0" RECESSED LED TROFFER W/ BATTERY BACKUP
EX	EXIT SIGN AND EMERGENCY LIGHTING WITH BATTERY BACKUP
EM	EMERGENCY BATTERY LIGHT FIXUTRE
WP	LED WALL PACK WITH PHOTOCELL
LX-2	FLUSH MOUNT LED LIGHT FIXTURE AT CANOPIES
LX6	LINEAR PERIMETER PARAPET DOWNLIGHT

3 A3 **N/A**

SCALE: 2"=1'-0"

4 A3 **N/A**

SCALE: 1"=1'-0"

SECURITY CAMERA LEGEND (16.3)

CAP INDEX	SECURITY PACKAGE #	CAMERA #S
0<100	1	1-4
100<250	2	1-8
>250	3	1-12

NOTES:
- WITH PACKAGE #2 AND #3, 4 EXTRA CAMERAS ARE AVAILABLE TO BE LOCATED AT THE OWNERS DISCRETION
* IF A CAMERA IS INSTALLED IN STAFF AREA, OWNER IS TO INFORM STAFF. *

CAMERAS # NUMBER OF CAMERAS

5 A3 **N/A**

SCALE: 2"=1'-0"

CEILING PLAN NOTES

1. REFER TO WALK-IN FREEZER & COOLER MANUFACTURER FOR EVAPORATOR AND LIGHTING. FINAL CONNECTION BY G.C.
2. N/A.
3. N/A.
4. EXHAUST HOODS SUPPLY BY OWNER AND INSTALL BY G.C.REFER TO MECHANICAL DRAWINGS.
5. TRUSS HUNG LED SCREENS SUPPLIED BY POPEYES. AND INSTALLED BY G.C. REFER TO DETAIL 5/A8. G.C TO PROVIDE & INSTALL ADEQUATE BLOCKING FOR SUPPORT.
6. LOCATION OF AIR CURTAIN. REFER TO MECHANICAL/ELECTRICAL DRAWINGS. GC TO PROVIDE AND INSTALL ELECTRICAL POWER FOR AIR CURTAIN. OPERATORS TO BE PROVIDED AT DRIVE-THRU WINDOW FOR AIR CURTAIN. REFER TO ELECTRICAL DRAWINGS.
7. ALL DIFFUSERS & RETURN AIR GRILLES TO BE WHITE.
8. REFER TO EXTERIOR ELEVATIONS FOR MOUNTING LOCATION OF WALL MOUNTED LIGHT FIXTURES (TYP.)
9. LINE OF CANOPY ABOVE. SUPPLY AND INSTALL BY G.C. REFER TO DETAILS AND STRUCTURAL DRAWINGS.
10. G.C. TO SUPPLY AND INSTALL 20 GA. STAINLESS STEEL PANEL ON CEILING TILE W/ HOLD DOWN CLIP AROUND EXHAUST HOOD. DO NOT FASTEN TO EXHAUST FOOD. ANY DAMAGED TO THE EQUIPMENT HOOD WILL BE AT THE COST OF G.C.
11. NOT USED
12. RAINWATER LEADER. REFER TO MECHANICAL DRAWINGS.
13. G.C. TO SUPPLY AND INSTALL EXHAUST FAN IN THE CABINET TO VENT ABOVE CEILING AT OFFICE DESK.
14. AIR CURTAIN AT DOOR. GC TO PROVIDE AND INSTALL ELECTRICAL POWER FOR AIR CURTAIN. REFER TO ELECTRICAL DRAWINGS.
15. HOOD USED ONLY WHERE THE CITY REQUESTS HOOD ABOVE EQUIPMENT.

NOTE:

1. THE GENERAL CONTRACTOR IS TO ENSURE THE FOLLOWING ITEMS ARE BUILT IN ACCORDANCE WITH STRUCTURAL DRAWINGS AND TO MEET CODE REQUIREMENTS (INCLUDING SEISMIC AND LATERAL RESTRAINT) AS REQUIRED:
   - SUSPENDED SHELVING SUPPORTS
   - SEISMIC AND LATERAL RESTRAINT FOR DUCTWORK
   - SUSPENDED CEILING PANELS, GYPSUM BOARD / T-BAR CEILINGS IN RELATION TO SEISMIC AND LATER RESTRAINT.
2. THE GENERAL CONTRACTOR IS RESPONSIBLE THAT ALL SUB-TRADES HAVE RETAINED A QUALIFIED STRUCTURAL ENGINEER TO REVIEW THEIR APPROPRIATE WORK. STRUCTURAL ENGINEER(S) TO ISSUE LETTER (ON THEIR LETTERHEAD) STATING THAT ALL WORK MEETS THE REQUIREMENT OF BUILDING CODE FOR SEISMIC RESTRAINTS.

ISSUE TABLE

No.	Date (mm/dd/yy)	Description
01	09-26-25	DTGO PROTOTYPE DOCUMENTS

REVISIONS

No.	Date	Description

DRAWINGS REVISED AS PER DESIGN BULLETIN

No.	Date	Description

THIS DRAWING IS OWNED BY OR LICENSED FOR USE BY POPEYES LOUISIANA KITCHEN (OR ITS AFFILIATED OR RELATED COMPANIES) AND MAY NOT BE REPRODUCED, USED, DOWNLOADED, DISSEMINATED, PUBLISHED, OR TRANSFERRED IN ANY FORM OR BY ANY MEANS, EXCEPT WITH THE PRIOR WRITTEN CONSENT OF POPEYES LOUISIANA KITCHEN. COPYRIGHT INFRINGEMENT IS A VIOLATION OF FEDERAL LAW SUBJECT TO CRIMINAL AND CIVIL PENALTIES.

THE CONTRACTOR IS TO VERIFY ALL DIMENSIONS AND CONDITIONS ON THE PROJECT AND TO REPORT ANY DISCREPANCIES TO THE POPEYES LOUISIANA KITCHEN REPRESENTATIVE PRIOR TO COMMENCING WORK. THESE DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION PURPOSES UNLESS INDICATED BY POPEYES LOUISIANA KITCHEN AS "ISSUED FOR CONSTRUCTION".

Professional Seal

DESIGNER NOTES:
DESIGN GUIDELINE ONLY - NOT FOR PERMIT OR CONSTRUCTION

THESE DOCUMENTS MUST BE COMPLETED AND / OR MODIFIED BY A LICENSED ARCHITECT AND ENGINEER TO CONFORM TO ALL APPLICABLE CODES, AND SPECIFIC SITE CONDITIONS. THERE IS NO WARRANTY, WHETHER IMPLIED OR EXPRESSED THAT THESE DOCUMENTS MEET THE APPLICABLE CODE REQUIREMENTS. LIABILITY FOR THE DESIGN AND ANY USE OF THE DOCUMENTS IS THE SOLE RESPONSIBILITY OF THE ARCHITECT AND ENGINEER OF RECORD.

Company Logo

Project

POPEYES LOUISIANA KITCHEN 1972

Store Type
US DTGO PROTOTYPE

Location
PROTOTYPE
DTGO (U.S.)
CITY, STATE

Drawing Title
REFLECTED CEILING PLAN

Drawn	Checked
XX	XX
Scale 1/4"=1'-0"	Date ##.##.####
Project No. XX	Drawing No. A3

POPEYES LOUISIANA KITCHEN MODEL DTGO, ADDRESS, CITY, STATE: DTGO PROTOTYPE DOCUMENTS (OCTOBER, 2025) STORE NO. XXXXX

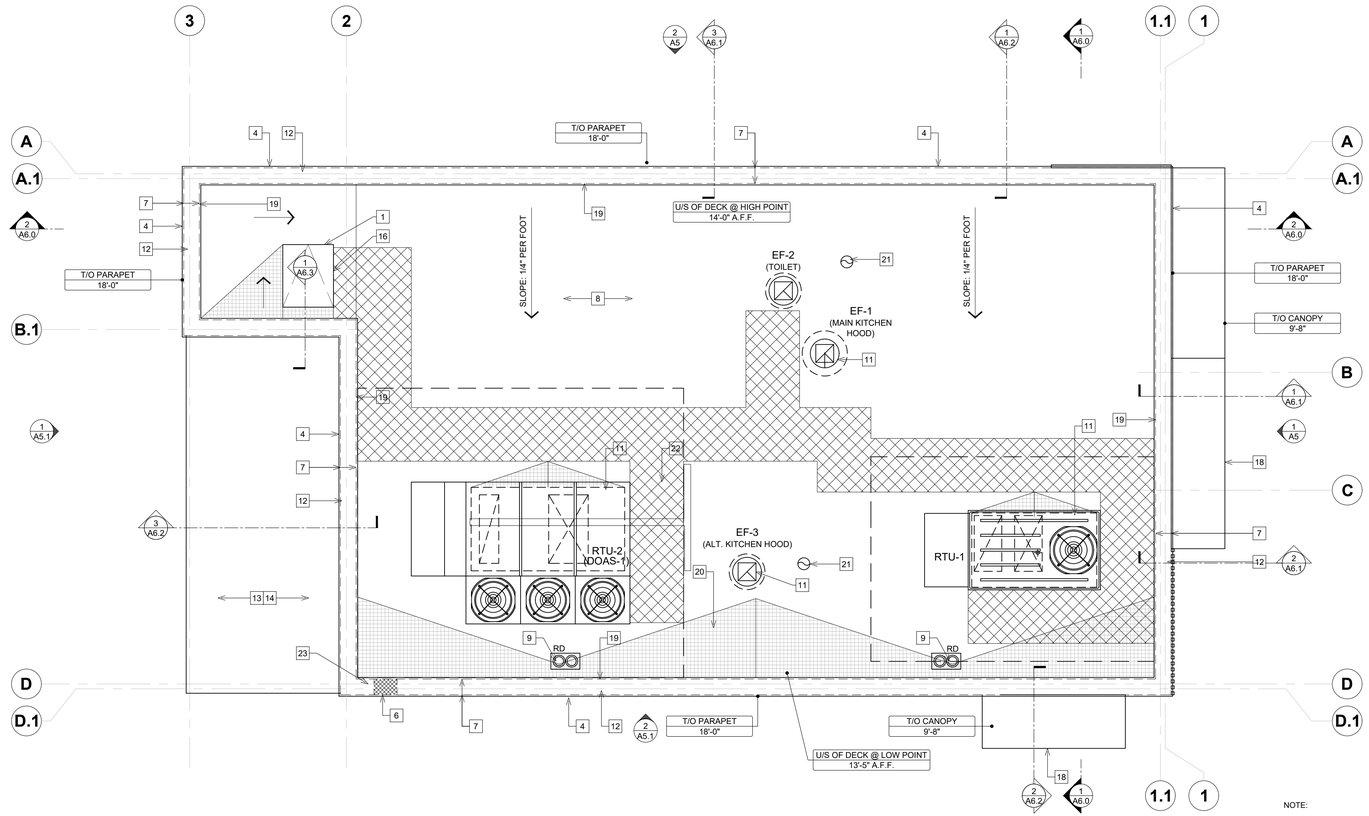

1 A4 **ROOF PLAN**
SCALE: 1/4"=1'-0"

NOTE:

1. ALL ROOFING TO BE IN STRICT ACCORDANCE WITH THE NATIONAL ROOFING CONTRACTORS ASSOCIATION ROOFING MANUAL.
2. G.C IS RESPONSIBLE FOR SEALING ALL ROOF PENETRATIONS UPON COMPLETION OF THE PROJECT.

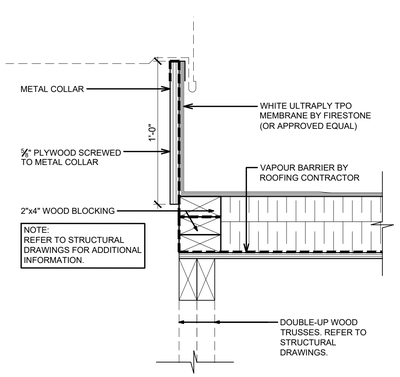

2 A4 **TYPICAL ROOF CURB DETAIL**
SCALE: 2"=1'-0"

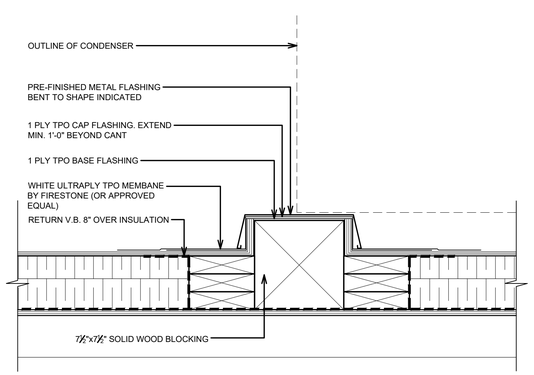

3 A4 **TYPICAL SLEEPER DETAIL**
SCALE: 2"=1'-0"

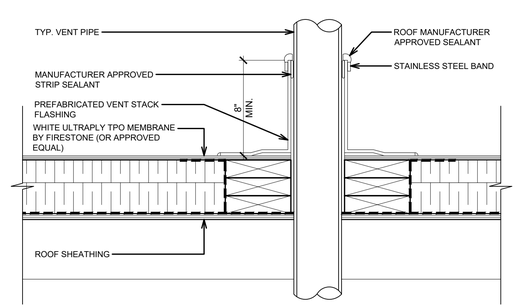

4 A4 **VENT PENETRATION DETAIL**
SCALE: 2"=1'-0"

SYMBOL LEGEND

1 / A1	DETAIL NUMBER / DRAWING NUMBER
1	NOTE REFERENCE

ROOF TYPE LEGEND

ROOF ASSEMBLY:
- MAS 60mil WHITE ULTRAPLY TPO MEMBRANE (OR APPROVED EQUAL)
- 2 LAYERS OF RIGID INSULATION (R-30.0 MIN.)
- 10mil VAPOUR RETARDER
- WOOD ROOF DECK
- WOOD TRUSS

(AS PER NRCA STANDARDS)

DESIGNER NOTES:
VERIFY R-VALUE PER PROJECT LOCATION

CALCULATED ROOF AREA

HORIZONTAL ROOF SURFACE (S.F)	1,305
VERTICAL SURFACE 50% AREA (S.F)	567
TOTAL PROJECTED ROOF AREA (S.F)	1,872

DRAINAGE CALCULATIONS:

(SIZE OF VERTICAL CONDUCTORS AND LEADERS)

100 YEAR, 1 HOUR RAIN FALL (IN.) (PER FIGURE 1106.1, 2024 INTERNATIONAL PLUMBING CODE)	3"
VERTICAL LEADER SIZE (RECTANGULAR)	3-1/2" X 4"
SPECIFIED LEADER CAPACITY (SINGLE) (PER TABLE 1106.2(2), 2024 INTERNATIONAL PLUMBING CODE)	5300 S.F
REQUIRED OVERFLOW SCUPPER SIZE (SINGLE)	1" X 10.7"
VERTICAL LEADER (X2) CAPACITY PROVIDED	10,600 S.F.

ROOF PLAN NOTES

1. ROOF ACCESS HATCH TO MATCH PRE-FINISHED METAL CAP FLASHING. REFER TO DETAIL 1/A6.3.
2. N/A.
3. N/A.
4. LINE OF PARAPET. REFER TO DETAILS ON SHEET A7.0.
5. N/A.
6. PRE-FINISHED EMERGENCY OVERFLOW SCUPPER. REFER TO DETAIL 2/A4.1.
7. LINE OF WALL BELOW.
8. WHITE ULTRAPLY TPO MEMBRANE BY FIRESTONE (OR APPROVED EQUAL). REFER TO ROOF TYPE SCHEDULE & SPECIFICATIONS.
9. PRIMARY ROOF DRAIN, WITH COMBINATION OVERFLOW DRAIN. REFER MECHANICAL DRAWINGS.
10. N/A.
11. H.V.A.C UNITS AND EXHAUST FANS AS PER MECHANICAL DRAWINGS. PROVIDE CURB WHERE REQUIRED. REFER TO DETAIL 2/A4.
12. PRE-FINISHED METAL CAP FLASHING. REFER TO EXTERIOR FINISH SCHEDULE ON SHEET A5 FOR COLOUR AND TYPE.
13. PROVIDE SLEEPERS FOR WALK-IN COOLER/FREEZER CONDENSER. SLEEPERS TO SPAN ACROSS JOISTS BELOW. REFER TO DETAIL 3/A4 & STRUCTURAL DRAWINGS.
14. EXTERIOR WALK-IN COOLER/FREEZER ROOF.
15. G.C TO PROVIDE AND INSTALL DOUBLE PIPE PORTAL (PART NO. 36002) C/W C-126 & C-212 CAP FOR PCL LINES MECH EQUIPMENT. ROOF OPENING (2'-3⅝" x1'-0") AND ROOF CURBS TO BE PROVIDED AND FURNISHED BY G.C. REFER TO DETAIL 4/A4 & 1/A4.1.
16. PROVIDE & INSTALL 3M NON-SLIP TAPE ON FLASHING AT LADDER LOCATION.
17. NOT USED.
18. CANOPY BELOW. REFER TO EXTERIOR ELEVATIONS.
19. EXTEND ROOF MEMBRANE UP PARAPET WALL AND OVER TOP OF FRAMING (TYP.). SECURE PREFABRICATED ROOF EDGE CLEATS THROUGH MEMBRANE AS SPECIFIED BY MANUFACTURER. REFER TO WALL SECTIONS AND DETAILS.
20. CROSS HATCH INDICATES TAPERED INSULATION OVER SPECIFIED RIGID THERMAL INSULATION (TYP.) FIELD VERIFY ROOF DRAIN LOCATIONS PRIOR TO INSTALLATION & INSTALL PER ROOF MANUFACTURER SPECIFICATIONS. G.C TO COORDINATE ACTUAL EXTENTS OF TAPERED INSULATION MATERIALS WITH ROOF INSTALLER & VERIFY INSTALLED COUNTER SLOPE OF ½" PER FOOT (MIN., AS MEASURED FROM LEVEL PLANE) TO DIRECT STORM WATER TOWARD ROOF DRAINS AS INDICATED ON PLAN.
21. VENTS. REFER TO MECHANICAL DRAWINGS & DETAIL 4/A4.
22. TPO WALK WAY PADS OR X-TREADS. REFER TO SPECIFICATIONS. CUT TPO WALK WAY PAD ROLLS TO MAXIMUM OF 9'-10". LEAVE A GAP OF 1" BETWEEN PIECES TO ALLOW FOR WATER DRAINAGE.
23. EMERGENCY THRU-WALL SCUPPER W/ METAL FLANGE BY ROOFING MANUFACTURER. BOTTOM OF SCUPPER OPENING TO BE 2" ABOVE THE ADJACENT ROOF SURFACE. SECONDARY ROOF DRAIN SYSTEMS SHALL HAVE THE END POINT OF DISCHARGE SEPARATE FROM THE PRIMARY SYSTEM. DISCHARGE SHALL BE ABOVE GRADE.VERIFY OPENING REQUIREMENTS WITH LOCAL CONDITIONS.

ISSUE TABLE

No.	Date (mm/dd/yy)	Description
01	09-26-25	DTGO PROTOTYPE DOCUMENTS

REVISIONS

No.	Date	Description

DRAWINGS REVISED AS PER DESIGN BULLETIN

No.	Date	Description

THIS DRAWING IS OWNED BY OR LICENSED FOR USE BY POPEYES LOUISIANA KITCHEN (OR ITS AFFILIATED OR RELATED COMPANIES) AND MAY NOT BE REPRODUCED, USED, DOWNLOADED, DISSEMINATED, PUBLISHED, OR TRANSFERRED IN ANY FORM OR BY ANY MEANS, EXCEPT WITH THE PRIOR WRITTEN CONSENT OF POPEYES LOUISIANA KITCHEN. COPYRIGHT INFRINGEMENT IS A VIOLATION OF FEDERAL LAW SUBJECT TO CRIMINAL AND CIVIL PENALTIES.

THE CONTRACTOR IS TO VERIFY ALL DIMENSIONS AND CONDITIONS ON THE PROJECT AND TO REPORT ANY DISCREPANCIES TO THE POPEYES LOUISIANA KITCHEN REPRESENTATIVE PRIOR TO COMMENCING WORK. THESE DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION PURPOSES UNLESS INDICATED BY POPEYES LOUISIANA KITCHEN AS "ISSUED FOR CONSTRUCTION".

Professional Seal

DESIGNER NOTES:
DESIGN GUIDELINE ONLY - NOT FOR PERMIT OR CONSTRUCTION

THESE DOCUMENTS MUST BE COMPLETED AND / OR MODIFIED BY A LICENSED ARCHITECT AND ENGINEER TO CONFORM TO ALL APPLICABLE CODES, AND SPECIFIC SITE CONDITIONS. THERE IS NO WARRANTY, WHETHER IMPLIED OR EXPRESSED THAT THESE DOCUMENTS MEET THE APPLICABLE CODE REQUIREMENTS. LIABILITY FOR THE DESIGN AND ANY USE OF THE DOCUMENTS IS THE SOLE RESPONSIBILITY OF THE ARCHITECT AND ENGINEER OF RECORD.

Company Logo

Project

LOUISIANA KITCHEN 1972 POPEYES

Store Type
US DTGO PROTOTYPE

Location
PROTOTYPE
DTGO (U.S.)
CITY, STATE

Drawing Title
ROOF PLAN AND DETAILS

Drawn	Checked
XX	XX
Scale: 1/4"=1'-0"	Date: ##.##.####
Project No.: XX	Drawing No.: A4

POPEYES LOUISIANA KITCHEN MODEL DTGO, ADDRESS, CITY, STATE: DTGO PROTOTYPE DOCUMENTS (OCTOBER, 2025) STORE NO. XXXXX

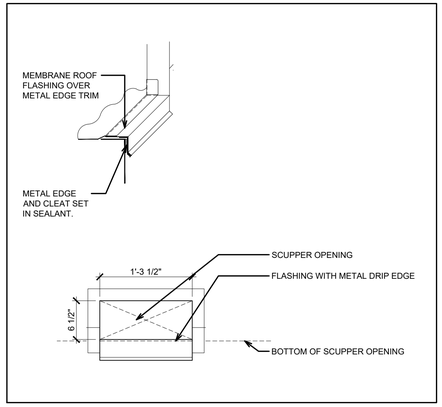

2 / A4.1 **EMERGENCY OVERFLOW SCUPPER DETAIL**

SCALE: 1"=1'-0"

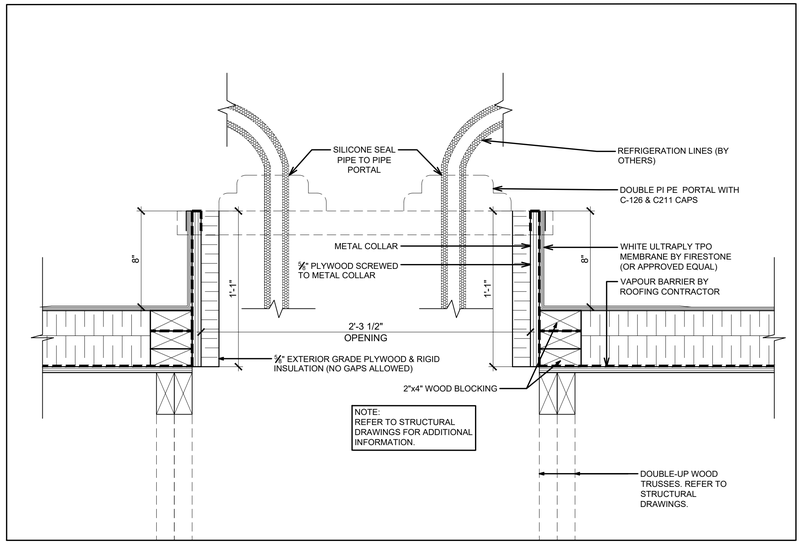

1 / A4.1 **TYPICAL ROOF OPENING DETAIL AT PIPE PORTAL**

SCALE: 2"=1'-0"

ISSUE TABLE

No.	Date (mm/dd/yy)	Description
01	09-26-25	DTGO PROTOTYPE DOCUMENTS

REVISIONS

No.	Date	Description

DRAWINGS REVISED AS PER DESIGN BULLETIN

No.	Date	Description

THIS DRAWING IS OWNED BY OR LICENSED FOR USE BY POPEYES LOUISIANA KITCHEN (OR ITS AFFILIATED OR RELATED COMPANIES) AND MAY NOT BE REPRODUCED, USED, DOWNLOADED, DISSEMINATED, PUBLISHED, OR TRANSFERRED IN ANY FORM OR BY ANY MEANS, EXCEPT WITH THE PRIOR WRITTEN CONSENT OF POPEYES LOUISIANA KITCHEN. COPYRIGHT INFRINGEMENT IS A VIOLATION OF FEDERAL LAW SUBJECT TO CRIMINAL AND CIVIL PENALTIES.

THE CONTRACTOR IS TO VERIFY ALL DIMENSIONS AND CONDITIONS ON THE PROJECT AND TO REPORT ANY DISCREPANCIES TO THE POPEYES LOUISIANA KITCHEN REPRESENTATIVE PRIOR TO COMMENCING WORK. THESE DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION PURPOSES UNLESS INDICATED BY POPEYES LOUISIANA KITCHEN AS "ISSUED FOR CONSTRUCTION".

Professional Seal

DESIGNER NOTES:
DESIGN GUIDELINE ONLY - NOT FOR PERMIT OR CONSTRUCTION

THESE DOCUMENTS MUST BE COMPLETED AND / OR MODIFIED BY A LICENSED ARCHITECT AND ENGINEER TO CONFORM TO ALL APPLICABLE CODES, AND SPECIFIC SITE CONDITIONS. THERE IS NO WARRANTY, WHETHER IMPLIED OR EXPRESSED THAT THESE DOCUMENTS MEET THE APPLICABLE CODE REQUIREMENTS.
LIABILITY FOR THE DESIGN AND ANY USE OF THE DOCUMENTS IS THE SOLE RESPONSIBILITY OF THE ARCHITECT AND ENGINEER OF RECORD.

Company Logo

Project

Store Type
US DTGO PROTOTYPE

Location
PROTOTYPE
DTGO (U.S.)

CITY, STATE

Drawing Title
ROOF DETAILS

Drawn	Checked
XX	XX
Scale	**Date**
1/4"=1'-0"	##.##.####
Project No.	**Drawing No.**
XX	A4.1

POPEYES LOUISIANA KITCHEN MODEL DTGO, ADDRESS, CITY, STATE: DTGO PROTOTYPE DOCUMENTS (OCTOBER, 2025) STORE NO. XXXXX

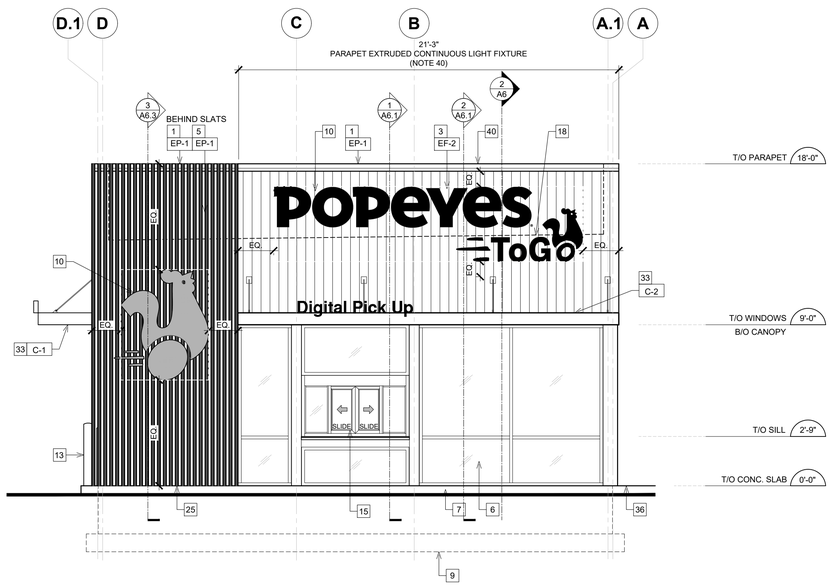

1 / A5 PROPOSED FRONT ELEVATION

SCALE: 1/4"=1' - 0"

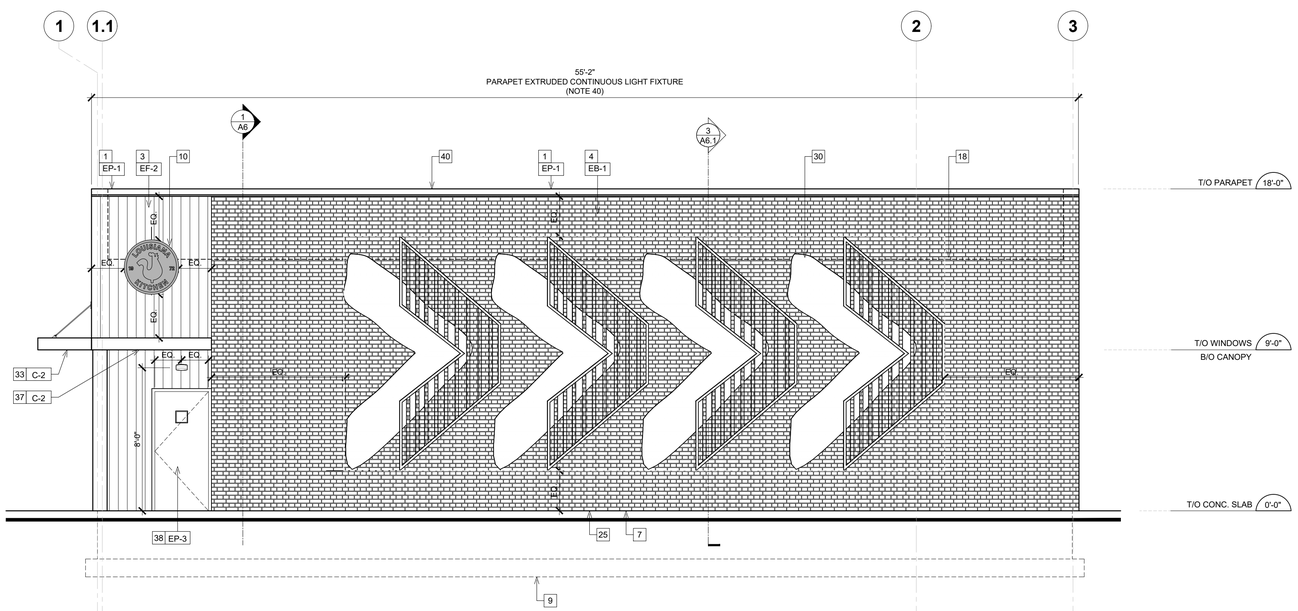

2 / A5 PROPOSED SIDE (NON-DT) ELEVATION

SCALE: 1/4"=1' - 0"

KEYNOTES (SHEETS A5 & A5.1)

1. PRE-FINISHED METAL CAP FLASHING C/W DRIP.
2. N/A.
3. REFER TO POPEYES PLK FINISH SCHEDULE AND 'FAB' SHEETS.
   FIBER CEMENT WALL PANEL SYSTEM, NICHIHA LATURA V GROOVE, AS PER THE PRE-FABRICATION VENDOR.
4. REFER TO POPEYES PLK FINISH SCHEDULE AND 'FAB' SHEETS.
   BRICK VENEER, NICHIHA VINTAGE BRICK OR GLEN-GERY FACEBRICK, AS PER THE PRE-FABRICATION VENDOR.
   REFER TO POPEYES PLK FINISH SCHEDULE AND 'FAB' SHEETS.
5. EIFS. AS PER THE PRE-FABRICATED VENDOR.
   REFER TO POPEYES PLK FINISH SCHEDULE AND 'FAB' SHEETS.
6. PRE-FINISHED 'BLACK ANODIZED' ALUMINUM STOREFRONT SYSTEM WITH INSULATED GLAZING.
7. EXPOSED FOUNDATION TO BE PARGED AND FREE OF IMPERFECTIONS.
8. GAS METER. REFER TO MECHANICAL DRAWINGS. COORDINATE LOCATION WITH CIVIL DRAWINGS AND LOCAL UTILITY COMPANY.
9. REFER TO STRUCTURAL DRAWINGS FOR FOUNDATION WALL AND FOOTING DETAILS.
10. INTERNALLY ILLUMINATED BUILDING SIGNAGE PROVIDED AND INSTALLED BY SIGN COMPANY. G.C TO PROVIDE AND INSTALL $\frac{3}{4}$" EXTERIOR GRADE PRESSURE TREATED PLYWOOD BACKING AND ALL FINAL ELECTRICAL CONNECTION. SIGN MANUFACTURER SHALL OBTAIN STRUCTURALLY SEALED DRAWINGS AND SIGNAGE PERMITS FROM THE CITY BASED ON LOCAL REQUIREMENTS. G.C SHALL VERIFY ACTUAL LOCATION & SIZE OF SIGNS WITH SIGN MANUFACTURER'S APPROVED DRAWINGS AND COORDINATE LOCATIONS OF BLOCKING AND UTILITIES. G.C TO COORDINATE WITH SIGN INSTALLER TO USE VHM DRILL BIT WHILE DRILLING FOR ELECTRICAL FEED LINES AND SIGNAGE FASTENERS. ALL ELEMENTS PROVIDED BY SIGNAGE FABRICATOR TO BE REVIEWED AND APPROVED BY POPEYES PRIOR TO PRODUCTION
11. N/A.
12. N/A.
13. PROVIDE & INSTALL 6" DIAMETER STEEL PIPE BOLLARD TOP AT 4'-6" A.F.F. G.C. TO PAINT "SAFETY YELLOW". REFER TO POPEYES PLK FINISH SCHEDULE.
14. ORANGE DRIVE-THRU WINDOW. REFER TO DRIVE-THRU AND WALK-UP WINDOW SCHEDULE ON SHEET A11.
15. ORANGE WALK-UP WINDOW. REFER TO DRIVE-THRU AND WALK-UP WINDOW SCHEDULE ON SHEET A11.
16. N/A.
17. N/A.
18. DASHED LINE INDICATES T/O OF ROOF BEHIND PARAPET.
19. C/T CABINET AND METER. REFER TO ELECTRICAL DRAWINGS.
    (NOT SHOWN). TO BE COORDINATED W/ ELECTRICAL DRAWINGS AND UTILITY.
20. N/A.
21. GENERAL PURPOSE EXTERIOR LIGHTING FIXTURES.
22. WALK-IN COOLER/FREEZER FINISH TO BE COMPLETED BY MANUFACTURER.
23. METAL RAILING SUPPLIED AND INSTALLED BY G.C (ONLY IF REQUIRED) ARCHITECT TO COORDINATE WITH CIVIL ENGINEER ON THE SITE PLAN. REFER TO DETAIL 2/A8.
24. PRE-FINISHED EMERGENCY OVERFLOW SCUPPER. REFER TO DETAIL 2/A4.1.
25. ALL WALL BASE FLASHING TO MATCH THE COLOR OF THE ADJACENT FINISH MATERIAL AT THAT AREA.
26. HOSE BIB. G.C. TO PAINT. COLOUR TO MATCH ADJACENT STUCCO COORDINATE EXACT LOCATION WITH G.C. REFER TO MECHANICAL DRAWINGS.
27. N/A.
28. N/A.
29. G.C TO PROVIDE CONCRETE CURB ALONG DRIVE-THRU LANE. CURB TO PROJECT 8" FROM FACE OF PANELS AND LENGTH OF CURB IS EXTENT OF FEATURE WALL.
30. BUILDING SIGNAGE PROVIDED AND INSTALLED BY SIGN COMPANY. SIGN MANUFACTURER SHALL OBTAIN STRUCTURALLY SEALED DRAWINGS AND SIGNAGE PERMITS FROM THE CITY BASED ON LOCAL REQUIREMENTS. G.C SHALL VERIFY ACTUAL LOCATION & SIZE OF SIGNS WITH SIGN MANUFACTURER'S APPROVED DRAWINGS AND COORDINATE LOCATIONS OF BLOCKING. ALL ELEMENTS PROVIDED BY SIGNAGE FABRICATOR TO BE REVIEWED AND APPROVED BY POPEYES PRIOR TO PRODUCTION.
31. REAR EXIT DOOR. REFER TO POPEYES PLK FINISH SCHEDULE
32. NOT USED.
33. OPEN BOTTOM ALUMINUM CANOPY WITH DOWNLIGHT LED LIGHT FIXTURE.SUPPLY BY SIGN COMPANY AND INSTALL BY G.C. ALL CANOPIES IN WALL SUPPORT BY G.C. REFER TO STRUCTURAL DRAWINGS.
34. N/A.
35. N/A.
36. CONCRETE SIDEWALK (BY G.C). REFER TO SITE PLAN.
37. N/A
38. NEW EXTERIOR DOOR.
    REFER TO POPEYES PLK FINISH SCHEDULE.
39. N/A.
40. PARAPET PERIMETER EXTRUDED CONTINUOUS DOWNLIGHT LIGHT FIXTURE.
    TO BE ATTACHED TO BUILDING PARAPET COPING, AS PER MANUFACTURER DIRECTIONS.
    FIXTURE COLOR TO MATCH ADJACENT PARAPET COLOR.
    REFER TO POPEYES MASTER LIGHT FIXTURE SCHEDULE.
    PARAPET LIGHTING MUST BE SUPPLIED BY POPEYE'S APPROVED DECOR VENDOR.
41. OVERFLOW DOWNSPOUT NOZZLE. REF TO PLUMBING.

GENERAL NOTES

1. SEALANT / CAULKING AROUND DOOR / WINDOW FRAMES. COLOR: TO MATCH WINDOW / DOOR FRAMES.
2. THE CONTRACTOR SHALL BECOME FAMILIAR WITH AND FOLLOW ALL DRAWINGS AND SPECIFICATIONS.
3. EXTERIOR ELEVATIONS MUST MATCH DESIGN TEAM APPROVED ELEVATION DRAWINGS. ANY DEVIATION FROM THE PROTOTYPE DRAWINGS OR THE APPROVED ELEVATION DRAWINGS MUST HAVE A SUBMITTED AND APPROVED EXCEPTION REQUEST FORM FROM POPEYES DESIGN TEAM.
4. ALL PARAPETS SHALL BE PAINTED ACCORDING TO THE FACADE COLOR.
5. ENSURE TO REFERENCE LATEST FINISH SCHEDULE IN THE DESIGN PORTAL ON A REGULAR BASIS.
6. ALL CANOPIES TO BE TEAL, EXCEPT AT THE DRIVE-THRU WINDOW.
7. BUILDING EXTERIOR AS PER PRE-FABRICATING VENDOR SYSTEM ASSEMBLY. REFER TO PRE-FAB SHELL DRAWINGS FOR SCOPE AND WALL CONSTRUCTION. NOTE: PRE-FAB WALL CONSTRUCTION LIMITS: INTERIOR SIDE FACE STUDS TO OUTSIDE FACE OF EXTERIOR FINISH.

SYMBOL LEGEND

1	NOTE REFERENCE. REFER TO ELEVATION NOTES
FN#	FINISH TYPE

ISSUE TABLE

No.	Date (mm/dd/yy)	Description
01	09-26-25	DTGO PROTOTYPE DOCUMENTS

REVISIONS

No.	Date	Description

DRAWINGS REVISED AS PER DESIGN BULLETIN

No.	Date	Description

THIS DRAWING IS OWNED BY OR LICENSED FOR USE BY POPEYES LOUISIANA KITCHEN (OR ITS AFFILIATED OR RELATED COMPANIES) AND MAY NOT BE REPRODUCED, USED, DOWNLOADED, DISSEMINATED, PUBLISHED, OR TRANSFERRED IN ANY FORM OR BY ANY MEANS, EXCEPT WITH THE PRIOR WRITTEN CONSENT OF POPEYES LOUISIANA KITCHEN. .COPYRIGHT INFRINGEMENT IS A VIOLATION OF FEDERAL LAW SUBJECT TO CRIMINAL AND CIVIL PENALTIES.

THE CONTRACTOR IS TO VERIFY ALL DIMENSIONS AND CONDITIONS ON THE PROJECT AND TO REPORT ANY DISCREPANCIES TO THE POPEYES LOUISIANA KITCHEN REPRESENTATIVE PRIOR TO COMMENCING WORK. THESE DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION PURPOSES UNLESS INDICATED BY POPEYES LOUISIANA KITCHEN AS "ISSUED FOR CONSTRUCTION".

Professional Seal

DESIGNER NOTES:
DESIGN GUIDELINE ONLY - NOT FOR PERMIT OR CONSTRUCTION

THESE DOCUMENTS MUST BE COMPLETED AND / OR MODIFIED BY A LICENSED ARCHITECT AND ENGINEER TO CONFORM TO ALL APPLICABLE CODES, AND SPECIFIC SITE CONDITIONS. THERE IS NO WARRANTY, WHETHER IMPLIED OR EXPRESSED THAT THESE DOCUMENTS MEET THE APPLICABLE CODE REQUIREMENTS.
LIABILITY FOR THE DESIGN AND ANY USE OF THE DOCUMENTS IS THE SOLE RESPONSIBILITY OF THE ARCHITECT AND ENGINEER OF RECORD.

Company Logo

Project

LOUISIANA KITCHEN 1972
POPEYES

Store Type
US DTGO PROTOTYPE

Location
PROTOTYPE
DTGO (U.S.)
CITY, STATE

Drawing Title
EXTERIOR ELEVATIONS

Drawn	Checked
XX	XX
Scale	**Date**
1/4"=1'-0"	##.##.####
Project No.	**Drawing No.**
XX	A5

POPEYES LOUISIANA KITCHEN MODEL DTGO, ADDRESS, CITY, STATE: DTGO PROTOTYPE DOCUMENTS (OCTOBER, 2025) STORE NO. XXXXX

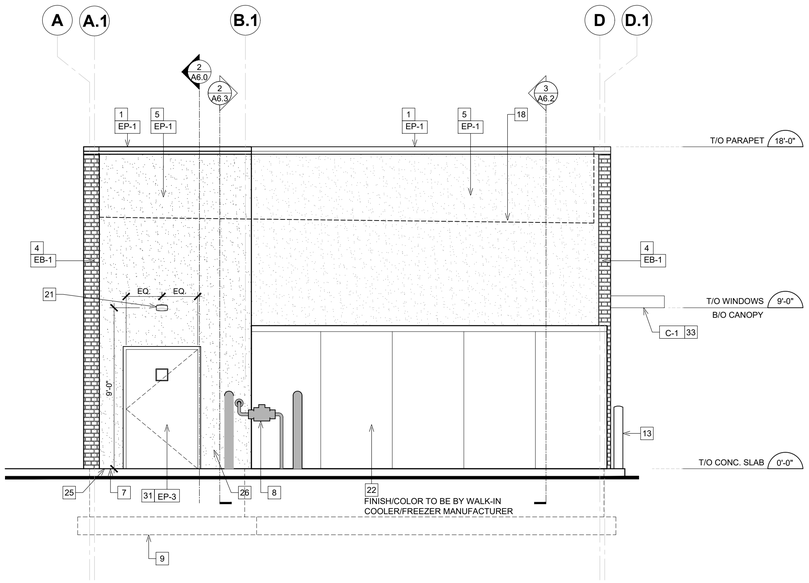

1 / A5.1 PROPOSED REAR ELEVATION

SCALE: 1/4"=1' - 0"

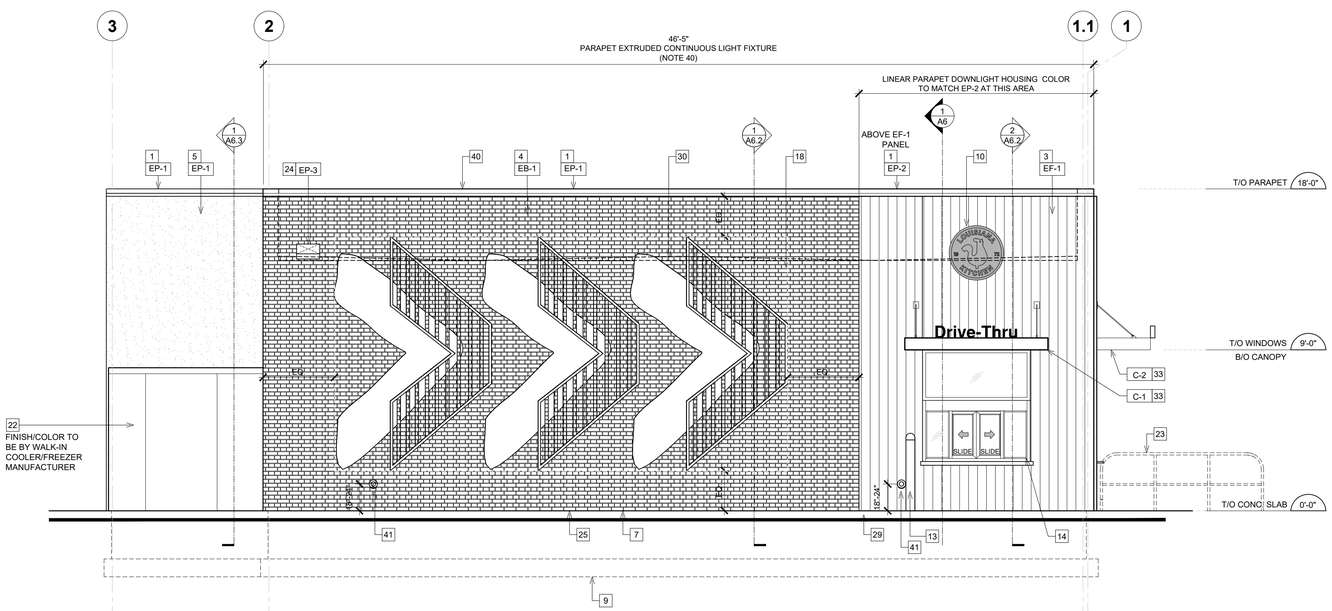

2 / A5.1 PROPOSED DT ELEVATION

SCALE: 1/4"=1' - 0"

KEYNOTES (SHEETS A5 & A5.1)

1. PRE-FINISHED METAL CAP FLASHING C/W DRIP.
2. N/A.
3. REFER TO POPEYES PLK FINISH SCHEDULE AND 'FAB' SHEETS.
   FIBER CEMENT WALL PANEL SYSTEM, NICHIHA LATURA V GROOVE, AS PER THE PRE-FABRICATION VENDOR.
4. REFER TO POPEYES PLK FINISH SCHEDULE AND 'FAB' SHEETS.
   BRICK VENEER, NICHIHA VINTAGE BRICK OR GLEN-GERY FACEBRICK, AS PER THE PRE-FABRICATION VENDOR.
   REFER TO POPEYES PLK FINISH SCHEDULE AND 'FAB' SHEETS.
5. EIFS. AS PER THE PRE-FABRICATED VENDOR.
   REFER TO POPEYES PLK FINISH SCHEDULE AND 'FAB' SHEETS.
6. PRE-FINISHED 'BLACK ANODIZED' ALUMINUM STOREFRONT SYSTEM WITH INSULATED GLAZING.
7. EXPOSED FOUNDATION TO BE PARGED AND FREE OF IMPERFECTIONS.
8. GAS METER. REFER TO MECHANICAL DRAWINGS. COORDINATE LOCATION WITH CIVIL DRAWINGS AND LOCAL UTILITY COMPANY.
9. REFER TO STRUCTURAL DRAWINGS FOR FOUNDATION WALL AND FOOTING DETAILS.
10. INTERNALLY ILLUMINATED BUILDING SIGNAGE PROVIDED AND INSTALLED BY SIGN COMPANY. G.C TO PROVIDE AND INSTALL ¾" EXTERIOR GRADE PRESSURE TREATED PLYWOOD BACKING AND ALL FINAL ELECTRICAL CONNECTION. SIGN MANUFACTURER SHALL OBTAIN STRUCTURALLY SEALED DRAWINGS AND SIGNAGE PERMITS FROM THE CITY BASED ON LOCAL REQUIREMENTS. G.C SHALL VERIFY ACTUAL LOCATION & SIZE OF SIGNS WITH SIGN MANUFACTURER'S APPROVED DRAWINGS AND COORDINATE LOCATIONS OF BLOCKING AND UTILITIES. G.C TO COORDINATE WITH SIGN INSTALLER TO USE VHM DRILL BIT WHILE DRILLING FOR ELECTRICAL FEED LINES AND SIGNAGE FASTENERS. ALL ELEMENTS PROVIDED BY SIGNAGE FABRICATOR TO BE REVIEWED AND APPROVED BY POPEYES PRIOR TO PRODUCTION
11. N/A.
12. N/A.
13. PROVIDE & INSTALL 6" DIAMETER STEEL PIPE BOLLARD TOP AT 4'-6" A.F.F. G.C. TO PAINT "SAFETY YELLOW". REFER TO POPEYES PLK FINISH SCHEDULE.
14. ORANGE DRIVE-THRU WINDOW. REFER TO DRIVE-THRU AND WALK-UP WINDOW SCHEDULE ON SHEET A11.
15. ORANGE WALK-UP WINDOW. REFER TO DRIVE-THRU AND WALK-UP WINDOW SCHEDULE ON SHEET A11.
16. N/A.
17. N/A.
18. DASHED LINE INDICATES T/O OF ROOF BEHIND PARAPET.
19. C/T CABINET AND METER. REFER TO ELECTRICAL DRAWINGS.
    (NOT SHOWN). TO BE COORDINATED W/ ELECTRICAL DRAWINGS AND UTILITY.
20. N/A.
21. GENERAL PURPOSE EXTERIOR LIGHTING FIXTURES.
22. WALK-IN COOLER/FREEZER FINISH TO BE COMPLETED BY MANUFACTURER.
23. METAL RAILING SUPPLIED AND INSTALLED BY G.C (ONLY IF REQUIRED) ARCHITECT TO COORDINATE WITH CIVIL ENGINEER ON THE SITE PLAN. REFER TO DETAIL 2/A8.
24. PRE-FINISHED EMERGENCY OVERFLOW SCUPPER. REFER TO DETAIL 2/A4.1.
25. ALL WALL BASE FLASHING TO MATCH THE COLOR OF THE ADJACENT FINISH MATERIAL AT THAT AREA.
26. HOSE BIB. G.C. TO PAINT. COLOUR TO MATCH ADJACENT STUCCO COORDINATE EXACT LOCATION WITH G.C. REFER TO MECHANICAL DRAWINGS.
27. N/A.
28. N/A.
29. G.C TO PROVIDE CONCRETE CURB ALONG DRIVE-THRU LANE. CURB TO PROJECT 8" FROM FACE OF PANELS AND LENGTH OF CURB IS EXTENT OF FEATURE WALL.
30. BUILDING SIGNAGE PROVIDED AND INSTALLED BY SIGN COMPANY. SIGN MANUFACTURER SHALL OBTAIN STRUCTURALLY SEALED DRAWINGS AND SIGNAGE PERMITS FROM THE CITY BASED ON LOCAL REQUIREMENTS. G.C SHALL VERIFY ACTUAL LOCATION & SIZE OF SIGNS WITH SIGN MANUFACTURER'S APPROVED DRAWINGS AND COORDINATE LOCATIONS OF BLOCKING. ALL ELEMENTS PROVIDED BY SIGNAGE FABRICATOR TO BE REVIEWED AND APPROVED BY POPEYES PRIOR TO PRODUCTION.
31. REAR EXIT DOOR. REFER TO POPEYES PLK FINISH SCHEDULE
32. NOT USED.
33. OPEN BOTTOM ALUMINUM CANOPY WITH DOWNLIGHT LED LIGHT FIXTURE.SUPPLY BY SIGN COMPANY AND INSTALL BY G.C. ALL CANOPIES IN WALL SUPPORT BY G.C. REFER TO STRUCTURAL DRAWINGS.
34. N/A.
35. N/A.
36. CONCRETE SIDEWALK (BY G.C). REFER TO SITE PLAN.
37. N/A
38. NEW EXTERIOR DOOR.
    REFER TO POPEYES PLK FINISH SCHEDULE.
39. N/A.
40. PARAPET PERIMETER EXTRUDED CONTINUOUS DOWNLIGHT LIGHT FIXTURE.
    TO BE ATTACHED TO BUILDING PARAPET COPING, AS PER MANUFACTURER DIRECTIONS.
    FIXTURE COLOR TO MATCH ADJACENT PARAPET COLOR.
    REFER TO POPEYES MASTER LIGHT FIXTURE SCHEDULE.
    PARAPET LIGHTING MUST BE SUPPLIED BY POPEYE'S APPROVED DECOR VENDOR.
41. OVERFLOW DOWNSPOUT NOZZLE. REF TO PLUMBING.

GENERAL NOTES

1. SEALANT / CAULKING AROUND DOOR / WINDOW FRAMES. COLOR: TO MATCH WINDOW / DOOR FRAMES.
2. THE CONTRACTOR SHALL BECOME FAMILIAR WITH AND FOLLOW ALL DRAWINGS AND SPECIFICATIONS.
3. EXTERIOR ELEVATIONS MUST MATCH DESIGN TEAM APPROVED ELEVATION DRAWINGS. ANY DEVIATION FROM THE PROTOTYPE DRAWINGS OR THE APPROVED ELEVATION DRAWINGS MUST HAVE A SUBMITTED AND APPROVED EXCEPTION REQUEST FORM FROM POPEYES DESIGN TEAM.
4. ALL PARAPETS SHALL BE PAINTED ACCORDING TO THE FACADE COLOR.
5. ENSURE TO REFERENCE LATEST FINISH SCHEDULE IN THE DESIGN PORTAL ON A REGULAR BASIS.
6. ALL CANOPIES TO BE TEAL, EXCEPT AT THE DRIVE-THRU WINDOW.
7. BUILDING EXTERIOR AS PER PRE-FABRICATING VENDOR SYSTEM ASSEMBLY. REFER TO PRE-FAB SHELL DRAWINGS FOR SCOPE AND WALL CONSTRUCTION. NOTE: PRE-FAB WALL CONSTRUCTION LIMITS: INTERIOR SIDE FACE STUDS TO OUTSIDE FACE OF EXTERIOR FINISH.

SYMBOL LEGEND

1	NOTE REFERENCE. REFER TO ELEVATION NOTES
FN#	FINISH TYPE

ISSUE TABLE

No.	Date (mm/dd/yy)	Description
01	09-26-25	DTGO PROTOTYPE DOCUMENTS

REVISIONS

No.	Date	Description

DRAWINGS REVISED AS PER DESIGN BULLETIN

No.	Date	Description

THIS DRAWING IS OWNED BY OR LICENSED FOR USE BY POPEYES LOUISIANA KITCHEN (OR ITS AFFILIATED OR RELATED COMPANIES) AND MAY NOT BE REPRODUCED, USED, DOWNLOADED, DISSEMINATED, PUBLISHED, OR TRANSFERRED IN ANY FORM OR BY ANY MEANS, EXCEPT WITH THE PRIOR WRITTEN CONSENT OF POPEYES LOUISIANA KITCHEN. .COPYRIGHT INFRINGEMENT IS A VIOLATION OF FEDERAL LAW SUBJECT TO CRIMINAL AND CIVIL PENALTIES.

THE CONTRACTOR IS TO VERIFY ALL DIMENSIONS AND CONDITIONS ON THE PROJECT AND TO REPORT ANY DISCREPANCIES TO THE POPEYES LOUISIANA KITCHEN REPRESENTATIVE PRIOR TO COMMENCING WORK. THESE DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION PURPOSES UNLESS INDICATED BY POPEYES LOUISIANA KITCHEN AS "ISSUED FOR CONSTRUCTION".

Professional Seal

DESIGNER NOTES:
DESIGN GUIDELINE ONLY - NOT FOR PERMIT OR CONSTRUCTION

THESE DOCUMENTS MUST BE COMPLETED AND / OR MODIFIED BY A LICENSED ARCHITECT AND ENGINEER TO CONFORM TO ALL APPLICABLE CODES, AND SPECIFIC SITE CONDITIONS. THERE IS NO WARRANTY, WHETHER IMPLIED OR EXPRESSED THAT THESE DOCUMENTS MEET THE APPLICABLE CODE REQUIREMENTS.
LIABILITY FOR THE DESIGN AND ANY USE OF THE DOCUMENTS IS THE SOLE RESPONSIBILITY OF THE ARCHITECT AND ENGINEER OF RECORD.

Company Logo

Project

Store Type
US DTGO PROTOTYPE

Location
PROTOTYPE
DTGO (U.S.)
CITY, STATE

Drawing Title
EXTERIOR
ELEVATIONS

Drawn	Checked
XX	XX
Scale	**Date**
1/4"=1'-0"	##.##.####
Project No.	**Drawing No.**
XX	A5.1

POPEYES LOUISIANA KITCHEN MODEL DTGO, ADDRESS, CITY, STATE: DTGO PROTOTYPE DOCUMENTS (OCTOBER, 2025) STORE NO. XXXXX

GENERAL NOTES:

1. CONTINUE GYPSUM BOARD TO U/S OF DECK & BETWEEN TRUSSES AT EXTERIOR WALLS (TYP.).
2. BUILDING EXTERIOR AS PER PRE-FABRICATION VENDOR SYSTEM ASSEMBLY. REFER TO PRE-FAB SHELL DRAWINGS FOR SCOPE AND WALL CONSTRUCTION.
   NOTE: PRE-FAB WALL CONSTRUCTION LIMITS: INTERIOR SIDE FACE OF STUD TO OUTSIDE OF FACE OF EXTERIOR FINISH.

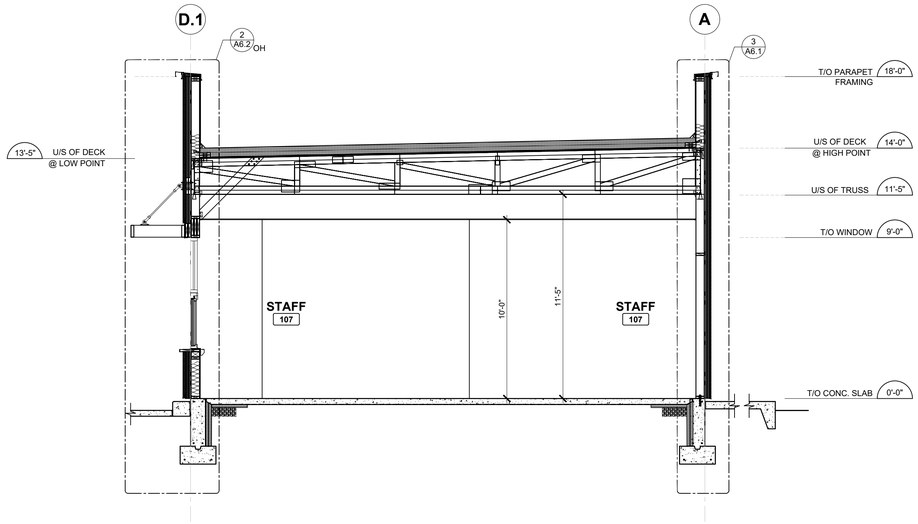

1 / A6 **BUILDING SECTION**
SCALE: 1/4" = 1'-0"

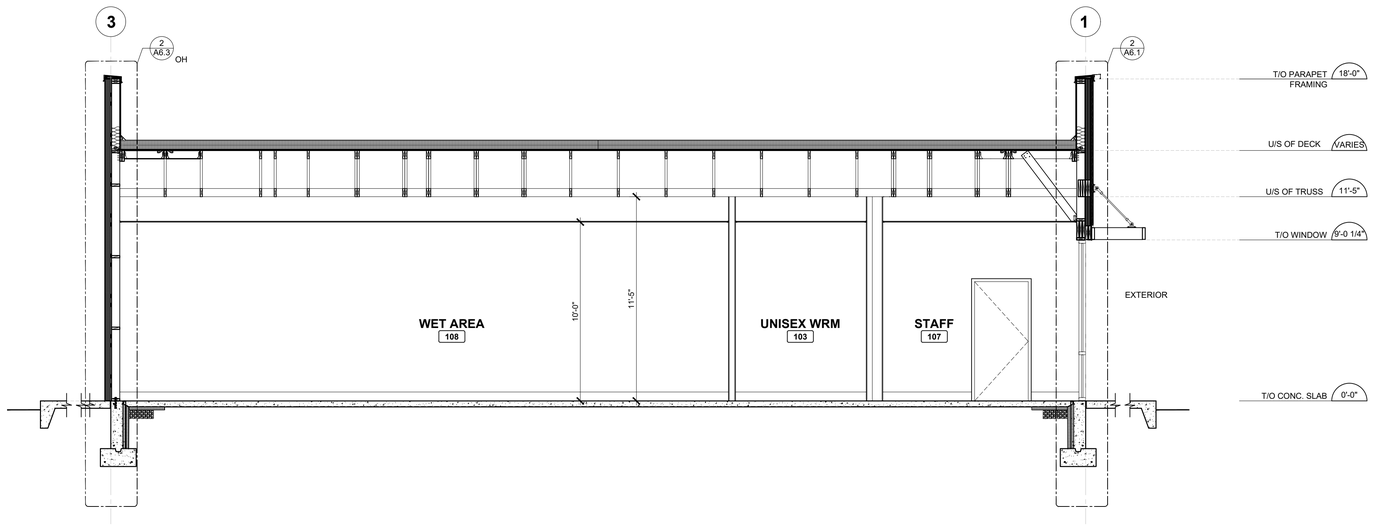

2 / A6 **BUILDING SECTION**
SCALE: 1/4" = 1'-0"

ISSUE TABLE

No.	Date (mm/dd/yy)	Description
01	09-26-25	DTGO PROTOTYPE DOCUMENTS

REVISIONS

No.	Date	Description

DRAWINGS REVISED AS PER DESIGN BULLETIN

No.	Date	Description

THIS DRAWING IS OWNED BY OR LICENSED FOR USE BY POPEYES LOUISIANA KITCHEN (OR ITS AFFILIATED OR RELATED COMPANIES) AND MAY NOT BE REPRODUCED, USED, DOWNLOADED, DISSEMINATED, PUBLISHED, OR TRANSFERRED IN ANY FORM OR BY ANY MEANS, EXCEPT WITH THE PRIOR WRITTEN CONSENT OF POPEYES LOUISIANA KITCHEN. COPYRIGHT INFRINGEMENT IS A VIOLATION OF FEDERAL LAW SUBJECT TO CRIMINAL AND CIVIL PENALTIES.

THE CONTRACTOR IS TO VERIFY ALL DIMENSIONS AND CONDITIONS ON THE PROJECT AND TO REPORT ANY DISCREPANCIES TO THE POPEYES LOUISIANA KITCHEN REPRESENTATIVE PRIOR TO COMMENCING WORK. THESE DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION PURPOSES UNLESS INDICATED BY POPEYES LOUISIANA KITCHEN AS "ISSUED FOR CONSTRUCTION".

Professional Seal

DESIGNER NOTES:
DESIGN GUIDELINE ONLY - NOT FOR PERMIT OR CONSTRUCTION

THESE DOCUMENTS MUST BE COMPLETED AND / OR MODIFIED BY A LICENSED ARCHITECT AND ENGINEER TO CONFORM TO ALL APPLICABLE CODES, AND SPECIFIC SITE CONDITIONS. THERE IS NO WARRANTY, WHETHER IMPLIED OR EXPRESSED THAT THESE DOCUMENTS MEET THE APPLICABLE CODE REQUIREMENTS.
LIABILITY FOR THE DESIGN AND ANY USE OF THE DOCUMENTS IS THE SOLE RESPONSIBILITY OF THE ARCHITECT AND ENGINEER OF RECORD.

Company Logo

Project

Store Type
US DTGO PROTOTYPE

Location
PROTOTYPE
DTGO (U.S.)
CITY, STATE

Drawing Title
BUILDING SECTIONS

Drawn	Checked
XXXX	XX
Scale	Date
AS NOTED	##.##.####
Project No.	Drawing No.
XX	A6

POPEYES LOUISIANA KITCHEN MODEL DTGO, ADDRESS, CITY, STATE: DTGO PROTOTYPE DOCUMENTS (OCTOBER, 2025) STORE NO. XXXXX

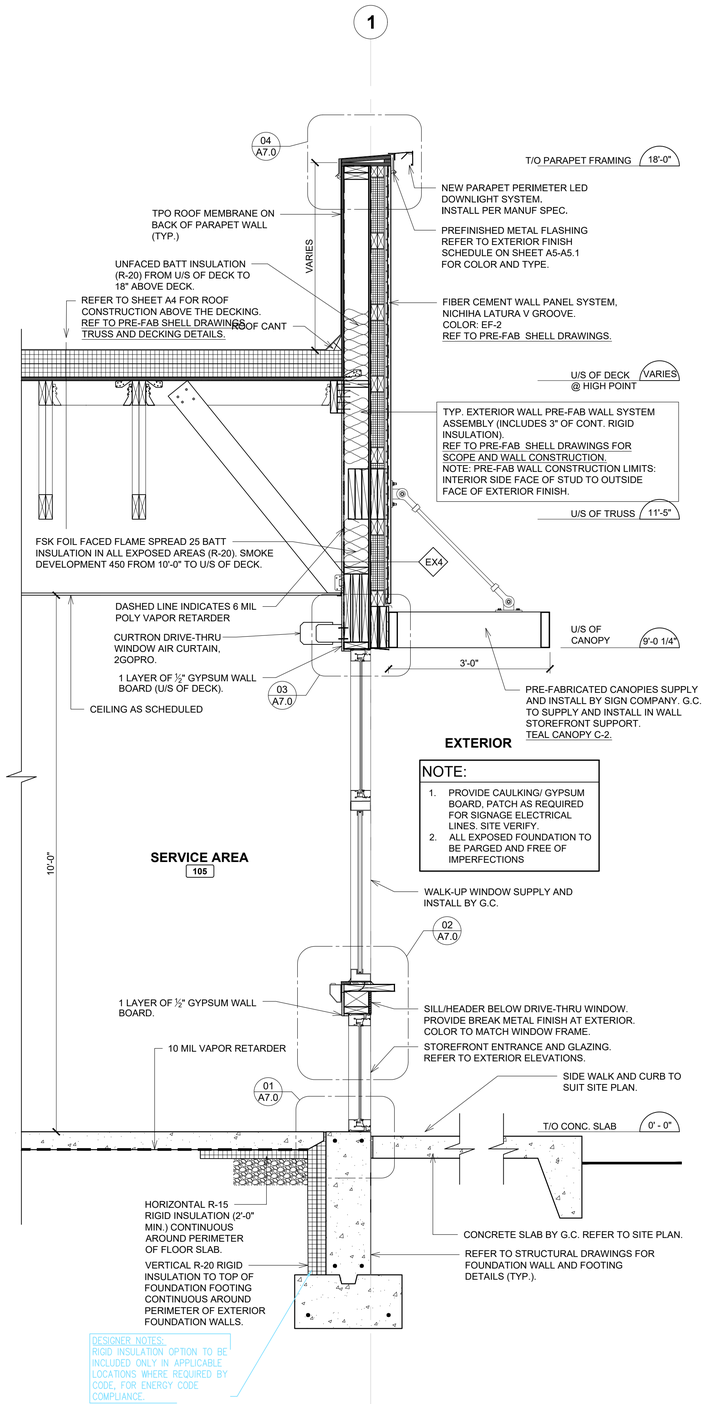

1 A6.1 **WALL SECTION @ WALK-UP WINDOW**
SCALE: 3/4" = 1'-0"

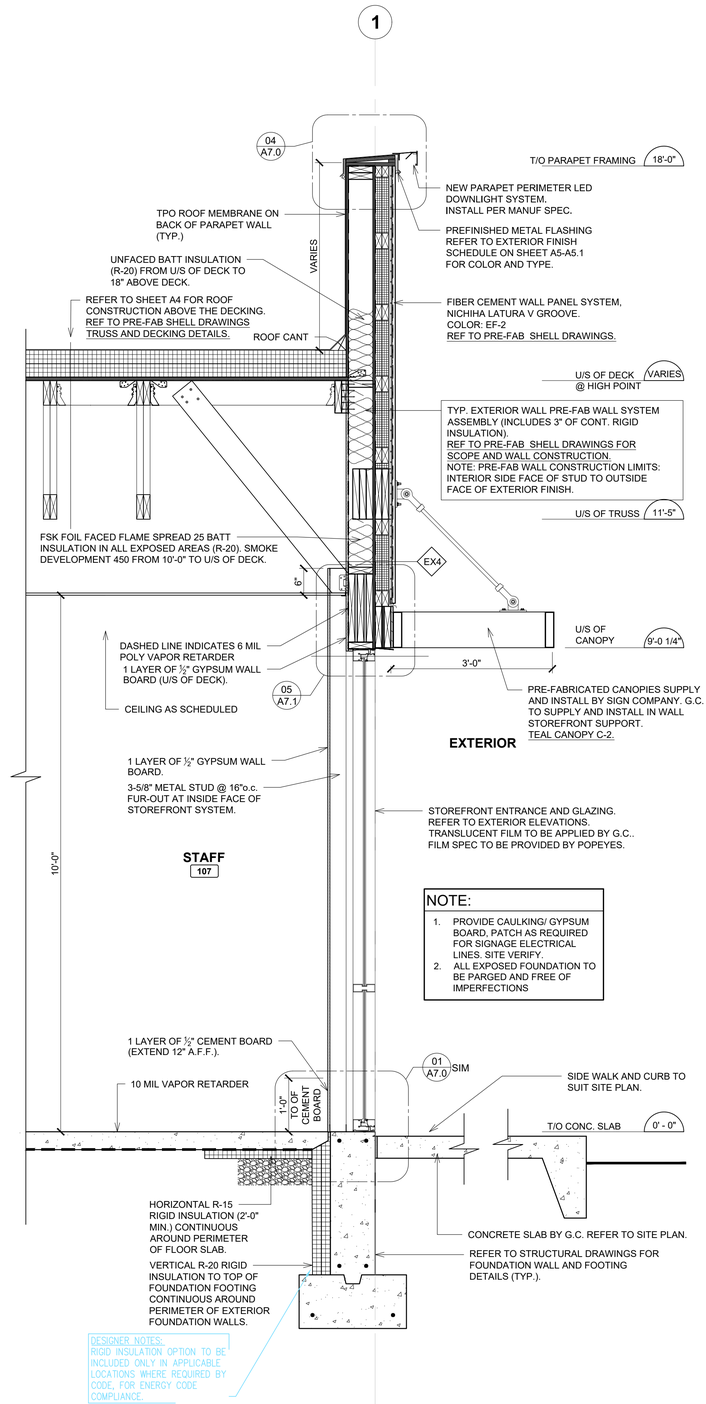

2 A6.1 **WALL SECTION @ FRONT**
SCALE: 3/4" = 1'-0"

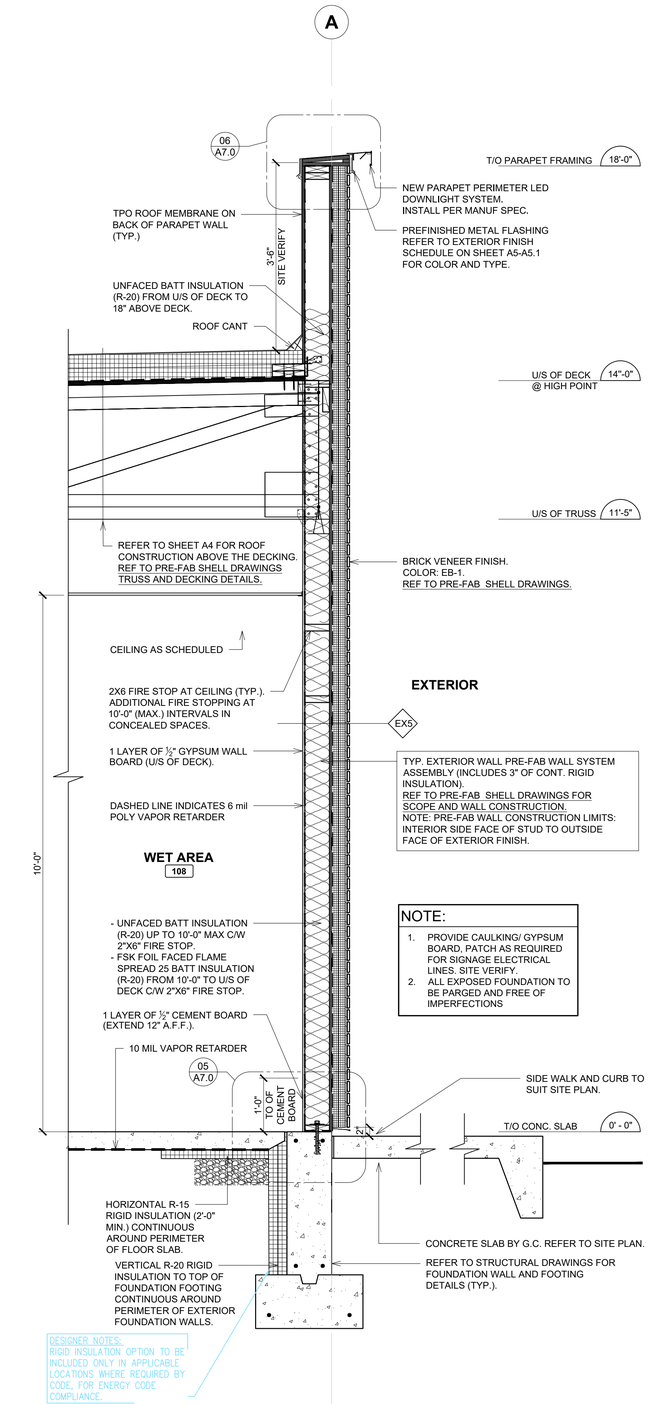

3 A6.1 **WALL SECTION @ SIDE**
SCALE: 3/4" = 1'-0"

ISSUE TABLE

No.	Date (mm/dd/yy)	Description
01	09-26-25	DTGO PROTOTYPE DOCUMENTS

REVISIONS

No.	Date	Description

DRAWINGS REVISED AS PER DESIGN BULLETIN

No.	Date	Description

THIS DRAWING IS OWNED BY OR LICENSED FOR USE BY POPEYES LOUISIANA KITCHEN (OR ITS AFFILIATED OR RELATED COMPANIES) AND MAY NOT BE REPRODUCED, USED, DOWNLOADED, DISSEMINATED, PUBLISHED, OR TRANSFERRED IN ANY FORM OR BY ANY MEANS, EXCEPT WITH THE PRIOR WRITTEN CONSENT OF POPEYES LOUISIANA KITCHEN. COPYRIGHT INFRINGEMENT IS A VIOLATION OF FEDERAL LAW SUBJECT TO CRIMINAL AND CIVIL PENALTIES.

THE CONTRACTOR IS TO VERIFY ALL DIMENSIONS AND CONDITIONS ON THE PROJECT AND TO REPORT ANY DISCREPANCIES TO THE POPEYES LOUISIANA KITCHEN REPRESENTATIVE PRIOR TO COMMENCING WORK. THESE DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION PURPOSES UNLESS INDICATED BY POPEYES LOUISIANA KITCHEN AS "ISSUED FOR CONSTRUCTION".

Professional Seal

DESIGNER NOTES:
DESIGN GUIDELINE ONLY - NOT FOR PERMIT OR CONSTRUCTION

THESE DOCUMENTS MUST BE COMPLETED AND / OR MODIFIED BY A LICENSED ARCHITECT AND ENGINEER TO CONFORM TO ALL APPLICABLE CODES, AND SPECIFIC SITE CONDITIONS. THERE IS NO WARRANTY, WHETHER IMPLIED OR EXPRESSED THAT THESE DOCUMENTS MEET THE APPLICABLE CODE REQUIREMENTS. LIABILITY FOR THE DESIGN AND ANY USE OF THE DOCUMENTS IS THE SOLE RESPONSIBILITY OF THE ARCHITECT AND ENGINEER OF RECORD.

Company Logo

Project

Store Type
US DTGO PROTOTYPE

Location
PROTOTYPE
DTGO (U.S.)
CITY, STATE

Drawing Title
WALL SECTIONS

Drawn	Checked
XX	XX
Scale: AS NOTED	Date: ##.##.####
Project No.: XX	Drawing No.: A6.1

POPEYES LOUISIANA KITCHEN MODEL DTGO, ADDRESS, CITY, STATE: DTGO PROTOTYPE DOCUMENTS (OCTOBER, 2025) STORE NO. XXXXX

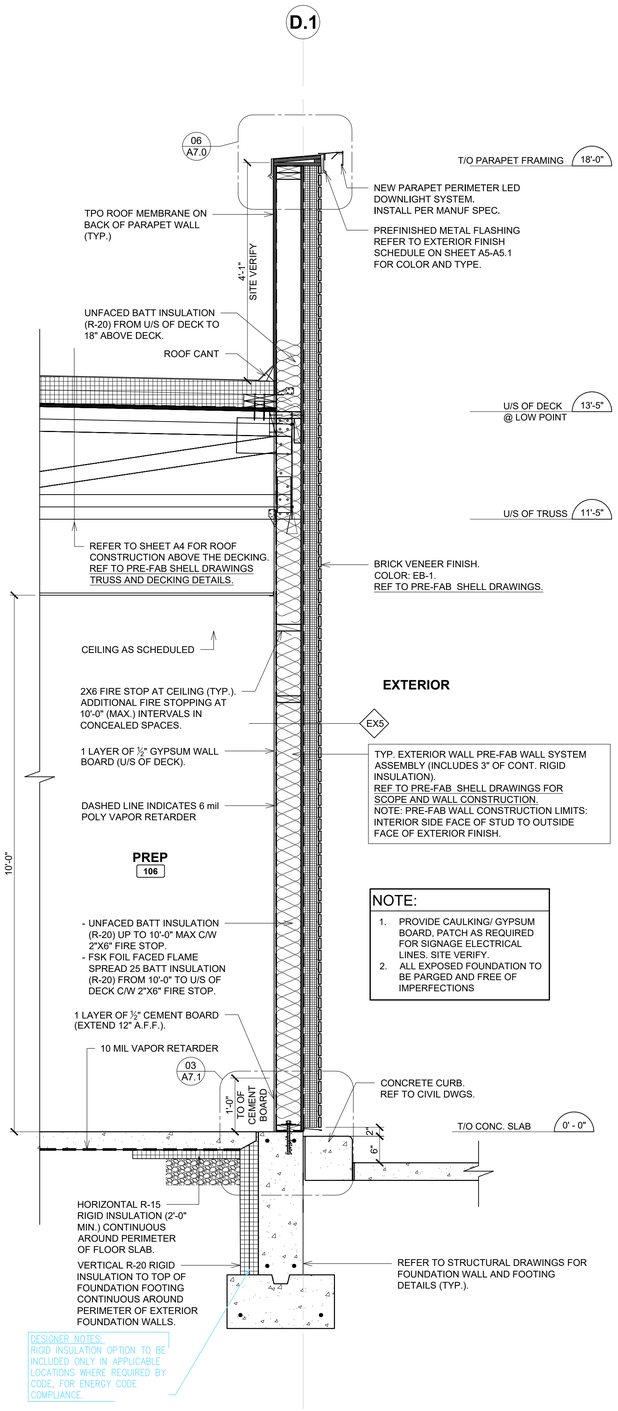

1 A6.2 **WALL SECTION @ DT ELEVATION**
SCALE: 3/4" = 1'-0"

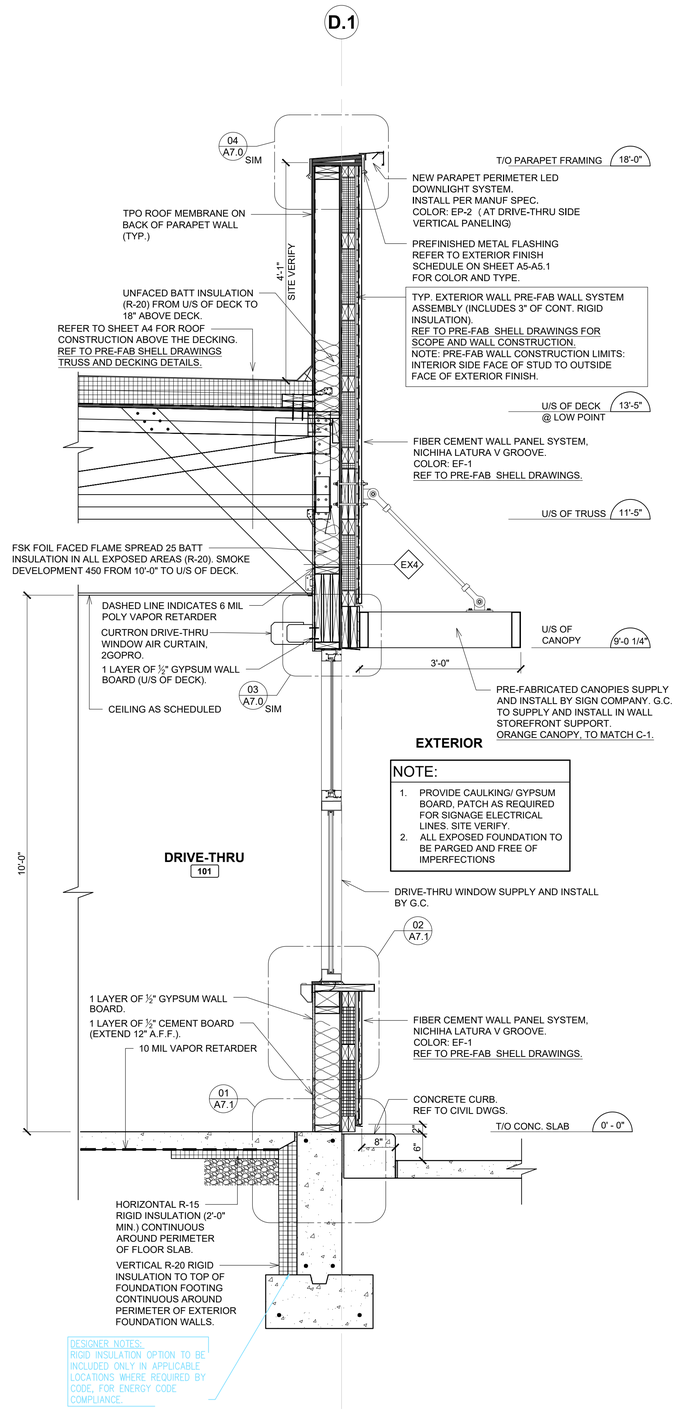

2 A6.2 **WALL SECTION @ DT WINDOW**
SCALE: 3/4" = 1'-0"

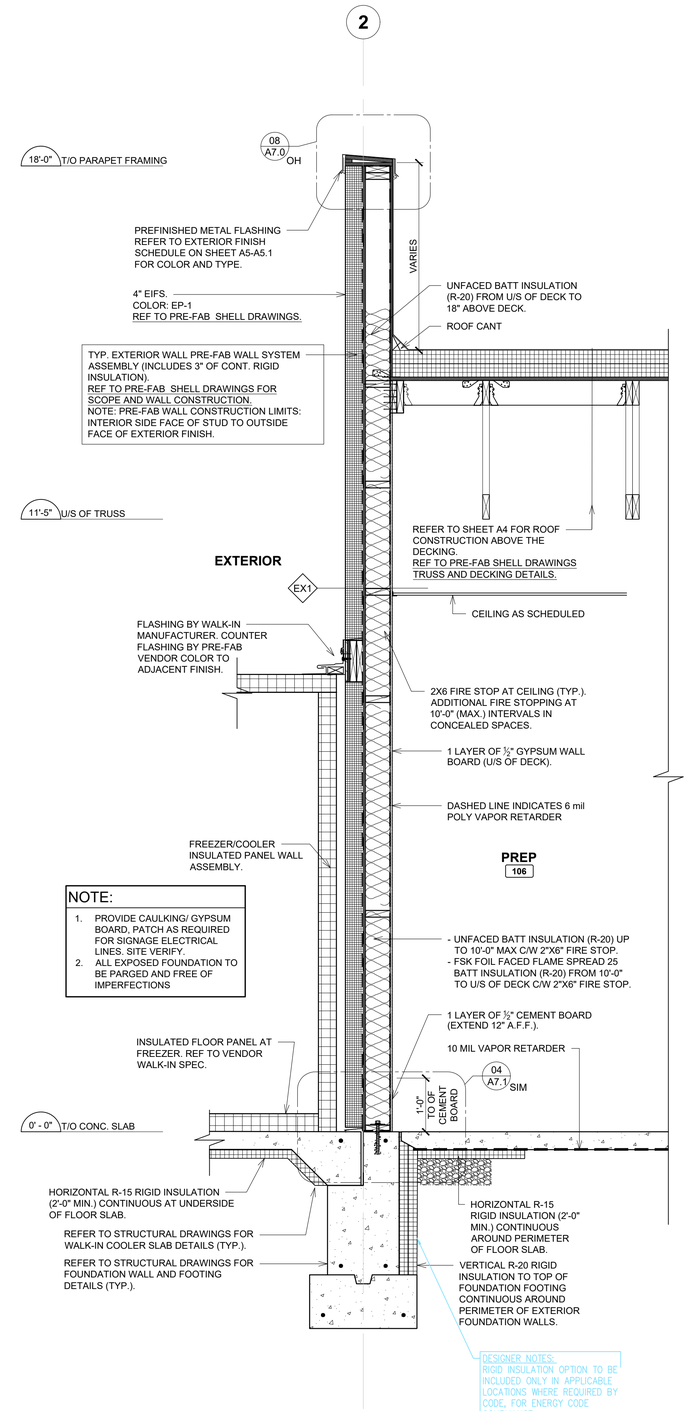

3 A6.2 **WALL SECTION @ REAR**
SCALE: 3/4" = 1'-0"

ISSUE TABLE

No.	Date (mm/dd/yy)	Description
01	09-26-25	DTGO PROTOTYPE DOCUMENTS

REVISIONS

No.	Date	Description

DRAWINGS REVISED AS PER DESIGN BULLETIN

No.	Date	Description

THIS DRAWING IS OWNED BY OR LICENSED FOR USE BY POPEYES LOUISIANA KITCHEN (OR ITS AFFILIATED OR RELATED COMPANIES) AND MAY NOT BE REPRODUCED, USED, DOWNLOADED, DISSEMINATED, PUBLISHED, OR TRANSFERRED IN ANY FORM OR BY ANY MEANS, EXCEPT WITH THE PRIOR WRITTEN CONSENT OF POPEYES LOUISIANA KITCHEN. COPYRIGHT INFRINGEMENT IS A VIOLATION OF FEDERAL LAW SUBJECT TO CRIMINAL AND CIVIL PENALTIES.

THE CONTRACTOR IS TO VERIFY ALL DIMENSIONS AND CONDITIONS ON THE PROJECT AND TO REPORT ANY DISCREPANCIES TO THE POPEYES LOUISIANA KITCHEN REPRESENTATIVE PRIOR TO COMMENCING WORK. THESE DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION PURPOSES UNLESS INDICATED BY POPEYES LOUISIANA KITCHEN AS "ISSUED FOR CONSTRUCTION".

Professional Seal

DESIGNER NOTES:
DESIGN GUIDELINE ONLY - NOT FOR PERMIT OR CONSTRUCTION

THESE DOCUMENTS MUST BE COMPLETED AND / OR MODIFIED BY A LICENSED ARCHITECT AND ENGINEER TO CONFORM TO ALL APPLICABLE CODES, AND SPECIFIC SITE CONDITIONS. THERE IS NO WARRANTY, WHETHER IMPLIED OR EXPRESSED THAT THESE DOCUMENTS MEET THE APPLICABLE CODE REQUIREMENTS. LIABILITY FOR THE DESIGN AND ANY USE OF THE DOCUMENTS IS THE SOLE RESPONSIBILITY OF THE ARCHITECT AND ENGINEER OF RECORD.

Company Logo

Project

Store Type
US DTGO PROTOTYPE

Location
PROTOTYPE
DTGO (U.S.)
CITY, STATE

Drawing Title
WALL SECTIONS

Drawn	Checked
XX	XX
Scale	**Date**
AS NOTED	##.##.####
Project No.	**Drawing No.**
XX	A6.2

POPEYES LOUISIANA KITCHEN MODEL DTGO, ADDRESS, CITY, STATE: DTGO PROTOTYPE DOCUMENTS (OCTOBER, 2025) STORE NO. XXXXX

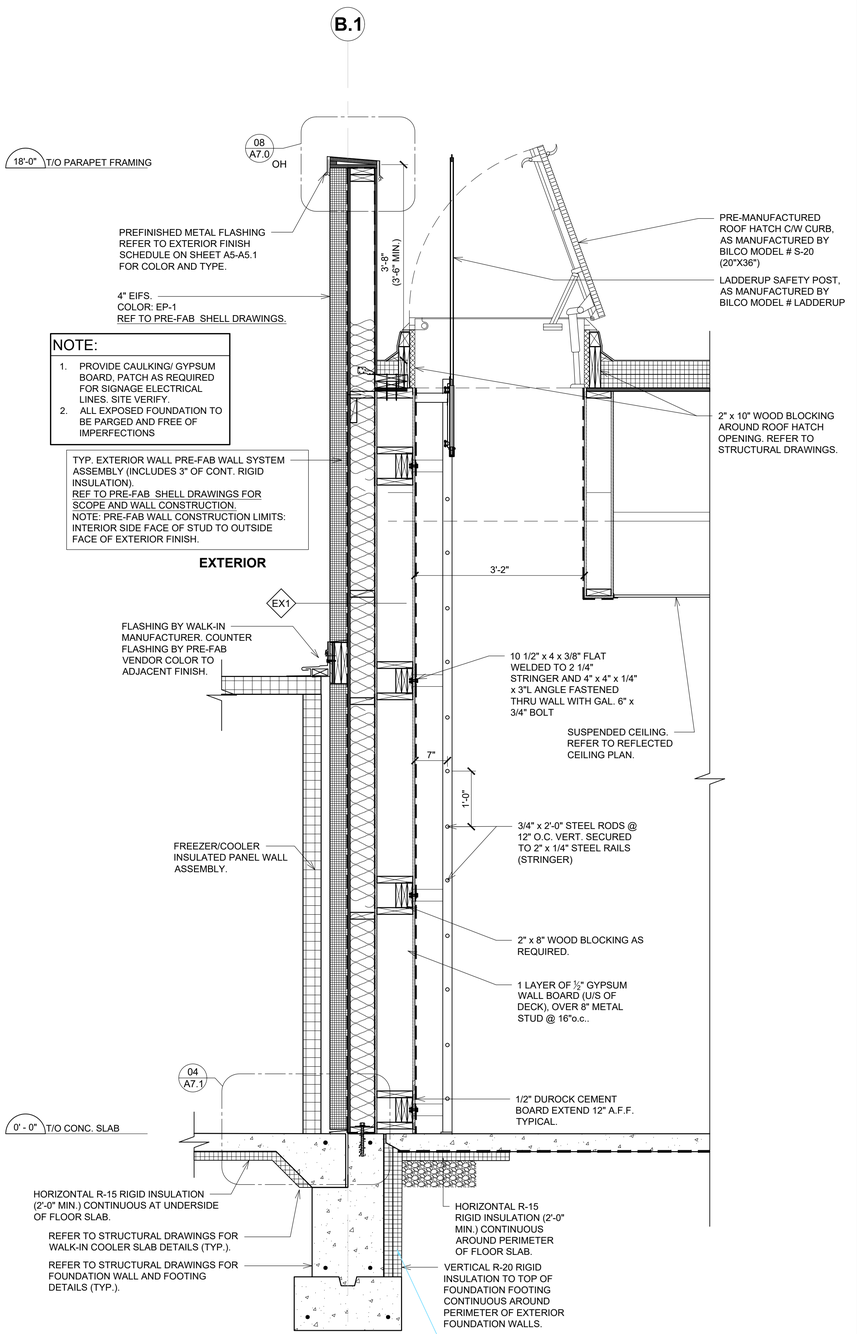

1 A6.3 **WALL SECTION @ ROOF LADDER**

SCALE: 3/4" = 1'-0"

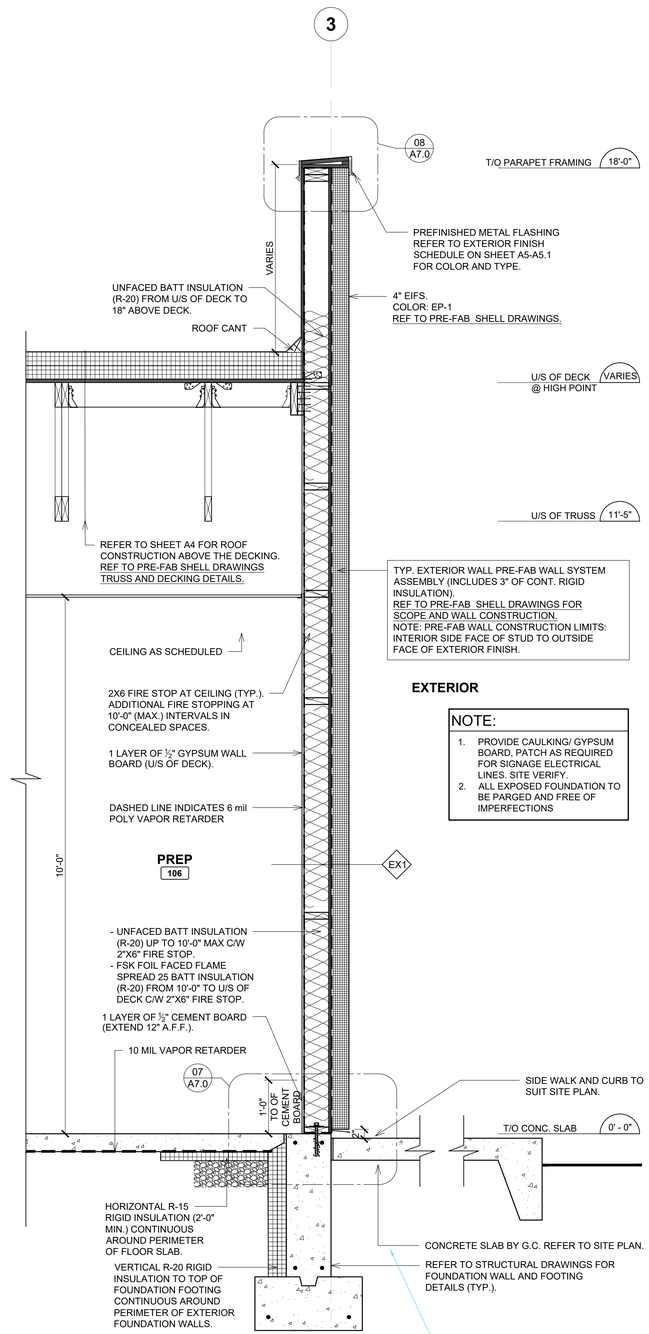

2 A6.3 **WALL SECTION @ REAR**

SCALE: 3/4" = 1'-0"

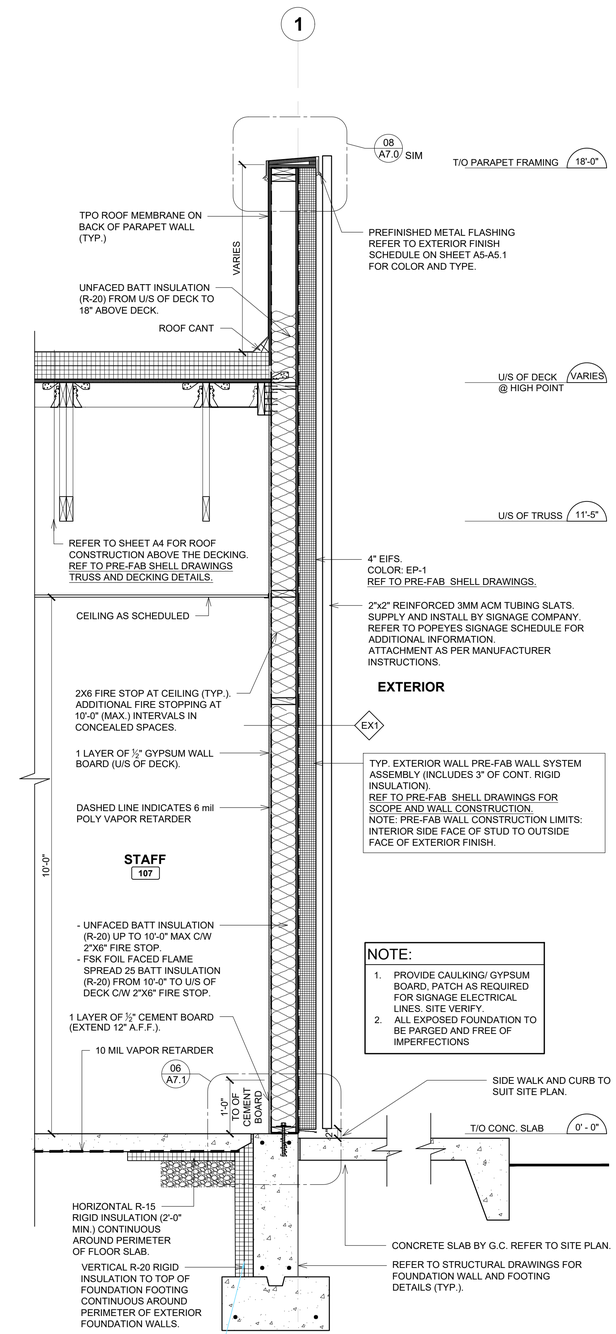

3 A6.3 **WALL SECTION @ FRONT**

SCALE: 3/4" = 1'-0"

ISSUE TABLE

No.	Date (mm/dd/yy)	Description
01	09-26-25	DTGO PROTOTYPE DOCUMENTS

REVISIONS

No.	Date	Description

DRAWINGS REVISED AS PER DESIGN BULLETIN

No.	Date	Description

THIS DRAWING IS OWNED BY OR LICENSED FOR USE BY POPEYES LOUISIANA KITCHEN (OR ITS AFFILIATED OR RELATED COMPANIES) AND MAY NOT BE REPRODUCED, USED, DOWNLOADED, DISSEMINATED, PUBLISHED, OR TRANSFERRED IN ANY FORM OR BY ANY MEANS, EXCEPT WITH THE PRIOR WRITTEN CONSENT OF POPEYES LOUISIANA KITCHEN. COPYRIGHT INFRINGEMENT IS A VIOLATION OF FEDERAL LAW SUBJECT TO CRIMINAL AND CIVIL PENALTIES.

THE CONTRACTOR IS TO VERIFY ALL DIMENSIONS AND CONDITIONS ON THE PROJECT AND TO REPORT ANY DISCREPANCIES TO THE POPEYES LOUISIANA KITCHEN REPRESENTATIVE PRIOR TO COMMENCING WORK. THESE DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION PURPOSES UNLESS INDICATED BY POPEYES LOUISIANA KITCHEN AS "ISSUED FOR CONSTRUCTION".

Professional Seal

DESIGNER NOTES:
DESIGN GUIDELINE ONLY - NOT FOR PERMIT OR CONSTRUCTION

THESE DOCUMENTS MUST BE COMPLETED AND / OR MODIFIED BY A LICENSED ARCHITECT AND ENGINEER TO CONFORM TO ALL APPLICABLE CODES, AND SPECIFIC SITE CONDITIONS. THERE IS NO WARRANTY, WHETHER IMPLIED OR EXPRESSED THAT THESE DOCUMENTS MEET THE APPLICABLE CODE REQUIREMENTS. LIABILITY FOR THE DESIGN AND ANY USE OF THE DOCUMENTS IS THE SOLE RESPONSIBILITY OF THE ARCHITECT AND ENGINEER OF RECORD.

Company Logo

Project

Store Type
US DTGO PROTOTYPE

Location
PROTOTYPE
DTGO (U.S.)
CITY, STATE

Drawing Title
WALL SECTIONS

Drawn	Checked
XX	XX
Scale	**Date**
AS NOTED	##.##.####
Project No.	**Drawing No.**
XX	A6.3

POPEYES LOUISIANA KITCHEN MODEL DTGO, ADDRESS, CITY, STATE: DTGO PROTOTYPE DOCUMENTS (OCTOBER, 2025) STORE NO. XXXXX

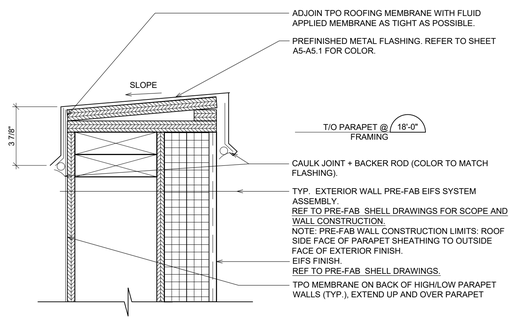

08 / A7.0 SECTION DETAIL @ PARAPET

SCALE: 2-1/2" = 1' - 0"

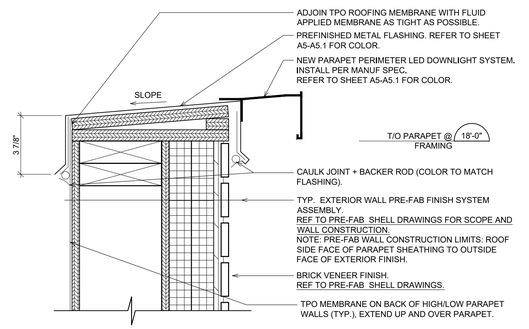

06 / A7.0 SECTION DETAIL @ PARAPET

SCALE: 2-1/2" = 1' - 0"

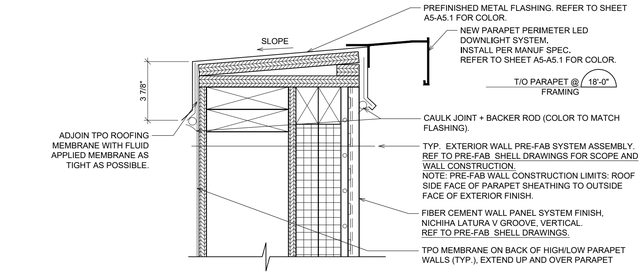

04 / A7.0 SECTION DETAIL @ PARAPET

SCALE: 2-1/2" = 1' - 0"

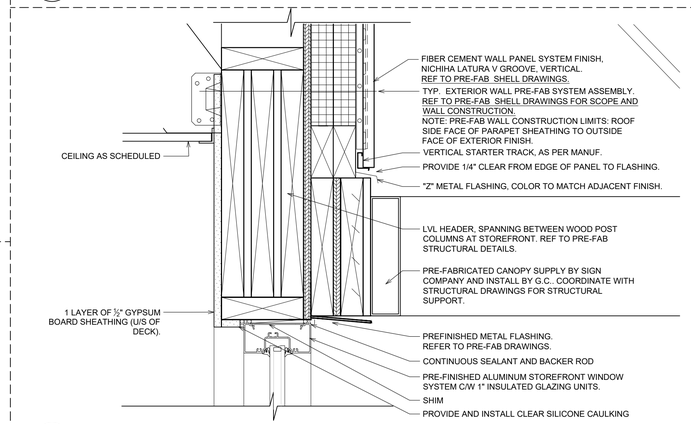

03 / A7.0 SECTION DETAIL @ STOREFRONT HEAD

SCALE: 2-1/2" = 1' - 0"

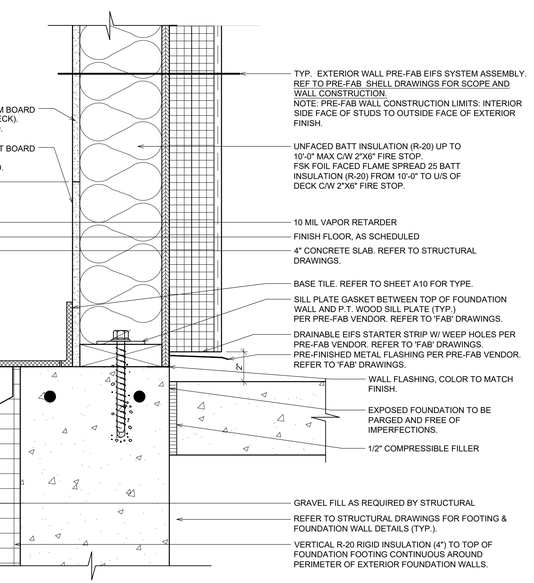

07 / A7.0 SECTION DETAIL @ WALL BASE

SCALE: 2-1/2" = 1' - 0"

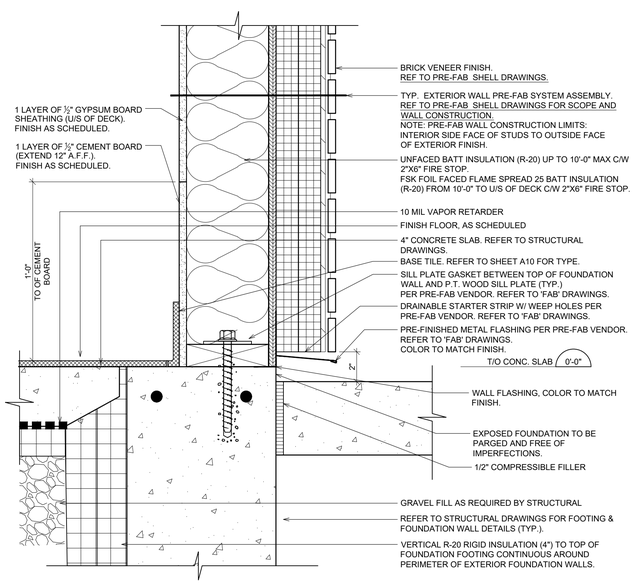

05 / A7.0 SECTION DETAIL @ WALL BASE

SCALE: 2-1/2" = 1' - 0"

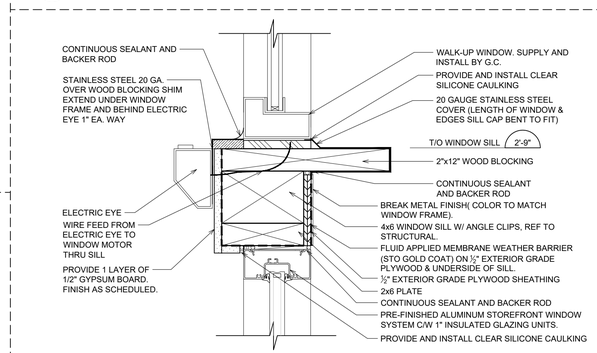

02 / A7.0 SECTION DETAIL @ WALK-UP WINDOW

SCALE: 2-1/2" = 1' - 0"

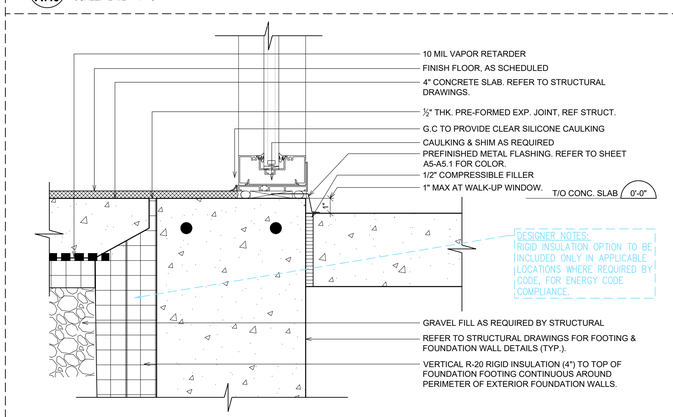

01 / A7.0 SECTION DETAIL @ STOREFRONT BASE

SCALE: 2-1/2" = 1' - 0"

ISSUE TABLE

No.	Date (mm/dd/yy)	Description
01	09-26-25	DTGO PROTOTYPE DOCUMENTS

REVISIONS

No.	Date	Description

DRAWINGS REVISED AS PER DESIGN BULLETIN

No.	Date	Description

THIS DRAWING IS OWNED BY OR LICENSED FOR USE BY POPEYES LOUISIANA KITCHEN I (OR ITS AFFILIATED OR RELATED COMPANIES) AND MAY NOT BE REPRODUCED, USED, DOWNLOADED, DISSEMINATED, PUBLISHED, OR TRANSFERRED IN ANY FORM OR BY ANY MEANS, EXCEPT WITH THE PRIOR WRITTEN CONSENT OF POPEYES LOUISIANA KITCHEN. COPYRIGHT INFRINGEMENT IS A VIOLATION OF FEDERAL LAW SUBJECT TO CRIMINAL AND CIVIL PENALTIES.

THE CONTRACTOR IS TO VERIFY ALL DIMENSIONS AND CONDITIONS ON THE PROJECT AND TO REPORT ANY DISCREPANCIES TO THE POPEYES LOUISIANA KITCHEN REPRESENTATIVE PRIOR TO COMMENCING WORK. THESE DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION PURPOSES UNLESS INDICATED BY POPEYES LOUISIANA KITCHEN AS "ISSUED FOR CONSTRUCTION".

Professional Seal

DESIGNER NOTES:
DESIGN GUIDELINE ONLY - NOT FOR PERMIT OR CONSTRUCTION

THESE DOCUMENTS MUST BE COMPLETED AND / OR MODIFIED BY A LICENSED ARCHITECT AND ENGINEER TO CONFORM TO ALL APPLICABLE CODES, AND SPECIFIC SITE CONDITIONS. THERE IS NO WARRANTY, WHETHER IMPLIED OR EXPRESSED THAT THESE DOCUMENTS MEET THE APPLICABLE CODE REQUIREMENTS.
LIABILITY FOR THE DESIGN AND ANY USE OF THE DOCUMENTS IS THE SOLE RESPONSIBILITY OF THE ARCHITECT AND ENGINEER OF RECORD.

Company Logo

Project

Store Type
US DTGO PROTOTYPE

Location
PROTOTYPE
DTGO (U.S.)
CITY, STATE

Drawing Title
SECTION DETAILS

Drawn	Checked
XX	XX
Scale	**Date**
AS NOTED	##.##.####
Project No.	**Drawing No.**
XX	A7.0

POPEYES LOUISIANA KITCHEN MODEL DTGO, ADDRESS, CITY, STATE: DTGO PROTOTYPE DOCUMENTS (OCTOBER, 2025) STORE NO. XXXXX

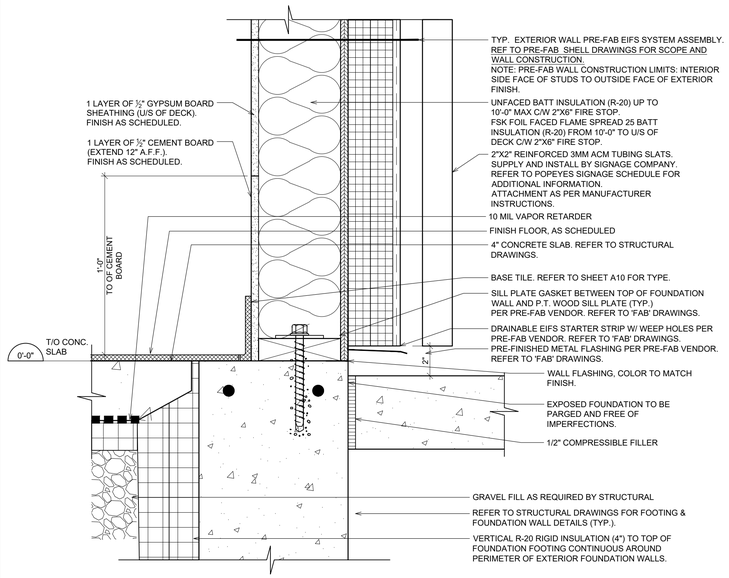

06 A7.1 SECTION DETAIL @ WALL BASE (@ SLATS)

SCALE: 2-1/2" = 1' - 0"

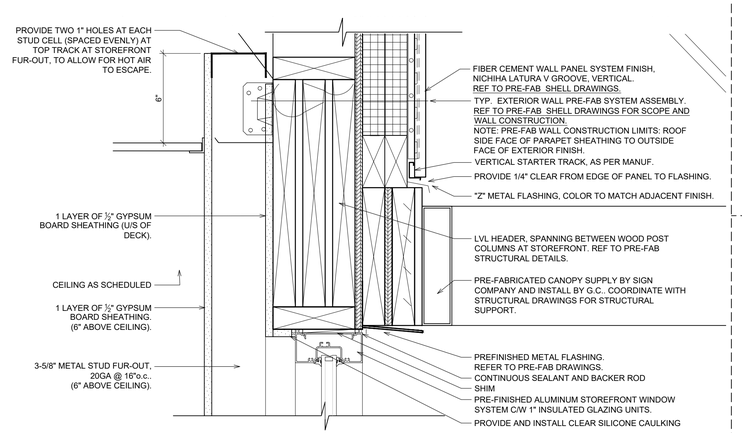

05 A7.1 SECTION DETAIL @ STOREFRONT HEAD

SCALE: 2-1/2" = 1' - 0"

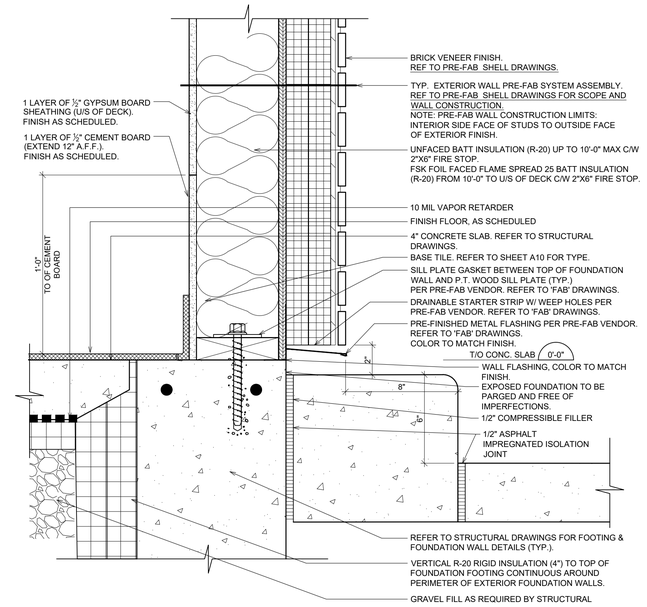

03 A7.1 SECTION DETAIL @ WALL BASE (DRIVE-THRU ELEVATION)

SCALE: 2-1/2" = 1' - 0"

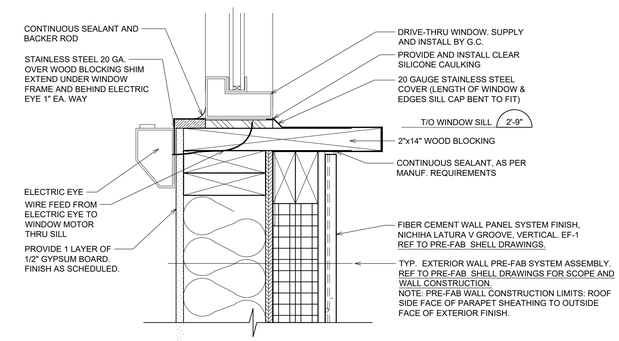

02 A7.1 SECTION DETAIL @ DRIVE-THRU WINDOW

SCALE: 2-1/2" = 1' - 0"

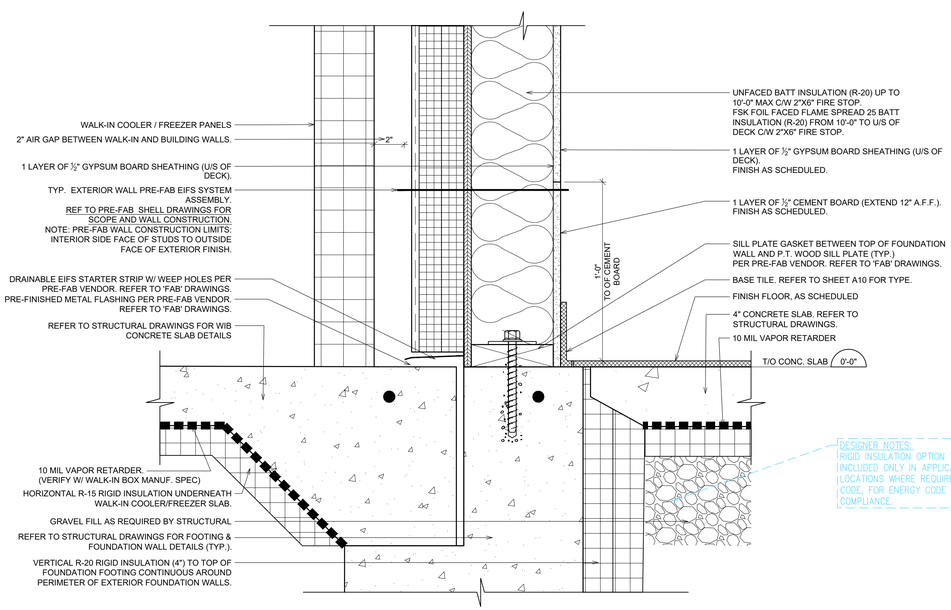

04 A7.1 SECTION DETAIL @ WALL BASE (REAR)

SCALE: 2-1/2" = 1' - 0"

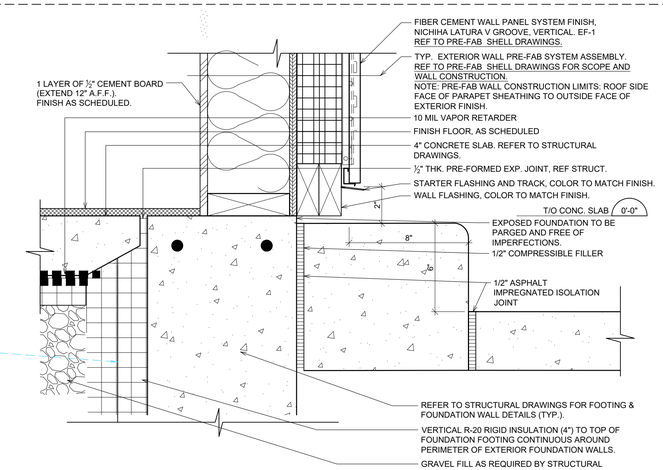

01 A7.1 SECTION DETAIL @ WALL BASE (DRIVE-THRU)

SCALE: 2-1/2" = 1' - 0"

ISSUE TABLE

No.	Date (mm/dd/yy)	Description
01	09-26-25	DTGO PROTOTYPE DOCUMENTS

REVISIONS

No.	Date	Description

DRAWINGS REVISED AS PER DESIGN BULLETIN

No.	Date	Description

THIS DRAWING IS OWNED BY OR LICENSED FOR USE BY POPEYES LOUISIANA KITCHEN (OR ITS AFFILIATED OR RELATED COMPANIES) AND MAY NOT BE REPRODUCED, USED, DOWNLOADED, DISSEMINATED, PUBLISHED, OR TRANSFERRED IN ANY FORM OR BY ANY MEANS, EXCEPT WITH THE PRIOR WRITTEN CONSENT OF POPEYES LOUISIANA KITCHEN. COPYRIGHT INFRINGEMENT IS A VIOLATION OF FEDERAL LAW SUBJECT TO CRIMINAL AND CIVIL PENALTIES.

THE CONTRACTOR IS TO VERIFY ALL DIMENSIONS AND CONDITIONS ON THE PROJECT AND TO REPORT ANY DISCREPANCIES TO THE POPEYES LOUISIANA KITCHEN REPRESENTATIVE PRIOR TO COMMENCING WORK. THESE DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION PURPOSES UNLESS INDICATED BY POPEYES LOUISIANA KITCHEN AS "ISSUED FOR CONSTRUCTION".

Professional Seal

DESIGNER NOTES:
DESIGN GUIDELINE ONLY - NOT FOR PERMIT OR CONSTRUCTION

THESE DOCUMENTS MUST BE COMPLETED AND / OR MODIFIED BY A LICENSED ARCHITECT AND ENGINEER TO CONFORM TO ALL APPLICABLE CODES, AND SPECIFIC SITE CONDITIONS. THERE IS NO WARRANTY, WHETHER IMPLIED OR EXPRESSED THAT THESE DOCUMENTS MEET THE APPLICABLE CODE REQUIREMENTS. LIABILITY FOR THE DESIGN AND ANY USE OF THE DOCUMENTS IS THE SOLE RESPONSIBILITY OF THE ARCHITECT AND ENGINEER OF RECORD.

Company Logo

Project

Store Type
US DTGO PROTOTYPE

Location
PROTOTYPE
DTGO (U.S.)
CITY, STATE

Drawing Title
SECTION DETAILS

Drawn	Checked
XX	XX
Scale	**Date**
AS NOTED	##.##.####
Project No.	**Drawing No.**
XX	A7.1

POPEYES LOUISIANA KITCHEN MODEL DTGO, ADDRESS, CITY, STATE: DTGO PROTOTYPE DOCUMENTS (OCTOBER, 2025) STORE NO. XXXXX

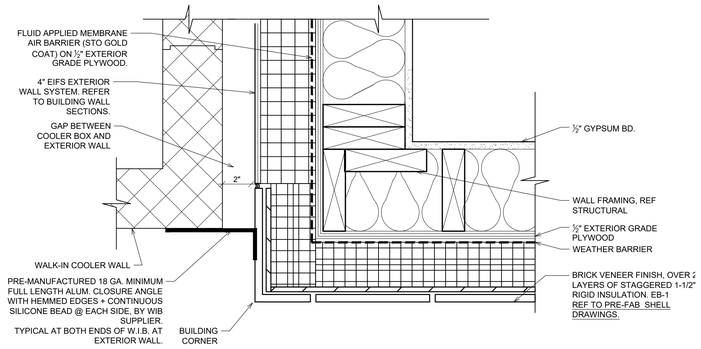

7 / A7.2 FLASHING DETAIL @ W.I.B. CORNER

SCALE: 2 ½"=1'-0"

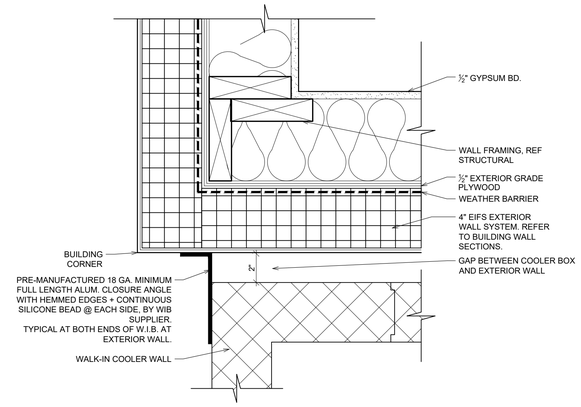

6 / A7.2 FLASHING DETAIL @ W.I.B. CORNER

SCALE: 2 ½"=1'-0"

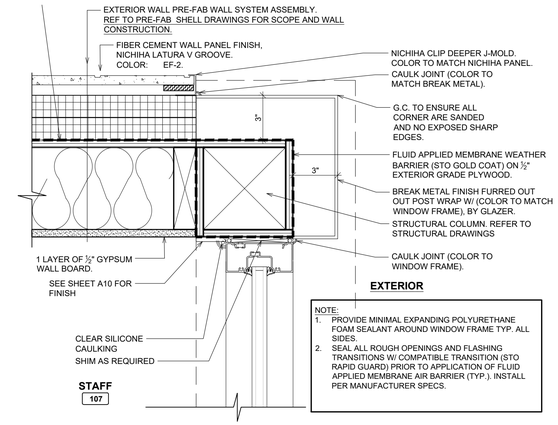

NOTE:
1. PROVIDE MINIMAL EXPANDING POLYURETHANE FOAM SEALANT AROUND WINDOW FRAME TYP. ALL SIDES.
2. SEAL ALL ROUGH OPENINGS AND FLASHING TRANSITIONS W/ COMPATIBLE TRANSITION (STO RAPID GUARD) PRIOR TO APPLICATION OF FLUID APPLIED MEMBRANE AIR BARRIER (TYP.). INSTALL PER MANUFACTURER SPECS.

1 / A7.2 PLAN DETAIL @ CORNER

SCALE: 2 ½"=1'-0"

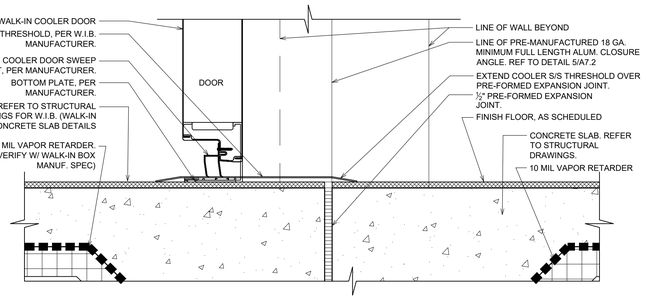

8 / A7.2 THRESHOLD DETAIL @ W.I.B.

SCALE: 2 ½"=1'-0"

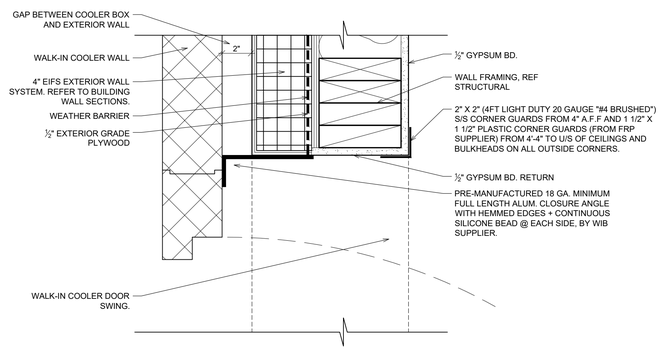

5 / A7.2 FLASHING DETAIL @ W.I.B. DOOR

SCALE: 2 ½"=1'-0"

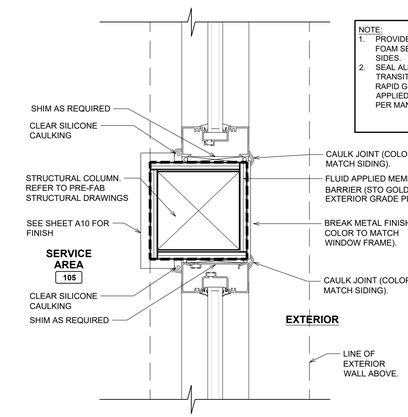

NOTE:
1. PROVIDE MINIMAL EXPANDING POLYURETHANE FOAM SEALANT AROUND WINDOW FRAME TYP. ALL SIDES.
2. SEAL ALL ROUGH OPENINGS AND FLASHING TRANSITIONS W/ COMPATIBLE TRANSITION (STO RAPID GUARD) PRIOR TO APPLICATION OF FLUID APPLIED MEMBRANE AIR BARRIER (TYP.). INSTALL PER MANUFACTURER SPECS.

2 / A7.2 PLAN DETAIL @ STOREFRONT POST

SCALE: 2 ½"=1'-0"

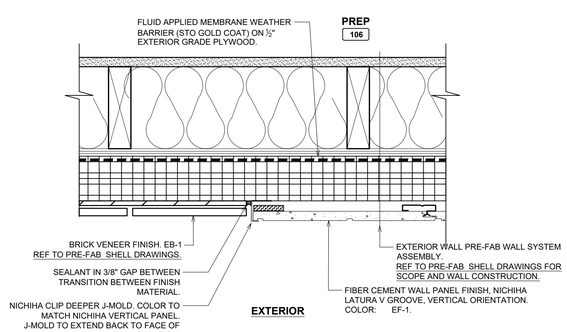

4 / A7.2 PLAN DETAIL @ MATERIAL TRANSITION

SCALE: 2 ½"=1'-0"

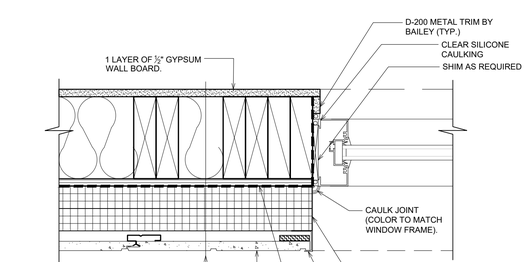

NOTE:
1. PROVIDE MINIMAL EXPANDING POLYURETHANE FOAM SEALANT AROUND WINDOW FRAME TYP. ALL SIDES.
2. SEAL ALL ROUGH OPENINGS AND FLASHING TRANSITIONS W/ COMPATIBLE TRANSITION (STO RAPID GUARD) PRIOR TO APPLICATION OF FLUID APPLIED MEMBRANE AIR BARRIER (TYP.). INSTALL PER MANUFACTURER SPECS.
3. INSTALL BOLLARD AFTER INSTALLATION OF DRIVE-THRU WINDOW

3 / A7.2 PLAN DETAIL @ DRIVE-THRU WINDOW

SCALE: 2 ½"=1'-0"

ISSUE TABLE

No.	Date (mm/dd/yy)	Description
01	09-26-25	DTGO PROTOTYPE DOCUMENTS

REVISIONS

No.	Date	Description

DRAWINGS REVISED AS PER DESIGN BULLETIN

No.	Date	Description

THIS DRAWING IS OWNED BY OR LICENSED FOR USE BY POPEYES LOUISIANA KITCHEN (OR ITS AFFILIATED OR RELATED COMPANIES) AND MAY NOT BE REPRODUCED, USED, DOWNLOADED, DISSEMINATED, PUBLISHED, OR TRANSFERRED IN ANY FORM OR BY ANY MEANS, EXCEPT WITH THE PRIOR WRITTEN CONSENT OF POPEYES LOUISIANA KITCHEN. COPYRIGHT INFRINGEMENT IS A VIOLATION OF FEDERAL LAW SUBJECT TO CRIMINAL AND CIVIL PENALTIES.

THE CONTRACTOR IS TO VERIFY ALL DIMENSIONS AND CONDITIONS ON THE PROJECT AND TO REPORT ANY DISCREPANCIES TO THE POPEYES LOUISIANA KITCHEN REPRESENTATIVE PRIOR TO COMMENCING WORK. THESE DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION PURPOSES UNLESS INDICATED BY POPEYES LOUISIANA KITCHEN AS "ISSUED FOR CONSTRUCTION".

Professional Seal

DESIGNER NOTES:
DESIGN GUIDELINE ONLY - NOT FOR PERMIT OR CONSTRUCTION

THESE DOCUMENTS MUST BE COMPLETED AND / OR MODIFIED BY A LICENSED ARCHITECT AND ENGINEER TO CONFORM TO ALL APPLICABLE CODES, AND SPECIFIC SITE CONDITIONS. THERE IS NO WARRANTY, WHETHER IMPLIED OR EXPRESSED THAT THESE DOCUMENTS MEET THE APPLICABLE CODE REQUIREMENTS.
LIABILITY FOR THE DESIGN AND ANY USE OF THE DOCUMENTS IS THE SOLE RESPONSIBILITY OF THE ARCHITECT AND ENGINEER OF RECORD.

Company Logo

Project

Store Type
US DTGO PROTOTYPE

Location
PROTOTYPE
DTGO (U.S.)
CITY, STATE

Drawing Title
PLAN DETAILS

Drawn	Checked
XX	XX
Scale: AS NOTED	Date: ##.##.####
Project No.: XX	Drawing No.: A7.2

POPEYES LOUISIANA KITCHEN MODEL DTGO, ADDRESS, CITY, STATE: DTGO PROTOTYPE DOCUMENTS (OCTOBER, 2025) STORE NO. XXXXX

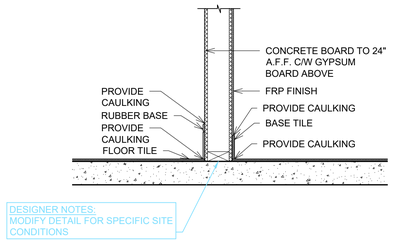

4 A8 BASE @ FRP & GYPSUM BOARD

SCALE: 1" = 1'-0"

3 A8 NOT USED

SCALE: 1/2" = 1'-0"



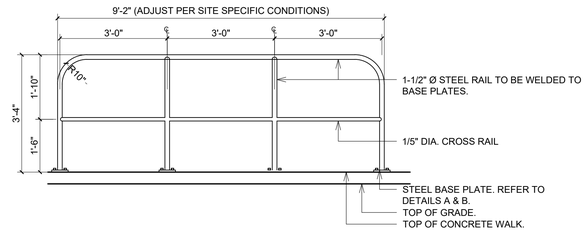

2 A8 DETAIL @ METAL RAILING

SCALE: 1/2" = 1'-0"

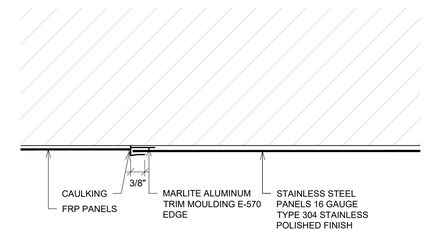

1 A8 FRP-STAINLESS STEEL TRIM DETAIL

SCALE: 6" = 1'-0"

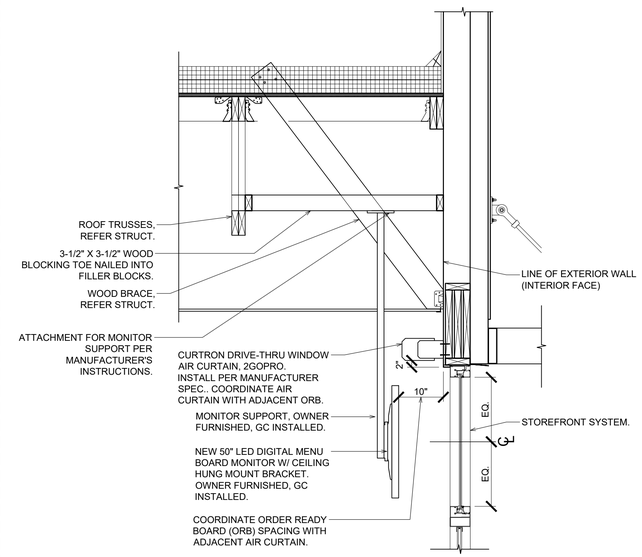

5 A8 MONITOR SUPPORT BRACKET DETAIL

SCALE: 3/4" = 1'-0"

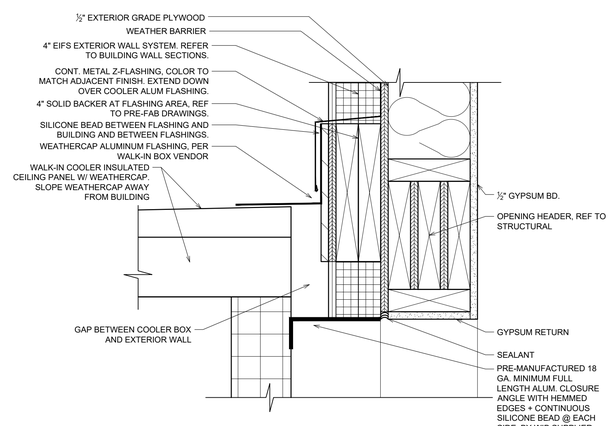

6 A8 HEAD DETAIL @ W.I.B.

SCALE: 2 ½"=1'-0"

ISSUE TABLE

No.	Date (mm/dd/yy)	Description
01	09-26-25	DTGO PROTOTYPE DOCUMENTS

REVISIONS

No.	Date	Description

DRAWINGS REVISED AS PER DESIGN BULLETIN

No.	Date	Description

THIS DRAWING IS OWNED BY OR LICENSED FOR USE BY POPEYES LOUISIANA KITCHEN (OR ITS AFFILIATED OR RELATED COMPANIES) AND MAY NOT BE REPRODUCED, USED, DOWNLOADED, DISSEMINATED, PUBLISHED, OR TRANSFERRED IN ANY FORM OR BY ANY MEANS, EXCEPT WITH THE PRIOR WRITTEN CONSENT OF POPEYES LOUISIANA KITCHEN. COPYRIGHT INFRINGEMENT IS A VIOLATION OF FEDERAL LAW SUBJECT TO CRIMINAL AND CIVIL PENALTIES.

THE CONTRACTOR IS TO VERIFY ALL DIMENSIONS AND CONDITIONS ON THE PROJECT AND TO REPORT ANY DISCREPANCIES TO THE POPEYES LOUISIANA KITCHEN REPRESENTATIVE PRIOR TO COMMENCING WORK. THESE DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION PURPOSES UNLESS INDICATED BY POPEYES LOUISIANA KITCHEN AS "ISSUED FOR CONSTRUCTION".

Professional Seal

DESIGNER NOTES:
DESIGN GUIDELINE ONLY - NOT FOR PERMIT OR CONSTRUCTION

THESE DOCUMENTS MUST BE COMPLETED AND / OR MODIFIED BY A LICENSED ARCHITECT AND ENGINEER TO CONFORM TO ALL APPLICABLE CODES, AND SPECIFIC SITE CONDITIONS. THERE IS NO WARRANTY, WHETHER IMPLIED OR EXPRESSED THAT THESE DOCUMENTS MEET THE APPLICABLE CODE REQUIREMENTS.
LIABILITY FOR THE DESIGN AND ANY USE OF THE DOCUMENTS IS THE SOLE RESPONSIBILITY OF THE ARCHITECT AND ENGINEER OF RECORD.

Company Logo

Project

Store Type
US DTGO PROTOTYPE

Location
PROTOTYPE
DTGO (U.S.)
CITY, STATE

Drawing Title
DETAILS

Drawn	Checked
XX	XX
Scale	**Date**
AS NOTED	##.##.####
Project No.	**Drawing No.**
XX	A8

POPEYES LOUISIANA KITCHEN MODEL DTGO, ADDRESS, CITY, STATE: DTGO PROTOTYPE DOCUMENTS (OCTOBER, 2025) STORE NO. XXXXX

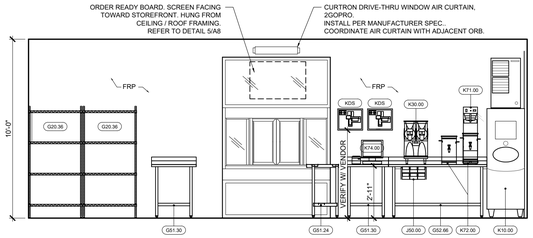

1 A9.1 **SERVICE AREA**
SCALE: 1/4" = 1'-0"

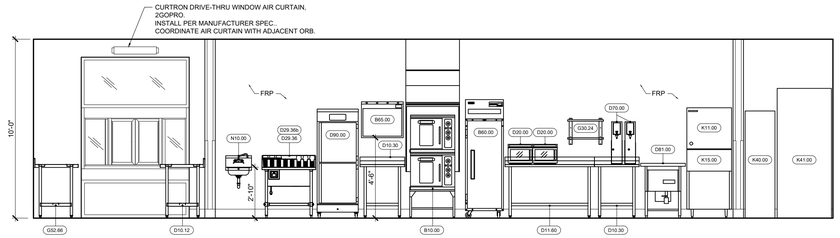

2 A9.1 **SERVICE / PREP AREA**
SCALE: 1/4" = 1'-0"

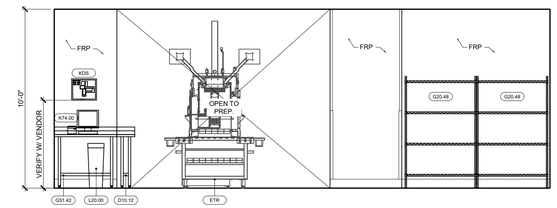

3 A9.1 **PREP / STAFF AREA**
SCALE: 1/4" = 1'-0"

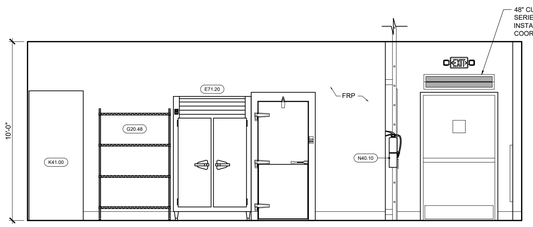

4 A9.1 **PREP AREA**
SCALE: 1/4" = 1'-0"

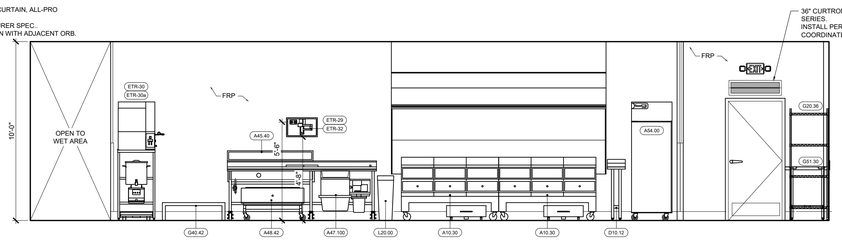

5 A9.1 **PREP AREA**
SCALE: 1/4" = 1'-0"

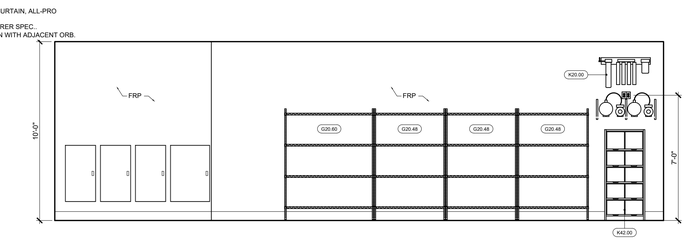

6 A9.1 **WET AREA**
SCALE: 1/4" = 1'-0"

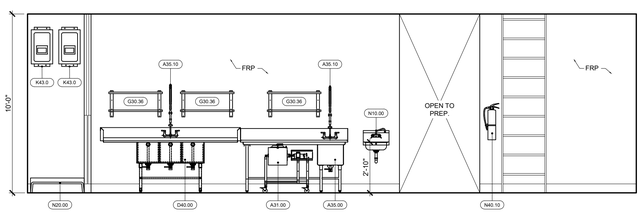

7 A9.1 **WET AREA**
SCALE: 1/4" = 1'-0"





8 A9.1 **WET AREA**
SCALE: 1/4" = 1'-0"

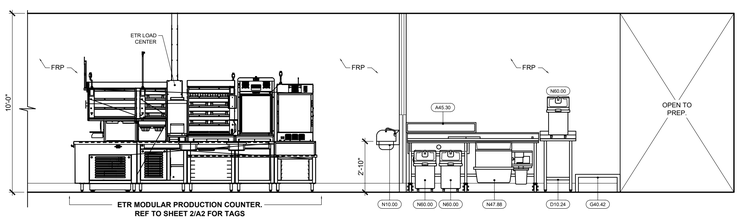

9 A9.1 **PREP AREA**
SCALE: 1/4" = 1'-0"

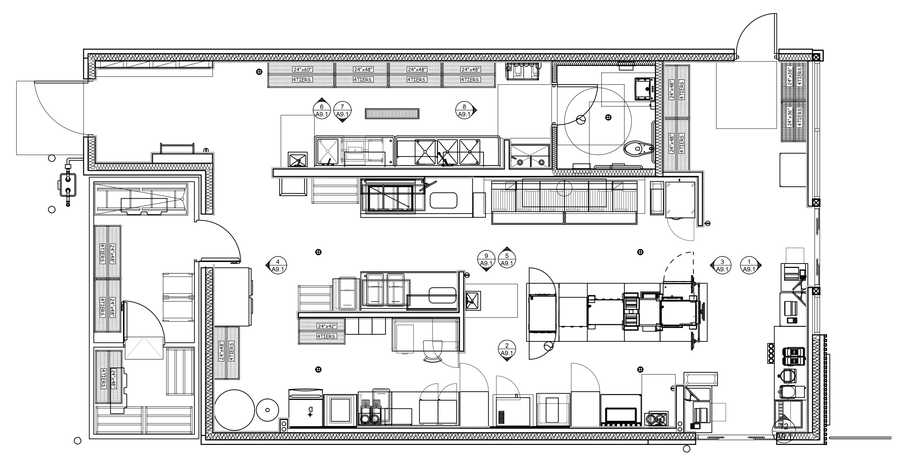

10 A9.1 **LEGEND FLOOR PLAN**
SCALE: 3/16"=1'-0"

ISSUE TABLE

No.	Date (mm/dd/yy)	Description
01	09-26-25	DTGO PROTOTYPE DOCUMENTS

REVISIONS

No.	Date	Description

DRAWINGS REVISED AS PER DESIGN BULLETIN

No.	Date	Description

THIS DRAWING IS OWNED BY OR LICENSED FOR USE BY POPEYES LOUISIANA KITCHEN (OR ITS AFFILIATED OR RELATED COMPANIES) AND MAY NOT BE REPRODUCED, USED, DOWNLOADED, DISSEMINATED, PUBLISHED, OR TRANSFERRED IN ANY FORM OR BY ANY MEANS, EXCEPT WITH THE PRIOR WRITTEN CONSENT OF POPEYES LOUISIANA KITCHEN. COPYRIGHT INFRINGEMENT IS A VIOLATION OF FEDERAL LAW SUBJECT TO CRIMINAL AND CIVIL PENALTIES.

THE CONTRACTOR IS TO VERIFY ALL DIMENSIONS AND CONDITIONS ON THE PROJECT AND TO REPORT ANY DISCREPANCIES TO THE POPEYES LOUISIANA KITCHEN REPRESENTATIVE PRIOR TO COMMENCING WORK. THESE DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION PURPOSES UNLESS INDICATED BY POPEYES LOUISIANA KITCHEN AS "ISSUED FOR CONSTRUCTION".

Professional Seal

DESIGNER NOTES:
DESIGN GUIDELINE ONLY - NOT FOR PERMIT OR CONSTRUCTION

THESE DOCUMENTS MUST BE COMPLETED AND / OR MODIFIED BY A LICENSED ARCHITECT AND ENGINEER TO CONFORM TO ALL APPLICABLE CODES, AND SPECIFIC SITE CONDITIONS. THERE IS NO WARRANTY, WHETHER IMPLIED OR EXPRESSED THAT THESE DOCUMENTS MEET THE APPLICABLE CODE REQUIREMENTS. LIABILITY FOR THE DESIGN AND ANY USE OF THE DOCUMENTS IS THE SOLE RESPONSIBILITY OF THE ARCHITECT AND ENGINEER OF RECORD.

Company Logo

Project

Store Type
US DTGO PROTOTYPE

Location
PROTOTYPE
DTGO (U.S.)
CITY, STATE

Drawing Title
INTERIOR ELEVATIONS

Drawn	Checked
XX	XX
Scale	**Date**
AS NOTED	##.##.####
Project No.	**Drawing No.**
XX	A9.1

POPEYES LOUISIANA KITCHEN MODEL DTGO, ADDRESS, CITY, STATE: DTGO PROTOTYPE DOCUMENTS (OCTOBER, 2025) STORE NO. XXXXX

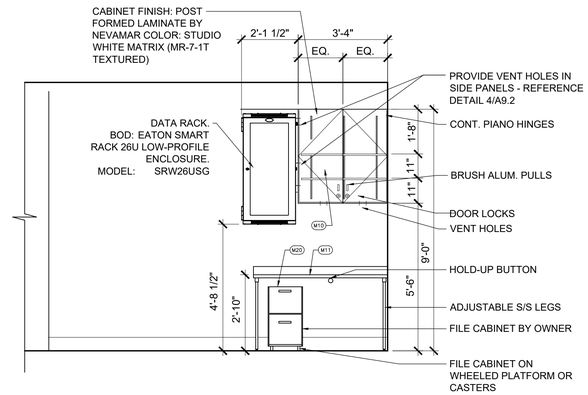

1 / A9.2 ELEVATIONS @ OFFICE, CABINET

SCALE: 3/8" = 1'-0"

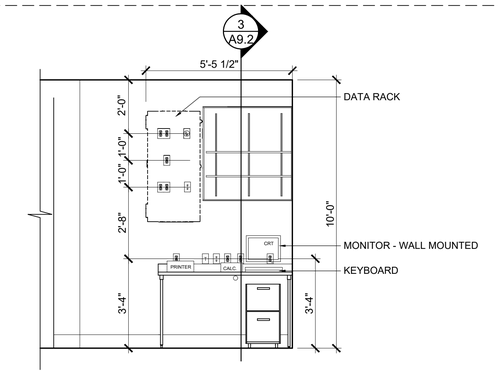

2 / A9.2 ELEVATIONS @ OFFICE

SCALE: 3/8" = 1'-0"



3 / A9.2 ELEVATIONS @ OFFICE

SCALE: 3/8" = 1'-0"



4 / A9.2 PERFORATED SIDE PANELS

SCALE: NTS

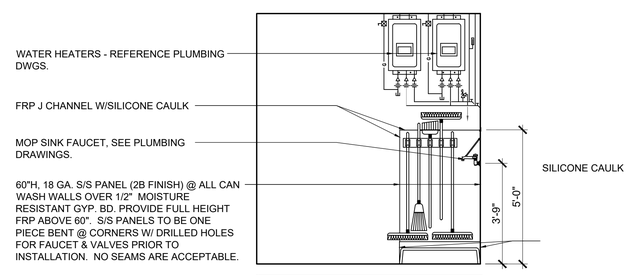

NOTE:
G.C. TO VERIFY EXACT DIMENSIONS OF MOP SINK PRIOR TO CONSTRUCTION

5 / A9.2 ELEVATION @ MOP SINK

SCALE: 3/8" = 1'-0"

EATON
Powering Business Worldwide

TRIPP LITE SERIES

SmartRack 26U Low-Profile Switch-Depth Wall-Mount Half-Height Rack Enclosure, Clear Acrylic Window, Hinged Back

MODEL NUMBER: SRW26USG

Wall-mount cabinet secures and organizes 26U of 19-inch rack equipment up to 20.5 inches deep in locations with limited floor space. Clear acrylic window allows you to monitor equipment without unlocking door.

Description

The SRW26USG SmartRack® 26U Low-Profile Switch-Depth Wall-Mount Rack Enclosure Cabinet is designed to house EIA-standard 19-inch rack equipment in network wiring closets, retail locations, classrooms, back offices and other areas with limited floor space where you need equipment to be secure, organized and out of the way. Constructed from heavy-duty steel with a durable black powder-coated finish, the cabinet has a maximum load capacity of 250 pounds (113.4 kilograms).
The front door features a shatter-resistant clear acrylic window that lets you monitor equipment readouts without unlocking the enclosure. Not only does the window help prevent equipment tampering and reduce acoustic noise, but it also adds visual flair to your IT installation.
The cabinet swings away from the wall on a sturdy hinge, allowing easy back-door access to equipment and cabling during installation and maintenance. The doors and side panels lock securely to help prevent damage, tampering or theft. The top, bottom and removable side panels are vented, which allows air to flow freely and keep equipment cool. The reversible doors can open left or right by rotating the cabinet 180 degrees before mounting. Convenient top and bottom ports allow easy cable routing.
The SRW26USG comes fully assembled and ready to mount to the wall, or use the optional SRCASTER rolling caster kit (sold separately) to make it a mobile rack. Square and 12-24 threaded mounting holes and numbered rack spaces make equipment installation easy. The vertical mounting rails adjust in 7/8-inch increments to accommodate equipment up to 20.5 inches deep, such as network switches and patch panels.

Features

Saves Valuable Workspace
- Perfect for network wiring closets, retail locations, classrooms, back offices and other areas with limited floor space where you need equipment to be secure, organized and out of the way
- Houses EIA-standard 19 in. rack equipment in 26U of space
- Maximum load capacity of 250 pounds (113.4 kg)

Hinged Cabinet for Convenient Access
- Swings away from the wall to allow easy back-door access to equipment and cabling during installation and maintenance

Highlights

- Maximum load capacity of 250 lbs (113.4 kgs)
- Swings away from wall on hinge for back-door easy access
- Front door includes shatter-resistant clear acrylic window
- Locking steel cabinet vented at sides, top and bottom
- Secures 26U of 19 in. rack equipment up to 20.5 in. deep

Package Includes

- SRW26USG SmartRack 26U Low-Profile Switch-Depth Wall-Mount Rack Enclosure Cabinet
- (48) M6 screws
- (48) M6 cage nuts
- (48) M6 washers
- (48) 12-24 screws
- (2) Keys
- Owner's manual

6 / A9.2 CABINET ENCLOSURE

SCALE: NTS

ISSUE TABLE

No.	Date (mm/dd/yy)	Description
01	09-26-25	DTGO PROTOTYPE DOCUMENTS

REVISIONS

No.	Date	Description

DRAWINGS REVISED AS PER DESIGN BULLETIN

No.	Date	Description

THIS DRAWING IS OWNED BY OR LICENSED FOR USE BY POPEYES LOUISIANA KITCHEN (OR ITS AFFILIATED OR RELATED COMPANIES) AND MAY NOT BE REPRODUCED, USED, DOWNLOADED, DISSEMINATED, PUBLISHED, OR TRANSFERRED IN ANY FORM OR BY ANY MEANS, EXCEPT WITH THE PRIOR WRITTEN CONSENT OF POPEYES LOUISIANA KITCHEN. COPYRIGHT INFRINGEMENT IS A VIOLATION OF FEDERAL LAW SUBJECT TO CRIMINAL AND CIVIL PENALTIES.

THE CONTRACTOR IS TO VERIFY ALL DIMENSIONS AND CONDITIONS ON THE PROJECT AND TO REPORT ANY DISCREPANCIES TO THE POPEYES LOUISIANA KITCHEN REPRESENTATIVE PRIOR TO COMMENCING WORK. THESE DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION PURPOSES UNLESS INDICATED BY POPEYES LOUISIANA KITCHEN AS "ISSUED FOR CONSTRUCTION".

Professional Seal

DESIGNER NOTES:
DESIGN GUIDELINE ONLY - NOT FOR PERMIT OR CONSTRUCTION

THESE DOCUMENTS MUST BE COMPLETED AND / OR MODIFIED BY A LICENSED ARCHITECT AND ENGINEER TO CONFORM TO ALL APPLICABLE CODES, AND SPECIFIC SITE CONDITIONS. THERE IS NO WARRANTY, WHETHER IMPLIED OR EXPRESSED THAT THESE DOCUMENTS MEET THE APPLICABLE CODE REQUIREMENTS.
LIABILITY FOR THE DESIGN AND ANY USE OF THE DOCUMENTS IS THE SOLE RESPONSIBILITY OF THE ARCHITECT AND ENGINEER OF RECORD.

Company Logo

Project

LOUISIANA KITCHEN 19 72
POPEYES

Store Type
US DTGO PROTOTYPE

Location
PROTOTYPE
DTGO (U.S.)
CITY, STATE

Drawing Title
INTERIOR ELEVATIONS

Drawn	Checked
XX	XX
Scale	**Date**
AS NOTED	##.##.####
Project No.	**Drawing No.**
XX	A9.2

POPEYES LOUISIANA KITCHEN MODEL DTGO, ADDRESS, CITY, STATE: DTGO PROTOTYPE DOCUMENTS (OCTOBER, 2025) STORE NO. XXXXX



1 A9.3 PLAN UNISEX WASHROOM
SCALE: 1/4" = 1'-0"

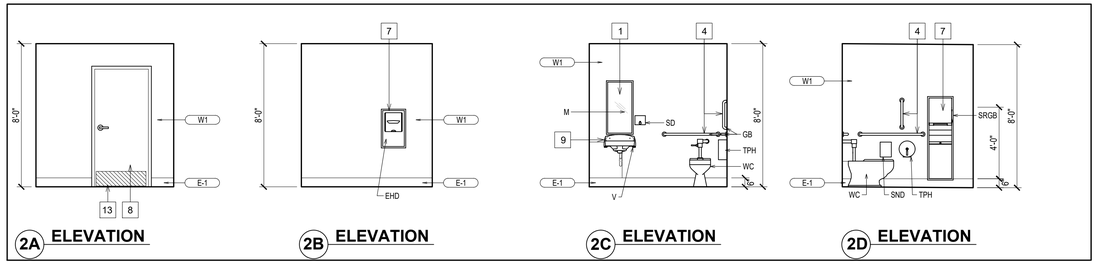

2A ELEVATION **2B ELEVATION** **2C ELEVATION** **2D ELEVATION**

2 A9.3 ELEVATIONS UNISEX WASHROOM
SCALE: 1/4" = 1'-0"

INTERIOR ELEVATION NOTES

1. MIRROR IN PUBLIC WASHROOMS TO BE 1'-6" x 3'-0". MIRROR TO BE CENTERED ABOVE VANITIES & SURFACE MOUNTED ON WALL FINISH. SEE DRAWING A2 FOR SPECIFICATION BOTTOM AND ONE OF THE VERTICAL SIDE FRAMES TO BE PRE-DRILLED & SCREWED TO WALL. REMAINDER OF FRAMES AND MIRROR TO BE ADHERED W/ APPROVED MIRROR ADHESIVE OR SILICONE. REFER TO DETAIL 14/A9.3
2. NOT USED.
3. NOT USED
4. PROVIDE PLYWOOD BACKING IN BETWEEN STUDS TO ACCOMMODATE GRAB BARS. PROVIDE ADEQUATE SIZE. REFER TO DETAIL11/A9.3.
5. N/A.
6. NOT USED.
7. PROVIDE OPENING IN WALL TO ACCOMMODATE SEMI-RECESSED ACCESSORIES. REFER TO DETAIL 8/A9.3 & 10/A9.3.
8. DOORS & FRAMES. REFER TO FINISH SCHEDULES ON SHEET A10 FOR FINISHES & A11 FOR TYPE.
9. VANITY - REFER TO DETAIL 12/A9.3.
10. NOT USED.
11. LAVATORY CARRIER - SEE PLUMBING SCHEDULE
12. NOT USED.
13. G.C TO PROVIDE AND INSTALL KICK PLATE. REFER TO HARDWARE SCHEDULE ON SHEET A11.
14. NOT USED.

SYMBOL LEGEND

1 NOTE REFERENCE REFER TO ELEVATION NOTES

WASHROOM ACCESSORIES

TPH	-TOILET PAPER HOLDER (R40), BOBRICK B-2890
GB	-GRAB BAR (R50), GAMCO 150-S x36" -GRAB BAR (R51), GAMCO 150-S x42" -GRAB BAR (R52), GAMCO 150-S x18"
M	-MIRROR (R20), CHANNEL FRAME 18"x36" - GAMCO C-18x36
SRGB	-SEMI-RECESSED GARBAGE BIN (N82) - BOBRICK B-3961
EHD	-ELECTRIC HAND DRYER (N83) - BRUSHED STAINLESS STEEL - XLERATOR XL-SB, WITH ADA-COMPLIANT RECESS KIT #40502
SD	-SOAP DISPENSER (R30), SURFACE MOUNT - BOBRICK B-4112
V	-VANITY
WC	-WATER CLOSET
CH	-COAT HOOK (R22), HEAVY-DUTY COAK HOOK BOBRICK B-9541
SND	-SANITARY NAPKIN DISPENSER (R60), SURFACE MOUNT BOBRICK B-270

WASHROOM GENERAL NOTES

1. DIMENSIONS SHOWN ARE FROM FINISH FACE OF WALL/FLOOR.
2. DIMENSION SHOWN ARE PREFERRED DIMENSIONS AND COMPLY WITH THE REQUIREMENTS OF A.D.A.A.G AND A.N.S.I -A117.1 G.C SHALL NOT DEVIATE FROM THESE STANDARDS UNLESS NECESSARY TO COMPLY WITH ADDITIONAL STATE OR LOCAL ACCESSIBILITY REQUIREMENTS.
3. REFER TO SPECIFICATIONS FOR ADDITIONAL INFORMATION.
4. G.C TO PROVIDE CLEAR CAULKING AT ALL WASHROOM FIXTURES AND TILE INTERSECTIONS.
5. REFER TO TYPICAL ACCESSORIES DETAILS FOR MOUNTING HEIGHTS AND OTHER SPECIFIC DIMENSIONS.
6. REFER TO FINISH SCHEDULE ON SHEET A10 FOR FINISHES.
7. G.C SHALL PROVIDE ADDITIONAL SOLID WOOD BLOCKING IN WALL AS NEEDED FOR PROPER INSTALLATION AND STRUCTURAL SUPPORT OF ACCESSORY ITEMS.
8. VERIFY ALL PAPER & SOAP PRODUCTS WITH VENDOR.
9. THE G.C. SHALL VERIFY WITH THE OWNER THAT THE PAPER AND SOAP SUPPLIER IS AVAILABLE FOR ALL REPLENISHMENT PRIOR TO HEALTH INSPECTION.
10. ALL EQUIPMENTS AND RESTROOM FIXTURES SHALL BE PROVIDED BY OWNER.

3 A9.3 N/A
SCALE: 1/4" = 1'-0"

4 A9.3 N/A
SCALE: 1/4" = 1'-0"

5 A9.3 N/A.

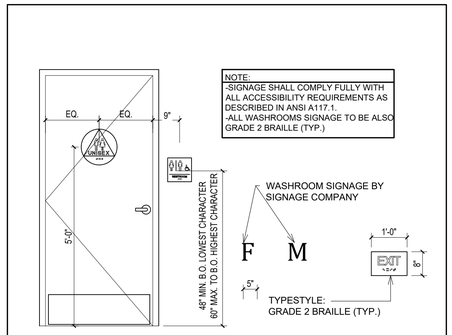

6 A9.3 N/A

7 A9.3 ACCESSIBILITY SIGNAGE.
SCALE: 1/2" = 1'-0"

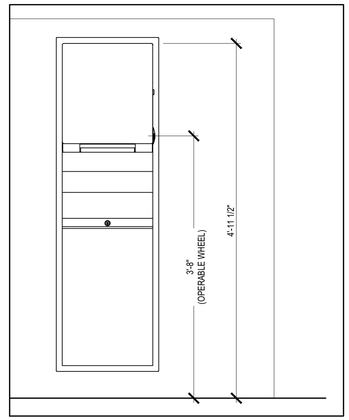

8 A9.3 DETAIL @ SEMI-RECESSED GARBAGE
SCALE: 1" = 1'-0"

9 A9.3 NOT USED
SCALE: 1" = 1'-0"

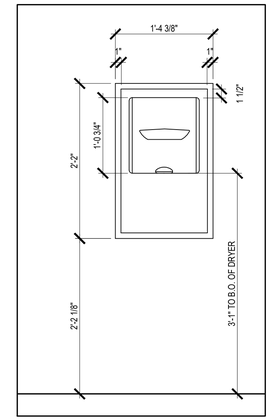

10 A9.3 DETAIL @ HAND DRYER
SCALE: 1" = 1'-0"

NOTES:
1. DIMENSIONS SHOWN ARE FROM FINISH FACE OF WALL/FLOOR.
2. DIMENSIONS SHOWN ARE PREFERRED DIMENSIONS AND COMPLY WITH THE REQUIREMENTS OF A.D.A.A.G. & A.N.S.I.-A117.1. G.C. SHALL NOT DEVIATE FROM THESE STANDARDS, UNLESS NECESSARY TO COMPLY WITH ADDITIONAL STATE OR LOCAL ACCESSIBILITY REQUIREMENTS.
3. REFER TO ACCESSORY SCHEDULE & SPECIFICATIONS FOR ADDITIONAL INFORMATION.

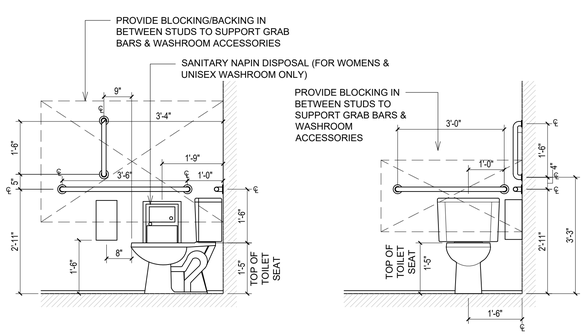

11 A9.3 DETAIL @ GRAB BARS
SCALE: 1/2" = 1'-0"

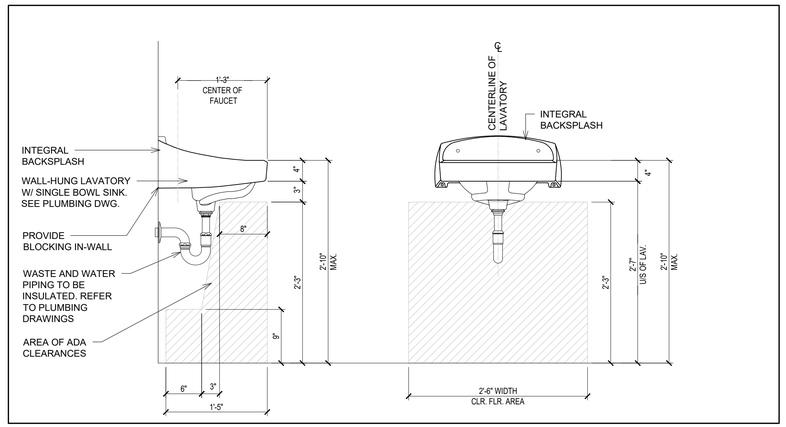

12 A9.3 DETAIL @ VANITY
SCALE: 1" = 1'-0"



13 A9.3 DETAIL @ SANITARY NAPKIN RECEPTACLE
SCALE: 1" = 1'-0"

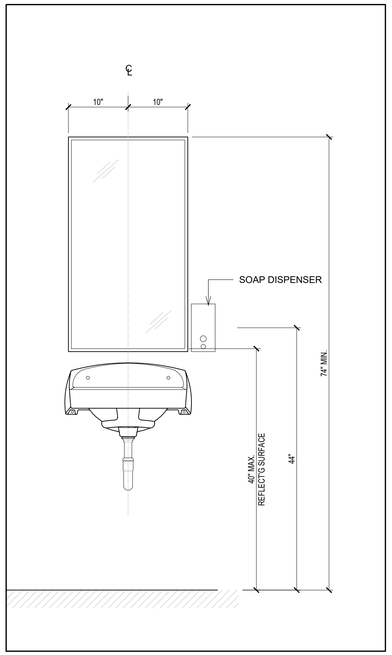

14 A9.3 MIRROR AND SOAP DISPENSER DETAIL
SCALE: 1" = 1'-0"

ISSUE TABLE

No.	Date (mm/dd/yy)	Description
01	09-26-25	DTGO PROTOTYPE DOCUMENTS

REVISIONS

No.	Date	Description

DRAWINGS REVISED AS PER DESIGN BULLETIN

No.	Date	Description

THIS DRAWING IS OWNED BY OR LICENSED FOR USE BY POPEYES LOUISIANA KITCHEN (OR ITS AFFILIATED OR RELATED COMPANIES) AND MAY NOT BE REPRODUCED, USED, DOWNLOADED, DISSEMINATED, PUBLISHED, OR TRANSFERRED IN ANY FORM OR BY ANY MEANS, EXCEPT WITH THE PRIOR WRITTEN CONSENT OF POPEYES LOUISIANA KITCHEN. COPYRIGHT INFRINGEMENT IS A VIOLATION OF FEDERAL LAW SUBJECT TO CRIMINAL AND CIVIL PENALTIES.

THE CONTRACTOR IS TO VERIFY ALL DIMENSIONS AND CONDITIONS ON THE PROJECT AND TO REPORT ANY DISCREPANCIES TO THE POPEYES LOUISIANA KITCHEN REPRESENTATIVE PRIOR TO COMMENCING WORK. THESE DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION PURPOSES UNLESS INDICATED BY POPEYES LOUISIANA KITCHEN AS "ISSUED FOR CONSTRUCTION".

Professional Seal

DESIGNER NOTES:
DESIGN GUIDELINE ONLY - NOT FOR PERMIT OR CONSTRUCTION

THESE DOCUMENTS MUST BE COMPLETED AND / OR MODIFIED BY A LICENSED ARCHITECT AND ENGINEER TO CONFORM TO ALL APPLICABLE CODES, AND SPECIFIC SITE CONDITIONS. THERE IS NO WARRANTY, WHETHER IMPLIED OR EXPRESSED THAT THESE DOCUMENTS MEET THE APPLICABLE CODE REQUIREMENTS. LIABILITY FOR THE DESIGN AND ANY USE OF THE DOCUMENTS IS THE SOLE RESPONSIBILITY OF THE ARCHITECT AND ENGINEER OF RECORD.

Company Logo

Project

Store Type
US DTGO PROTOTYPE

Location
PROTOTYPE
DTGO (U.S.)
CITY, STATE

Drawing Title
WASHROOM DETAILS

Drawn	Checked
XX XX	XX
Scale: AS NOTED	Date: ##.##.####
Project No.: XX	Drawing No.: A9.3

POPEYES LOUISIANA KITCHEN MODEL DTGO, ADDRESS, CITY, STATE, DTGO PROTOTYPE DOCUMENTS (OCTOBER, 2025) STORE NO. XXXXX

NOTES

1. GENERAL CONTRACTOR TO PROVIDE MINIMUM 1 CASE OF EACH SET OF FLOOR TILES, WALL TILES & CEILING TILES AND 1 GALLON OF EACH PAINT COLOUR FOR FUTURE USE. THESE MATERIALS ARE TO BE LEFT ON SITE WITH THE RESTAURANT OWNER.
2. IF APPLICABLE, PROVIDE & INSTALL SCHLUTER STRIP (SHL-3) AT ALL FLOOR TILE TRANSITION THROUGH OUT THE ENTIRE STORE. REFER TO FINISHING SCHEDULE.
3. PROVIDE & INSTALL SCHLUTER-DILEX-KSN AT LOCATION OF FLOOR TILE AT DELIVERY DOOR. REFER TO FINISHING SCHEDULE.
4. G.C. TO SEAL ALL GWB / MILLWORK JOINTS WITH CLEAR SILICONE CAULKING AFTER COMPLETION OF PAINTING, FINAL CLEANING.

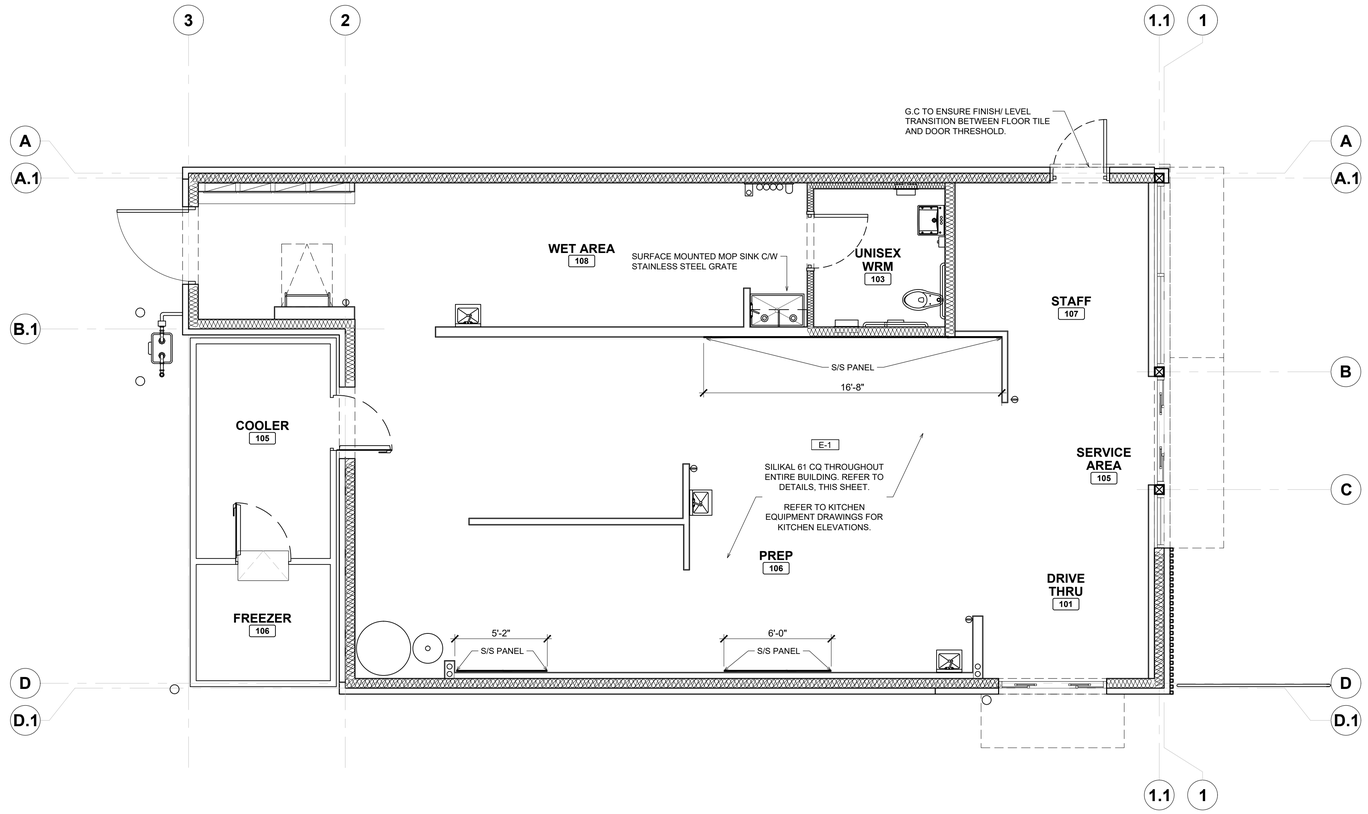

1 A10 **TILE PLAN**
SCALE: 1/4"=1'-0"

ROOM FINISH SCHEDULE

● SEE INTERIOR ELEVATIONS FOR LOCATION AND TYPE OF INTERIOR FINISHES.

ROOM		FLOORS				BASE			WALLS												CEILINGS				
									PAINT				FINISH								PAINT		FINISH		
NO.	NAME	E-1				E-1			PT-1	PT-2	PT-3	PT-4	W-1										ACT-1G	ACT-2G	HEIGHT
103	WASHROOM (UNISEX)	●				●							●										●		8'-0"
105	SERVICE AREA	●				●							●											●	10'-0"
106	PREP	●				●							●											●	10'-0"
107	STAFF AREA	●				●							●											●	10'-0"
108	WET AREA	●				●							●											●	10'-0"



A **N/A**

B **KITCHEN**



C **N/A**

D **PUBLIC WASHROOMS**

2 A10 **TYPICAL INTERIOR ELEVATIONS**
SCALE: 1/4"=1'-0"

ISSUE TABLE

No.	Date (mm/dd/yy)	Description
01	09-26-25	DTGO PROTOTYPE DOCUMENTS

REVISIONS

No.	Date	Description

DRAWINGS REVISED AS PER DESIGN BULLETIN

No.	Date	Description

THIS DRAWING IS OWNED BY OR LICENSED FOR USE BY POPEYES LOUISIANA KITCHEN (OR ITS AFFILIATED OR RELATED COMPANIES) AND MAY NOT BE REPRODUCED, USED, DOWNLOADED, DISSEMINATED, PUBLISHED, OR TRANSFERRED IN ANY FORM OR BY ANY MEANS, EXCEPT WITH THE PRIOR WRITTEN CONSENT OF POPEYES LOUISIANA KITCHEN. COPYRIGHT INFRINGEMENT IS A VIOLATION OF FEDERAL LAW SUBJECT TO CRIMINAL AND CIVIL PENALTIES.

THE CONTRACTOR IS TO VERIFY ALL DIMENSIONS AND CONDITIONS ON THE PROJECT AND TO REPORT ANY DISCREPANCIES TO THE POPEYES LOUISIANA KITCHEN REPRESENTATIVE PRIOR TO COMMENCING WORK. THESE DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION PURPOSES UNLESS INDICATED BY POPEYES LOUISIANA KITCHEN AS "ISSUED FOR CONSTRUCTION".

Professional Seal

DESIGNER NOTES:
DESIGN GUIDELINE ONLY - NOT FOR PERMIT OR CONSTRUCTION

THESE DOCUMENTS MUST BE COMPLETED AND / OR MODIFIED BY A LICENSED ARCHITECT AND ENGINEER TO CONFORM TO ALL APPLICABLE CODES, AND SPECIFIC SITE CONDITIONS. THERE IS NO WARRANTY, WHETHER IMPLIED OR EXPRESSED THAT THESE DOCUMENTS MEET THE APPLICABLE CODE REQUIREMENTS. LIABILITY FOR THE DESIGN AND ANY USE OF THE DOCUMENTS IS THE SOLE RESPONSIBILITY OF THE ARCHITECT AND ENGINEER OF RECORD.

Company Logo

Project

Store Type
US DTGO PROTOTYPE

Location
PROTOTYPE
DTGO (U.S.)
CITY, STATE

Drawing Title
TILE PLAN AND FINISHING SCHEDULE

Drawn	Checked
XX	XX
Scale	**Date**
1/4"=1'-0"	##.##.####
Project No.	**Drawing No.**
XX	A10

POPEYES LOUISIANA KITCHEN MODEL DTGO, ADDRESS, CITY, STATE: DTGO PROTOTYPE DOCUMENTS (OCTOBER, 2025) STORE NO. XXXXX

DOOR AND FRAME SCHEDULE

DOORS						FRAMES			HARDWARE	REMARKS
NO.	SIZE	R.O SIZE	TYPE	MAT.	FIN.	TYPE	MAT.	FIN.	SET NO.	
103	3'-0" x 6'-8" x 1-3/4"	DOOR WIDTH + 1-1/4" x DOOR HEIGHT + 5/8"	E	HM	--	F2	HM KNOCKDOWN	--	03	UNDERCUT DOOR 5/8". DOORS / FRAMES TO BE PAINTED AS PER POPEYES DECOR PACKAGE. TRANSITION TO OCCUR AT DOOR JAMB.
106	4'-0" x 7'-0" x 1-3/4"	DOOR WIDTH + 1-1/4" x DOOR HEIGHT + 5/8"	B	HM/N	--	F2	HM/N	--	01	16 GA. GALVANIZED LOCKNET SECURITY DOOR.
107	3'-0" x 7'-0" x 1-3/4"	DOOR WIDTH + 1-1/4" x DOOR HEIGHT + 5/8"	B	HM/N	--	F2	HM/N	--	06	16 GA. GALVANIZED LOCKNET SECURITY DOOR.

ABBREVIATIONS

AL	ALUMINUM	HM	HOLLOW METAL	PLY	PLYWOOD	P.LAM	PLASTIC LAMINATE	WD	WOOD
GL	GLASS	HMIN	HOLLOW METAL INSULATED	PM	PREFINISHED METAL	MILLW'K	MILLWORK		PROVIDED BY DOOR MANUFACTURER

EXTERIOR WINDOW SCHEDULE

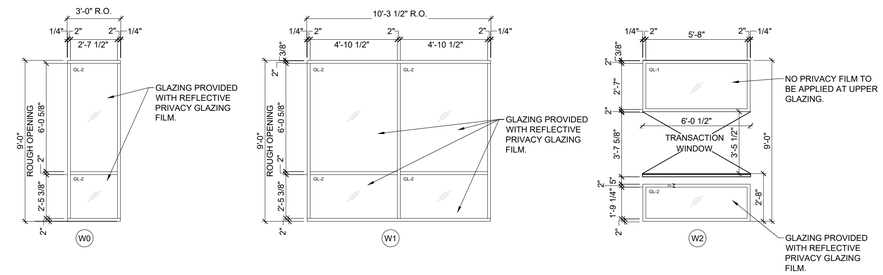

WINDOW TYPE	GLAZING TYPE:
PRIMARY MANUFACTURER - KAWNEER - KAWNEER TRIFAB VERSAGLAZE 451T THERMALLY BROKEN 2"x4 ½" - COLOUR: BLACK ANODIZED - CLASS 2, .0004 ANODIZING - LOW 'E' INSULATED ALL GLAZING IN DOORS TO BE SAFETY HEAT TREATED. REFER TO SP4 FOR APPROVED ALTERNATE MANUFACTURERS ALL CAULKING TO MATCH FRAMES (TREMCO DYMONIC) MAXIMUM U-FACTOR OF FIXED GLAZING ASSEMBLY (GLASS UNIT & ALUMINUM FRAMING) -0.36	-(GL-1) 1" INSULATED GLAZING PANEL, CLEAR GLASS - (GL-2) 1" INSULATED GLAZING PANEL, CLEAR TEMPERED / SAFETY GLASS REFER TO SPECIFICATION SECTION 08 8000 MAX. SHGC (GLASS ONLY) - 0.38

DOOR HARDWARE SCHEDULE

HARDWARE SET NO. 1: (LOCKNET SERIES DOOR PACKAGE)

DOOR FRAME & HARDWARE INCLUDING ONE- WAY VISION PANEL W/ FLAP, CONTINUOUS HINGE, HEAVY DUTY CLOSER AND PANIC HARDWARE ORDERED THROUGH
LOCKNET (800) 887-4307
1 EA. 3'-6" X 7'-0" X 1.75" X 16 GA. X G60 GALVANIZED LOCKNET SECURITY DOOR
1 EA. 3'-6" X 7'-0" X (5-7/8" OR 6-3/4") JAMB DEPTH X 14 GA. X G60 GALVANIZED X WELDED IN PLACE EOA X 1/4" X 2-1/2" HR PLATE SPREADER BAR X 4-SIDED WELDED DOOR FRAME X FACTORY FINISH PAINTED
8 EA. 3/4"Ø COVER PLUGS (BLACK)
1 EA. AIR LOUVER VLF-IG-PVC-1/2" LEXAN - 9" X 9" GALVANIZED SECURITY VISION
1 EA. PEMKO CDHFM82SLF-HD FULL MORTISE CONT. GEARED ALUM. HINGE X 628
1 EA. SECURITY LATCH GUARD X FULL LENGTH X TORX SD/ST SMS X FACTORY FINISH
1 EA. ARROW 1250S X EO X AL EXIT DEVICE
1 EA. DORMA 8616 X DS X FCOV S SN1 X AL CLOSER
1 EA. ROCKWOOD 24" X 40" X .050 X US32D X SECURITY TORX SD/ST SMS ARMOR PLATE ON PUSH SIDE
1 EA. PEMKO 171A X 42" X DOUBLE NOTCH CUT ENDS X THRESHOLD
1 EA. PEMKO 346C X 46" AL OVERHEAD RAIN DRIP X SECURITY TORX SD/ST SMS
1 EA. PEMKO 221APK X 42" AL COMBINATION KICK PLAT & DOOR SHOE X TORX
1 SET. P8512 X CONT. PERIMETER WEATHER SEAL (BLACK)
1 EA. INSTALLATION KIT (PER LOCKNET)
1 EA. CARDBOARD PACKAGING (2 PIECE BOX)
1 EA. DELIVERED ON FULL LENGTH WOODEN PALLET

HARDWARE SET NO. 2: (BY YKK AP AMERICA INC.)

NOT USED

HARDWARE SET NO. 3:

1-1/2 PR. HINGES	McKINNEY	BEARING HINGES,4-1/2" X 4-1/2" US26D
1 EA. LATCHSET W/LOCK	SCHLAGE	SATURN X US26D
1 EA. FLOOR STOP	BALDWIN	#4000 FLOOR MOUNT
1 EA. KICKPLATE	BURNS	8" X 30" X 8" 16GA. US628
1 EA. COAT HOOK	JACKNOB	#400 WITH RUBBER BUMPER
1 EA. CLOSER	LCN	1460 ALUMINUM CLOSER

FOLLOWING ITEMS PROVIDED & INSTALLED BY G.C.:

1 EA. SIGN	HANDICAP ACCESSIBILITY (ADA)
1 EA. SIGN	AS REQD: DOOR #103

HARDWARE SET NO. 4:

NOT USED

HARDWARE SET NO. 5:

NOT USED

HARDWARE SET NO. 6: (LOCKNET SERIES DOOR PACKAGE)

DOOR FRAME & HARDWARE INCLUDING ONE- WAY VISION PANEL W/ FLAP, CONTINUOUS HINGE, HEAVY DUTY CLOSER AND PANIC HARDWARE ORDERED THROUGH
LOCKNET (800) 887-4307
1 EA. 3'-0" X 7'-0" X 1.75" X 16 GA. X G60 GALVANIZED LOCKNET SECURITY DOOR
1 EA. 3'-0" X 7'-0" X (5-7/8" OR 6-3/4") JAMB DEPTH X 14 GA. X G60 GALVANIZED X WELDED IN PLACE EOA X 1/4" X 2-1/2" HR PLATE SPREADER BAR X 4-SIDED WELDED DOOR FRAME X FACTORY FINISH PAINTED
8 EA. 3/4"Ø COVER PLUGS (BLACK)
1 EA. AIR LOUVER VLF-IG-PVC-1/2" LEXAN - 9" X 9" GALVANIZED SECURITY VISION
1 EA. PEMKO CDHFM82SLF-HD FULL MORTISE CONT. GEARED ALUM. HINGE X 628
1 EA. SECURITY LATCH GUARD X FULL LENGTH X TORX SD/ST SMS X FACTORY FINISH
1 EA. ARROW 1250S X EO X AL EXIT DEVICE
1 EA. DORMA 8616 X DS X FCOV S SN1 X AL CLOSER
1 EA. ROCKWOOD 24" X 40" X .050 X US32D X SECURITY TORX SD/ST SMS ARMOR PLATE ON PUSH SIDE
1 EA. PEMKO 171A X 36" X DOUBLE NOTCH CUT ENDS X THRESHOLD
1 EA. PEMKO 346C X 40" AL OVERHEAD RAIN DRIP X SECURITY TORX SD/ST SMS
1 EA. PEMKO 221APK X 36" AL COMBINATION KICK PLAT & DOOR SHOE X TORX
1 SET. P8512 X CONT. PERIMETER WEATHER SEAL (BLACK)
1 EA. INSTALLATION KIT (PER LOCKNET)
1 EA. CARDBOARD PACKAGING (2 PIECE BOX)
1 EA. DELIVERED ON FULL LENGTH WOODEN PALLET

HARDWARE SCHEDULE NOTES:

1. ALL HARDWARE IS NEW.
2. ALL DOOR LOCKSETS / LATCHES SHALL BE "LEVER TYPE" IN COMPLIANCE WITH A.D.A.A.G. SECTION 4.1.3.9).
3. ALL DOOR HANDLES, PULLS, LATCHES, LOCKS, AND/OR OTHER OPERATING DEVICES SHALL BE INSTALLED BETWEEN 34" MINIMUM AND 48" MAXIMUM ABOVE FINISHED FLOOR.
4. ALL DOOR THRESHOLDS SHALL BE 1/2" HIGH MAXIMUM.
5. ALL DOOR CLOSERS SHALL BE ADJUSTED SO THAT FROM THE OPEN POSITION OF 70 DEGREES, THE DOOR WILL TAKE AT LEAST 3 SECONDS TO MOVE TO A POINT 3 INCHES FROM THE LATCH, MEASURED TO THE LEAD EDGE (A.D.A.A.G. 4.13.10).

WINDOW SCHEDULE

MARK	R.O. SIZE	CONST.	GLASS TYPE	HEAD HEIGHT	REMARKS
W0	3'-0" x 9'-0 1/4"	ALUM	GL-2	9'-0 1/4"	BLACK ANODIZED (CLASS I, 0.7 MILS MINIMUM) FINISH
W1	10'-3 1/2" x 9'-0 1/4"	ALUM	GL-2	9'-0 1/4"	BLACK ANODIZED (CLASS I, 0.7 MILS MINIMUM) FINISH
W2	6'-0 1/2" x 9'-0 1/4"	ALUM	GL-1 / GL-2	9'-0 1/4"	BLACK ANODIZED (CLASS I, 0.7 MILS MINIMUM) FINISH
W5	6'-0 1/2" x 3'-5 1/2"	ALUM	PER. MANUF.	6'-1 1/2"	SEE 'DRIVE-THRU WINDOW SCHEDULE' BELOW.

WINDOW SCHEDULE NOTES:

1. REFER TO WINDOW ELEVATIONS FOR SPECIFIC DIMENSIONS AND ADDITIONAL DETAIL INFORMATION.
2. WINDOW CONTRACTOR SHALL FIELD VERIFY ALL ROUGH OPENINGS FOR ALL WINDOWS PRIOR TO PREPARATION OF SHOP DRAWINGS.
3. ALL GLASS TO BE SAFETY GLASS TYPE (TEMPERED).

DRIVE-THRU AND WALK-UP WINDOW SCHEDULE

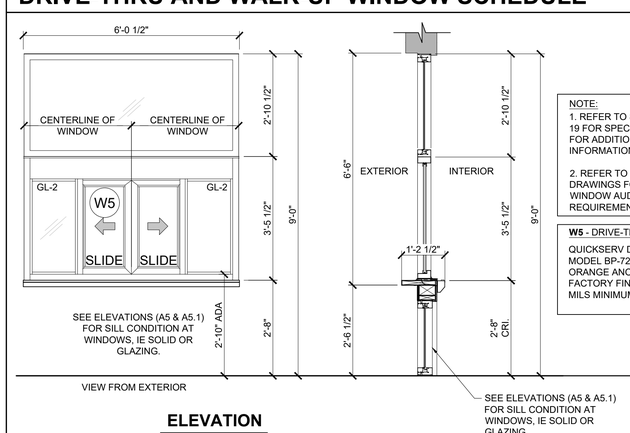

NOTE:
1. REFER TO SECTION 08 56 19 FOR SPECIFICATIONS FOR ADDITIONAL INFORMATION.

2. REFER TO ELECTRICAL DRAWINGS FOR DRIVE-THRU WINDOW AUDIO & POWER REQUIREMENTS

W5 - DRIVE-THRU WINDOW:

QUICKSERV DT WINDOW
MODEL BP-7241E
ORANGE ANODIZED KYNAR FACTORY FINISH (CLASS 1, .7 MILS MINIMUM) ALUMINUM

ELEVATION
SCALE: 1/2" = 1'-0"

DOOR TYPES

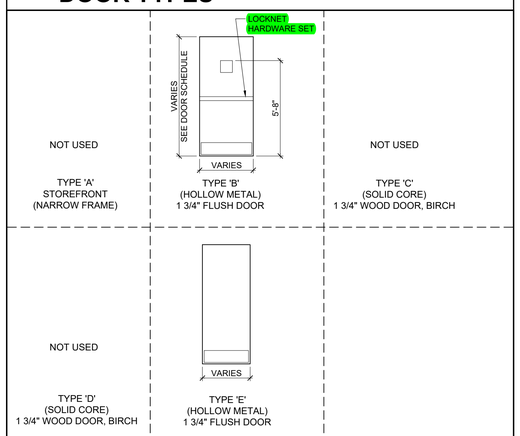

GENERAL NOTE

ALL DOORS TO BE SUPPLIED BY G.C. UNLESS OTHERWISE NOTED.

DOOR FRAME TYPES



TYPE 'F2'

(HOLLOW METAL)

ISSUE TABLE

No.	Date (mm/dd/yy)	Description
01	09-26-25	DTGO PROTOTYPE DOCUMENTS

REVISIONS

No.	Date	Description

DRAWINGS REVISED AS PER DESIGN BULLETIN

No.	Date	Description

THIS DRAWING IS OWNED BY OR LICENSED FOR USE BY POPEYES LOUISIANA KITCHEN (OR ITS AFFILIATED OR RELATED COMPANIES) AND MAY NOT BE REPRODUCED, USED, DOWNLOADED, DISSEMINATED, PUBLISHED, OR TRANSFERRED IN ANY FORM OR BY ANY MEANS, EXCEPT WITH THE PRIOR WRITTEN CONSENT OF POPEYES LOUISIANA KITCHEN. .COPYRIGHT INFRINGEMENT IS A VIOLATION OF FEDERAL LAW SUBJECT TO CRIMINAL AND CIVIL PENALTIES.

THE CONTRACTOR IS TO VERIFY ALL DIMENSIONS AND CONDITIONS ON THE PROJECT AND TO REPORT ANY DISCREPANCIES TO THE POPEYES LOUISIANA KITCHEN REPRESENTATIVE PRIOR TO COMMENCING WORK. THESE DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION PURPOSES UNLESS INDICATED BY POPEYES LOUISIANA KITCHEN AS "ISSUED FOR CONSTRUCTION".

Professional Seal

DESIGNER NOTES:
DESIGN GUIDELINE ONLY - NOT FOR PERMIT OR CONSTRUCTION

THESE DOCUMENTS MUST BE COMPLETED AND / OR MODIFIED BY A LICENSED ARCHITECT AND ENGINEER TO CONFORM TO ALL APPLICABLE CODES, AND SPECIFIC SITE CONDITIONS. THERE IS NO WARRANTY, WHETHER IMPLIED OR EXPRESSED THAT THESE DOCUMENTS MEET THE APPLICABLE CODE REQUIREMENTS.
LIABILITY FOR THE DESIGN AND ANY USE OF THE DOCUMENTS IS THE SOLE RESPONSIBILITY OF THE ARCHITECT AND ENGINEER OF RECORD.

Company Logo

Project

Store Type
US DTGO PROTOTYPE

Location
PROTOTYPE
DTGO (U.S.)
CITY, STATE

Drawing Title
DOOR AND WINDOW SCHEDULES

Drawn	Checked
XX	XX
Scale	**Date**
AS NOTED	##.##.####
Project No.	**Drawing No.**
XX	A11

POPEYES LOUISIANA KITCHEN MODEL DTGO, ADDRESS, CITY, STATE: DTGO PROTOTYPE DOCUMENTS (OCTOBER, 2025) STORE NO. XXXXX

DIVISION 03 - CONCRETE

REINFORCED CONCRETE 03 30 00

SEE STRUCTURAL SHEETS FOR ADDITIONAL INFORMATION.

DIVISION 04 - MASONRY

UNIT MASONRY 04 20 00

FOR REFERENCE ONLY. REFER TO PRE-FABRICATED BUILDING SHELL SHEETS (FBS) FOR PROJECT SPECIFIC INFORMATION.

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. DRAWINGS AND GENERAL PROVISIONS OF CONTRACT APPLY TO THIS SECTION.

1.2 QUALITY ASSURANCE

A. ALL MASONRY CONSTRUCTION SHALL CONFORM TO THE LATEST, ADOPTED EDITIONS OF THE STANDARDS AND MATERIAL SPECIFICATIONS REFERENCED HEREIN.

B. REFERENCE STANDARDS

1. ACI 530/ASCE 5/TMS 402, "BUILDING CODE REQUIREMENTS FOR MASONRY STRUCTURES."
2. ACI 530.1/ASCE 6/TMS 602, "SPECIFICATION FOR MASONRY STRUCTURES."
   a. CONFORM COLD WEATHER MASONRY CONSTRUCTION TO PARAGRAPH 1.8.C.
   b. CONFORM HOT WEATHER MASONRY CONSTRUCTION TO PARAGRAPH 1.8.D.

1.3 DELIVERY, STORAGE, AND HANDLING

A. DELIVER MASONRY MATERIALS TO PROJECT IN UNDAMAGED CONDITION.

B. STORE AND HANDLE MASONRY UNITS OFF THE GROUND, UNDER COVER, AND IN A DRY LOCATION TO PREVENT THEIR DETERIORATION OR DAMAGE DUE TO MOISTURE, TEMPERATURE CHANGES, CONTAMINANTS, CORROSION, AND OTHER CAUSES. IF UNITS BECOME WET, DO NOT PLACE UNTIL UNITS ARE IN AN AIR-DRIED CONDITION.

C. STORE CEMENTITIOUS MATERIALS OFF THE GROUND, UNDER COVER, AND IN DRY LOCATION.

D. STORE AGGREGATES WHERE GRADING AND OTHER REQUIRED CHARACTERISTICS CAN BE MAINTAINED AND CONTAMINATION AVOIDED.

E. STORE MASONRY ACCESSORIES INCLUDING METAL ITEMS TO PREVENT CORROSION AND ACCUMULATION OF DIRT AND OIL.

1.4 PROJECT CONDITIONS

A. PROTECTION OF MASONRY: DURING ERECTION, COVER TOPS OF WALLS, PROJECTIONS, AND SILLS WITH WATERPROOF SHEETING AT END OF EACH DAY'S WORK. COVER PARTIALLY COMPLETED MASONRY WHEN CONSTRUCTION IS NOT IN PROGRESS.

1. EXTEND COVER A MINIMUM OF 24 INCHES DOWN BOTH SIDES AND HOLD COVER SECURELY IN PLACE.

B. STAIN PREVENTION: PREVENT GROUT, MORTAR, AND SOIL FROM STAINING THE FACE OF MASONRY TO BE LEFT EXPOSED OR PAINTED. REMOVE IMMEDIATELY ANY GROUT, MORTAR, AND SOIL THAT COMES IN CONTACT WITH SUCH MASONRY.

1. PROTECT BASE OF WALLS FROM RAIN-SPLASHED MUD AND MORTAR SPLATTER BY MEANS OF COVERINGS SPREAD ON GROUND AND OVER WALL SURFACE.
2. PROTECT SILLS, LEDGES, AND PROJECTIONS FROM MORTAR DROPPINGS.
3. PROTECT SURFACES OF WINDOW AND DOORFRAMES, AS WELL AS SIMILAR PRODUCTS WITH PAINTED AND INTEGRAL FINISHES FROM MORTAR DROPPINGS.

C. COLD-WEATHER CONSTRUCTION: COMPLY WITH REFERENCED UNIT MASONRY STANDARD FOR COLD-WEATHER CONSTRUCTION AND THE FOLLOWING:

1. DO NOT LAY MASONRY UNITS THAT ARE WET OR FROZEN.
2. REMOVE MASONRY DAMAGED BY FREEZING CONDITIONS.

D. HOT-WEATHER CONSTRUCTION: COMPLY WITH REFERENCED UNIT MASONRY STANDARD.

PART 2 - PRODUCTS

2.1 MATERIALS

A. CONCRETE BLOCK (AS APPLICABLE): ASTM C90, MINIMUM NET AREA COMPRESSIVE STRENGTH OF CONCRETE MASONRY UNITS: 2,500 PSI.

1. BOND BEAM AND CORE FILL: ASTM C476, COARSE TYPE, MINIMUM COMPRESSIVE STRENGTH: 2,500 PSI.
2. SIZE: PROVIDE CONCRETE MASONRY UNITS COMPLYING WITH REQUIREMENTS INDICATED BELOW FOR SIZES THAT ARE MANUFACTURED TO SPECIFIED FACE DIMENSIONS WITHIN TOLERANCES SPECIFIED IN THE APPLICABLE REFERENCED ASTM SPECIFICATION FOR CONCRETE MASONRY UNITS.
3. CONCRETE MASONRY UNITS: MANUFACTURED TO SPECIFIED DIMENSIONS OF 3/8 INCH LESS THAN NOMINAL WIDTHS BY NOMINAL HEIGHTS BY NOMINAL LENGTHS INDICATED ON DRAWINGS.
4. CONCRETE MASONRY UNITS WITH INTEGRAL WATER REPELLANT: WHERE SHOWN, PROVIDE UNITS MADE WITH LIQUID POLYMERIC, INTEGRAL WATER-REPELLANT ADMIXTURE THAT DOES NOT REDUCE FLEXURAL BOND STRENGTH FOR EXPOSED UNITS; PRODUCT: GRACE CONSTRUCTION PRODUCTS, A UNIT OF W.R. GRACE & CO. - CONN; "DRY-BLOCK"

2.2 BRICK (AS APPLICABLE)

A. STANDARD FACE BRICK AS MANUFACTURED BY GLEN-GERY, BORAL, GENERAL SHALE, OR BELDEN BRICK; TO COMPLY WITH ASTM C 216, SEVERE WEATHERING GRADE, TYPE FBS.

B. BRICK COLOR: SEE THE EXTERIOR FINISH SCHEDULE.

C. SAMPLES FOR VERIFICATION:

1. FACE BRICK, IN THE FORM OF STRAPS OF FIVE OR MORE BRICKS.
2. COLOR FOR COMPARISON TO EXISTING IF APPLICABLE.
3. SPECIAL SHAPES AS REQUIRED TO COMPLETE THE WORK AS DESCRIBED IN THE DRAWINGS.
4. WEEP HOLES AND VENTS.

2.3 MORTAR AND GROUT MIXES

A. MORTAR: TYPE S, MINIMUM COMPRESSIVE STRENGTH: 1,800 PSI.

B. FILL VERTICAL COLLAR JOINTS BELOW GRADE SOLIDLY WITH MORTAR.

2.4 MISCELLANEOUS

A. MASONRY WALLS ARE NOT DESIGNED TO BE STABLE DURING CONSTRUCTION. THE CONTRACTOR SHALL INSTALL, IN A TIMELY MANNER TO PREVENT COLLAPSE OF THE WALLS, ADEQUATE BRACING DESIGNED TO RESIST ALL APPLICABLE LOADS OR FORCES. BRACING SHALL REMAIN IN PLACE UNTIL ALL STRUCTURAL ELEMENTS PROVIDING LATERAL SUPPORT FOR THE WALLS ARE IN PLACE AND THE WALLS HAVE ATTAINED THE SPECIFIED DESIGN STRENGTH.

B. FILL CORES SOLIDLY AROUND ANCHOR RODS.

C. LAY HOLLOW MASONRY UNITS WITH FULL MORTAR COVERAGE ON HORIZONTAL AND VERTICAL FACE SHELLS. PROVIDE FULL MORTAR COVERAGE FOR ALL WEBS IN THE STARTING COURSE ON FOOTINGS, AND WHEN ADJACENT TO CELLS OR CAVITIES TO BE FILLED WITH GROUT. LAY SOLID UNITS WITH FULL HEAD AND BED JOINTS.

D. WHERE MASONRY UNITS OF DIFFERING WIDTHS ARE CONSTRUCTED ON ONE ANOTHER, INSTALL AT LEAST ONE FULL COURSE OF 100% SOLID OR SOLIDLY-GROUTED MASONRY FOR THE WIDER OF THE TWO UNITS, CONTINUOUSLY ALONG THE TRANSITION (FOR EXAMPLE, AT BRICK LEDGES).

2.5 HORIZONTAL JOINT REINFORCEMENT, WALL TIES AND ANCHORS MANUFACTURERS: HOHMANN & BARNARD, DUR-O-WAL, NATIONAL WIRE PRODUCTS CORP.

A. HORIZONTAL JOINT REINFORCEMENT:

1. EYE AND PINTLE TYPE RODS SPACED NOT MORE THAN 16 INCHES ON CENTER, CLASS B-2, HOT DIPPED GALVANIZED, WITH 9 GAGE SIDE RODS. SIZE, 2 INCHES LESS THAN NOMINAL WALL THICKNESS.
2. FREE STANDING COMPOSITE WALLS: LADDER DESIGN, CROSS RODS SPACED NOT MORE THAN 16 INCHES ON CENTER, CLASS B-2, HOT DIPPED GALVANIZED, WITH 9 GAGE SIDE RODS. SIZE, 2 INCHES LESS THAN NOMINAL WALL THICKNESS.
   a. CONCRETE BLOCK LATERAL SUPPORT ANCHORS: 1/8 INCH THICK X 1-1/4 INCH WIDE X 16 INCH LONG, MILL GALVANIZED WITH DOWN-TURNED END BENDS.
   b. WIRE MESH WALL TIES SHALL BE 16 GAGE HOT-DIPPED GALVANIZED WIRE MESH WITH 1/2 INCH OPENINGS.

B. MASONRY VENEER ANCHORS:

1. GALV. ADJUSTABLE VENEER ANCHOR WITH TWO CADMIUM COATED SCREWS, 14 GAGE ANCHOR AND 3/16 INCH DIAMETER STEEL TIES. PROVIDE ONE ANCHOR FOR EACH 2.0 SQUARE FEET OF WALL AREA. TIES SHALL BE SIZED TO EXTEND WITHIN 3/4 INCH OF FACE MASONRY. ANCHORS MUST BE FASTENED DIRECTLY TO METAL STUDS.
2. CORRUGATED METAL VENEER TIES SHALL NOT BE USED.

2.6 MISCELLANEOUS MASONRY ACCESSORIES

A. NONMETALLIC EXPANSION JOINT STRIPS: PREMOLDED FILLER STRIPS COMPLYING WITH ASTM D 1056, TYPE 2 (CLOSED CELL), CLASS A (CELLULAR RUBBER AND RUBBER-LIKE MATERIALS WITH SPECIFIC RESISTANCE TO PETROLEUM BASE OILS), GRADE 1 (COMPRESSION-DEFLECTION RANGE OF 2-5 PSI), COMPRESSIBLE UP TO 35 PERCENT, OF WIDTH AND THICKNESS INDICATED, FORMULATED FROM THE FOLLOWING MATERIAL:

1. NEOPRENE.

B. PREFORMED CONTROL JOINT GASKETS: MATERIAL AS INDICATED BELOW, DESIGNED TO FIT STANDARD SASH BLOCK AND TO MAINTAIN LATERAL STABILITY IN MASONRY WALL; SIZE AND CONFIGURATION AS INDICATED.

1. STYRENE-BUTADIENE RUBBER COMPOUND: ASTM D 2000, DESIGNATION 2AA-805.

C. BOND BREAKER STRIPS: ASPHALT-SATURATED ORGANIC ROOFING FELT COMPLYING WITH ASTM D 226, TYPE I (NO. 15 ASPHALT FELT).

D. WEEP/VENT PRODUCTS: USE RECTANGULAR PLASTIC WEEP/VENT TUBING: CLEAR BUTYRATE, 3/8" BY 1-1/2" BY 3-1/2" LONG. SPACE AS SHOWN BUT NOT LESS THAN 2'-0" O.C.

2.7 THRU WALL FLASHING

A. COPPER/PAPER FLASHING: 3 OZ. COPPER SHEET LAMINATED BETWEEN 2 SHEETS OF BITUMINOUS IMPREGNATED CREPE KRAFT PAPER OR SATURATED FABRIC.

B. PRODUCTS: SUBJECT TO COMPLIANCE WITH REQUIREMENTS SPECIFIED, PROVIDE ONE OF THE FOLLOWING:

1. W.R. GRACE & CO., "PERMA-A-BARRIER".
2. AFCO PRODUCTS, INC., "COP-A-BOND DUPLEX".
3. PHOENIX BUILDING PRODUCTS, INC.; "DUPLEX COP-R FLASH".
4. YORK MANUFACTURING, INC.; "COP-R-TEX DUPLEX".

C. ADHESIVE FOR FLASHING; TYPE RECOMMENDED BY MANUFACTURER OF FLASHING MATERIAL FOR USE INDICATED.

2.8 MASONRY CLEANERS

A. JOB-MIXED DETERGENT SOLUTION: SOLUTION OF TRISODIUM PHOSPHATE (1/2-CUP DRY MEASURE) AND LAUNDRY DETERGENT (1/2-CUP DRY MEASURE) DISSOLVED IN ONE GALLON OF WATER.

PART 3 - EXECUTION

3.1 EXAMINATION

A. EXAMINE CONDITIONS, WITH INSTALLER PRESENT, FOR COMPLIANCE WITH REQUIREMENTS FOR INSTALLATION TOLERANCES AND OTHER SPECIFIC CONDITIONS, AND OTHER CONDITIONS AFFECTING PERFORMANCE OF UNIT MASONRY.

1. FOR THE RECORD, PREPARE WRITTEN REPORT, ENDORSED BY INSTALLER, LISTING CONDITIONS DETRIMENTAL TO PERFORMANCE OF UNIT MASONRY.

B. EXAMINE ROUGH-IN AND BUILT-IN CONSTRUCTION TO VERIFY ACTUAL LOCATIONS OF PIPING CONNECTIONS PRIOR TO INSTALLATION.

C. DO NOT PROCEED UNTIL UNSATISFACTORY CONDITIONS HAVE BEEN CORRECTED.

3.2 INSTALLATION, GENERAL

A. COMPLY WITH REFERENCED UNIT MASONRY STANDARD AND OTHER REQUIREMENTS INDICATED APPLICABLE TO EACH TYPE OF INSTALLATION INCLUDED IN PROJECT.

B. THICKNESS: BUILD SINGLE-WYTHE WALLS TO THE ACTUAL THICKNESS OF THE MASONRY UNITS, USING UNITS OF NOMINAL THICKNESS INDICATED.

C. GUILD CHASES AND RECESSES AS SHOWN OR REQUIRED TO ACCOMMODATE ITEMS SPECIFIED IN THIS AND OTHER SECTIONS OF THE SPECIFICATIONS. PROVIDE NOT LESS THAN 8 INCHES OF MASONRY BETWEEN CHASE OR RECESS AND JAMB OF OPENINGS AND BETWEEN ADJACENT CHASES AND RECESSES.

D. LEAVE OPENINGS FOR EQUIPMENT TO BE INSTALLED BEFORE COMPLETION OF MASONRY. AFTER INSTALLATION OF EQUIPMENT, COMPLETE MASONRY TO MATCH CONSTRUCTION IMMEDIATELY ADJACENT TO THE OPENING.

E. CUT MASONRY UNITS WITH MOTOR-DRIVEN SAWS TO PROVIDE CLEAN, SHARP, UNCHIPPED EDGES. CUT UNITS AS REQUIRED TO PROVIDE CONTINUOUS PATTERN AND TO FIT ADJOINING CONSTRUCTION. USE FULL-SIZE UNITS WITHOUT CUTTING WHERE POSSIBLE.

3.3 CONSTRUCTION TOLERANCES

A. COMPLY WITH CONSTRUCTION TOLERANCES OF REFERENCED UNIT MASONRY STANDARD.

3.4 LAYING MASONRY WALLS

A. LAY OUT WALLS IN ADVANCE FOR ACCURATE SPACING OF SURFACE BOND PATTERNS WITH UNIFORM JOINT WIDTHS AND FOR ACCURATE LOCATING OF OPENINGS, MOVEMENT-TYPE JOINTS, RETURNS, AND OFFSETS. AVOID THE USE OF LESS-THAN-HALF-SIZE UNITS AT CORNERS, JAMBS, AND WHERE POSSIBLE AT OTHER LOCATIONS.

B. LAY UP WALLS TO COMPLY WITH SPECIFIED CONSTRUCTION TOLERANCES, WITH COURSES ACCURATELY SPACED AND COORDINATED WITH OTHER CONSTRUCTION.

C. BOND PATTERN FOR EXPOSED MASONRY: LAY EXPOSED MASONRY IN THE FOLLOWING BOND PATTERN; DO NOT USE UNITS WITH LESS THAT NOMINAL 4-INCH HORIZONTAL FACE DIMENSIONS AT CORNERS OR JAMBS.

1. ONE-HALF RUNNING BOND WITH VERTICAL JOINT IN EACH COURSE CENTERED ON UNITS IN COURSES ABOVE AND BELOW.

D. LAY CONCEALED MASONRY WITH ALL UNITS IN A WYTHE IN RUNNING BOND OR BONDED BY LAPPING NOT LESS THAN 2 INCHES. BOND AND INTERLOCK EACH COURSE OF EACH WYTHE AT CORNERS. DO NOT USE UNITS WITH LESS THAN NOMINAL 4-INCH HORIZONTAL FACE DIMENSIONS AT CORNERS OR JAMBS.

E. STOPPING AND RESUMING WORK: IN EACH COURSE, RACK BACK 1/2-UNIT LENGTH FOR ONE-HALF RUNNING BOND OR 1/3-UNIT LENGTH FOR ONE-THIRD RUNNING BOND; DO NOT TOOTH. CLEAN EXPOSED SURFACES OF SET MASONRY, WET CLAY MASONRY UNITS LIGHTLY (IF REQUIRED), AND REMOVE LOOSE MASONRY UNITS AND MORTAR PRIOR TO LAYING FRESH MASONRY.

F. BUILT-IN-WORK: AS CONSTRUCTION PROGRESSES, BUILD-IN-ITEMS SPECIFIED UNDER THIS AND OTHER SECTIONS OF THE SPECIFICATIONS. FILL IN SOLIDLY WITH MASONRY AROUND BUILT-IN ITEMS.

1. FILL SPACE BETWEEN HOLLOW METAL FRAMES AND MASONRY SOLIDLY WITH MORTAR, UNLESS OTHERWISE INDICATED.
2. WHERE BUILT-IN-ITEMS ARE TO BE EMBEDDED IN CORES OF HOLLOW MASONRY UNITS, PLACE A LAYER OF METAL LATH IN THE JOINT BELOW AND ROD MORTAR OR GROUT INTO CORE.

3.5 MORTAR BEDDING AND JOINTING

A. LAY HOLLOW CONCRETE MASONRY UNITS AS FOLLOWS:

1. WITH FULL MORTAR COVERAGE ON HORIZONTAL AND VERTICAL FACE SHELLS TOOL FINISHED JOINT TO SLIGHT CONCAVE SECTION FORMING UNIFORMLY DENSE GROUT SURFACE.
2. BED WEBS IN MORTAR IN STARTING COURSE ON FOOTINGS AND IN ALL COURSES OF PIERS AND WHERE ADJACENT TO CELLS OR CAVITIES TO BE FILLED WITH GROUT.
3. FOR STARTING COURSE ON FOOTINGS WHERE CELLS ARE NOT GROUTED, SPREAD OUT FULL MORTAR BED INCLUDING AREAS UNDER CELLS.

B. CUT JOINTS FLUSH FOR MASONRY WALLS TO BE CONCEALED OR TO BE COVERED BY OTHER MATERIALS, UNLESS OTHERWISE INDICATED.

C. REPOINT MORTAR JOINTS ADJOINING GLAZED SURFACES OF PREFACED CONCRETE MASONRY UNITS WITH CHEMICAL-RESISTANT, WATER-CLEANABLE, EPOXY GROUT. AFTER BEDDING MORTAR HAS BECOME FIRM BUT BEFORE IT HARDENS OR SETS, RAKE JOINTS ADJOINING GLAZED SURFACES BACK 1/4-INCH FROM FACE. REPOINT WITH CHEMICAL-RESISTANT, WATER-CLEANABLE, EPOXY GROUT. TOOL FINISHED JOINT TO SLIGHTLY CONCAVE SECTION FORMING UNIFORMLY DENSE GROUT SURFACE.

3.6 MOVEMENT (CONTROL AND EXPANSION) JOINTS

A. GENERAL: INSTALL CONTROL AND EXPANSION JOINTS IN UNIT MASONRY WHERE INDICATED. BUILD IN RELATED ITEMS AS THE MASONRY PROGRESSES. DO NOT FORM A CONTINUOUS SPAN THROUGH MOVEMENT JOINTS UNLESS PROVISIONS ARE MADE TO PREVENT IN-PLANE RESTRAINT OF WALL OR PARTITION MOVEMENT.

B. FORM CONTROL JOINTS IN CONCRETE MASONRY AS FOLLOWS:

1. INSTALL PREFORMED CONTROL JOINT GASKETS DESIGNED TO FIT STANDARD SASH BLOCK.

3.7 REPAIRING, POINTING, AND CLEANING

A. REMOVE AND REPLACE MASONRY UNITS THAT ARE LOOSE, CHIPPED, BROKEN, STAINED, OR OTHERWISE DAMAGED OR IF UNITS DO NOT MATCH ADJOINING UNITS. INSTALL NEW UNITS TO MATCH ADJOINING UNITS AND IN FRESH MORTAR OR GROUT, POINTED TO ELIMINATE EVIDENCE OF REPLACEMENT.

B. POINTING: DURING THE TOOLING OF JOINTS, ENLARGE ANY VOIDS OR HOLES, EXCEPT WEEP HOLES, AND COMPLETELY FILL WITH MORTAR. POINT-UP ALL JOINTS INCLUDING CORNERS, OPENINGS, AND ADJACENT CONSTRUCTION TO PROVIDE A NEAT, UNIFORM APPEARANCE, PREPARED FOR APPLICATION OF SEALANTS.

C. FINAL CLEANING: AFTER MORTAR IS THOROUGHLY SET AND CURED, CLEAN EXPOSED MASONRY AS FOLLOWS:

1. TEST CLEANING METHODS ON SAMPLE WALL PANEL; LEAVE 1/2 PANEL UNCLEANED FOR COMPARISON PURPOSES. OBTAIN OWNER'S APPROVAL OF SAMPLE CLEANING BEFORE PROCEEDING WITH CLEANING OF MASONRY.
2. CLEAN CONCRETE MASONRY BY MEANS OF CLEANING METHOD INDICATED IN NCMA TEK 45 APPLICABLE TO TYPE OF STAIN PRESENT ON EXPOSED SURFACES.

D. PROTECTION: PROVIDE FINAL PROTECTION AND MAINTAIN CONDITIONS, IN A MANNER ACCEPTABLE TO INSTALLER THAT ENSURES UNIT MASONRY IS WITHOUT DAMAGE AND DETERIORATION AT TIME OF CONTRACT COMPLETION.

END OF SECTION 04 20 00

DIVISION 5 - METALS

DECORATIVE METAL RAILINGS SECTION 05 73 00

PART 1 - GENERAL

1.1 SUMMARY

A. SECTION INCLUDES:

1. STEEL AND IRON DECORATIVE RAILINGS.

1.2 ACTION SUBMITTALS

A. PRODUCT DATA: FOR THE FOLLOWING:

1. MANUFACTURER'S PRODUCT LINES OF RAILINGS ASSEMBLED FROM STANDARD COMPONENTS.
2. GROUT, ANCHORING CEMENT, AND PAINT PRODUCTS.

B. SHOP DRAWINGS: INCLUDE PLANS, ELEVATIONS, SECTIONS, AND ATTACHMENT DETAILS.

C. SAMPLES: FOR EACH TYPE OF EXPOSED FINISH REQUIRED.

D. DELEGATED-DESIGN SUBMITTAL: FOR INSTALLED PRODUCTS INDICATED TO COMPLY WITH PERFORMANCE REQUIREMENTS AND DESIGN CRITERIA, INCLUDING ANALYSIS DATA SIGNED AND SEALED BY THE QUALIFIED PROFESSIONAL ENGINEER RESPONSIBLE FOR THEIR PREPARATION.

1.3 INFORMATIONAL SUBMITTALS

QUALIFICATION DATA:
MANUFACTURER QUALIFICATIONS: COMPANY SPECIALIZING IN MANUFACTURING/PRODUCING PRODUCTS SPECIFIED IN THIS SECTION WITH MINIMUM 10 YEARS DOCUMENTED EXPERIENCE.

INSTALLER'S QUALIFICATIONS: FIRM WITH DEMONSTRATED EXPERIENCE IN INSTALLATION OF SYSTEMS SIMILAR IN COMPLEXITY TO THOSE REQUIRED FOR THIS PROJECT.

E. PRODUCT TEST REPORTS: BASED ON EVALUATION OF COMPREHENSIVE TESTS PERFORMED BY A QUALIFIED TESTING AGENCY, ACCORDING TO ASTM E 894 AND ASTM E 935.

F. PRECONSTRUCTION TEST REPORTS.

G. EVALUATION REPORTS: FOR POST-INSTALLED ANCHORS, FROM ICC-ES.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. STEEL AND IRON DECORATIVE RAILINGS:

1. MANUFACTURER:
   c. FORTRESS RAILING PRODUCTS, OR ACCEPTED EQUIVALENT AS SUPPLIED BY GENERAL CONTRACTOR.

B. PRODUCT OPTIONS: INFORMATION ON CIVIL DRAWINGS AND IN SPECIFICATIONS ESTABLISHES REQUIREMENTS FOR SYSTEM'S AESTHETIC EFFECTS AND PERFORMANCE CHARACTERISTICS.

1. DO NOT MODIFY INTENDED AESTHETIC EFFECTS, AS JUDGED SOLELY BY OWNER, EXCEPT WITH OWNER'S APPROVAL.

2.2 METALS, GENERAL

A. BRACKETS, FLANGES, FASTENERS, AND ANCHORS: SAME METAL AND FINISH AS SUPPORTED RAILS AS PROVIDED FROM FORTRESS RAILING PRODUCTS BY GENERAL CONTRACTOR

2.3 STEEL AND IRON

A. TUBING, BARS, PLATES, AND OTHER CAST IRON MEMBERS PER ICC AC-273.

2.5 STEEL AND IRON FINISHES

A. GALVANIZED RAILINGS:

1. PRE GALVANIZED EXTERIOR STEEL AND IRON RAILINGS, INCLUDING HARDWARE, AFTER FABRICATION.
2. COMPLY WITH ICC AC-237.
3. DO NOT QUENCH OR APPLY POST-GALVANIZING TREATMENTS THAT MIGHT INTERFERE WITH PAINT ADHESION.

PART 3 - EXECUTION

3.1 INSTALLATION

A. FIT EXPOSED CONNECTIONS TOGETHER TO FORM TIGHT, HAIRLINE JOINTS.

B. PERFORM CUTTING, DRILLING, AND FITTING REQUIRED FOR INSTALLING RAILINGS. SET RAILINGS ACCURATELY IN LOCATION, ALIGNMENT, AND ELEVATION; MEASURED FROM ESTABLISHED LINES AND LEVELS AND FREE OF RACK.

1. SET POSTS PLUMB WITHIN A TOLERANCE OF 1/16 INCH IN 3 FEET.
2. ALIGN RAILS PER MANUFACTURER'S INSTRUCTIONS.

C. TOUCHUP PAINTING: IMMEDIATELY AFTER ERECTION, CLEAN FIELD WELDS, BOLTED CONNECTIONS, AND ABRADED AREAS OF SHOP PAINT, AND PAINT EXPOSED AREAS WITH THE SAME MATERIAL USED FOR SHOP PAINTING TO COMPLY WITH SSPC-PA 1 FOR TOUCHING UP SHOP-PAINTED SURFACES.

END OF SECTION 05 73 00

DIVISION 6 - WOOD, PLASTICS, AND COMPOSITES

ROUGH CARPENTRY SECTION 06 10 00

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. DRAWINGS AND GENERAL PROVISIONS OF CONTRACT APPLY TO THIS SECTION

1.2 DELIVERY, STORAGE AND HANDLING

A. DELIVERY AND STORAGE: KEEP MATERIALS UNDER COVER AND DRY. PROTECT AGAINST EXPOSURE TO WEATHER AND CONTACT WITH DAMP OR WET SURFACES. STACK LUMBER AS WELL AS PLYWOOD AND OTHER PANELS FLAT WITH SPACERS BETWEEN EACH BUNDLE; PROVIDE FOR AIR CIRCULATION WITHIN AND AROUND STACKS AND UNDER TEMPORARY COVERINGS INCLUDING POLYETHYLENE AND SIMILAR MATERIALS.

1.3 INFORMATIONAL SUBMITTALS

A. ALL STRUCTURAL LUMBER CONSTRUCTION SHALL CONFORM TO THE LATEST, ADOPTED EDITIONS OF THE STANDARDS AND MATERIAL SPECIFICATIONS REFERENCED HEREIN

PART 2 - PRODUCTS

2.1 LUMBER PRODUCTS

A. GENERAL: ALL LUMBER SHALL COMPLY WITH THE REQUIREMENTS OF DOC PS 20. FURNISH LUMBER WITH EACH PIECE FACTORY-MARKED WITH GRADE STAMP OF INSPECTION AGENCY VERIFYING COMPLIANCE WITH GRADING RULE REQUIREMENTS AND IDENTIFYING GRADING AGENCY, GRADE, SPECIES, MOISTURE CONTENT AND MILL.

1. FOR EXPOSED LUMBER INDICATED TO RECEIVE A STAINED OR NATURAL FINISH, MARK GRADE STAMP ON END OR BACK OF EACH PIECE OR PROVIDE CERTIFICATE OF GRADE COMPLIANCE ISSUED BY GRADING AGENCY.
2. PROVIDE DRESSED LUMBER, S4S, UNLESS OTHERWISE INDICATED.

B. INSPECTION AGENCIES: INSPECTION AGENCIES AND THE ABBREVIATIONS USED TO REFERENCE THEM WITH LUMBER GRADES AND SPECIES PER SPIB - SOUTHERN PINE INSPECTION BUREAU.

C. GRADE STAMPS: PROVIDE LUMBER WITH EACH PIECE FACTORY-MARKED WITH GRADE STAMP OF INSPECTION AGENCY EVIDENCING COMPLIANCE WITH GRADING RULE REQUIREMENTS AND IDENTIFYING GRADING AGENCY, GRADE, SPECIES, MOISTURE CONTENT AT TIME OF SURFACING, AND MILL.

2.2 DIMENSION LUMBER AND BOARDS FOR CONCEALED CONDITIONS

A. SPECIES: SPRUCE PINE FIR.

B. MOISTURE CONTENT: S-DRY, KD 19 OR MC 19 (19 PERCENT MAXIMUM MOISTURE CONTENT).

C. GRADE: STRUCTURAL LUMBER: NO. 2 OR STANDARD GRADE. BOARDS: NO. 2, 2 COMMON, OR CONSTRUCTION BOARDS.

2.3 FIRE RETARDANT-TREATED MATERIALS

A. GENERAL: COMPLY WITH PERFORMANCE REQUIREMENTS IN AWPA C20 (LUMBER) AND AWPA C27 (PLYWOOD).

1. USE EXTERIOR TYPE FOR EXTERIOR LOCATIONS AND WHERE INDICATED.
2. USE INTERIOR TYPE A, HIGH TEMPERATURE (HT) FOR ENCLOSED ROOF FRAMING, FRAMING IN ATTIC SPACES AND WHERE INDICATED.

2.4 CONSTRUCTION PANELS

A. STANDARDS: COMPLY WITH REQUIREMENTS OF DOC PS 1 VOLUNTARY PRODUCT STANDARD "CONSTRUCTION INDUSTRIAL PLYWOOD" FOR VENEER PLYWOOD AND APA PRP-108 "PERFORMANCE STANDARDS AND POLICIES FOR STRUCTURAL-USE PANELS" FOR PERFORMANCE-RATED PANELS. TRADEMARK: FURNISH CONSTRUCTION PANELS THAT ARE EACH FACTORY-MARKED WITH APA TRADEMARK FOR GRADE SPECIFIED.

B. MISCELLANEOUS CONCEALED PANELS: APA-RATED SHEATHING, EXPOSURE 1, SPAN RATING TO SUIT FRAMING IN EACH LOCATION.

C. ELECTRICAL/TELEPHONE BACKING PANELS: APA-RATED SHEATHING, EXPOSURE 1, FIRE-RETARDANT TREATED, THICKNESS AS INDICATED BUT NOT LESS THAN 15/32 INCH.

2.5 MISCELLANEOUS LUMBER

A. GENERAL: PROVIDE LUMBER FOR SUPPORT OR ATTACHMENT OF OTHER CONSTRUCTION INCLUDING ROOFTOP EQUIPMENT CURBS AND SUPPORT BASES, CANT STRIPS, BUCKS, NAILERS, BLOCKING, FURRING, GROUNDS, STRIPPING AND SIMILAR MEMBERS.

B. UNLESS NOTED OTHERWISE, INSTALL MINIMUM DOUBLE JACK BEARING STUDS UNDER EACH END OF ALL BEAMS AND GIRDER TRUSSES, BUT NOT LESS THAN THE NUMBER REQUIRED TO PROVIDE FULL-WIDTH SOLID BEARING OF THE SUPPORTED MEMBERS.

C. FABRICATE MISCELLANEOUS LUMBER FROM DIMENSION LUMBER OF SIZES INDICATED AND INTO SHAPES SHOWN.

D. INSTALL STANDARD THREE-STUD CORNER CONSTRUCTION AT INSIDE AND OUTSIDE CORNERS, PROVIDING NAILING SURFACES FOR SHEATHING. INSTALL BLOCKING AS REQUIRED.

E. INSTALL ONE LAYER OF 1/2" THICK WOOD STRUCTURAL PANEL BETWEEN EACH MEMBER OF DIMENSIONAL LUMBER HEADERS.

F. TREAT ALL EXTERIOR LUMBER OR LUMBER IN CONTACT WITH CONCRETE OR MASONRY WITH PRESERVATIVE IN ACCORDANCE WITH AWPA.

2.6 FASTENERS

A. GENERAL: PROVIDE STAINLESS STEEL FASTENERS OF SIZE AND TYPE TO SUIT APPLICATION UNLESS INDICATED OTHERWISE THAT COMPLY WITH REQUIREMENTS SPECIFIED IN THIS ARTICLE FOR MATERIAL AND MANUFACTURE. WHERE ROUGH CARPENTRY IS EXPOSED TO WEATHER, IN GROUND CONTACT, OR IN AREA OF HIGH RELATIVE HUMIDITY, PROVIDE FASTENERS WITH A HOT-DIP ZINC COATING PER ASTM A 153 OR OF AISI TYPE 304 STAINLESS STEEL.

B. PROVIDE FASTENERS FOR USE WITH METAL FRAMING ANCHORS THAT COMPLY WITH WRITTEN RECOMMENDATIONS OF METAL FRAMING MANUFACTURER.

C. CONCEALED JOINT FASTENERS: THREADED STEEL.

D. NAILS, WIRE, BRADS, AND STAPLES: ASTM F 1667.

E. POWER DRIVEN FASTENERS: NATIONAL EVALUATION REPORT NER - 272.

F. WOOD SCREWS: FLAT HEAD, CONFORMING TO ANSI/ASME B18.6.1

G. BOLTS, NUTS, AND WASHERS: ASTM A 307, GRADE A; WITH ASTM A563 HEX NUTS AND ASTM F436 FLAT WASHERS.

H. CONNECTIONS: AS A MINIMUM, CONFORM CONNECTIONS FOR STRUCTURAL MEMBERS TO THE FASTENING SCHEDULE LISTED IN LOCAL BUILDING CODES.

1. PROVIDE GALVANIZED CONNECTORS BY THE SIMPSON STRONG-TIE CO. INSTALL ALL CONNECTORS IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS.
2. WOOD STRUCTURAL PANELS TO WOOD ROOF RAFTERS AND TRUSSES: NAILED, USE 10d COMMON NAILS SPACED AT 6 INCHES O.C. AT PANEL EDGES AND 12 INCHES O.C. AT INTERMEDIATE SUPPORTS. PROVIDE SOLID 2x4 (MINIMUM) BLOCKING BETWEEN ROOF FRAMING MEMBERS AT ALL ROOF PANEL EDGES.
3. WOOD STRUCTURAL PANELS TO WOOD STUDS: USE 8d COMMON NAILS SPACED AT 6 INCHES O.C. AT PANEL EDGES AND 12 INCHES O.C. AT INTERMEDIATE SUPPORTS. BLOCK ALL PANEL EDGES WITH SOLID FULL-DEPTH BLOCKING.
4. PROVIDE GALVANIZED FASTENERS FOR ALL EXTERIOR APPLICATIONS AND FOR ALL FIRE-RETARDANT TREATED OR WOOD-PRESERVATIVE TREATED MATERIALS.
   a. HOT-DIP GALVANIZE ALL STEEL CONNECTORS AND PRODUCTS 14 GA. AND THICKER AFTER FABRICATION THAT ARE IN CONTACT WITH PRESERVATIVE-TREATED WOOD. PROVIDE MINIMUM 2.0 OZ. COATING, ALL SIDES, PER ASTM A123. PROVIDE HOT-DIPPED GALVANIZED CONNECTORS PER ASTM A153 OR STAINLESS STEEL CONNECTORS.
   b. HOT-DIP GALVANIZE ALL STEEL CONNECTORS AND PRODUCTS LESS THAN 14 GA. THICK AFTER FABRICATION THAT ARE IN CONTACT WITH PRESERVATIVE-TREATED WOOD. PROVIDE MINIMUM 1.85 OZ. COATING, ALL SIDES, PER ASTM A653. PROVIDE HOT-DIPPED GALVANIZED CONNECTORS PER ASTM A153 OR STAINLESS STEEL CONNECTORS.

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

A. DISCARD UNITS OF MATERIAL WITH DEFECTS THAT IMPAIR QUALITY OF ROUGH CARPENTRY CONSTRUCTION AND THAT ARE TOO SMALL TO USE IN FABRICATING ROUGH CARPENTRY WITH MINIMUM JOINTS OR OPTIMUM JOINT ARRANGEMENT.

B. SET ROUGH CARPENTRY TO REQUIRED LEVELS AND LINES, WITH MEMBERS PLUMB AND TRUE TO LINE AND CUT AND FITTED.

C. FIT ROUGH CARPENTRY TO OTHER CONSTRUCTION; SCRIBE AND COPE AS REQUIRED FOR ACCURATE FIT. CORRELATE LOCATION OF FURRING, NAILERS, BLOCKING, GROUNDS, AND SIMILAR SUPPORTS TO ALLOW ATTACHMENT OF OTHER CONSTRUCTION.

D. SECURELY ATTACH ROUGH CARPENTRY WORK TO SUBSTRATE BY ANCHORING AND FASTENING AS INDICATED AND IN ACCORDANCE WITH TABLE 2304.9.1 "FASTEN SCHEDULE" IN ICC'S INTERNATIONAL BUILDING CODE.

E. PROVIDE BLOCKING AND FRAMING AS INDICATED AND AS REQUIRED TO SUPPORT FACING MATERIALS, FIXTURES, SPECIALTY ITEMS AND TRIM.

F. PROVIDE FIRE BLOCKING IN FURRED SPACES, STUD SPACES AND OTHER CONCEALED CAVITIES AS INDICATED AND AS FOLLOWS:

1. FURRED SPACES OF WALLS, AT EACH FLOOR LEVEL AND AT CEILINGS.
2. CONCEALED SPACES OF WOOD FRAMED WALLS AND PARTITIONS AT EACH FLOOR LEVEL AND AT CEILING LINE OF TOP STORY.
3. CONCEALED SPACES BETWEEN FLOOR SLEEPERS AND TO SOLIDLY FILL SPACE BELOW PARTITIONS.
4. CONCEALED SPACES BEHIND COMBUSTIBLE CORNICES AND EXTERIOR TRIM.

3.2 WOOD GROUNDS, NAILERS, BLOCKING, AND SLEEPERS

A. INSTALL WOOD GROUNDS, NAILERS, BLOCKING, AND SLEEPERS WHERE SHOWN AND WHERE REQUIRED FOR SCREEDING OR ATTACHMENT OF OTHER WORK. FORM TO SHAPES AS SHOWN AND CUT AS REQUIRED FOR TRUE LINE AND LEVEL OF WORK TO BE ATTACHED. COORDINATE LOCATION WITH OTHER WORK INVOLVED.

B. ATTACH TO SUBSTRATES AS REQUIRED TO SUPPORT APPLIED LOADING. COUNTER SINK BOLTS AND NUTS FLUSH WITH SURFACES, UNLESS OTHERWISE INDICATED. BUILD INTO MASONRY DURING INSTALLATION OF MASONRY WORK. WHERE POSSIBLE, ANCHOR TO FORM WORK BEFORE CONCRETE PLACEMENT.

3.3 CONSTRUCTION PANELS

A. COMPLY WITH APPLICABLE INSTALLATION RECOMMENDATIONS IN APA FORM E30 "DESIGN/CONSTRUCTION GUIDE - RESIDENTIAL AND COMMERCIAL."

END OF SECTION 06 10 00

SHEATHING SECTION 06 16 00

FOR REFERENCE ONLY. REFER TO PRE-FABRICATED BUILDING SHELL SHEETS (FBS) FOR PROJECT SPECIFIC INFORMATION.

PART 1 - GENERAL

1.1 SUMMARY

A. SECTION INCLUDES:

1. WALL SHEATHING.
2. ROOF SHEATHING.

1.2 ACTION SUBMITTALS

A. PRODUCT DATA: FOR EACH TYPE OF PROCESS AND FACTORY-FABRICATED PRODUCT. INDICATE COMPONENT MATERIALS AND DIMENSIONS AND INCLUDE CONSTRUCTION AND APPLICATION DETAILS.

1. INCLUDE DATA FOR WOOD-PRESERVATIVE TREATMENT FROM CHEMICAL TREATMENT MANUFACTURER AND CERTIFICATION BY TREATING PLANT THAT TREATED PLYWOOD COMPLIES WITH REQUIREMENTS.
2. INCLUDE DATA FOR FIRE-RETARDANT TREATMENT FROM CHEMICAL TREATMENT MANUFACTURER AND CERTIFICATION BY TREATING PLANT THAT TREATED PLYWOOD COMPLIES WITH REQUIREMENTS.

1.3 INFORMATIONAL SUBMITTALS

B. MANUFACTURER QUALIFICATIONS: A QUALIFIED MANUFACTURER THAT IS CERTIFIED FOR CHAIN OF CUSTODY BY AN FSC-ACCREDITED CERTIFICATION BODY.

C. VENDOR QUALIFICATIONS: A VENDOR THAT IS CERTIFIED FOR CHAIN OF CUSTODY BY AN FSC-ACCREDITED CERTIFICATION BODY.

D. ALL STRUCTURAL LUMBER CONSTRUCTION SHALL CONFORM TO THE LATEST, ADOPTED EDITIONS OF THE STANDARDS AND MATERIAL SPECIFICATIONS REFERENCED HEREIN.

1.4 REFERENCE STANDARD

A. NDS, "NATIONAL DESIGN SPECIFICATION FOR WOOD CONSTRUCTION" BY THE AMERICAN FOREST & PAPER ASSOCIATION (AF & PA).

PART 2 - PRODUCTS

2.1 WOOD PANEL PRODUCTS

A. GENERAL: ALL LUMBER SHALL COMPLY WITH THE REQUIREMENTS OF DOC PS 20. FURNISH LUMBER WITH EACH PIECE FACTORY-MARKED WITH GRADE STAMP OF INSPECTION AGENCY VERIFYING COMPLIANCE WITH GRADING RULE REQUIREMENTS AND IDENTIFYING GRADING AGENCY, GRADE, SPECIES, MOISTURE CONTENT AND MILL.

B. ALL WOOD STRUCTURAL PANELS SHALL COMPLY WITH REQUIREMENTS OF DOC PS 1, DOC PS 2, HPVA HP I AND APA PDS. FACTORY-MARK ALL WOOD STRUCTURAL PANELS WITH A GRADING STAMP OF THE INSPECTION AGENCY.

C. EMISSIONS: PRODUCTS SHALL MEET THE TESTING AND PRODUCT REQUIREMENTS OF THE CALIFORNIA DEPARTMENT OF HEALTH SERVICES' "STANDARD PRACTICE FOR THE TESTING OF VOLATILE ORGANIC EMISSIONS FROM VARIOUS SOURCES USING SMALL-SCALE ENVIRONMENTAL CHAMBERS."

2.2 WALL SHEATHING

A. 15/32" (1/2" NOMINAL), APA RATED SHEATHING, 24/16, EXPOSURE 1.

2.3 ROOF SHEATHING

A. 23/32" (3/4" NOMINAL), APA RATED SHEATHING, 48/24, EXPOSURE 1, U.N.O.

2.4 FASTENERS

A. FOR FASTENER SPECIFICATIONS, SEE ROUGH CARPENTRY - SECTION 06 10 00.

2.5 MISCELLANEOUS

A. INSTALL STANDARD THREE-STUD CORNER CONSTRUCTION AT INSIDE AND OUTSIDE CORNERS, PROVIDING NAILING SURFACES FOR SHEATHING. INSTALL BLOCKING AS REQUIRED.

B. INSTALL ONE LAYER OF 1/2" THICK WOOD STRUCTURAL PANEL BETWEEN EACH MEMBER OF DIMENSIONAL LUMBER HEADERS.

C. TREAT ALL EXTERIOR LUMBER OR LUMBER IN CONTACT WITH CONCRETE OR MASONRY WITH PRESERVATIVE IN ACCORDANCE WITH AWPA.

D. INSTALL WOOD STRUCTURAL PANEL WALL SHEATHING ON ALL EXTERIOR WALLS.

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

A. DO NOT USE MATERIALS WITH DEFECTS THAT IMPAIR QUALITY OF SHEATHING OR PIECES THAT ARE TOO SMALL TO USE WITH MINIMUM NUMBER OF JOINTS OR OPTIMUM JOINT ARRANGEMENT. ARRANGE JOINTS SO THAT PIECES DO NOT SPAN BETWEEN FEWER THAN THREE SUPPORT MEMBERS.

B. CUT PANELS AT PENETRATIONS, EDGES, AND OTHER OBSTRUCTIONS OF WORK; FIT TIGHTLY AGAINST ABUTTING CONSTRUCTION UNLESS OTHERWISE INDICATED.

C. SECURELY ATTACH TO SUBSTRATE BY FASTENING AS INDICATED, COMPLYING WITH THE FOLLOWING:

1. NES NER-272 FOR POWER-DRIVEN FASTENERS.
2. TABLE 2304.9.1, "FASTENING SCHEDULE," IN ICC'S "INTERNATIONAL BUILDING CODE."
3. TABLE R602.3(1), "FASTENER SCHEDULE FOR STRUCTURAL MEMBERS," AND TABLE R602.3(2), "ALTERNATE ATTACHMENTS," IN ICC'S "INTERNATIONAL RESIDENTIAL CODE FOR ONE- AND TWO-FAMILY DWELLINGS."

D. COORDINATE WALL AND ROOF SHEATHING INSTALLATION WITH FLASHING AND JOINT-SEALANT INSTALLATION SO THESE MATERIALS ARE INSTALLED IN SEQUENCE AND MANNER THAT PREVENT EXTERIOR MOISTURE FROM PASSING THROUGH COMPLETED ASSEMBLY.

E. DO NOT BRIDGE BUILDING EXPANSION JOINTS; CUT AND SPACE EDGES OF PANELS TO MATCH SPACING OF STRUCTURAL SUPPORT ELEMENTS.

3.2 WOOD STRUCTURAL PANEL INSTALLATION

A. GENERAL: COMPLY WITH APPLICABLE RECOMMENDATIONS IN APA FORM NO. E30, "ENGINEERED WOOD CONSTRUCTION GUIDE," FOR TYPES OF STRUCTURAL-USE PANELS AND APPLICATIONS INDICATED.

B. FASTENING METHODS: FASTEN PANELS AS INDICATED BELOW:

1. WALL AND ROOF SHEATHING:
   a. NAIL TO WOOD FRAMING. APPLY A CONTINUOUS BEAD OF GLUE TO FRAMING MEMBERS AT EDGES OF WALL SHEATHING PANELS.
   b. SPACE PANELS 1/8 INCH APART AT EDGES AND ENDS.

END OF SECTION 06 16 00

SHOP-FABRICATED WOOD TRUSSES SECTION 06 17 53

FOR REFERENCE ONLY. REFER TO PRE-FABRICATED BUILDING SHELL SHEETS (FBS) FOR PROJECT SPECIFIC INFORMATION.

PART 1 - GENERAL

1.1 SUMMARY

A. SECTION INCLUDES:

1. WOOD ROOF TRUSSES.
2. WOOD GIRDER TRUSSES.
3. WOOD TRUSS BRACING.
4. METAL TRUSS ACCESSORIES.

B. ALLOWANCES: PROVIDE WOOD TRUSS BRACING UNDER THE METAL-PLATE-CONNECTED TRUSS BRACING ALLOWANCE AS SPECIFIED IN SECTION 012100 "ALLOWANCES."

C. ALL STRUCTURAL LUMBER CONSTRUCTION SHALL CONFORM TO THE LATEST, ADOPTED EDITIONS OF THE STANDARDS AND MATERIAL SPECIFICATIONS REFERENCED HEREIN.

D. REFERENCE STANDARD

1. NDS, "NATIONAL DESIGN SPECIFICATION FOR WOOD CONSTRUCTION" BY THE AMERICAN FOREST & PAPER ASSOCIATION (AF & PA).

1.2 ACTION SUBMITTALS

A. PRODUCT DATA: FOR METAL-PLATE CONNECTORS, METAL TRUSS ACCESSORIES, AND FASTENERS.

B. SHOP DRAWINGS: SHOW FABRICATION AND INSTALLATION DETAILS FOR TRUSSES.

1. SHOW LOCATION, PITCH, SPAN, CAMBER, CONFIGURATION, AND SPACING FOR EACH TYPE OF TRUSS REQUIRED.
2. INDICATE SIZES, STRESS GRADES, AND SPECIES OF LUMBER.
3. INDICATE LOCATIONS, SIZES, AND MATERIALS FOR PERMANENT BRACING REQUIRED TO PREVENT BUCKLING OF INDIVIDUAL TRUSS MEMBERS DUE TO DESIGN LOADS.
4. INDICATE TYPE, SIZE, MATERIAL, FINISH, DESIGN VALUES, ORIENTATION, AND LOCATION OF METAL CONNECTOR PLATES AND HANGER CONNECTOR TYPES.
5. INDICATE ALL TEMPORARY AND PERMANENT BRACING REQUIREMENTS OF TRUSS MEMBERS. IN AREAS WHERE TRUSS TOP CHORDS AND/OR BOTTOM CHORDS DO NOT RECEIVE SHEATHING, INDICATE THE REQUIRED CHORD BRACING AND BRACE SPACINGS FOR ALL APPLICABLE LOAD CASES. INDICATE ANCHORAGE OF "CAP" TRUSSES AND/OR "OVERLAY" TRUSSES.
6. SHOW SPLICE DETAILS AND BEARING DETAILS.
7. SUBMIT TRUSS SHOP DRAWINGS WHICH EXHIBIT THE SEAL OF THE ENGINEER RESPONSIBLE FOR THE TRUSS DESIGN.

C. DELEGATED-DESIGN SUBMITTAL: FOR METAL-PLATE-CONNECTED WOOD TRUSSES INDICATED TO COMPLY WITH PERFORMANCE REQUIREMENTS AND DESIGN CRITERIA, INCLUDING ANALYSIS DATA SIGNED AND SEALED BY THE QUALIFIED PROFESSIONAL ENGINEER RESPONSIBLE FOR THEIR DESIGN AND PREPARATION.

1.3 INFORMATIONAL SUBMITTALS

A. PRODUCT CERTIFICATES.

B. EVALUATION REPORTS: FOR THE FOLLOWING, FROM ICC-ES:

1. METAL-PLATE CONNECTORS.
2. METAL TRUSS ACCESSORIES.

1.4 QUALITY ASSURANCE

A. METAL CONNECTOR-PLATE MANUFACTURER QUALIFICATIONS: A MANUFACTURER THAT IS A MEMBER OF TPI AND THAT COMPLIES WITH QUALITY-CONTROL PROCEDURES IN TPI 1 FOR MANUFACTURE OF CONNECTOR PLATES.

1. MANUFACTURER'S RESPONSIBILITIES INCLUDE PROVIDING PROFESSIONAL ENGINEERING SERVICES NEEDED TO ASSUME ENGINEERING RESPONSIBILITY.
2. ENGINEERING RESPONSIBILITY: PREPARATION OF SHOP DRAWINGS AND COMPREHENSIVE ENGINEERING ANALYSIS BY A QUALIFIED PROFESSIONAL ENGINEER.

A. FABRICATOR QUALIFICATIONS: SHOP THAT PARTICIPATES IN A RECOGNIZED QUALITY-ASSURANCE PROGRAM THAT COMPLIES WITH QUALITY-CONTROL PROCEDURES IN TPI 1 AND THAT INVOLVES THIRD-PARTY INSPECTION BY AN INDEPENDENT TESTING AND INSPECTING AGENCY ACCEPTABLE TO ARCHITECT AND AUTHORITIES HAVING JURISDICTION AND IS CERTIFIED FOR CHAIN OF CUSTODY BY AN FSC-ACCREDITED CERTIFICATION BODY.

1.5 DELIVERY, STORAGE, AND HANDLING

A. HANDLE AND STORE TRUSSES TO COMPLY WITH RECOMMENDATIONS IN TPI BCSI, "BUILDING COMPONENT SAFETY INFORMATION: GUIDE TO GOOD PRACTICE FOR HANDLING, INSTALLING, RESTRAINING, & BRACING METAL PLATE CONNECTED WOOD TRUSSES."

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. SEE STRUCTURAL DRAWINGS FOR TRUSS DESIGN LOADS AND DEFLECTION CRITERIA FROM ORIGINAL SPECIFICATION INFORMATION.

B. DELEGATED DESIGN: ENGAGE A QUALIFIED PROFESSIONAL ENGINEER, AS DEFINED IN SECTION 014000 "QUALITY REQUIREMENTS," TO DESIGN METAL-PLATE-CONNECTED WOOD TRUSSES.

C. STRUCTURAL PERFORMANCE: PROVIDE METAL-PLATE-CONNECTED WOOD TRUSSES CAPABLE OF WITHSTANDING DESIGN LOADS WITHIN LIMITS AND UNDER CONDITIONS INDICATED. COMPLY WITH REQUIREMENTS IN TPI 1 UNLESS MORE STRINGENT REQUIREMENTS ARE SPECIFIED BELOW.

2.2 DIMENSION LUMBER

A. ALL LUMBER SHALL COMPLY WITH THE REQUIREMENTS OF DOC PS 20. FURNISH LUMBER WITH EACH PIECE FACTORY-MARKED WITH GRADE STAMP OF INSPECTION AGENCY VERIFYING COMPLIANCE WITH GRADING RULE REQUIREMENTS AND IDENTIFYING GRADING AGENCY, GRADE, SPECIES, MOISTURE CONTENT AND MILL.

B. PERMANENT BRACING: PROVIDE WOOD BRACING THAT COMPLIES WITH REQUIREMENTS FOR MISCELLANEOUS LUMBER IN SECTION 06 10 00 "ROUGH CARPENTRY."

2.3 METAL CONNECTOR PLATES

A. USE GALVANIZED SHEET STEEL CONFORMING WITH ASTM A653, COATING CLASS G60 . MANUFACTURE WITH HOLES, PLUGS, TEETH, OR PRONGS UNIFORMLY SPACED AND FORMED.

B. THE TRUSS MANUFACTURER SHALL DESIGN, DETAIL, PROVIDE AND INSTALL ALL INTERNAL TRUSS COMPONENT CONNECTIONS.

2.4 FASTENERS

A. FOR FASTENER SPECIFICATIONS, SEE ROUGH CARPENTRY - SECTION 06 10 00.

2.5 METAL TRUSS-TO-TRUSS HANGERS

A. THE TRUSS MANUFACTURER SHALL DESIGN AND DESIGNATE ALL TRUSS-TO-TRUSS HANGERS. THE CONTRACTOR SHALL FURNISH AND INSTALL ALL TRUSS-TO-TRUSS HANGERS IN ACCORDANCE WITH THE HANGER MANUFACTURER'S SPECIFICATIONS.

2.6 MISCELLANEOUS

A. PROVIDE AND INSTALL TEMPORARY AND PERMANENT BRACING FOR PRE-ENGINEERED, PRE-FABRICATED WOOD TRUSSES AS INDICATED ON THE TRUSS MANUFACTURER'S APPROVED SHOP DRAWINGS.

2.7 FABRICATION

A. ASSEMBLE TRUSS MEMBERS IN DESIGN CONFIGURATION INDICATED; USE JIGS OR OTHER MEANS TO ENSURE UNIFORMITY AND ACCURACY OF ASSEMBLY WITH JOINTS CLOSELY FITTED TO COMPLY WITH TOLERANCES IN TPI 1. POSITION MEMBERS TO PRODUCE DESIGN CAMBER INDICATED.

1. FABRICATE WOOD TRUSSES WITHIN MANUFACTURING TOLERANCES IN TPI 1.

B. CONNECT TRUSS MEMBERS BY METAL CONNECTOR PLATES LOCATED AND SECURELY EMBEDDED SIMULTANEOUSLY IN BOTH SIDES OF WOOD MEMBERS BY AIR OR HYDRAULIC PRESS.

PART 3 - EXECUTION

3.1 INSTALLATION

A. INSTALL WOOD TRUSSES ONLY AFTER SUPPORTING CONSTRUCTION IS IN PLACE AND IS BRACED AND SECURED.

B. IF TRUSSES ARE DELIVERED TO PROJECT SITE IN MORE THAN ONE PIECE, ASSEMBLE TRUSSES BEFORE INSTALLING.

C. HOIST TRUSSES IN PLACE BY LIFTING EQUIPMENT SUITED TO SIZES AND TYPES OF TRUSSES REQUIRED, EXERCISING CARE NOT TO DAMAGE TRUSS MEMBERS OR JOINTS BY OUT-OF-PLANE BENDING OR OTHER CAUSES.

D. INSTALL AND BRACE TRUSSES ACCORDING TO TPI RECOMMENDATIONS AND AS INDICATED.

E. ANCHOR TRUSSES SECURELY AT BEARING POINTS; USE METAL TRUSS TIE-DOWNS OR FLOOR TRUSS HANGERS AS APPLICABLE. INSTALL FASTENERS THROUGH EACH FASTENER HOLE IN METAL FRAMING ANCHORS ACCORDING TO MANUFACTURER'S FASTENING SCHEDULES AND WRITTEN INSTRUCTIONS.

F. SECURELY CONNECT EACH TRUSS PLY REQUIRED FOR FORMING BUILT-UP GIRDER TRUSSES.

G. INSTALL AND FASTEN PERMANENT BRACING DURING TRUSS ERECTION AND BEFORE CONSTRUCTION LOADS ARE APPLIED. ANCHOR ENDS OF PERMANENT BRACING WHERE TERMINATING AT WALLS OR BEAMS.

1. INSTALL BRACING TO COMPLY WITH SECTION 06 10 00 "ROUGH CARPENTRY."
2. INSTALL AND FASTEN STRONGBACK BRACING VERTICALLY AGAINST VERTICAL WEB OF PARALLEL-CHORD FLOOR TRUSSES AT CENTERS INDICATED.

H. INSTALL WOOD TRUSSES WITHIN INSTALLATION TOLERANCES IN TPI 1.

I. DO NOT ALTER TRUSSES IN FIELD. DO NOT CUT, DRILL, NOTCH, OR REMOVE TRUSS MEMBERS.

J. REPLACE WOOD TRUSSES THAT ARE DAMAGED OR DO NOT MEET REQUIREMENTS.

END OF SECTION 06 17 53

FINISH CARPENTRY SECTION 06 20 00

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. DRAWINGS AND GENERAL PROVISIONS OF CONTRACT APPLY TO THIS SECTION.

1.2 DELIVERY, STORAGE AND HANDLING

A. DELIVERY AND STORAGE: KEEP MATERIALS UNDER COVER AND DRY. PROTECT AGAINST EXPOSURE TO WEATHER AND CONTACT WITH DAMP OR WET SURFACES. STACK LUMBER AS WELL AS PLYWOOD AND OTHER PANELS FLAT WITH SPACERS BETWEEN EACH BUNDLE. PROVIDE FOR AIR CIRCULATION WITHIN AND AROUND STACKS AND UNDER TEMPORARY COVERINGS INCLUDING POLYETHYLENE AND SIMILAR MATERIALS.

1.3 QUALITY ASSURANCE

A. PERFORM WORK IN ACCORDANCE WITH AWI ARCHITECTURAL WOODWORK QUALITY STANDARDS, PREMIUM GRADE AND WIC MANUAL OF MILLWORK, PREMIUM GRADE.

B. FABRICATORS: MUST BE PRE-APPROVED BY THE ARCHITECT.

C. FABRICATORS: COMPANY SPECIALIZING IN FABRICATING THE PRODUCTS SPECIFIED IN THE SECTION WITH MINIMUM TEN YEARS DOCUMENTED EXPERIENCE.

1.4 REGULATORY REQUIREMENTS

A. CONFORM TO APPLICABLE LOCAL CODE FOR FIRE RETARDANT REQUIREMENTS.

PART 2 - PRODUCTS

2.1 MATERIALS GENERAL: UNLESS OTHERWISE INDICATED, PROVIDE MATERIALS THAT COMPLY WITH THE CRITERIA SPECIFIED IN THIS SECTION.

A. LUMBER: DOC PS 20 AND APPLICABLE GRADING RULES OF INSPECTION AGENCIES CERTIFIED BY ALSC'S BOARD OF REVIEW.

B. SOFTWOOD PLYWOOD: DOC PS 1.

C. HARDBOARD: AHA A135.4.

D. MDF: ANSI A208.2, GRADE 130

E. PARTICLE BOARD: ANSI A208.1, GRADE M-2 EXTERIOR GLUE.

F. MELAMINE-FACED PARTICLEBOARD: PARTICLE BOARD COMPLYING WITH ANSI A208.1, GRADE M-2, FINISHED ON BOTH SIDES WITH THERMALLY FUSED, MELAMINE-IMPREGNATED DECORATIVE PAPER COMPLYING WITH LMA SAT-1.

2.2 FIRE-RETARDANT-TREATED MATERIALS

A. LUMBER: COMPLY WITH PERFORMANCE REQUIREMENTS IN AWPA C20, INTERIOR TYPE A. KILN DRY TO A MAXIMUM MOISTURE CONTENT OF 19 PERCENT.

B. PLYWOOD: COMPLY WITH PERFORMANCE REQUIREMENTS IN AWPA C27, INTERIOR TYPE A. KILN DRY TO A MAXIMUM MOISTURE CONTENT OF 18 PERCENT.

2.3 LUMBER SIDING

A. PROVIDE SIDING PER THIS SECTION, UNLESS OTHERWISE INDICATED.

B. PROVIDE KILN-DRIED LUMBER SIDING COMPLYING WITH DOC PS 20, FACTORY COATED WITH EXTERIOR ALKYD PRIMER, UNLESS OTHERWISE NOTED.

C. SPECIES AND GRADE: WESTERN RED CEDAR, CLEAR HEART, AWI PREMIUM GRADE.

2.4 EXTERIOR STANDING AND RUNNING TRIM

A. PROVIDE TRIM PER THIS SECTION, UNLESS OTHERWISE NOTED

B. LUMBER TRIM:

1. SPECIES AND GRADE: WESTERN RED CEDAR, CLEAR HEART, AWI PREMIUM GRADE.
2. MAXIMUM MOISTURE CONTENT: 15 PERCENT.
3. FACE SURFACE: SURFACED (SMOOTH).
4. MATERIAL SUITABLE FOR TRANSPARENT FINISH.

C. MOLDINGS: WMMPA WM 4 P-GRADE WOOD MOLDINGS, WITHOUT FINGER JOINTING. MADE FROM KILN-DRIED STOCK TO PATTERNS INCLUDED IN WMMPA WM 12.

1. SPECIES AND GRADE: WESTERN RED CEDAR, CLEAR HEART, AWI PREMIUM GRADE.
2. MAXIMUM MOISTURE CONTENT: 15 PERCENT.
3. MATERIAL SUITABLE FOR TRANSPARENT FINISH.

D. MANUFACTURED POLYURETHANE TRIM: MOLDED HIGH DENSITY POLYURETHANE FOAM WITH INTERIM PROTECTIVE BARRIER COAT PRIMER, RESISTANT TO UV DEGRADATION.

1. AVAILABLE PRODUCTS: SUBJECT TO COMPLIANCE WITH REQUIREMENTS, PRODUCTS THAT MAY BE INCORPORATED INTO THE WORK INCLUDE, BUT ARE NOT LIMITED TO, THE FOLLOWING:
2. PRODUCTS: SUBJECT TO COMPLIANCE WITH REQUIREMENTS, PROVIDE ONE OF THE FOLLOWING:
   a. FYPON, LTD.: PROFILES AS INDICATED ON DRAWINGS.
   b. APPROVED EQUAL
3. APPLY FINISH PAINT TO ALL EXPOSED SURFACES OF PRIME COATED MATERIALS INSTALLED ON EXTERIOR OF PROJECT.

E. CELLULAR PVC TRIM: EXTRUDED, EXPANDED PVC WITH SMALL CELL MICROSTRUCTURE, MADE FROM UV- AND HEAT-STABILIZED, RIGID MATERIAL.

ISSUE TABLE

No.	Date (mm/dd/yy)	Description
01	09-26-25	DTGO PROTOTYPE DOCUMENTS

REVISIONS

No.	Date	Description

DRAWINGS REVISED AS PER DESIGN BULLETIN

No.	Date	Description

THIS DRAWING IS OWNED BY OR LICENSED FOR USE BY POPEYES LOUISIANA KITCHEN (OR ITS AFFILIATED OR RELATED COMPANIES) AND MAY NOT BE REPRODUCED, USED, DOWNLOADED, DISSEMINATED, PUBLISHED, OR TRANSFERRED IN ANY FORM OR BY ANY MEANS, EXCEPT WITH THE PRIOR WRITTEN CONSENT OF POPEYES LOUISIANA KITCHEN . COPYRIGHT INFRINGEMENT IS A VIOLATION OF FEDERAL LAW SUBJECT TO CRIMINAL AND CIVIL PENALTIES.

THE CONTRACTOR IS TO VERIFY ALL DIMENSIONS AND CONDITIONS ON THE PROJECT AND TO REPORT ANY DISCREPANCIES TO THE POPEYES LOUISIANA KITCHEN REPRESENTATIVE PRIOR TO COMMENCING WORK. THESE DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION PURPOSES UNLESS INDICATED BY POPEYES LOUISIANA KITCHEN AS "ISSUED FOR CONSTRUCTION".

Professional Seal

DESIGNER NOTES:
DESIGN GUIDELINE ONLY - NOT FOR PERMIT OR CONSTRUCTION

THESE DOCUMENTS MUST BE COMPLETED AND / OR MODIFIED BY A LICENSED ARCHITECT AND ENGINEER TO CONFORM TO ALL APPLICABLE CODES, AND SPECIFIC SITE CONDITIONS. THERE IS NO WARRANTY, WHETHER IMPLIED OR EXPRESSED THAT THESE DOCUMENTS MEET THE APPLICABLE CODE REQUIREMENTS. LIABILITY FOR THE DESIGN AND ANY USE OF THE DOCUMENTS IS THE SOLE RESPONSIBILITY OF THE ARCHITECT AND ENGINEER OF RECORD.

Company Logo

Project

Store Type: US DTGO PROTOTYPE

Location: PROTOTYPE DTGO (U.S.) CITY, STATE

Drawing Title: ARCHITECTURAL SPECIFICATIONS

Drawn	Checked
XX	XX
Scale	Date
	##.##.####
Project No.	Drawing No.
XX	SP2

POPEYES LOUISIANA KITCHEN MODEL DTGO, ADDRESS, CITY, STATE: DTGO PROTOTYPE DOCUMENTS (OCTOBER, 2025) STORE NO. XXXXX

1. AVAILABLE PRODUCTS: SUBJECT TO COMPLIANCE WITH REQUIREMENTS, PRODUCTS THAT MAY BE INCORPORATED INTO THE WORK INCLUDE, BUT ARE NOT LIMITED TO, THE FOLLOWING:
2. PRODUCTS: SUBJECT TO COMPLIANCE WITH REQUIREMENTS, PROVIDE ONE OF THE FOLLOWING:
   a. PLY-TRIM, INC.; DURABOARD.
   b. ROYAL MOULDINGS LIMITED; PRO SERIES EXTERIOR MOULDINGS.
   c. VYCOM CORP.; AZEK.
3. DENSITY: NOT LESS THAN 31 LB/CU. FT. (500 KG/CU. M.)
4. HEAT DEFLECTION TEMPERATURE: NOT LESS THAN 130° F (54° C), PER ASTM D 648.
5. FLAME-SPREAD INDEX: 75 OR LESS, PER ASTM E 84.

2.5 INTERIOR STANDING AND RUNNING TRIM

A. PROVIDE TRIM PER THIS SECTION, UNLESS OTHERWISE INDICATED.

B. SOFTWOOD LUMBER TRIM:
1. SPECIES AND GRADE: EASTERN WHITE PINE; AWI PREMIUM GRADE.
2. MAXIMUM MOISTURE CONTENT: 15 PERCENT.
3. FACE SURFACE: SURFACED (SMOOTH).
4. MATERIAL SUITABLE TO RECEIVE TRANSPARENT FINISH.

C. HARDWOOD LUMBER TRIM:
1. SPECIES AND GRADE: SELECT WHITE BIRCH, MILL CLEAR, AWI PREMIUM GRADE.
2. MAXIMUM MOISTURE CONTENT: 9 PERCENT.
3. FACE SURFACE: SURFACED (SMOOTH).
4. MATERIAL SUITABLE TO RECEIVE TRANSPARENT FINISH.

D. SOFTWOOD MOLDINGS: WMMPA WM 4, N-GRADE WOOD MOLDINGS. MAKE PATTERNS INCLUDED IN WMMPA WM 12.
1. SPECIES AND GRADE: EASTERN WHIT PINE; AWI PREMIUM GRADE.
2. MAXIMUM MOISTURE CONTENT: 15 PERCENT.
3. MATERIAL SUITABLE TO RECEIVE TRANSPARENT FINISH.

E. HARDWOOD MOLDINGS: WMMPA HWM 2, N-GRADE WOOD MOLDINGS. MAKE PATTERNS INCLUDED IN WMMPA WM 12.
1. SPECIES AND GRADE: SELECT WHITE BIRCH, MILL CLEAR, AWI PREMIUM GRADE.
2. MAXIMUM MOISTURE CONTENT: 9 PERCENT.
3. MATERIAL SUITABLE TO RECEIVE TRANSPARENT FINISH.

2.6 SHEET MATERIALS

A. PROVIDE SHEET MATERIAL PER THIS SECTION, UNLESS OTHERWISE INDICATED.

B. INTERIOR SOFTWOOD PLYWOOD:
1. SPECIES AND GRADE: DOUGLAS FIR, AWI PREMIUM GRADE.
2. FACE SURFACE: SURFACED (SMOOTH) PLUGGED AND SANDED.

C. EXTERIOR MEDIUM DENSITY OVERLAY PLYWOOD:
1. GRADE: PS 1-95 AWI PREMIUM VENEER GRADE.
2. VENEER CORE.
3. TYPE OF GLUE: AS RECOMMENDED FOR APPLICATION.
4. PAPER SATURATED WITH PHENOLIC RESIN SOLID FACE (PAPER SATURATED FACE ONE SIDE ONLY AND EQUAL TO TOSENBERG MDO BY ROSEBURG FORREST PRODUCTS. FURNISH FACTORY PRIMED (2) SIDES AND EDGES).

2.7 MISCELLANEOUS MATERIALS

A. FOR FASTENER SPECIFICATIONS, SEE ROUGH CARPENTRY - SECTION 06 10 00

B. GLUE: ALIPHATIC-RESIN, POLYURETHANE, OR RESORCINOL WOOD GLUE.
1. USE WOOD GLUE THAT HAS A VOC CONTENT OF 30 G/L OR LESS WHEN CALCULATED ACCORDING TO 40 CRF 59, SUBPART D (EPA METHOD 24).

C. ACCESSORIES:
1. LUMBER FOR SHIMMING, BLOCKING, AND MISCELLANEOUS USE: SOFTWOOD LUMBER OF DOUGLAS FIR, UTILITY GRADE SPECIES. SIZE AS REQUIRED FOR CONDITION UNLESS SHOWN OTHERWISE.
2. PLASTIC EDGE TRIM: EXTRUDED CONVEX SHAPE; SMOOTH FINISH; SELF LOCKING SERRATED TONGUE; WIDTH TO MATCH COMPONENT THICKNESS; COLOR AS SELECTED BY ARCHITECT.
3. PRIMER: ALKYD PRIMER SEALER TYPE. PRIME IN ACCORDANCE WITH MANUFACTURER'S REQUIREMENT AND PER SECTION 09900 (PAINTING).
4. WOOD FILLER: OIL BASE, TINTED TO MATCH SURFACE FINISH COLOR.

D. HARDWARE:
1. BHMA A156.9 AS FOLLOWS: ALL HARDWARE TO BE AS SHOWN ON DRAWINGS. IF NOT SHOWN PROVIDE HARDWARE AS DIRECTED BY OWNER AND/OR AS REQUIRED FOR A COMPLETE INSTALLATION.

E. FABRICATION:
1. FABRICATE TO AWI PREMIUM STANDARDS.
2. SHOP ASSEMBLE WORK FOR DELIVERY TO SITE, PERMITTING PASSAGE THROUGH BUILDING OPENINGS.
3. FIT INTERIOR EXPOSED SHEET MATERIAL EDGES WITH PLASTIC EDGING WHERE SHOWN (NEVER LEAVE IN FINISHED EDGE EXPOSED TO VIEW).
4. WHEN NECESSARY TO CUT AND FIT ON SITE, PROVIDE MATERIALS WITH AMPLE ALLOWANCE FOR CUTTING. PROVIDE TRIM FOR SCRIBING AND SITE CUTTING.

F. SHOP FINISHING
1. SAND WORK SMOOTH AND SET EXPOSED NAILS AND SCREWS.
2. APPLY WOOD FILLER IN EXPOSED NAIL AND SCREW INDENTATIONS.
3. ON ITEMS TO RECEIVE TRANSPARENT FINISHES, USE WOOD FILLER WHICH MATCHES SURROUNDING SURFACES AND OF TYPES RECOMMENDED FOR APPLIED FINISHES.
4. FINISH WORK IN ACCORDANCE WITH AWI AS SHOWN ON DRAWINGS AND AS DIRECTED BY OWNER.

PART 3 - EXECUTION

3.1 EXAMINATION
A. VERIFY EXISTING CONDITIONS BEFORE STARTING WORK.
B. VERIFY ADEQUACY OF BACKING AND SUPPORT FRAMING.
C. VERIFY MECHANICAL, ELECTRICAL, AND BUILDING ITEMS AFFECTING WORK OF THIS SECTION ARE PLACED AND READY TO RECEIVE THIS WORK.

3.2 INSTALLATION
A. INSTALL WORK IN ACCORDANCE WITH AWI PREMIUM QUALITY STANDARD.
B. SET AND SECURE MATERIALS AND COMPONENTS IN PLACE, PLUMB, AND LEVEL.
C. CAREFULLY SCRIBE WORK ABUTTING OTHER COMPONENTS, WITH MAXIMUM GAPS OF 1/32 INCH (1 MM). DO NOT USE ADDITIONAL OVERLAY TRIM TO CONCEAL LARGER GAPS.
D. MITER 90 DEGREES EXTERIOR CORNERS OF MDO EXTERIOR PLYWOOD.
E. INSTALL HARDWARE IN ACCORDANCE WITH MANUFACTURER'S INSTRUCTIONS.
F. SET EXPOSED FASTENERS. APPLY WOOD FILLER IN EXPOSED FASTENER INDENTATIONS. SAND WORK SMOOTH.

3.3 ERECTION TOLERANCES
A. MAXIMUM VARIATION FROM TRUE POSITION: 1/16 INCH (1.5 MM).
B. MAXIMUM OFFSET FROM TRUE ALIGNMENT WITH ABUTTING MATERIALS: 1/32 INCH (0.7MM).

END OF SECTION 06 20 00

DIVISION 7 - THERMAL & MOISTURE PROTECTION

THERMAL INSULATION SECTION 07 21 00

PART 1 - GENERAL

1.1 RELATED DOCUMENTS
A. DRAWINGS AND GENERAL PROVISIONS OF CONTRACT APPLY TO THIS SECTION.

1.2 QUALITY ASSURANCE
A. SINGLE-SOURCE RESPONSIBILITY FOR INSULATION PRODUCTS: OBTAIN EACH TYPE OF BUILDING INSULATION FROM A SINGLE SOURCE WITH RESOURCES TO PROVIDE CONSISTENT QUALITY IN APPEARANCE AND PHYSICAL PROPERTIES WITHOUT DELAYING PROGRESS OF THE WORK.

1.3 DELIVERY, STORAGE AND HANDLING
A. PROTECT INSULATION MATERIALS FROM PHYSICAL DAMAGE AND FROM DETERIORATION BY MOISTURE, SOILING, AND OTHER SOURCES. STORE INSIDE AND IN A DRY LOCATION. COMPLY WITH MANUFACTURER'S RECOMMENDATIONS FOR HANDLING, STORAGE, AND PROTECTION DURING INSTALLATION.
B. PROTECT PLASTIC INSULATION AS FOLLOWS: DO NOT EXPOSE TO SUNLIGHT, EXCEPT TO EXTENT NECESSARY FOR PERIOD OF INSTALLATION AND CONCEALMENT. PROTECT AGAINST IGNITION AT ALL TIMES. DO NOT DELIVER PLASTIC INSULATING MATERIALS TO PROJECT SITE AHEAD OF INSTALLATION TIME. COMPLETE INSTALLATION AND CONCEALMENT OF PLASTIC MATERIALS AS RAPIDLY AS POSSIBLE IN EACH AREA OF CONSTRUCTION.

PART 2 - PRODUCTS

2.1 MANUFACTURERS
A. EXTRUDED POLYSTYRENE BOARD INSULATION: OWENS CORNING OR DOW CHEMICAL COMPANY OR DIVERSIFOAM PRODUCTS.
B. BATT INSULATION: OWENS CORNING OR JOHNS MANVILLE INTERNATIONAL, INC. OR CERTAINTEED PRODUCTS CORPORATION.

2.2 INSULATING MATERIALS
A. GENERAL: PROVIDE INSULATING MATERIALS AS SCHEDULED IN THE DRAWINGS, THAT COMPLY WITH REQUIREMENTS AND WITH REFERENCED STANDARDS. PREFORMED UNITS: SIZES TO FIT APPLICATIONS INDICATED, SELECTED FROM MANUFACTURER'S STANDARD THICKNESS, WIDTHS AND LENGTHS.
B. EXTRUDED POLYSTYRENE BOARD INSULATION: RIGID, CELLULAR POLYSTYRENE THERMAL INSULATION WITH CLOSED-CELLS AND INTEGRAL HIGH DENSITY SKIN, FORMED BY THE EXPANSION OF POLYSTYRENE BASE RESIN IN AN EXTRUSION PROCESS TO COMPLY WITH ASTM C 578 FOR TYPE INDICATED; WITH 5-YEAR AGED R-VALUES OF 5.4 AND 5 AT 40 AND 75 DEG F (4.4 AND 23.9 DEG C), RESPECTIVELY; AND TYPE IV, 1.6-PCF MIN. DENSITY, UNLESS OTHERWISE INDICATED. SURFACE BURNING CHARACTERISTICS: MAXIMUM FLAME SPREAD AND SMOKE DEVELOPMENT VALUES OF 75 AND 450, RESPECTIVELY. FOR EXPOSED INSULATION FLAME SPREAD SHALL NOT EXCEED 25.
C. BATT INSULATION: GLASS FIBER BLANKET TYPE INSULATION: TYPE III, FOIL-SCRIM-KRAFT LAMINATE FACED, CLASS A, ASTM C665 AND FLAME SPREAD OF 25 OR LESS AND SMOKE DEVELOPMENT OF 50 OR LESS. MANUFACTURER'S STANDARD LENGTHS AND WIDTHS REQUIRED TO COORDINATE WITH SPACES INSULATED.
D. MINERAL FIBER FIRESTOPPING INSULATION: UNITED STATES GYPSUM CO. "THERMAFIBER SAFING INSULATION" OR AN APPROVED EQUAL, TYPE 1 UNFACED. MANUFACTURER'S STANDARD LENGTHS, WIDTHS AND THICKNESS. PROVIDE MANUFACTURER'S STANDARD IMPALING STYLE GALVANIZED STEEL SAFING INSULATION CLIPS AND BRACKETS.
MATERIALS SHALL BE RATED NON-COMBUSTIBLE AS DEFINED BY NFPA WHEN TESTED IN ACCORDANCE WITH ASTM E136.

2.3 VAPOR RETARDERS
A. POLYETHYLENE VAPOR RETARDER: ASTM D4397, 8 MILS THICK WITH MAXIMUM PERM RATING OF 0.1 PERM. PROVIDE PRESSURE SENSITIVE TAPE OF TYPE RECOMMENDED BY VAPOR-RETARDER MANUFACTURER FOR SEALING JOINTS AND PENETRATIONS.

2.4 PROTECTION
A. GENERAL: PROTECT INSTALLATION AND VAPOR RETARDERS FROM DAMAGE DUE TO HARMFUL WEATHER EXPOSURES, PHYSICAL ABUSE, AND OTHER CAUSES. PROVIDE TEMPORARY COVERINGS OR ENCLOSURES WHERE INSULATION WILL BE SUBJECT TO ABUSE AND CANNOT BE CONCEALED AND PROTECTED BY PERMANENT CONSTRUCTION IMMEDIATELY AFTER INSTALLATION.

PART 3 - EXECUTION

3.1 INSTALLATION
A. INSTALL INSULATION IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS FOR CONDITIONS OF INSTALLATION INDICATED.
B. EXTEND INSULATION FULL THICKNESS OVER ENTIRE AREA TO BE INSULATED. CUT AND FIT TIGHTLY AROUND OBSTRUCTIONS. FILL ALL VOIDS.
C. INSTALL INSULATION IN SINGLE LAYER OF REQUIRED THICKNESS. DO NOT INSTALL BROKEN RIGID BOARD PANELS OR TORN BLANKET INSULATION.
D. PROVIDE INSULATION CONTINUOUS BEHIND ELECTRICAL BOXES, CONDUIT AND PIPING AT EXTERIOR WALLS.
E. INSTALL BLANKET TYPE INSULATION WITH TIGHT FITTING BUTT JOINTS. INSTALL FOIL FACING VAPOR BARRIER EXPOSED TO THE INTERIOR. PROVIDE SUPPLEMENTARY SUPPORT WHEN REQUIRED TO MAINTAIN INSULATION IN PERMANENT PROPER LOCATION.
F. INSTALL BLANKET TYPE INSULATION LOCATED NEAR BOTTOM CHORD OF ROOF TRUSS OVER A WIRE MESH SUPPORT PLANE WHICH IS SECURED TO THE ROOF TRUSS MEMBER. INSTALL FOIL FACING VAPOR BARRIER EXPOSED TO THE INTERIOR. WIRE MESH TO BE FURNISHED AND INSTALLED IN ACCORDANCE WITH THE BLANKET TYPE INSULATION MANUFACTURER'S RECOMMENDATIONS.
G. INSTALL FIRESTOPPING MATERIALS IN ACCORDANCE WITH MANUFACTURER'S INSTRUCTIONS TO MAINTAIN FIRE SEPARATIONS INDICATED. INSTALL FIRESTOPPING INSULATION OF PROPER SIZES AND THICKNESS' WITH BRACKETS OR SAFING CLIPS SPACED AS NEEDED AND NOT MORE THAN 24" ON CENTER. FILL SAFE-OFF AREA. FILL ALL VOIDS. PROVIDE CONTINUITY OF FIRE SAFETY SYSTEMS AS INDICATED.

END OF SECTION 07 21 00

EXTERIOR INSULATION AND SECTION 07 24 00 FINISH SYSTEMS

FOR REFERENCE ONLY. REFER TO PRE-FABRICATED BUILDING SHELL SHEETS (FBS) FOR PROJECT SPECIFIC INFORMATION.

PART 1 - GENERAL

1.1 SUMMARY
A. PROVIDE AIR AND MOISTURE BARRIER, AND COMPATIBLE EIFS FOR VERTICAL ABOVE GRADE EXTERIOR WALLS
B. RELATED SECTIONS:
1. SECTION 06 16 00: SHEATHING
2. SECTION 07 62 00: SHEET METAL FLASHING AND TRIM
3. SECTION 08 11 00 METAL DOORS AND FRAMES
4. SECTION 08 41 13 ALUMINUM ENTRANCES AND STOREFRONT WINDOWS

1.2 SUBMITTALS
A. MANUFACTURER'S SPECIFICATIONS, DETAILS, INSTALLATION INSTRUCTIONS AND PRODUCT DATA
B. MANUFACTURER'S CODE COMPLIANCE REPORT
C. MANUFACTURER'S STANDARD WARRANTY
D. APPLICATOR'S INDUSTRY TRAINING CREDENTIALS
E. SAMPLES FOR APPROVAL AS DIRECTED BY ARCHITECT OR OWNER
F. SEALANT MANUFACTURER'S CERTIFICATE OF COMPLIANCE WITH ASTM C 1382
G. PREPARE AND SUBMIT PROJECT-SPECIFIC DETAILS (WHEN REQUIRED BY CONTRACT DOCUMENTS)

1.3 REFERENCES
A. ASTM STANDARDS:

ATSM C 578 SPECIFICATION FOR PREFORMED, CELLULAR POLYSTYRENE THERMAL INSULATION
ASTM C 1382 TEST METHOD FOR DETERMINING TENSILE ADHESION PROPERTIES OF SEALANTS WHEN USED IN EXTERIOR INSULATION AND FINISH SYSTEMS (EIFS) JOINTS

ASTM E 84 TEST METHOD FOR SURFACE BURNING CHARACTERISTICS OF BUILDING MATERIALS
ASTM E 96 TEST METHODS FOR WATER VAPOR TRANSMISSION OF MATERIALS
ASTM E 119 METHOD FOR FIRE TESTS OF BUILDING CONSTRUCTION AND MATERIALS
ASTM E 2134 TEST METHOD FOR EVALUATING THE TENSILE-ADHESION PERFORMANCE OF AN EXTERIOR INSULATION AND FINISH SYSTEM (EIFS)
ASTM E 2178 TEST METHOD FOR AIR PERMEANCE OF BUILDING MATERIALS
ASTM E 2273 TEST METHOD FOR DETERMINING THE DRAINAGE EFFICIENCY OF EXTERIOR INSULATION AND FINISH SYSTEM (EIFS) CLAD WALL ASSEMBLIES
ASTM E 2357 STANDARD TEST METHOD FOR DETERMINING AIR LEAKAGE OF AIR BARRIER ASSEMBLIES
ASTM E 2485 STANDARD TEST METHOD FOR FREEZE/THAW RESISTANCE OF EXTERIOR I NSULATION AND FINISH SYSTEMS (EIFS) AND WATER RESISTIVE BARRIER COATINGS

B. BUILDING CODE STANDARDS

AC 235 ACCEPTANCE CRITERIA FOR EIFS CLAD DRAINAGE WALL ASSEMBLIES (NOVEMBER, 2009)

C. NATIONAL FIRE PROTECTION ASSOCIATION (NFPA) STANDARDS

NFPA 268 STANDARD TEST METHOD FOR DETERMINING IGNITABILITY OF EXTERIOR WALL ASSEMBLIES USING A RADIANT HEAT ENERGY SOURCE
NFPA 285 STANDARD METHOD OF TEST FOR THE EVALUATION OF FLAMMABILITY CHARACTERISTICS OF EXTERIOR NON-LOAD-BEARING WALL ASSEMBLIES CONTAINING COMBUSTIBLE COMPONENTS USING THE INTERMEDIATE-SCALE, MULTISTORY TEST APPARATUS

D. OTHER REFERENCED DOCUMENTS
1. AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS AATCC-127 WATER RESISTANCE: HYDROSTATIC PRESSURE TEST

3. ICC-ES ESR-1233, STOGUARD WITH GOLD COAT, STOGUARD WITH EMERALDCOAT, AND STOGUARD VAPORSEAL WATER-RESISTIVE BARRIERS AND STOENERGY GUARD
4. ICC-ES ESR-1748, STOTHERM® CI

1.4 DESIGN REQUIREMENTS
A. WIND LOAD
1. DESIGN FOR MAXIMUM ALLOWABLE SYSTEM DEFLECTION, NORMAL TO THE PLANE OF THE WALL, OF L/240.
2. DESIGN FOR WIND LOAD IN CONFORMANCE WITH CODE REQUIREMENTS.
3. MAXIMUM WIND LOAD RESISTANCE: + 188 PSF (9.00 KPA), PROVIDED STRUCTURAL SUPPORTS AND SHEATHING/SHEATHING ATTACHMENT ARE ADEQUATE TO RESIST THESE PRESSURES.

B. MOISTURE CONTROL
1. PREVENT THE ACCUMULATION OF WATER BEHIND THE EIFS OR INTO THE WALL ASSEMBLY, EITHER BY CONDENSATION OR LEAKAGE THROUGH THE WALL CONSTRUCTION, IN THE DESIGN AND DETAILING OF THE WALL ASSEMBLY:
   a. PROVIDE FLASHING TO DIRECT WATER TO THE EXTERIOR WHERE IT IS LIKELY TO PENETRATE COMPONENTS IN THE WALL ASSEMBLY, INCLUDING, ABOVE WINDOW AND DOOR HEADS, BENEATH WINDOW AND DOOR SILLS, AT ROOF/WALL INTERSECTIONS, DECKS, ABUTMENTS OF LOWER WALLS WITH HIGHER WALLS, ABOVE PROJECTING FEATURES, AT FLOOR LINES, AND AT THE BASE OF THE WALL.
   b. AIR LEAKAGE PREVENTION - PROVIDE CONTINUITY OF THE AIR BARRIER SYSTEM AT FOUNDATION, ROOF, WINDOWS, DOORS, AND OTHER PENETRATIONS THROUGH THE WALL WITH CONNECTING AND COMPATIBLE AIR BARRIER COMPONENTS TO MINIMIZE CONDENSATION AND LEAKAGE CAUSED BY AIR MOVEMENT.
   c. VAPOR DIFFUSION AND CONDENSATION - PERFORM A DEW POINT ANALYSIS AND/OR DYNAMIC HYGROTHERMAL MODELING OF THE WALL ASSEMBLY TO DETERMINE THE POTENTIAL FOR ACCUMULATION OF MOISTURE IN THE WALL ASSEMBLY BY DIFFUSION. ADJUST INSULATION THICKNESS AND/OR OTHER WALL ASSEMBLY COMPONENTS ACCORDINGLY TO MINIMIZE RISK. AVOID THE USE OF VAPOR RETARDERS ON THE INTERIOR SIDE OF THE WALL IN WARM,

C. IMPACT RESISTANCE
1. PROVIDE 2 LAYERS OF STO MESH TO A MINIMUM HEIGHT OF 2'-0" ABOVE GRADE AT ENTIRE BUILDING PERIMETER.

D. JOINTS
1. PROVIDE MINIMUM 3/4 INCH (19 MM) WIDE JOINTS IN THE EIFS WHERE THEY EXIST IN THE SUBSTRATE OR SUPPORTING CONSTRUCTION, WHERE THE CLADDING ADJOINS DISSIMILAR CONSTRUCTION OR MATERIALS, AT CHANGES IN BUILDING HEIGHT, AT EXPANSION, CONTROL, AND COLD JOINTS IN CONSTRUCTION, AND AT FLOOR LINES IN MULTI-LEVEL WOOD FRAME CONSTRUCTION. SIZE JOINTS TO CORRESPOND WITH ANTICIPATED MOVEMENT. ALIGN TERMINATING EDGES OF EIFS WITH JOINT EDGES OF THROUGH WALL EXPANSION JOINTS AND SIMILAR JOINTS IN CONSTRUCTION. REFER TO STO DETAILS.
2. PROVIDE MINIMUM 1/2 INCH (13 MM) WIDE PERIMETER SEALANT JOINTS AT ALL PENETRATIONS THROUGH THE EIFS (WINDOWS, DOORS, MECHANICAL, ELECTRICAL, AND PLUMBING PENETRATIONS, ETC.).
3. PROVIDE COMPATIBLE BACKER ROD AND SEALANT THAT HAS BEEN EVALUATED IN ACCORDANCE WITH ASTM C 1382, AND THAT MEETS MINIMUM 50% ELONGATION AFTER CONDITIONING.
4. 2.PROVIDE JOINTS SO THAT AIR BARRIER CONTINUITY IS MAINTAINED ACROSS THE JOINT, AND DRAIN JOINTS TO THE EXTERIOR, OR PROVIDE OTHER MEANS TO PREVENT OR CONTROL WATER INFILTRATION AT JOINTS.

E. GRADE CONDITION
1. PROVIDE MINIMUM 6 INCH (152 MM) CLEARANCE ABOVE GRADE OR AS REQUIRED BY CODE.

F. TRIM, PROJECTING ARCHITECTURAL FEATURES AND REVEALS
1. ALL TRIM AND PROJECTING ARCHITECTURAL FEATURES MUST HAVE A MINIMUM 1:2 [27°] SLOPE ALONG THEIR TOP SURFACE. ALL REVEALS MUST HAVE MINIMUM ¾ INCH (19 MM) INSULATION THICKNESS AT THE BOTTOM OF THE REVEAL. ALL HORIZONTAL REVEALS MUST HAVE A MINIMUM 1:2 [27°] SLOPE ALONG THEIR BOTTOM SURFACE. INCREASE SLOPE FOR NORTHERN CLIMATES TO PREVENT ACCUMULATION OF ICE/SNOW AND WATER ON SURFACE. WHERE TRIM/FEATURE OR BOTTOM SURFACE OF REVEAL PROJECTS MORE THAN 2 INCHES (51 MM) FROM THE FACE OF THE EIFS WALL PLANE, PROTECT THE TOP SURFACE WITH WATERPROOF BASE COAT. PERIODIC INSPECTIONS AND INCREASED MAINTENANCE MAY BE REQUIRED TO MAINTAIN SURFACE INTEGRITY OF THE EIFS FINISH ON WEATHER EXPOSED SLOPED SURFACES. LIMIT PROJECTING FEATURES TO EASILY ACCESSIBLE AREAS AND LIMIT TOTAL AREA TO FACILITATE AND MINIMIZE MAINTENANCE. REFER TO STO DETAILS.
2. DO NOT USE THE EIFS ON WEATHER EXPOSED PROJECTING LEDGES, SILLS, OR OTHER PROJECTING FEATURES UNLESS SUPPORTED BY FRAMING OR OTHER STRUCTURAL SUPPORT AND PROTECTED WITH METAL COPING OR FLASHING.
REFER TO STO MANUFACTURER WEBSITE FOR DETAILS PROVIDING ADDITIONAL INFORMATION AND/OR CONTACT STO MANUFACTURER FOR DETAIL PROVISIONS (WWW.STOCORP.COM).

G. INSULATION THICKNESS
1. MINIMUM EPS INSULATION THICKNESS IS 1 INCH (25 MM).
2. MAXIMUM EPS INSULATION THICKNESS IS 12 INCHES (305 MM), EXCEPT AS NOTED BELOW FOR FIRE-RESISTANCE RATED WALL ASSEMBLIES.

H. FIRE PROTECTION
1. DO NOT USE EPS FOAM PLASTIC IN EXCESS OF 12 INCHES (305 MM) THICK ON TYPES I, II, III, OR IV CONSTRUCTION UNLESS APPROVED BY THE CODE OFFICIAL.
2. WHERE A FIRE-RESISTANCE RATING IS REQUIRED BY CODE USE THE EIFS OVER A RATED CONCRETE OR CONCRETE MASONRY ASSEMBLY. LIMIT USE OVER RATED FRAME ASSEMBLIES TO NON-LOAD BEARING ASSEMBLIES (THE EIFS IS CONSIDERED NOT TO ADD OR DETRACT FROM THE FIRE-RESISTANCE OF THE RATED ASSEMBLY). MAXIMUM ALLOWABLE EPS THICKNESS: 4 INCHES (102 MM).
3. REFER TO MANUFACTURER'S TESTING OR APPLICABLE CODE COMPLIANCE REPORT FOR OTHER LIMITATIONS THAT MAY APPLY.

1.5 PERFORMANCE REQUIREMENTS
A. COMPLY WITH ASTM E 2570 (AIR/MOISTURE BARRIER) AND ASTM E 2568 (EIFS).

1.6 QUALITY ASSURANCE

A. MANUFACTURER REQUIREMENTS
1. MEMBER IN GOOD STANDING OF THE EIFS INDUSTRY MEMBERS ASSOCIATION (EIMA)
2. AIR/MOISTURE BARRIER AND EIFS MANUFACTURER FOR A MINIMUM OF THIRTY (30) YEARS
3. LATEST VERSIONS OF THE MANUFACTURING FACILITIES ISO 9001 STANDARD (CERTIFIED QUALITY SYSTEM) AND ISO 14001 STANDARD (CERTIFIED ENVIRONMENTAL MANAGEMENT SYSTEM).

B. CONTRACTOR REQUIREMENTS
1. ENGAGED IN APPLICATION OF SIMILAR SYSTEMS FOR A MINIMUM OF THREE (3) YEARS
2. KNOWLEDGEABLE IN THE PROPER USE AND HANDLING OF STO MATERIALS
3. EMPLOY SKILLED MECHANICS WHO ARE EXPERIENCED AND KNOWLEDGEABLE IN AIR/MOISTURE BARRIER AND EIFS APPLICATION, AND FAMILIAR WITH THE REQUIREMENTS OF THE SPECIFIED WORK
4. SUCCESSFUL COMPLETION OF MINIMUM OF THREE (3) PROJECTS OF SIMILAR SIZE AND COMPLEXITY TO THE SPECIFIED PROJECT
5. PROVIDE THE PROPER EQUIPMENT, MANPOWER AND SUPERVISION ON THE JOB SITE TO INSTALL THE SYSTEM IN COMPLIANCE WITH STO'S PUBLISHED SPECIFICATIONS AND DETAILS AND THE PROJECT PLANS AND SPECIFICATIONS

C. INSULATION BOARD MANUFACTURER REQUIREMENTS
1. EPS BOARD LISTED BY AN APPROVED AGENCY
2. EPS BOARD MANUFACTURED UNDER STO LICENSING AGREEMENT AND RECOGNIZED BY STO AS BEING CAPABLE OF PRODUCING EPS INSULATION BOARD TO MEET EIFS REQUIREMENTS
3. EPS BOARD LABELED WITH INFORMATION REQUIRED BY STO, THE APPROVED LISTING AGENCY, AND THE APPLICABLE BUILDING CODE.

D. MOCK-UP TESTING
1. CONSTRUCT FULL-SCALE MOCK-UP OF TYPICAL AIR/MOISTURE BARRIER AND EIFS/WINDOW WALL ASSEMBLY WITH SPECIFIED TOOLS AND MATERIALS AND TEST AIR AND WATER INFILTRATION AND STRUCTURAL PERFORMANCE IN ACCORDANCE WITH ASTM E 283, ASTM E 331 AND ASTM E 330, RESPECTIVELY, THROUGH INDEPENDENT LABORATORY. MOCK-UP SHALL COMPLY WITH REQUIREMENTS OF PROJECT SPECIFICATIONS. WHERE MOCK-UP IS TESTED AT JOB SITE MAINTAIN APPROVED MOCK-UP AT SITE AS REFERENCE STANDARD. IF TESTED OFF-SITE ACCURATELY RECORD CONSTRUCTION DETAILING AND SEQUENCING OF APPROVED MOCK-UP FOR REPLICATION DURING CONSTRUCTION.

E. INSPECTIONS
1. PROVIDE INDEPENDENT THIRD PARTY INSPECTION WHERE REQUIRED BY CODE OR CONTRACT DOCUMENTS
2. CONDUCT INSPECTIONS IN ACCORDANCE WITH CODE REQUIREMENTS AND CONTRACT DOCUMENTS

1.7 DELIVERY, STORAGE AND HANDLING
A. DELIVER ALL MATERIALS IN THEIR ORIGINAL SEALED CONTAINERS BEARING MANUFACTURER'S NAME AND IDENTIFICATION OF PRODUCT
B. PROTECT COATINGS (PAIL PRODUCTS) FROM FREEZING AND TEMPERATURES IN EXCESS OF 90°F (32°C). STORE AWAY FROM DIRECT SUNLIGHT.
C. PROTECT PORTLAND CEMENT BASED MATERIALS (BAG PRODUCTS) FROM MOISTURE AND HUMIDITY. STORE UNDER COVER OFF THE GROUND IN A DRY LOCATION.

1.8 PROJECT/SITE CONDITIONS
A. MAINTAIN AMBIENT AND SURFACE TEMPERATURES ABOVE 40°F (4°C) DURING APPLICATION AND DRYING PERIOD, MINIMUM 24 HOURS AFTER APPLICATION OF AIR/MOISTURE BARRIER AND EIFS PRODUCTS
B. PROVIDE SUPPLEMENTARY HEAT FOR INSTALLATION IN TEMPERATURES LESS THAN 40°F (4°C)
C. PROVIDE PROTECTION OF SURROUNDING AREAS AND ADJACENT SURFACES FROM APPLICATION OF PRODUCTS

1.9 COORDINATION/SCHEDULING
A. PROVIDE SITE GRADING SUCH THAT THE EIFS TERMINATES ABOVE GRADE A MINIMUM OF 6 INCHES (150 MM) OR AS REQUIRED BY CODE
B. COORDINATE INSTALLATION OF FOUNDATION WATERPROOFING, ROOFING MEMBRANE, WINDOWS, DOORS AND OTHER WALL PENETRATIONS TO PROVIDE A CONTINUOUSLY CONNECTED AIR AND MOISTURE BARRIER
C. PROVIDE PROTECTION OF ROUGH OPENINGS BEFORE INSTALLING WINDOWS, DOORS, AND OTHER PENETRATIONS THROUGH THE WALL
D. INSTALL WINDOW AND DOOR HEAD FLASHING IMMEDIATELY AFTER WINDOWS AND DOORS ARE INSTALLED
E. INSTALL DIVERTER FLASHINGS WHEREVER WATER CAN ENTER THE WALL ASSEMBLY TO DIRECT WATER TO THE EXTERIOR
F. INSTALL SPLICES OR TIE-INS FROM AIR/MOISTURE BARRIER OVER BACK LEG OF FLASHINGS, STARTER TRACKS, AND SIMILAR DETAILS TO FORM A SHINGLE LAP THAT DIRECTS INCIDENTAL WATER TO THE EXTERIOR
G. INSTALL COPINGS AND SEALANT IMMEDIATELY AFTER INSTALLATION OF THE EIFS WHEN COATINGS ARE DRY, AND SUCH THAT, WHERE SEALANT IS APPLIED AGAINST THE EIFS SURFACE, IT IS APPLIED AGAINST THE BASE COAT OR PRIMED BASE COAT SURFACE
   a. STO GOLD FILL® - READY MIXED COATING APPLIED BY TROWEL OR KNIFE FOR ROUGH OPENING PROTECTION OF FRAME WALLS AND JOINT TREATMENT OF SHEATHING WHEN USED WITH STOGUARD MESH. ALSO USED AS A DETAIL COMPONENT WITH STOGUARD MESH TO SPLICE OVER BACK FLANGE OF STARTER TRACK, FLASHING, AND SIMILAR SHIP LAP DETAILS
H. SCHEDULE WORK SUCH THAT AIR/MOISTURE BARRIER IS EXPOSED TO WEATHER NO LONGER THAN 180 DAYS IF STO GOLD COAT IS USED, 90 DAYS IF STO AIRSEAL IS USED.
I. ATTACH PENETRATIONS THROUGH THE EIFS TO STRUCTURAL SUPPORT AND PROVIDE WATER TIGHT SEAL AT PENETRATIONS

1.10 WARRANTY
A. PROVIDE MANUFACTURER'S STANDARD WARRANTY

PART 2 PRODUCTS

2.1 MANUFACTURERS
A. PROVIDE AIR/MOISTURE BARRIER AND EIFS COATINGS AND ACCESSORIES FROM SINGLE SOURCE MANUFACTURER OR APPROVED SUPPLIER
B. THE FOLLOWING ARE ACCEPTABLE MANUFACTURERS:
1. STO CORP. - AIR/MOISTURE BARRIER, EIFS
2. PLASTIC COMPONENTS, INC. - EIFS ACCESSORIES

2.2 AIR/MOISTURE BARRIER

REFER TO FLUID APPLIED MEMBRANE AIR BARRIERS SECTION 07 27 26

2.3 ADHESIVE
A. STO TURBOSTICK™ - ONE COMPONENT POLYURETHANE SPRAY FOAM ADHESIVE

2.4 INSULATION BOARD
A. STO EPS INSULATION BOARD: NOMINAL 1.0 LB/FT3 (16 KG/M3) EXPANDED POLYSTYRENE (EPS) INSULATION BOARD IN COMPLIANCE WITH ASTM E 2430 AND ASTM C 578 TYPE I REQUIREMENTS AND LISTED, LABELED, AND FURNISHED IN ACCORDANCE WITH SECTION 1.6C.

2.5 BASE COAT
B. CEMENTITIOUS BASE COAT
1. STO BTS PLUS - FACTORY BLENDED ONE COMPONENT POLYMER MODIFIED PORTLAND CEMENT BASED HIGH BUILD BASE COAT. ALSO USED AS A LEVELER FOR CONCRETE AND MASONRY SURFACES

2.6 REINFORCING MESHES
A. STANDARD MESH
1. STO MESH - NOMINAL 4.5 OZ/YD2 (153 G/M2), SYMMETRICAL, INTERLACED OPEN-WEAVE GLASS FIBER FABRIC MADE WITH ALKALINE RESISTANT COATING FOR COMPATIBILITY WITH STO MATERIALS

2.7 PRIMER
A. STOPRIME SAND - ACRYLIC BASED TINTABLE PRIMER WITH SAND FOR ROLLER APPLICATION

2.8 FINISH COAT
A. STOLIT® LOTUSAN® - ACRYLIC BASED TEXTURED WALL FINISH WITH GRADED MARBLE AGGREGATE AND SELF-CLEANING PROPERTIES

2.9 JOB MIXED INGREDIENTS
A. WATER - CLEAN AND POTABLE \
B. PORTLAND CEMENT - TYPE I, TYPE II, OR TYPE I-II IN CONFORMANCE WITH ASTM C 150

2.10 ACCESSORIES
A. STARTER TRACK - RIGID PVC (POLYVINYL CHLORIDE) PLASTIC TRACK PART NO. STDE AS FURNISHED BY PLASTIC COMPONENTS, INC., 9051 NW 97TH TERRACE, MIAMI, FL 33178 (800 327 - 7077).
B. STO-MESH CORNER BEAD STANDARD - ONE COMPONENT PVC (POLYVINYL CHLORIDE) ACCESSORY WITH INTEGRAL REINFORCING MESH FOR OUTSIDE CORNER REINFORCEMENT.
C. STO DRIP EDGE PROFILE - ONE COMPONENT PVC (POLYVINYL CHLORIDE) ACCESSORY WITH INTEGRAL REINFORCING MESH THAT CREATES A DRIP EDGE AND PLASTER RETURN

2.11 MIXING
A. STO GOLD COAT - MIX WITH A CLEAN, RUST-FREE HIGH SPEED MIXER TO A UNIFORM CONSISTENCY
B. STO BTS PLUS - MIX RATIO WITH WATER: 5-6.5 QUARTS (4.7-6.2 L) OF WATER PER 47 POUND (21.3 KG) BAG OF STO BTS PLUS. POUR WATER INTO A CLEAN MIXING PAIL. ADD STO BTS PLUS, MIX TO A UNIFORM CONSISTENCY AND ALLOW TO SET FOR APPROXIMATELY 5 MINUTES. ADJUST MIX IF NECESSARY WITH ADDITIONAL STO BTS PLUS OR WATER AND REMIX TO A UNIFORM TROWEL CONSISTENCY. AVOID RETEMPERING. KEEP MIX RATIO CONSISTENT. DO NOT EXCEED MAXIMUM WATER AMOUNT IN MIX RATIO.
C. STOLIT LOTUSAN - MIX WITH A CLEAN, RUST-FREE HIGH SPEED MIXER TO A UNIFORM CONSISTENCY. A SMALL AMOUNT OF WATER MAY BE ADDED TO ADJUST WORKABILITY. LIMIT ADDITION OF WATER TO AMOUNT NEEDED TO ACHIEVE THE FINISH TEXTURE.
D. MIX ONLY AS MUCH MATERIAL AS CAN READILY BE USED
DO NOT USE ANTI-FREEZE COMPOUNDS OR OTHER ADDITIVES

PART 3 EXECUTION

3.1 ACCEPTABLE INSTALLERS
A. PREQUALIFY UNDER QUALITY ASSURANCE REQUIREMENTS OF THIS SPECIFICATION (SECTION 1.06 B)

3.2 EXAMINATION
A. INSPECT SHEATHING APPLICATION FOR COMPLIANCE WITH APPLICABLE REQUIREMENT AND INSTALLATION IN CONFORMANCE WITH SPECIFICATION AND MANUFACTURER REQUIREMENTS:
1. GLASS MAT FACED GYPSUM SHEATHING COMPLIANT WITH ASTM C 1177
2. EXTERIOR GRADE AND EXPOSURE I WOOD BASED SHEATHING - APA ENGINEERED WOOD ASSOCIATION E 30
3. CEMENTITIOUS SHEATHING - CONSULT MANUFACTURER
4. ATTACHMENT INTO STRUCTURAL SUPPORTS WITH ADJOINING SHEETS ABUTTED (GAPPED IF WOOD-BASED SHEATHING) AND FASTENERS AT REQUIRED SPACING TO RESIST DESIGN WIND PRESSURES AS DETERMINED BY DESIGN PROFESSIONAL
5. FASTENERS SEATED FLUSH WITH SHEATHING SURFACE AND NOT OVER-DRIVEN
B. REPORT DEVIATIONS FROM THE REQUIREMENTS OF PROJECT SPECIFICATIONS OR OTHER CONDITIONS THAT MIGHT ADVERSELY AFFECT THE AIR/MOISTURE BARRIER AND THE EIFS INSTALLATION TO THE GENERAL CONTRACTOR. DO NOT START WORK UNTIL DEVIATIONS ARE CORRECTED.

3.3 SURFACE PREPARATION
A. REMOVE SURFACE CONTAMINANTS GYPSUM SHEATHING
B. REPAIR CRACKS, SPALLS OR DAMAGE IN CONCRETE AND CONCRETE MASONRY SURFACES AND LEVEL CONCRETE AND MASONRY SURFACES TO COMPLY WITH REQUIRED TOLERANCES
C. APPLY CONDITIONER (CONSULT STO) BY SPRAY OR ROLLER TO CHALKING OR EXCESSIVELY ABSORPTIVE SURFACES OR PRESSURE WASH TO REMOVE SURFACE CHALKINESS
D. REMOVE FASTENERS THAT ARE NOT ANCHORED INTO SUPPORTING CONSTRUCTION AND SEAL HOLES WITH AIR BARRIER MATERIAL
E. SEAL OVER-DRIVEN FASTENERS WITH AIR BARRIER MATERIAL AND INSTALL ADDITIONAL FASTENERS AS NEEDED TO COMPLY WITH FASTENER SPACING REQUIREMENT
F. FILL LARGE GAPS BETWEEN SHEATHING OR VOIDS AROUND PIPE, CONDUIT, SCUPPER, AND SIMILAR PENETRATIONS WITH SPRAY FOAM AND SHAVE FLUSH WITH SURFACE (REFER TO STO DETAILS)
G. REPLACE WEATHER-DAMAGED SHEATHING AND REPAIR OR REPLACE DAMAGED OR CRACKED SHEATHING

3.4 INSTALLATION
A. TRANSITION DETAILING
1. DETAIL TRANSITION AREAS WITH STO RAPIDGUARD OR STOGUARD TRANSITION MEMBRANE TO ACHIEVE AIR BARRIER CONTINUITY. FOR ILLUSTRATIONS OF INSTALLATION, REFER TO STO GUIDE DETAILS AND STO RAPIDGUARD INSTALLATION GUIDE OR STOGUARD TRANSITION MEMBRANE INSTALLATION GUIDE (WWW.STOCORP.COM)

B. ROUGH OPENING
1. STO GOLD FILL WITH STOGUARD MESH: APPLY 9 INCH (229 MM) WIDE STOGUARD MESH AT ROUGH OPENINGS. IMMEDIATELY APPLY STO GOLD FILL BY SPRAY OR TROWEL OVER THE MESH AND SPREAD WITH A TROWEL TO CREATE A SMOOTH SURFACE THAT COMPLETELY COVERS THE MESH (REFER TO STOCORP WEBSITE, WWW.STOCORP.COM, STO DETAIL 22s.20M).

C. SHEATHING JOINT TREATMENT
1. STO GOLD FILL WITH STOGUARD MESH: PLACE 4 INCH (102 MM) WIDE MESH CENTERED ALONG SHEATHING JOINTS AND MINIMUM 9 INCH (229 MM) WIDE MESH CENTERED AND FOLDED AT INSIDE AND OUTSIDE CORNERS. IMMEDIATELY APPLY STO GOLD FILL BY SPRAY OR TROWEL AND SPREAD WITH A TROWEL TO CREATE A SMOOTH SURFACE THAT COMPLETELY COVERS THE MESH.

D. AIR/MOISTURE BARRIER COATING INSTALLATION
1. PLYWOOD AND GYPSUM SHEATHING: APPLY WATERPROOF COATING BY SPRAY OR ROLLER OVER SHEATHING SURFACE, INCLUDING THE DRY JOINT TREATMENT, ROUGH OPENING PROTECTION, AND TRANSITION AREAS, TO A UNIFORM WET MIL THICKNESS OF 10 MILS IN ONE COAT (STO GOLD COAT) OR 20 MILS IN ONE COAT (STO AIRSEAL). USE ½ INCH (13 MM) NAP ROLLER FOR PLYWOOD. USE ¾ INCH (19 MM) NAP ROLLER FOR GLASS MAT FACED GYPSUM SHEATHING. PROTECT FROM WEATHER UNTIL DRY.

E. AIR /MOISTURE BARRIER CONNECTIONS AND SHINGLE LAPS
1. COORDINATE INSTALLATION OF CONNECTING AIR BARRIER COMPONENTS WITH OTHER TRADES TO PROVIDE A CONTINUOUS AIR TIGHT MEMBRANE.
2. COORDINATE INSTALLATION OF FLASHING AND OTHER MOISTURE PROTECTION COMPONENTS WITH OTHER TRADES TO ACHIEVE COMPLETE MOISTURE PROTECTION SUCH THAT WATER IS DIRECTED TO THE EXTERIOR, NOT INTO THE WALL ASSEMBLY, AND DRAINED TO THE EXTERIOR AT SOURCES OF LEAKS (WINDOWS, DOORS AND SIMILAR PENETRATIONS THROUGH THE WALL ASSEMBLY).
3. SPLICE-IN HEAD FLASHINGS ABOVE WINDOWS, DOORS, FLOOR LINES, ROOF/SIDEWALL STEP FLASHING, AND SIMILAR LOCATIONS WITH STOGUARD DETAIL COMPONENT TO ACHIEVE SHINGLE LAP OF THE AIR/MOISTURE BARRIER SUCH THAT WATER IS DIRECTED TO THE EXTERIOR.

3.4.2 EIFS INSTALLATION

A. STARTER TRACK
1. STRIKE A LEVEL LINE AT THE BASE OF THE WALL TO MARK WHERE THE TOP OF THE STARTER TRACK TERMINATES.
2. ATTACH THE STARTER TRACK EVEN WITH THE LINE INTO STRUCTURAL SUPPORTS WITH THE PROPER FASTENER: TYPE S-12 CORROSION RESISTANT SCREWS FOR STEEL FRAMING WITH MINIMUM 3/8 INCH (9 MM) AND THREE THREAD PENETRATION, GALVANIZED OR ZINC COATED NAILS FOR WOOD FRAMING WITH MINIMUM 3/4 INCH (19 MM) PENETRATION, AND CORROSION RESISTANT CONCRETE OR MASONRY SCREWS WITH MINIMUM 1 INCH (25 MM) PENETRATION FOR CONCRETE OR CMU. ATTACH BETWEEN STUDS INTO BLOCKING AS NEEDED TO SECURE THE TRACK FLAT AGAINST THE WALL SURFACE. ATTACH AT MAXIMUM 16 INCHES (406 MM) ON CENTER INTO FRAMING. FOR SOLID WOOD SHEATHING OR CONCRETE/MASONRY SURFACES, ATTACH DIRECTLY AT 12 INCHES (305 MM) ON CENTER MAXIMUM.
3. BUTT SECTIONS OF STARTER TRACK TOGETHER. MITER CUT OUTSIDE CORNERS AND ABUT. SNIP FRONT FLANGE OF ONE INSIDE CORNER PIECE (TO ALLOW EPS INSULATION BOARD TO BE SEATED INSIDE OF TRACK) AND ABUT.
   a. POLYURETHANE SPRAY FOAM ADHESIVE (STO TURBOSTICK): APPLY ADHESIVE TO THE BACK OF THE INSULATION BOARD WITH THE DISPENSING PISTOL APPROXIMATELY ¾ INCH (19 MM) FROM ENDS. APPLY 5 ADDITIONAL RIBBONS SPACED EQUALLY AT NO GREATER THAN 7 INCHES (177 MM) APART BETWEEN THE END RIBBONS. APPLY UNIFORM RIBBONS OF ADHESIVE PARALLEL WITH THE SHORT DIMENSION OF THE BOARD SO THAT WHEN BOARDS ARE PLACED ON THE WALL THE RIBBONS WILL BE VERTICAL. APPLY ADHESIVE RIBBONS APPROXIMATELY ½ INCH (51 MM) IN DIAMETER WHICH WILL EXPAND TO ¾ - 1 INCH (19 - 25 MM). KEEP ADHESIVE ½ INCH (51 MM) SHORT OF BOARD EDGES. APPLY ADHESIVE UNIFORMLY SO RIBBONS OF ADHESIVE DO NOT CONVERGE. ALLOW ADHESIVE TO "DWELL" AND BECOME "TACKY" BEFORE PLACING BOARDS ON WALL. ADHESIVE WILL LOOK SMOOTH, NOT JAGGED, WHEN READY TO APPLY TO WALL SURFACE. PLACE BOARDS WHILE ADHESIVE IS "TACKY" AND BEFORE ADHESIVE "SKINS".
4. INSTALL STARTER TRACK AT OTHER EIFS TERMINATIONS AS DESIGNATED ON DETAIL DRAWINGS: ABOVE ROOF ALONG DORMERS OR GABLE END WALLS, AND BENEATH WINDOW SILLS WITH CONCEALED FLASHING (REFER TO STO DETAILS).
5. DETAIL SPLICE STRIPS FOR STARTER TRACK, FLASHING AT FLOOR LINES, HEAD OF WINDOWS AND DOORS
6. STARTER TRACK, WINDOW/DOOR HEAD FLASHING, FLOOR LINE FLASHING, AND ROOF/SIDE WALL STEP FLASHING: INSTALL MINIMUM 4 INCH (100 MM) WIDE DETAIL COMPONENT OVER BACK FLANGE OF STARTER TRACK, FLOOR LINE FLASHING, HEAD FLASHING, AND ROOF/SIDE WALL STEP FLASHING. CENTER THE DETAIL COMPONENT SO IT SPANS EVENLY BETWEEN THE BACK LEG OF FLASHING (OR ACCESSORY) AND THE COATED SHEATHING. MAKE A SMOOTH TRANSITION TO THE COATED SHEATHING WITH A TROWEL, KNIFE, OR ROLLER, DEPENDING ON THE DETAIL COMPONENT MATERIAL BEING USED. WHEN STO GOLD FILL WITH STOGUARD MESH IS THE DETAIL COMPONENT APPLY ANOTHER COAT OF THE WATERPROOF COATING OVER THE DETAIL AREA. DO NOT LEAVE DETAIL COMPONENTS EXPOSED FOR MORE THAN 30 DAYS.

C. BACKWRAPPING
1. APPLY A STRIP OF DETAIL MESH TO THE DRY AIR/MOISTURE BARRIER AT ALL SYSTEM TERMINATIONS (WINDOWS, DOORS, EXPANSION JOINTS, ETC.) EXCEPT WHERE THE STARTER TRACK IS INSTALLED. THE MESH MUST BE WIDE ENOUGH TO ADHERE APPROXIMATELY 4 INCHES (100 MM) OF MESH ONTO THE WALL, BE ABLE TO WRAP AROUND THE INSULATION BOARD EDGE AND COVER A MINIMUM OF 2 ½ INCHES (64 MM) ON THE OUTSIDE SURFACE OF THE INSULATION BOARD. ATTACH MESH STRIPS TO THE AIR/MOISTURE BARRIER AND ALLOW THEM TO DANGLE UNTIL THE BACKWRAP PROCEDURE IS COMPLETED (PARAGRAPH 3.04 G1). ALTERNATIVELY, PRE-WRAP TERMINATING EDGES OF INSULATION BOARD.

D. ADHESIVE APPLICATION AND INSTALLATION OF INSULATION BOARD
1. ENSURE THE AIR/MOISTURE BARRIER SURFACE (STO GOLD COAT) IS FREE OF SURFACE CONTAMINATION. INSTALL THE INSULATION BOARD WITHIN 30 DAYS OF THE APPLICATION OF THE AIR/MOISTURE BARRIER COATING (STO GOLD COAT), OR CLEAN THE SURFACE AND RECOAT WITH STO GOLD COAT.
2. RASP THE INTERIOR LOWER FACE OF INSULATION BOARDS TO PROVIDE A SNUG FRICTION FIT INTO THE STARTER TRACK. (NOTE: RASPING PREVENTS AN OUTWARD BOW AT THE STARTER TRACK).
3. USE EITHER POLYURETHANE SPRAY FOAM ADHESIVE (STO TURBOSTICK) OR CEMENTITOUS ADHESIVE:
CEMENTITIOUS ADHESIVE: APPLY ADHESIVE TO THE BACK OF THE INSULATION BOARD WITH THE PROPER SIZE (1/2 X ½ X 2 INCH [13 X 13 X 51 MM]) STAINLESS STEEL NOTCHED TROWEL. APPLY UNIFORM RIBBONS OF ADHESIVE PARALLEL WITH THE SHORT DIMENSION OF THE BOARD SO THAT WHEN BOARDS ARE PLACED ON THE WALL THE RIBBONS WILL BE VERTICAL. APPLY ADHESIVE UNIFORMLY SO RIBBONS OF ADHESIVE DO NOT CONVERGE. IMMEDIATELY PLACE INSULATION BOARDS IN A RUNNING BOND PATTERN ON THE WALL WITH THE LONG DIMENSION HORIZONTAL. START BY INSERTING THE LOWER EDGE OF THE BOARDS INSIDE THE STARTER TRACK AT THE BASE OF THE WALL UNTIL THEY CONTACT THE BOTTOM OF THE TRACK. APPLY FIRM PRESSURE OVER THE ENTIRE SURFACE OF THE BOARDS TO ENSURE UNIFORM CONTACT OF PLACE INSULATION BOARDS IN A RUNNING BOND PATTERN ON THE WALL WITH THE LONG DIMENSION HORIZONTAL. START BY INSERTING THE LOWER EDGE OF THE BOARDS INSIDE THE STARTER TRACK AT THE BASE OF THE WALL UNTIL THEY CONTACT THE BOTTOM OF THE TRACK. APPLY LIGHT PRESSURE WHEN PLACING THE BOARDS. AFTER BOARDS HAVE BEEN IN PLACE FOR 5-10 MINUTES USE A STRAIGHT EDGE TO LIGHTLY PRESS THE BOARDS INWARD AND TO KEEP BOARD JOINTS FLUSH, AS POST EXPANSION OF THE ADHESIVE MAY FORCE BOARDS SLIGHTLY OUTWARD.
4. BRIDGE SHEATHING JOINTS BY A MINIMUM OF 6 INCHES (152 MM). INTERLOCK INSIDE AND OUTSIDE CORNERS.
5. BUTT ALL BOARD JOINTS TIGHTLY TOGETHER TO ELIMINATE ANY THERMAL BREAKS. CARE MUST BE TAKEN TO PREVENT ANY ADHESIVE FROM GETTING BETWEEN THE JOINTS OF THE BOARDS.
6. CUT INSULATION BOARD IN AN L-SHAPED PATTERN TO FIT AROUND OPENINGS. DO NOT ALIGN BOARD JOINTS WITH CORNERS OF OPENINGS.
7. CHECK FOR SATISFACTORY CONTACT OF THE INSULATION BOARD WITH THE SUBSTRATE. IF ANY BOARDS HAVE LOOSE AREAS USE THE SPRAY FOAM ADHESIVE DISPENSING PISTOL TO CREATE A HOLE THROUGH THE BOARD AND INJECT ADHESIVE TO ATTACH THE LOOSE AREA. ALLOW THE ADHESIVE TO EXPAND TO THE OUTER FACE OF THE BOARD WHILE WITHDRAWING THE PISTOL. CUT EXCESS ADHESIVE FLUSH WITH THE SURFACE OF THE INSULATION. DO NOT USE NAILS, SCREWS, OR ANY OTHER TYPE OF NON-THERMAL MECHANICAL FASTENER.

E. SLIVERING AND RASPING OF INSULATION BOARD SURFACE
1. MAKE SURE INSULATION BOARDS ARE FULLY ADHERED TO THE SUBSTRATE BEFORE PROCEEDING TO STEPS 3.04 E2 AND 3.04 E3 BELOW.
2. FILL ANY OPEN JOINTS IN THE INSULATION BOARD LAYER WITH SLIVERS OF INSULATION OR THE SPRAY FOAM ADHESIVE.
3. RASP THE INSULATION BOARD SURFACE TO ACHIEVE A SMOOTH, EVEN SURFACE AND TO REMOVE ANY ULTRAVIOLET RAY DAMAGE.

F. TRIM, REVEALS AND PROJECTING AESTHETIC FEATURES
1. ATTACH FEATURES AND TRIM WHERE DESIGNATED ON DRAWINGS WITH ADHESIVE TO A BASE LAYER OF INSULATION BOARD OR TO THE COATED SHEATHING SURFACE. FILL ANY GAPS BETWEEN THE TRIM AND BASE LAYER OF INSULATION WITH SPRAY FOAM ADHESIVE AND RASP FLUSH WITH THE TRIM SURFACE. SLOPE THE TOP SURFACE OF ALL TRIM/FEATURES MINIMUM 1:2 (27°) AND THE BOTTOM OF ALL HORIZONTAL REVEALS MINIMUM 1:2 (27°).
2. CUT REVEALS/AESTHETIC GROOVES WITH A HOT-KNIFE, ROUTER OR GROOVE-TOOL IN LOCATIONS INDICATED ON DRAWINGS.
3. OFFSET REVEALS/AESTHETIC GROOVES MINIMUM 3 INCHES (75 MM) FROM INSULATION BOARD JOINTS.
4. DO NOT LOCATE REVEALS/AESTHETIC GROOVES AT HIGH STRESS AREAS.
5. ENSURE MINIMUM ¾ INCH (19 MM) THICKNESS OF INSULATION BOARD AT THE BOTTOM OF THE REVEALS/AESTHETIC GROOVES.

G. COMPLETION OF BACKWRAPPING
1. COMPLETE THE BACKWRAPPING PROCEDURE BY APPLYING BASE COAT TO EXPOSED EDGES OF INSULATION BOARD AND APPROXIMATELY 4 INCHES (100 MM) ONTO THE FACE OF THE INSULATION BOARD. PULL MESH TIGHT AROUND THE BOARD AND EMBED IT IN THE BASE COAT WITH A STAINLESS STEEL TROWEL. USE A CORNER TROWEL FOR CLEAN, STRAIGHT LINES. SMOOTH ANY WRINKLES OR GAPS IN THE MESH.

H. ACCESSORY INSTALLATION
1. CORNER BEAD: CUT THE CORNER BEAD ACCESSORY TO PROPER LENGTH AS NEEDED. USE FULL PIECES WHEREVER POSSIBLE AND AVOID USING SHORT FILLER PIECES. OFFSET ACCESSORY BUTT JOINTS FROM SUBSTRATE JOINTS. APPLY BASE COAT WITH A STAINLESS STEEL TROWEL TO AN APPROXIMATE THICKNESS OF 1/8 INCH (3 MM) TO THE OUTSIDE CORNER AREA THAT WILL RECEIVE THE ACCESSORY. IMMEDIATELY PLACE THE ACCESSORY DIRECTLY INTO THE WET BASE COAT MATERIAL. DO NOT SLIDE INTO PLACE. PRESS THE ACCESSORY INTO PLACE. A CORNER TROWEL IS BEST FOR THIS PURPOSE. EMBED AND COMPLETELY COVER THE MESH AND PVC BY TROWELING FROM THE CORNER TO THE EDGE OF THE MESH SO THAT NO MESH OR PVC COLOR IS VISIBLE. AVOID EXCESS BUILD-UP OF BASE COAT AND FEATHER ALONG MESH EDGES. ADJOIN SEPARATE PIECES BY ABUTTING PVC TO PVC AND OVERLAPPING THE MESH "TAIL" FROM ONE PIECE ONTO THE NEXT PIECE. FULLY EMBED THE ACCESSORY AND MESH "TAIL" IN BASE COAT MATERIAL. WHEN INSTALLING FIELD MESH REINFORCEMENT OVERLAP ACCESSORY MESH AND PVC. REMOVE ANY EXCESS BASE COAT FROM THE OUTSIDE CORNER.
2. DRIP EDGE: INSTALL THE DRIP EDGE ACCESSORY PRIOR TO APPLICATION OF FIELD MESH (PARAGRAPH 3.4.2 I5 BELOW). INSTALL WITH ARROW ON MESH POINTING UP. CUT THE ACCESSORY TO PROPER LENGTH AS NEEDED. USE FULL PIECES WHEREVER POSSIBLE AND AVOID USING SHORT FILLER PIECES. OFFSET ACCESSORY BUTT JOINTS FROM SUBSTRATE JOINTS. APPLY BASE COAT WITH A STAINLESS STEEL TROWEL TO AN APPROXIMATE THICKNESS OF 1/8 INCH (3 MM) TO THE AREA THAT WILL RECEIVE THE ACCESSORY. IMMEDIATELY PLACE THE ACCESSORY DIRECTLY INTO THE WET BASE COAT MATERIAL AND PRESS INTO PLACE. DO NOT SLIDE INTO PLACE. EMBED AND COMPLETELY COVER THE MESH AND PVC BY TROWELING FROM THE DRIP EDGE SCREED RAIL TO THE EDGE OF THE MESH. AVOID EXCESS BUILD-UP OF BASE COAT, FEATHER ALONG MESH EDGES, AND REMOVE ANY EXCESS BASE COAT FROM THE DRIP EDGE NOSING. ABUT ADJOINING PIECES AND INSTALL AS DESCRIBED ABOVE. WHEN INSTALLING FIELD MESH REINFORCEMENT OVERLAP ACCESSORY MESH 4 INCHES (10 CM) ON BOTH VERTICAL AND HORIZONTAL FACES SO THE PVC IS OVERLAPPED, AND REMOVE ANY EXCESS BASE COAT FROM THE DRIP EDGE NOSING. ON VERTICAL AND HORIZONTAL FACES OF THE ACCESSORY INSTALL FINISH TO THE DRIP EDGE LINES AND REMOVE ANY PROTRUDING FINISH FROM THE DRIP EDGE NOSING.

I. BASE COAT AND REINFORCING MESH APPLICATION
1. ENSURE THE INSULATION BOARD IS FIRMLY ADHERED AND FREE OF SURFACE CONTAMINATION OR UV DEGRADATION, AND IS THOROUGHLY RASPED BEFORE COMMENCING THE BASE COAT APPLICATION.
2. APPLY MINIMUM 9X12 INCH (225X300 MM) DIAGONAL STRIPS OF DETAIL MESH AT CORNERS OF WINDOWS, DOORS, AND ALL PENETRATIONS THROUGH THE SYSTEM. EMBED THE STRIPS IN WET BASE COAT AND TROWEL FROM THE CENTER TO THE EDGES OF THE MESH TO AVOID WRINKLES.
3. APPLY DETAIL MESH AT TRIM, REVEALS AND PROJECTING ARCHITECTURAL FEATURES. EMBED THE MESH IN THE WET BASE COAT. TROWEL FROM THE BASE OF REVEALS TO THE EDGES OF THE MESH.
4. ULTRA-HIGH IMPACT MESH APPLICATION (RECOMMENDED TO A MINIMUM HEIGHT OF 6'-0" [1.8 M] ABOVE FINISHED GRADE AT ALL AREAS ACCESSIBLE TO PEDESTRIAN TRAFFIC AND OTHER AREAS EXPOSED TO ABNORMAL STRESS OR IMPACT, AND WHERE INDICATED ON CONTRACT DRAWINGS): APPLY BASE COAT OVER THE INSULATION BOARD WITH A STAINLESS STEEL TROWEL TO A UNIFORM THICKNESS OF APPROXIMATELY 1/8 INCH (3 MM). WORK HORIZONTALLY OR VERTICALLY IN STRIPS OF 40 INCHES (1016 MM), AND IMMEDIATELY EMBED THE MESH INTO THE WET BASE COAT BY TROWELING FROM THE CENTER TO THE EDGE OF THE MESH. BUTT ULTRA-HIGH IMPACT MESH AT SEAMS. ALLOW THE BASE COAT TO DRY.
5. STANDARD MESH APPLICATION: APPLY BASE COAT OVER THE INSULATION BOARD, INCLUDING AREAS WITH ULTRA-HIGH IMPACT MESH, WITH A STAINLESS STEEL TROWEL TO A UNIFORM THICKNESS OF APPROXIMATELY ⅛ INCH (3 MM). WORK HORIZONTALLY OR VERTICALLY IN STRIPS OF 40 INCHES (1016MM), AND IMMEDIATELY EMBED THE MESH INTO THE WET BASE COAT BY TROWELING FROM THE CENTER TO THE EDGE OF THE MESH. OVERLAP MESH NOT LESS THAN 2-½ INCHES (64 MM) AT MESH SEAMS AND AT OVERLAPS OF DETAIL MESH. FEATHER SEAMS AND EDGES. DOUBLE WRAP ALL INSIDE AND OUTSIDE CORNERS WITH MINIMUM 6 INCH (152 MM) OVERLAP IN EACH DIRECTION (OPTIONAL IF CORNER BEAD ACCESSORY IS USED - SEE NOTE TO PARAGRAPH 3.4.2 H1 ABOVE).AVOID WRINKLES IN THE MESH. THE MESH MUST BE FULLY EMBEDDED SO THAT NO MESH COLOR SHOWS THROUGH THE BASE COAT WHEN IT IS DRY. RE-SKIM WITH ADDITIONAL BASE COAT IF MESH COLOR IS VISIBLE.
6. SLOPED SURFACES: FOR TRIM, REVEALS, AESTHETIC BANDS, CORNICE PROFILES, SILLS OR OTHER ARCHITECTURAL FEATURES THAT PROJECT BEYOND THE VERTICAL WALL PLANE MORE THAN 2 INCHES (51 MM) APPLY WATERPROOF BASE COAT WITH A STAINLESS STEEL TROWEL TO THE SLOPED SURFACE AND MINIMUM FOUR INCHES (100 MM) ABOVE AND BELOW IT. EMBED STANDARD MESH OR DETAIL MESH IN THE WATERPROOF BASE COAT AND OVERLAP MESH SEAMS A MINIMUM OF 2-½ INCHES (65 MM).
7. ALLOW BASE COAT TO THOROUGHLY DRY BEFORE APPLYING PRIMER OR FINISH.
   a. AVOID APPLICATION IN DIRECT SUNLIGHT.
   b. APPLY FINISH IN A CONTINUOUS APPLICATION, AND WORK TO AN ARCHITECTURAL BREAK IN THE WALL.
   c. WEATHER CONDITIONS AFFECT APPLICATION AND DRYING TIME. HOT OR DRY CONDITIONS LIMIT WORKING TIME AND ACCELERATE DRYING. ADJUSTMENTS IN THE SCHEDULING OF WORK MAY BE REQUIRED TO ACHIEVE DESIRED RESULTS. COOL OR DAMP CONDITIONS EXTEND WORKING TIME AND RETARD DRYING AND MAY REQUIRE ADDED MEASURES OF PROTECTION AGAINST WIND, DUST, DIRT, RAIN AND FREEZING. ADJUST WORK SCHEDULE AND PROVIDE PROTECTION.
   d. DO NOT INSTALL SEPARATE BATCHES OF FINISH SIDE-BY-SIDE.
   e. DO NOT APPLY FINISH INTO OR OVER SEALANT JOINTS. APPLY FINISH TO OUTSIDE FACE OF WALL ONLY.
   f. DO NOT APPLY FINISH OVER IRREGULAR OR UNPREPARED SURFACES, OR SURFACES NOT IN COMPLIANCE WITH THE REQUIREMENTS OF THE PROJECT SPECIFICATIONS.
8. **DARK COLOURED EIFS NOT TO BE INSTALLED IN DIRECT SUNLIGHT.**

J. PRIMER APPLICATION
1. ENSURE THE BASE COAT SURFACE IS FREE OF SURFACE CONTAMINATION BEFORE COMMENCING THE PRIMER APPLICATION.
2. APPLY PRIMER EVENLY WITH BRUSH, ROLLER OR PROPER SPRAY EQUIPMENT OVER THE CLEAN, DRY BASE COAT AND ALLOW TO DRY THOROUGHLY BEFORE APPLYING FINISH.

K. FINISH COAT APPLICATION
1. ENSURE THE BASE COAT SURFACE OR PRIMED BASE COAT IS FREE OF SURFACE CONTAMINATION BEFORE COMMENCING THE FINISH APPLICATION.
2. APPLY FINISH DIRECTLY OVER THE BASE COAT OR PRIMED BASE COAT WHEN DRY. APPLY FINISH BY SPRAY OR STAINLESS STEEL TROWEL, DEPENDING ON THE FINISH SPECIFIED. FOLLOW THESE GENERAL RULES FOR APPLICATION OF FINISH:

3.5 PROTECTION
A. PROVIDE PROTECTION OF INSTALLED MATERIALS FROM WATER INFILTRATION INTO OR BEHIND THEM
B. PROVIDE PROTECTION OF INSTALLED MATERIALS FROM DUST, DIRT, PRECIPITATION, FREEZING AND CONTINUOUS HIGH HUMIDITY UNTIL THEY ARE FULLY DRY

3.6 CLEANING, REPAIR AND MAINTENANCE
A. CLEAN AND MAINTAIN THE EIFS FOR A FRESH APPEARANCE AND TO PREVENT WATER ENTRY INTO AND BEHIND THE SYSTEM. REPAIR CRACKS, IMPACT DAMAGE, SPALLS OR DELAMINATION PROMPTLY.
B. MAINTAIN ADJACENT COMPONENTS OF CONSTRUCTION SUCH AS SEALANTS, WINDOWS, DOORS, AND FLASHING, TO PREVENT WATER ENTRY INTO OR BEHIND THE EIFS AND ANYWHERE INTO THE WALL ASSEMBLY
C. REFER TO STO RESTORE REPAIR AND MAINTENANCE GUIDE (RESTORE PROGRAM) FOR DETAILED INFORMATION ON RESTORATION - CLEANING, REPAIRS, RECOATING, RESURFACING AND REFINISHING, OR RE-CLADDING

END OF SECTION 07 24 00

ISSUE TABLE

No.	Date (mm/dd/yy)	Description
01	09-26-25	DTGO PROTOTYPE DOCUMENTS

REVISIONS

No.	Date	Description

DRAWINGS REVISED AS PER DESIGN BULLETIN

No.	Date	Description

THIS DRAWING IS OWNED BY OR LICENSED FOR USE BY POPEYES LOUISIANA KITCHEN (OR ITS AFFILIATED OR RELATED COMPANIES) AND MAY NOT BE REPRODUCED, USED, DOWNLOADED, DISSEMINATED, PUBLISHED, OR TRANSFERRED IN ANY FORM OR BY ANY MEANS, EXCEPT WITH THE PRIOR WRITTEN CONSENT OF POPEYES LOUISIANA KITCHEN . COPYRIGHT INFRINGEMENT IS A VIOLATION OF FEDERAL LAW SUBJECT TO CRIMINAL AND CIVIL PENALTIES.

THE CONTRACTOR IS TO VERIFY ALL DIMENSIONS AND CONDITIONS ON THE PROJECT AND TO REPORT ANY DISCREPANCIES TO THE POPEYES LOUISIANA KITCHEN REPRESENTATIVE PRIOR TO COMMENCING WORK. THESE DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION PURPOSES UNLESS INDICATED BY POPEYES LOUISIANA KITCHEN AS "ISSUED FOR CONSTRUCTION".

Professional Seal

DESIGNER NOTES:
DESIGN GUIDELINE ONLY - NOT FOR PERMIT OR CONSTRUCTION

THESE DOCUMENTS MUST BE COMPLETED AND / OR MODIFIED BY A LICENSED ARCHITECT AND ENGINEER TO CONFORM TO ALL APPLICABLE CODES, AND SPECIFIC SITE CONDITIONS. THERE IS NO WARRANTY, WHETHER IMPLIED OR EXPRESSED THAT THESE DOCUMENTS MEET THE APPLICABLE CODE REQUIREMENTS.
LIABILITY FOR THE DESIGN AND ANY USE OF THE DOCUMENTS IS THE SOLE RESPONSIBILITY OF THE ARCHITECT AND ENGINEER OF RECORD.

Company Logo

Project

LOUISIANA 19 72 KITCHEN
POPEYES®

Store Type
US DTGO PROTOTYPE

Location
PROTOTYPE
DTGO (U.S.)
CITY, STATE

Drawing Title
ARCHITECTURAL SPECIFICATIONS

Drawn	Checked
XX	XX
Scale	Date ##.##.####
Project No. XX	Drawing No. SP3

POPEYES LOUISIANA KITCHEN MODEL DTGO, ADDRESS, CITY, STATE: DTGO PROTOTYPE DOCUMENTS (OCTOBER, 2025) STORE NO. XXXXX

FLUID APPLIED MEMBRANE AIR BARRIER
SECTION 07 27 26

FOR REFERENCE ONLY. REFER TO PRE-FABRICATED BUILDING SHELL SHEETS (FBS) FOR PROJECT SPECIFIC INFORMATION.

PART 1 - GENERAL

1.1 SUMMARY

A. SECTION INCLUDES MATERIALS AND INSTALLATION OF VAPOR PERMEABLE FLUID APPLIED AIR AND MOISTURE BARRIER MEMBRANE OVER VERTICAL ABOVE GRADE CONCRETE WALLS, CONCRETE MASONRY WALLS, AND WALL SHEATHING.

B. RELATED SECTIONS INCLUDE THE FOLLOWING:

1.2 DEFINITIONS

A. AIR BARRIER MATERIAL: A PRIMARY ELEMENT THAT PROVIDES A CONTINUOUS BARRIER TO THE MOVEMENT OF AIR.

B. AIR BARRIER ACCESSORY: A TRANSITIONAL COMPONENT OF THE AIR BARRIER THAT PROVIDES CONTINUITY.

C. AIR BARRIER AUXILIARY MATERIAL: A TRANSITIONAL COMPONENT THAT PROVIDES AIR BARRIER CONTINUITY FURNISHED BY A SOURCE OTHER THAN THE PRIMARY AIR BARRIER MANUFACTURER.

D. AIR BARRIER ASSEMBLY: THE COLLECTION OF AIR BARRIER MATERIALS, ACCESSORY AND AUXILIARY MATERIALS APPLIED TO AN OPAQUE WALL, INCLUDING JOINTS AND JUNCTIONS TO ABUTTING CONSTRUCTION, TO CONTROL AIR MOVEMENT THROUGH THE WALL.

1.3 PRE-INSTALLATION MEETINGS

A. PRE-INSTALLATION CONFERENCE

1. REVIEW AIR BARRIER INSTALLATION REQUIREMENTS AND INSTALLATION DETAILS, MOCK-UPS, TESTING REQUIREMENTS, PROTECTION, AND SEQUENCING OF WORK.

1.4 REFERENCES

A. BUILDING CODE AND MATERIAL EVALUATION SERVICE STANDARDS

B. ASTM STANDARDS

D 4541-09 TEST METHOD FOR PULL-OFF STRENGTH OF COATINGS USING PORTABLE ADHESION TESTERS

E 84-98 TEST METHOD FOR SURFACE BURNING CHARACTERISTICS OF BUILDING MATERIAL

E 96-00 TEST METHOD FOR WATER VAPOR TRANSMISSION OF MATERIALS

E 779-10 STANDARD TEST METHOD FOR DETERMINING AIR LEAKAGE RATE BY FAN PRESSURIZATION

E 783-02 STANDARD TEST METHOD FOR FIELD MEASUREMENT OF AIR LEAKAGE THROUGH INSTALLED EXTERIOR WINDOWS AND DOORS

E 1186-03 (2009) STANDARD PRACTICES FOR AIR LEAKAGE SITE DETECTION IN BUILDING ENVELOPES AND AIR BARRIER SYSTEMS

1E 1827-96 (2007) STANDARD TEST METHODS FOR DETERMINING AIR TIGHTNESS OF BUILDINGS USING AN ORIFICE BLOWER DOOR

1E 2178-03 TEST METHOD FOR AIR PERMEANCE OF BUILDING MATERIALS

15.E 2357-05 STANDARD TEST METHOD FOR DETERMINING AIR LEAKAGE OF AIR BARRIER ASSEMBLIES

C. AMERICAN SOCIETY OF HEATING, REFRIGERATING AND AIR-CONDITIONING ENGINEERS, INC. (ASHRAE) 2005 ASHRAE HANDBOOK FUNDAMENTALS ASHRAE 90.1 2016, ENERGY STANDARD FOR BUILDINGS EXCEPT LOW-RISE RESIDENTIAL BUILDINGS

D. NATIONAL FIRE PROTECTION ASSOCIATION (NFPA) NFPA 285 STANDARD FIRE TEST METHOD FOR EVALUATION OF FIRE PROPAGATION CHARACTERISTICS OF EXTERIOR NON-LOAD-BEARING WALL ASSEMBLIES CONTAINING COMBUSTIBLE COMPONENTS

E. SOUTH COAST AIR QUALITY MANAGEMENT DISTRICT (SCAQMD) RULE 1113 (2007) ARCHITECTURAL COATINGS

1.5 COORDINATION/SCHEDULING

A. COORDINATE INSTALLATION OF FOUNDATION WATERPROOFING, ROOFING MEMBRANE, WINDOWS, DOORS AND OTHER WALL PENETRATIONS TO PROVIDE A CONTINUOUS AIR BARRIER.

B. PROVIDE PROTECTION OF ROUGH OPENINGS BEFORE INSTALLING WINDOWS, DOORS, AND OTHER PENETRATIONS THROUGH THE WALL.

C. PROVIDE SILL FLASHING TO DIRECT WATER TO THE EXTERIOR BEFORE WINDOWS AND DOORS ARE INSTALLED.

D. INSTALL WINDOW AND DOOR HEAD FLASHING IMMEDIATELY AFTER WINDOWS AND DOORS ARE INSTALLED.

E. INSTALL DIVERTER FLASHINGS WHEREVER WATER CAN ENTER THE ASSEMBLY TO DIRECT WATER TO THE EXTERIOR.

F. INSTALL PARAPET CAP FLASHING AND SIMILAR FLASHING AT COPINGS AND SILLS TO PREVENT WATER ENTRY INTO THE WALL ASSEMBLY.

G. INSTALL CLADDING WITHIN 180 DAYS OF AIR AND MOISTURE BARRIER INSTALLATION.

SUBMITTALS

A. MANUFACTURER'S SPECIFICATIONS, DETAILS AND PRODUCT DATA.

B. MANUFACTURER'S STANDARD WARRANTY.

C. MANUFACTURER'S ICC EVALUATION REPORT CONFIRMING COMPLIANCE WITH THE IBC, IRC, AND IECC AS AN AIR BARRIER AND WATER-RESISTIVE BARRIER.

D. SAMPLES FOR APPROVAL AS DIRECTED BY ARCHITECT OR OWNER.

E. SHOP DRAWINGS: SUBSTRATE JOINTS, CRACKS, FLASHING TRANSITIONS, PENETRATIONS, CORNERS, TERMINATIONS, AND TIE-INS WITH ADJOINING CONSTRUCTION, AND INTERFACES WITH SEPARATE MATERIALS THAT FORM PART OF THE AIR BARRIER ASSEMBLY.

1.8 QUALITY ASSURANCE

A. MANUFACTURER REQUIREMENTS

1. MANUFACTURER OF EXTERIOR WALL AIR AND MOISTURE BARRIER MATERIALS FOR A MINIMUM OF 30 YEARS IN NORTH AMERICA.

2. LATEST VERSIONS OF THE ISO 9001 STANDARD (CERTIFIED QUALITY SYSTEM) AND ISO 14001 STANDARD (CERTIFIED ENVIRONMENTAL MANAGEMENT SYSTEM).

B. CONTRACTOR REQUIREMENTS

1. KNOWLEDGEABLE IN THE PROPER USE AND HANDLING OF STO MATERIALS.

2. EMPLOY SKILLED MECHANICS WHO ARE EXPERIENCED AND KNOWLEDGEABLE IN WATERPROOFING AND AIR BARRIER APPLICATION, AND FAMILIAR WITH THE REQUIREMENTS OF THE SPECIFIED WORK.

3. PROVIDE THE PROPER EQUIPMENT, MANPOWER AND SUPERVISION ON THE JOB-SITE TO INSTALL THE AIR BARRIER ASSEMBLY IN COMPLIANCE WITH THE PROJECT PLANS & SPECIFICATIONS, SHOP DRAWINGS, AND STO'S PUBLISHED SPECIFICATIONS AND DETAILS.

C. REGULATORY COMPLIANCE

1. PRIMARY AIR BARRIER AND JOINT TREATMENT REINFORCEMENT MATERIALS:

a. LISTED BY IBC AND RECOGNIZED FOR USE ON ALL TYPES OF CONSTRUCTION. REFER TO ICC ESR 1233 FOR LIMITATIONS.

b. COMPLY WITH VOC REQUIREMENTS OF SCAQMD RULE 1113.

c. COMPLY WITH AIR BARRIER MATERIAL REQUIREMENTS OF ASHRAE 90.1 - 2019 OR LATEST VERSION.

d. COMPLY WITH AIR BARRIER MATERIAL REQUIREMENTS OF ASHRAE 189.1 - 2017 OR LATEST VERSION.

e. COMPLY WITH 2021 (OR LATEST VERSION) IRC REQUIREMENT FOR A CONTINUOUS AIR BARRIER

f. COMPLY WITH AIR BARRIER MATERIAL REQUIREMENTS OF 2021 AND 2018 IBC AND IECC.

D. MOCK-UPS

1. BUILD STAND-ALONE SITE MOCK UP OR SAMPLE WALL AREA ON AS-BUILT CONSTRUCTION TO INCORPORATE BACK-UP WALL CONSTRUCTION, TYPICAL DETAILS COVERING SUBSTRATE JOINTS, CRACKS, FLASHING TRANSITIONS, PENETRATIONS, CORNERS, TERMINATIONS, TIE-INS WITH ADJOINING CONSTRUCTION, AND INTERFACES WITH SEPARATE MATERIALS THAT FORM PART OF THE AIR BARRIER ASSEMBLY.

1.9 PRE-CONSTRUCTION TESTING

A. CONDUCT TESTING BY QUALIFIED TEST AGENCY OR BUILDING ENVELOPE CONSULTANT.

1. CONDUCT ASSEMBLY AIR LEAKAGE TESTING IN ACCORDANCE WITH ASTM E 783.

2. CONDUCT ADHESION TESTING TO SUBSTRATES IN ACCORDANCE WITH ASTM D 4541.

3. CONDUCT WET SEALANT COMPATIBILITY TESTING IN ACCORDANCE WITH SEALANT MANUFACTURER'S FIELD QUALITY CONTROL TEST PROCEDURE.

4. NOTIFY DESIGN PROFESSIONAL MINIMUM 7 DAYS PRIOR TO TESTING.

1.10 DELIVERY, STORAGE AND HANDLING

A. DELIVER ALL MATERIALS IN THEIR ORIGINAL SEALED CONTAINERS BEARING MANUFACTURER'S NAME AND IDENTIFICATION OF PRODUCT.

B. PROTECT COATINGS (PAIL PRODUCTS) FROM FREEZING TEMPERATURES AND TEMPERATURES IN EXCESS OF 90 DEGREES F (32 DEGREES C). STORE AWAY FROM DIRECT SUNLIGHT.

C. PROTECT PORTLAND CEMENT BASED MATERIALS (BAG PRODUCTS) FROM MOISTURE AND HUMIDITY. STORE UNDER COVER OFF THE GROUND IN A DRY LOCATION.

D. PROTECT AND STORE ACCESSORY AND AUXILIARY PRODUCTS IN ACCORDANCE WITH MANUFACTURER'S WRITTEN INSTRUCTIONS.

1.11 PROJECT/SITE CONDITIONS

A. MAINTAIN AMBIENT AND SURFACE TEMPERATURES ABOVE 40 DEGREES F (4 DEGREES C) DURING APPLICATION AND DRYING PERIOD, MINIMUM 24 HOURS AFTER APPLICATION OF AIR AND MOISTURE BARRIER MATERIALS.

B. PROVIDE SUPPLEMENTARY HEAT FOR INSTALLATION IN TEMPERATURES LESS THAN 40 DEGREES F (4 DEGREES C) OR IF SURFACE TEMPERATURE IS LIKELY TO FALL BELOW 40 DEGREES F (4 DEGREES C).

C. PROVIDE PROTECTION OF SURROUNDING AREAS AND ADJACENT SURFACES FROM APPLICATION OF MATERIALS.

1.12 WARRANTY

A. PROVIDE MANUFACTURER'S STANDARD WARRANTY.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. PRODUCTS: VAPOUR PERMEABLE AIR BARRIER MEMBRANE, SELF ADHERED FOR [RAIN SCREEN SYSTEMS] [SLOPED ROOFING] : TRIPLE LAYER SPUNBONDED POLYPROPYLENE WITH A NOMINAL THICKNESS OF 0.60MM (24 MILS) AND WATER VAPOUR TRANSMISSION OF 1373 NG/PA.S.M2 (24 PERMS) AS PER ASTM E96 METHOD B. MEMBRANES MUST COMPLY WITH THE ASTM E2178 (AIR BARRIER MATERIALS) AND THE MEMBRANE SYSTEM MUST COMPLY WITH ASTM E2357 (AIR BARRIER ASSEMBLIES) AND HAVE AN AIR LEAKAGE RATE CLASSIFICATION OF "A1" [AT A 1 IN 50 HOURLY WIND PRESSURE DIFFERENCE OF 650PA, 12 METRES ABOVE GRADE]. SRP AIROUTSHIELD SA280 1 866 533 0233 WWW.SRPAIROUTSHIELD.COM

B. COLOUR: BLACK

2.2 MATERIALS

A. PRIMARY AIR BARRIER MATERIAL: STOGUARD WITH STO EMERALDCOAT - READY-MIXED FLEXIBLE SPRAY OR ROLLER APPLIED AIR AND MOISTURE BARRIER MATERIAL.

B. ACCESSORY MATERIALS

1. SHEATHING JOINT TREATMENTS

a. STO RAPIDGUARD™: ONE COMPONENT STPE RAPID DRYING GUN-APPLIED TREATMENT FOR SHEATHING JOINTS, ROUGH OPENINGS, SEAMS, CRACKS, PENETRATIONS AND OTHER TRANSITIONS IN ABOVE GRADE WALL CONSTRUCTION.

2. ROUGH OPENING TREATMENTS

a. STO RAPIDGUARD™: ONE COMPONENT STPE RAPID DRYING GUN-APPLIED TREATMENT FOR SHEATHING JOINTS, ROUGH OPENINGS, SEAMS, CRACKS, PENETRATIONS AND OTHER TRANSITIONS IN ABOVE GRADE WALL CONSTRUCTION.

3. TRANSITION DETAIL COMPONENTS

a. STOGUARD TRANSITION MEMBRANE: FLEXIBLE AIR AND MOISTURE BARRIER MEMBRANE FOR CONTINUITY AT STATIC TRANSITIONS: SHEATHING TO FOUNDATION, DISSIMILAR MATERIALS (CMU TO FRAME WALL), WALL TO BALCONY FLOOR SLAB OR CEILING, AND SHINGLE LAP TRANSITIONS TO FLASHING. ALSO USED FOR DYNAMIC JOINTS: FLOOR LINE DEFLECTION JOINTS, MASONRY CONTROL JOINTS, AND THROUGH WALL JOINTS IN MASONRY OR FRAME CONSTRUCTION.

4. PRIMERS

a. STOGUARD PRIMER: RUBBER RESIN EMULSION PRIMER FOR USE WITH STOGUARD TAPE TO ENHANCE ADHESION.

C. AUXILIARY MATERIALS

1. WET SEALANT: DOW CORNING 758, 790, 791, AND 795 SEALANTS

2. PRE-CURED SEALANT TAPE: DOW 123

3. SPRAY ADHESIVE: 3M SUPER 77 SPRAY ADHESIVE

4. SPRAY FOAM: DOW GREAT STUFF FOR GAPS AND CRACKS

D. PATCH AND LEVELING MATERIAL FOR CONCRETE AND MASONRY

1. STO LEVELER: POLYMER MODIFIED CEMENTITIOUS PATCH AND LEVELING MATERIAL FOR PREPARED CONCRETE AND MASONRY SURFACES FOR LEVELING UP TO 1/4 INCH (6 MM).

2. STO BTS-XTRA: POLYMER MODIFIED LIGHTWEIGHT CEMENTITIOUS PATCH AND LEVELING MATERIAL FOR PREPARED CONCRETE AND MASONRY SURFACES FOR LEVELING UP TO 1/8 INCH (3 MM).

2.3 PERFORMANCE REQUIREMENTS

A. DURABILITY, RESISTANCE TO AGING, WATER AND WATER PENETRATION RESISTANCE, STRUCTURAL LOADING: JOINT TREATMENT AND PRIMARY AIR BARRIER MATERIAL, COMPLY WITH ICC ES AC 212

B. FLEXIBILITY: ASTM D 522, PRIMARY AIR BARRIER MATERIAL, NO CRACKING OR DELAMINATION BEFORE AND AFTER AGING USING 1/8 INCH (3 MM) MANDREL AT 14º F (10º C)

C. NAIL SEALABILITY: ASTM D 1970, 7.9.1, PRIMARY AIR BARRIER PASSES

D. RESISTANCE TO MOLD: ASTM D 3273, NO MOLD GROWTH AFTER 28 DAY EXPOSURE

E. ADHESION: JOINT TREATMENT AND PRIMARY AIR BARRIER MATERIAL, ASTM C 297 OR D 4541, > 30 PSI (207 KPA), OR EXCEEDS STRENGTH OF GLASS MAT FACING ON GLASS MAT GYPSUM SUBSTRATES

F. SURFACE BURNING: ASTM E 84, JOINT TREATMENT AND PRIMARY AIR BARRIER MATERIAL FLAME SPREAD < 25, SMOKE DEVELOPED < 450, CLASS A BUILDING MATERIAL

G. WATER VAPOR PERMEANCE: ASTM E 96 METHOD B, > 10 PERMS (570 NG/PA·S·M2)

H. FIELD ADHESION TESTING: ASTM D 4541, > 30 PSI (207 KPA) OR EXCEEDS STRENGTH OF GLASS MAT FACING ON GLASS MAT GYPSUM SUBSTRATES

I. FIRE RESISTANCE: ASTM E 119, PERMITTED FOR USE IN EXTERIOR WALLS OF FIRE-RESISTANCE-RATED CONSTRUCTION ASSEMBLIES. REFER TO ICC-ESR 1233.

J. BUILDING ENVELOPE AIR LEAKAGE: ASTM E 779 OR 1827, < 0.4 CFM/FT2 (2 L/S·M2)

K. MATERIAL AIR LEAKAGE: ASTM E 2178, PRIMARY AIR BARRIER AND JOINT TREATMENT < 0.004 CFM/FT2 AT 1.57 PSF (0.02 L/SM2 AT 75 PA)

L. ASSEMBLY AIR LEAKAGE: ASTM E 2357, < 0.04 CFM/FT2 (0.2 L/S·M2) AIR LEAKAGE AFTER CONDITIONING PROTOCOL

M. FIRE PROPAGATION: NFPA 285, MEETS REQUIREMENTS FOR USE ON ALL TYPES OF CONSTRUCTION. REFER TO ICC-ESR 1233.

N. VOLATILE ORGANIC COMPOUNDS: SCAQMD RULE 1113, JOINT TREATMENT AND PRIMARY AIR BARRIER MATERIAL < 100 G/L

O. WATER-RESISTIVE BARRIER: ICC ES 212, JOINT TREATMENT AND PRIMARY AIR BARRIER MATERIAL COMPLY AND ARE LISTED IN A VALID ICC ESR.

2.4 DESIGN CRITERIA

A. STRUCTURAL (WIND AND AXIAL LOADS)

1. DESIGN FOR MAXIMUM ALLOWABLE DEFLECTION NORMAL TO THE PLANE OF THE WALL: L/240. WHERE CLADDING DICTATES STIFFER DEFLECTION CRITERIA USE CLADDING DESIGN CRITERIA FOR MAXIMUM ALLOWABLE DEFLECTION.

2. DESIGN FOR WIND LOAD IN CONFORMANCE WITH CODE REQUIREMENTS.

B. MOISTURE CONTROL

1. PREVENT THE ACCUMULATION OF WATER IN THE WALL ASSEMBLY AND BEHIND THE EXTERIOR WALL CLADDING: STO

a. MINIMIZE CONDENSATION WITHIN THE ASSEMBLY.

b. DRAIN WATER DIRECTLY TO THE EXTERIOR WHERE IT IS LIKELY TO PENETRATE COMPONENTS IN THE WALL ASSEMBLY (WINDOWS AND DOORS, FOR EXAMPLE).

c. PROVIDE CORROSION RESISTANT FLASHING TO DIRECT WATER TO THE EXTERIOR IN ACCORDANCE WITH CODE REQUIREMENTS, INCLUDING: ABOVE WINDOW AND DOOR HEADS, BENEATH WINDOW AND DOOR SILLS, AT ROOF/WALL INTERSECTIONS, FLOOR LINES, DECKS, INTERSECTIONS OF LOWER WALLS WITH HIGHER WALLS, AND AT THE BASE OF THE WALL.

C. AIR BARRIER CONTINUITY: PROVIDE CONTINUOUS AIR BARRIER ASSEMBLY OF COMPATIBLE AIR BARRIER COMPONENTS.

D. SUBSTRATES

1. CONCRETE MASONRY UNITS: PROVIDE CMU SURFACES IN CONFORMANCE WITH THE APPLICABLE BUILDING CODE, AND SUCH THAT A VOID AND PINHOLE FREE AIR BARRIER IS ACHIEVED. PROVIDE NORMAL WEIGHT UNITS WITH FLUSH JOINTS (STRUCK FLUSH WITH THE SURFACE) AND ALLOW FOR A MINIMUM OF 2 COATS OF THE PRIMARY AIR BARRIER MATERIAL APPLIED BY SPRAY OR ROLLER ALTERNATIVELY, FOR "ROUGH" CMU WALL SURFACES ALLOW FOR A CEMENTITIOUS PARGE COAT TO FILL AND LEVEL IRREGULAR SURFACES, PRIOR TO 1 COAT OF THE PRIMARY AIR BARRIER MATERIAL.

2. CONCRETE: PROVIDE CONCRETE IN CONFORMANCE WITH THE APPLICABLE BUILDING CODE.

3. SHEATHING: PROVIDE GYPSUM SHEATHING IN COMPLIANCE WITH ASTM C 1177, PROVIDE APA EXTERIOR OR EXPOSURE 1 WOOD-BASED SHEATHING, AND PROVIDE SHEATHING THAT MEETS REQUIRED DESIGN WIND PRESSURES.

E. MECHANICAL VENTILATION: MAINTAIN PRESSURIZATION AND INDOOR HUMIDITY LEVELS IN ACCORDANCE WITH RECOMMENDATIONS OF ASHRAE (SEE 2005 ASHRAE HANDBOOK--FUNDAMENTALS).

PART 3 EXECUTION

3.1 EXAMINATION

A. INSPECT CONCRETE AND CONCRETE MASONRY SURFACES FOR:

1. CONTAMINATION - ALGAE, DIRT, DUST, EFFLORESCENCE, FORM OIL, FUNGUS, GREASE, MILDEW OR OTHER FOREIGN SUBSTANCES.

2. SURFACE DEFICIENCIES - WEAK, FRIABLE, CHALKINESS, LAITANCE, BUGHOLES, AND SPALLS.

3. CRACKS - MEASURE CRACK WIDTH AND RECORD LOCATION OF CRACKS.

4. DAMAGE OR DETERIORATION.

5. MOISTURE CONTENT AND MOISTURE DAMAGE - USE A MOISTURE METER TO DETERMINE IF THE SURFACE IS DRY ENOUGH TO RECEIVE THE WATERPROOF AIR BARRIER AND RECORD ANY AREAS OF MOISTURE DAMAGE OR EXCESS MOISTURE.

6. FLUSH MASONRY MORTAR JOINTS COMPLETELY FILLED WITH MORTAR.

B. INSPECT SHEATHING APPLICATION FOR COMPLIANCE WITH APPLICABLE REQUIREMENT:

1. EXTERIOR GRADE AND EXPOSURE I WOOD BASED SHEATHING: E30U-2007, ENGINEERED WOOD CONSTRUCTION GUIDE, AND THE REQUIREMENTS OF THE APPLICABLE BUILDING CODE.

2. GLASS MAT FACED GYPSUM SHEATHING IN COMPLIANCE WITH ASTM C 1177: CONSULT MANUFACTURER'S PUBLISHED RECOMMENDATIONS AND ICC ES REPORT. CONFORM WITH PROJECT REQUIREMENTS FOR WIND LOAD RESISTANCE.

3. CEMENTITIOUS SHEATHING - CONSULT MANUFACTURER'S PUBLISHED RECOMMENDATIONS AND ICC ES REPORT. CONFORM WITH PROJECT REQUIREMENTS FOR WIND LOAD RESISTANCE.

C. REPORT DEVIATIONS FROM THE REQUIREMENTS OF PROJECT SPECIFICATIONS OR OTHER CONDITIONS THAT MIGHT ADVERSELY AFFECT THE AIR AND MOISTURE BARRIER INSTALLATION. DO NOT START WORK UNTIL DEVIATIONS ARE CORRECTED.

3.2 SURFACE PREPARATION

A. CONCRETE MASONRY

1. SURFACE MUST BE STRUCTURALLY SOUND AND FREE OF WEAK OR DAMAGED SURFACE CONDITIONS SUCH AS LAITANCE OR SPALLS. SURFACE MUST BE CLEAN, DRY, FROST-FREE, AND FREE OF ANY BOND-INHIBITING MATERIALS SUCH AS DUST, DIRT, OIL, ALGAE, MILDEW, SALTS, EFFLORESCENCE, OR ANY OTHER SURFACE CONTAMINATION. MORTAR JOINTS MUST BE STRUCK FLUSH WITH THE SURFACE.

2. REMOVE EXCESS MORTAR FROM MASONRY TIES, LINTELS AND SHELF ANGLES.

3. REMOVE LOOSE OR DAMAGED MATERIAL BY WATER-BLASTING, SANDBLASTING OR MECHANICAL WIRE BRUSHING. REMOVE SURFACE CONTAMINATION SUCH AS DIRT OR EFFLORESCENCE BY CHEMICAL OR MECHANICAL MEANS. REPAIR SURFACE DEFECTS SUCH AS SPALLS, VOIDS AND HOLES WITH STO BTS XTRA (UP TO 1/8 INCH [3 MM] THICK) OR STO LEVELER (UP TO 1/4 INCH [6 MM] THICK).

4. REPAIR NON-STRUCTURAL CRACKS UP TO 1/8 INCH (3 MM) WIDE BY RAKING WITH A SHARP TOOL TO REMOVE LOOSE, FRIABLE MATERIAL AND BLOW CLEAN WITH OIL-FREE COMPRESSED AIR. APPLY JOINT TREATMENT MATERIAL OVER CRACK, EMBED REINFORCEMENT (WHERE APPLICABLE), AND SMOOTH JOINT TREATMENT MATERIAL WITH A TROWEL, DRYWALL OR PUTTY KNIFE TO COVER THE REINFORCEMENT.

B. CONCRETE

1. SURFACE MUST BE STRUCTURALLY SOUND AND FREE OF WEAK OR DAMAGED SURFACE CONDITIONS SUCH AS LAITANCE, BUGHOLES, OR SPALLS. SURFACE MUST BE CLEAN, DRY, FROST-FREE, AND FREE OF ANY BOND-INHIBITING MATERIALS SUCH AS DUST, DIRT, OIL, FORM RELEASE, ALGAE, MILDEW, SALTS, EFFLORESCENCE, OR ANY OTHER SURFACE CONTAMINATION.

2. REMOVE PROJECTING FINS, RIDGES, FORM TIES, AND HIGH SPOTS BY MECHANICAL MEANS.

3. REMOVE LOOSE OR DAMAGED MATERIAL BY WATER-BLASTING, SANDBLASTING OR MECHANICAL WIRE BRUSHING. REMOVE FORM RELEASE BY CHEMICAL OR MECHANICAL MEANS. REPAIR SURFACE DEFECTS SUCH AS HONEYCOMBS, PITTING, SPALLS, VOIDS OR HOLES WITH STO BTS XTRA (UP TO 1/8 INCH [3 MM] THICK) OR STO LEVELER (UP TO 3/8 INCH [9 MM] THICK).

4. REPAIR NON-STRUCTURAL CRACKS UP TO 1/8 INCH (3 MM) WIDE BY RAKING WITH A SHARP TOOL TO REMOVE LOOSE, FRIABLE MATERIAL AND BLOW CLEAN WITH OIL-FREE COMPRESSED AIR. APPLY JOINT TREATMENT MATERIAL OVER CRACK, EMBED REINFORCEMENT (WHERE APPLICABLE), AND SMOOTH JOINT TREATMENT MATERIAL WITH A TROWEL, DRYWALL OR PUTTY KNIFE TO COVER THE REINFORCEMENT.

C. SHEATHING

1. REMOVE AND REPLACE DAMAGED SHEATHING.

2. SPOT SURFACE DEFECTS SUCH AS OVER-DRIVEN FASTENERS, KNOT HOLES, OR OTHER VOIDS IN SHEATHING WITH KNIFE GRADE JOINT TREATMENT MATERIAL.

3. SPOT FASTENERS WITH KNIFE GRADE OR COATING JOINT TREATMENT MATERIAL.

3.3 INSTALLATION

3.3.1 AIR/MOISTURE BARRIER INSTALLATION OVER EXTERIOR OR EXPOSURE I WOOD-BASED SHEATHING (PLYWOOD AND OSB), GLASS MAT FACED GYPSUM SHEATHING IN COMPLIANCE WITH ASTM C 1177, CONCRETE, AND CONCRETE MASONRY (CMU) WALL CONSTRUCTION

A. COORDINATE WORK WITH OTHER TRADES TO ENSURE AIR BARRIER CONTINUITY WITH CONNECTIONS AT FOUNDATION, FLOOR LINES, FLASHINGS, LINTELS AND SHELF ANGLES, OPENINGS AND PENETRATIONS SUCH AS PIPES, VENTS, WINDOWS AND DOORS, MASONRY ANCHORS, RAFTERS OR BEAMS, JOINTS IN CONSTRUCTION, PROJECTIONS SUCH AS DECKS AND BALCONIES, AND ROOF LINE.

B. TRANSITION DETAILING: DETAIL TRANSITION AREAS WITH STO RAPIDGUARD OR STOGUARD TRANSITION MEMBRANE TO ACHIEVE AIR BARRIER CONTINUITY. FOR ILLUSTRATIONS OF INSTALLATION, REFER TO STO GUIDE DETAILS AND STO RAPIDGUARD INSTALLATION GUIDE OR STOGUARD TRANSITION MEMBRANE INSTALLATION GUIDE (WWW.STOCORP.COM).

C. ROUGH OPENING PROTECTION

1. INSTALL ROUGH OPENING PROTECTION. REFER TO STO DETAILS AND APPLICABLE STO PRODUCT BULLETINS.

D. SHEATHING JOINTS

1. INSTALL JOINT TREATMENT MATERIAL SHEATHING JOINTS. REFER TO STO DETAILS AND APPLICABLE STO PRODUCT BULLETINS.

E. AIR AND MOISTURE BARRIER COATING

1. CONCRETE - INSTALL ONE COAT OF STO EMERALDCOAT BY SPRAY OR ROLLER IN A UNIFORM, CONTINUOUS WET FILM OF 10 MILS TO THE PREPARED CONCRETE SUBSTRATE. DO NOT INSTALL OVER WORKING OR MOVING JOINT SEALANTS.

2. CONCRETE MASONRY - INSTALL ONE LIBERAL COAT OF STO EMERALDCOAT BY SPRAY OR ROLLER IN A UNIFORM, CONTINUOUS FILM TO THE PREPARED CONCRETE MASONRY SUBSTRATE. BACKROLL SPRAY APPLICATIONS. ALLOW TO DRY. INSTALL A SECOND LIBERAL COAT IN A UNIFORM, CONTINUOUS FILM, AND BACKROLL SPRAY APPLICATIONS, TO ACHIEVE A VOID AND PINHOLE FREE SURFACE. DEPENDING ON THE CONDITION OF THE SURFACE A MINIMUM OF 10 WET MILS UP TO A MAXIMUM OF 30 WET MILS PER COAT IS REQUIRED. APPLY ADDITIONAL COATS IF NEEDED TO ACHIEVE A VOID AND PINHOLE FREE SURFACE. DO NOT INSTALL OVER WORKING OR MOVING JOINT SEALANTS.

3. SHEATHING

a. GLASS MAT FACED GYPSUM SHEATHING: INSTALL ONE COAT OF STO EMERALDCOAT BY SPRAY OR ROLLER IN A UNIFORM, CONTINUOUS FILM OF 10 WET MILS TO THE PREPARED GLASS MAT GYPSUM SUBSTRATE TO ACHIEVE A VOID AND PINHOLE FREE SURFACE. DO NOT INSTALL OVER WORKING OR MOVING JOINT SEALANTS.

b. PLYWOOD SHEATHING: INSTALL ONE COAT OF STO EMERALDCOAT BY SPRAY OR ROLLER IN A UNIFORM, CONTINUOUS FILM OF 10 WET MILS TO THE PREPARED SUBSTRATE TO ACHIEVE A VOID AND PINHOLE FREE SURFACE. DO NOT INSTALL OVER WORKING OR MOVING JOINT SEALANTS.

c. OSB SHEATHING: INSTALL ONE COAT OF STO EMERALDCOAT BY SPRAY OR ROLLER IN A UNIFORM, CONTINUOUS FILM OF 10 WET MILS TO THE PREPARED SUBSTRATE AND TO A VOID AND PINHOLE FREE SURFACE. INSPECT SURFACE AND TOUCH-UP WITH A SECOND COAT AT RAISED WOOD STRANDS. DO NOT INSTALL OVER WORKING OR MOVING JOINT SEALANTS.

3.4 FIELD QUALITY CONTROL

A. OWNER'S QUALIFIED TESTING AGENCY OR BUILDING ENVELOPE CONSULTANT SHALL PERFORM INSPECTIONS AND TESTS.

B. INSPECTIONS: AIR BARRIER MATERIALS ARE SUBJECT TO INSPECTION TO VERIFY COMPLIANCE WITH REQUIREMENTS.

1. CONDITION OF SUBSTRATES AND SUBSTRATE PREPARATION.

2. INSTALLATION OF PRIMARY AIR BARRIER MATERIAL, ACCESSORY MATERIALS, AND COMPATIBLE AUXILIARY MATERIALS OVER STRUCTURALLY SOUND SUBSTRATES AND IN CONFORMANCE WITH ARCHITECTURAL DESIGN DETAILS, CONTRACTOR'S SHOP DRAWINGS, PROJECT MOCK-UP, AND MANUFACTURER'S WRITTEN INSTALLATION INSTRUCTIONS.

3. AIR BARRIER CONTINUITY AND CONNECTIONS WITHOUT GAPS AND HOLES AT FOUNDATION, FLOOR LINES, FLASHINGS, LINTELS AND SHELF ANGLES, OPENINGS AND PENETRATIONS SUCH AS PIPES, VENTS, WINDOWS AND DOORS, MASONRY ANCHORS, RAFTERS OR BEAMS, JOINTS IN CONSTRUCTION, PROJECTIONS SUCH AS DECKS AND BALCONIES, AND ROOF LINE.

C. TESTS: AIR BARRIER MATERIALS AND ASSEMBLY ARE SUBJECT TO TESTS TO VERIFY COMPLIANCE WITH PERFORMANCE REQUIREMENTS:

1. QUALITATIVE AIR LEAKAGE TEST: ASTM E 1186

2. QUANTITATIVE AIR LEAKAGE TEST: ASTM E 779, E 783, AND E 1827

3. ADHESION TEST: ASTM D 4541

4. QUALITATIVE ADHESION AND COMPATIBILITY TESTING: WET SEALANT MANUFACTURER'S FIELD QUALITY CONTROL ADHESION TEST

D. REPAIR NON-CONFORMING SUBSTRATES AND AIR BARRIER MATERIAL INSTALLATION TO CONFORM WITH PROJECT REQUIREMENTS.

E. TAKE CORRECTIVE ACTION TO REPAIR AND REPLACE, REINSTALL, SEAL OPENINGS, GAPS, OR OTHER SOURCES OF AIR LEAKAGE TO CONFORM WITH PROJECT PERFORMANCE REQUIREMENTS.

3.5 PROTECTION AND CLEANING

A. PROTECT AIR BARRIER MATERIALS FROM DAMAGE DURING CONSTRUCTION CAUSED BY WIND, RAIN, FREEZING, CONTINUOUS HIGH HUMIDITY, OR PROLONGED EXPOSURE TO SUN LIGHT.

B. PROTECT AIR BARRIER MATERIALS FROM DAMAGE FROM TRADES, VANDALS, AND WATER INFILTRATION DURING CONSTRUCTION.

C. REPAIR DAMAGED MATERIALS TO MEET PROJECT SPECIFICATION REQUIREMENTS.

D. CLEAN SPILLS, STAINS, SOILING FROM FINISHES OR OTHER CONSTRUCTION MATERIALS THAT WILL BE EXPOSED IN THE COMPLETED WORK WITH COMPATIBLE CLEANERS.

E. REMOVE ALL MASKING MATERIALS AFTER WORK IS COMPLETED.

ATTENTION

END OF SECTION 07 27 26

COMPOSITE WALL PANELS SECTION 07 42 43

FOR REFERENCE ONLY. REFER TO PRE-FABRICATED BUILDING SHELL SHEETS (FBS) FOR PROJECT SPECIFIC INFORMATION.

PART I - GENERAL

1.1 SECTION INCLUDES:

A. EXTERIOR, PANELIZED FIBER CEMENT CLADDING SYSTEM AND ACCESSORIES TO COMPLETE A DRAINED AND BACK-VENTILATED RAINSCREEN.

B. INTERIOR FIBER CEMENT PANELIZED CLADDING SYSTEM AND ACCESSORIES.

1.2 RELATED SECTIONS

A. SECTION 05 41 00 - STRUCTURAL METAL STUD FRAMING

B. SECTION 06 10 00 - ROUGH CARPENTRY

C. SECTION 06 16 00 - SHEATHING

D. SECTION 07 20 00 - THERMAL PROTECTION

E. SECTION 07 25 00 - WEATHER BARRIERS

F. SECTION 07 60 00 - FLASHING AND SHEET METAL

G. SECTION 07 90 00 - JOINT PROTECTION

1.3 REFERENCES

A. AMERICAN ARCHITECTURAL MANUFACTURERS ASSOCIATION (AAMA):

1. AAMA 509 - VOLUNTARY TEST AND CLASSIFICATION METHOD OF DRAINED AND BACK VENTILATED RAIN SCREEN WALL CLADDING SYSTEMS

B. ASTM INTERNATIONAL (ASTM):

1. ASTM C518 - STANDARD TEST METHOD FOR STEADY-STATE THERMAL TRANSMISSION PROPERTIES BY MEANS OF THE HEAT FLOW METER APPARATUS.

2. ASTM C1186 - STANDARD SPECIFICATION FOR FLAT FIBER-CEMENT SHEETS.

a. ASTM C1185 - STANDARD TEST METHODS FOR SAMPLING AND TESTING NON-ASBESTOS FIBER CEMENT.3. ASTM E84 - STANDARD TEST FOR SURFACE BURNING CHARACTERISTICS OF BUILDING MATERIALS.

4. ASTM E119 - STANDARD TEST METHODS FOR FIRE TESTS OF BUILDING CONSTRUCTION AND MATERIALS.

5. ASTM E228 - STANDARD TEST METHOD FOR LINEAR THERMAL EXPANSION OF SOLID MATERIALS WITH A VITREOUS SILICA DILATOMETER.

6. ASTM E330 - STANDARD TEST METHOD FOR STRUCTURAL PERFORMANCE OF EXTERIOR WINDOWS, CURTAIN WALLS, AND DOORS BY UNIFORM STATIC AIR PRESSURE DIFFERENCE.

7. ASTM E331 - STANDARD TEST METHOD FOR WATER PENETRATION OF EXTERIOR WINDOWS, CURTAIN WALLS, AND DOORS BY UNIFORM STATIC AIR PRESSURE DIFFERENCE.

C. FLORIDA BUILDING CODE - TEST PROTOCOL HVHZ

1. TESTING APPLICATION STANDARD (TAS) 202, 203 - HVHZ TEST PROCEDURES

D. NATIONAL FIRE PROTECTION ASSOCIATION (NFPA):

1. NFPA 285 - FIRE TEST METHOD FOR EXTERIOR WALL ASSEMBLIES CONTAINING COMBUSTIBLE MATERIAL.

2. NFPA 268 - IGNITION RESISTANCE OF EXTERIOR WALL ASSEMBLIES.

E. STANDARDS COUNCIL OF CANADA & UNDERWRITERS LABORATORIES CANADA (ULC):

1. CAN/ULC S102 - STANDARD METHOD OF TEST FOR SURFACE BURNING CHARACTERISTICS.

2. CAN/ULC S134 - STANDARD METHOD OF FIRE TEST OF EXTERIOR WALL ASSEMBLY.

1.4 SUBMITTALS

A. SUBMIT UNDER PROVISIONS OF SECTION 01 33 00.

B. PRODUCT DATA: SUBMIT MANUFACTURER'S PRODUCT DESCRIPTION, STORAGE AND HANDLING REQUIREMENTS, AND INSTALLATION INSTRUCTIONS.

C. PRODUCT TEST REPORTS AND CODE COMPLIANCE: DOCUMENTS DEMONSTRATING PRODUCT COMPLIANCE WITH LOCAL BUILDING CODE, SUCH AS TEST REPORTS OR EVALUATION REPORTS FROM QUALIFIED, INDEPENDENT TESTING AGENCIES.

D. NOT USED

E. MANUFACTURER'S DETAILS: SUBMIT DRAWINGS (.DWG, .RVT, AND/OR .PDF FORMATS), INCLUDING PLANS, SECTIONS, SHOWING INSTALLATION DETAILS THAT DEMONSTRATE PRODUCT DIMENSIONS, EDGE/TERMINATION CONDITIONS/TREATMENTS, COMPRESSION AND CONTROL JOINTS, CORNERS, OPENINGS, AND PENETRATIONS.

F. SAMPLES: SUBMIT SAMPLES OF EACH PRODUCT TYPE PROPOSED FOR USE.

1.5 QUALITY ASSURANCE

A. MANUFACTURER QUALIFICATIONS:

1. ALL FIBER CEMENT PANELS SPECIFIED IN THIS SECTION MUST BE SUPPLIED BY A MANUFACTURER WITH A MINIMUM OF 10 YEARS OF EXPERIENCE IN FABRICATING AND SUPPLYING FIBER CEMENT CLADDING SYSTEMS.

2. PROVIDE TECHNICAL AND DESIGN SUPPORT AS NEEDED REGARDING INSTALLATION REQUIREMENTS AND WARRANTY COMPLIANCE PROVISIONS.

B. INSTALLER QUALIFICATIONS: ALL PRODUCTS LISTED IN THIS SECTION ARE TO BE INSTALLED BY A SINGLE INSTALLER TRAINED BY MANUFACTURER OR REPRESENTATIVE.

C. MOCK-UP WALL: PROVIDE A MOCK-UP WALL AS EVALUATION TOOL FOR PRODUCT AND INSTALLATION WORKMANSHIP.

D. PRE-INSTALLATION MEETINGS: PRIOR TO BEGINNING INSTALLATION, CONDUCT CONFERENCE TO VERIFY AND DISCUSS SUBSTRATE CONDITIONS, MANUFACTURER'S INSTALLATION INSTRUCTIONS AND WARRANTY REQUIREMENTS, AND PROJECT REQUIREMENTS.

1.6 DELIVERY, STORAGE, AND HANDLING

A. PANELS MUST BE STORED FLAT AND KEPT DRY BEFORE INSTALLATION. A WATERPROOF COVER OVER PANELS AND ACCESSORIES SHOULD BE USED AT ALL TIMES PRIOR TO INSTALLATION. DO NOT STACK PALLETS MORE THAN TWO HIGH. REFER TO THE INFORMATION INCLUDED ON EACH PALLET.

B. IF PANELS ARE EXPOSED TO WATER OR WATER VAPOR PRIOR TO INSTALLATION, ALLOW TO COMPLETELY DRY BEFORE INSTALLING. FAILURE TO DO SO MAY RESULT IN PANEL SHRINKAGE AT SHIP LAP JOINTS, AND SUCH ACTION MAY VOID WARRANTY.

C. PANELS MUST BE CARRIED ON EDGE. DO NOT CARRY OR LIFT PANELS FLAT. IMPROPER HANDLING MAY CAUSE CRACKING OR PANEL DAMAGE.

D. DIRECT CONTACT BETWEEN THE PANELS AND THE GROUND SHOULD BE AVOIDED AT ALL TIMES. IT IS NECESSARY TO KEEP PANELS CLEAN DURING INSTALLATION PROCESS.

1.7 WARRANTY

A. PROVIDE MANUFACTURER'S 15-YEAR WARRANTY AGAINST MANUFACTURED DEFECTS IN FIBER CEMENT PANELS. ADDITIONAL 5-YEAR EXTENSION AVAILABLE WHEN REFINISHED IN YEAR 14-15.

B. PROVIDE MANUFACTURER'S 15-YEAR WARRANTY AGAINST MANUFACTURED DEFECTS IN PANEL FINISH.

C. WARRANTY PROVIDES FOR THE ORIGINAL PURCHASER. SEE WARRANTY FOR DETAILED INFORMATION ON TERMS, CONDITIONS AND LIMITATIONS.

PART II: PRODUCTS

2.1 MANUFACTURERS

A. ACCEPTABLE MANUFACTURERS:

1. NICHIHA USA, INC., 3150 AVONDALE MILL RD, MACON, GA 301216, USA

2. NICHIHA CORPORATION, 18-19 NISHIKI 2-CHOME NAKA-KU, NAGOYA, AICHI 460-8610, JAPAN.

B. ACCEPTABLE MANUFACTURER'S REPRESENTATIVE: NICHIHA USA, INC., 6465 E. JOHNS CROSSING, SUITE 250, JOHNS CREEK, GA 30097. TOLL FREE: 1.866.424.4421, OFFICE: 770.805.9466, FAX: 770.805.9467, WWW.NICHIHA.COM.

1. BASIS OF DESIGN PRODUCT: NICHIHA VINTAGEWOOD.

a. PROFILE COLORS: BARK, CEDAR, REDWOOD, ASH, AND SPRUCE.

b. PROFILES: WOOD PLANK TEXTURE WITH THREE, 3/8" GROOVES RUNNING LENGTHWISE, SPACED 5-5/8" APART.

c. ACCESSORY/COMPONENT OPTIONS:

i. MANUFACTURED CORNERS WITH 3-1/2" RETURNS FOR EACH PROFILE COLOR.

ii. ALUMINUM TRIM OPTIONS: CORNER KEY, OPEN OUTSIDE CORNER, H-MOLD, J-MOLD, COMPRESSION JOINT, INSIDE CORNER

1. FINISH: BARK, CEDAR, CLEAR ANODIZED, OR PRIMED.

iii. ESSENTIAL FLASHING SYSTEM: STARTER, OVERHANG.

1. FINISH: MATTE BLACK.

d. DIMENSIONS:

1. AWP-1818: 455MM (17-7/8") (H) X 1,818 MM (71-9/16") (L).

2. AWP-3030: 455MM (17-7/8") (H) X 3,030 MM (119-5/16") (L).

e. PANEL THICKNESS: 16 MM (5/8").

f. WEIGHT: AWP-1818: 35.27 LBS. PER PANEL, AWP-3030: 57.32 LBS. PER PANEL.

g. COVERAGE: 8.88 SQ. FT. PER PANEL (1818), 14.81 SQ. FT. PER PANEL (3030).

h. FACTORY SEALED ON SIX [6] SIDES.

C. SUBSTITUTIONS: NOT PERMITTED.

D. REQUESTS FOR SUBSTITUTIONS WILL BE CONSIDERED IN ACCORDANCE WITH PROVISIONS OF SECTION 01 60 00.

2.2 MATERIALS

A. FIBER CEMENT PANELS MANUFACTURED FROM A PRESSED, STAMPED, AND AUTOCLAVED MIX OF PORTLAND CEMENT, FLY ASH, SILICA, RECYCLED REJECTS, AND WOOD FIBER BUNDLES.

B. PANEL SURFACE PRE-FINISHED AND MACHINE APPLIED.

C. PANELS PROFILED ALONG 3030MM EDGES SO THAT THE LONG JOINTS BETWEEN THE INSTALLED PANELS ARE SHIP-LAPPED.

D. FACTORY-APPLIED SEALANT GASKET ADDED TO TOP PANEL EDGE; ALL 3030MM EDGE JOINTS CONTAIN A FACTORY SEALANT.

2.3 PERFORMANCE REQUIREMENTS:

A. FIBER CEMENT CLADDING - MUST COMPLY WITH ASTM C1186, TYPE A, GRADE II REQUIREMENTS:

1. ASTM C1185 - STANDARD TEST METHODS FOR SAMPLING AND TESTING NON-ASBESTOS FIBER CEMENT:

a. WET FLEXURAL STRENGTH: RESULT: 1418 PSI, LOWER LIMIT: 1015 PSI.

b. WATER TIGHTNESS: NO WATER DROPLETS OBSERVED ON ANY SPECIMEN.

c. FREEZE-THAW: NO DAMAGE OR DEFECTS OBSERVED.

d. WARM WATER: NO EVIDENCE OF CRACKING, DELAMINATION, SWELLING, OR OTHER DEFECTS OBSERVED.

e. HEAT-RAIN: NO CRAZING, CRACKING, OR OTHER DELETERIOUS EFFECTS, SURFACE OR JOINT CHANGES OBSERVED IN ANY SPECIMEN.

B. MEAN COEFFICIENT OF LINEAR THERMAL EXPANSION (ASTM E228): MAX 1.0*10^-5 IN./IN. F.

C. SURFACE BURNING (CAN-ULC S102/ASTM E84): FLAME SPREAD: 0, SMOKE DEVELOPED: 0.

D. WIND LOAD (ASTM E330): CONTACT MANUFACTURER FOR ULTIMATE TEST PRESSURE DATA CORRESPONDING TO FRAMING TYPE, DIMENSIONS, FASTENER TYPE, AND ATTACHMENT CLIPS. PROJECT ENGINEER(S) MUST DETERMINE ZONE 4 AND 5 DESIGN PRESSURES BASED ON PROJECT SPECIFICS.

1. MINIMUM LATERAL DEFLECTION: L/120.

E. WATER PENETRATION (ASTM E331): NO WATER LEAKAGE OBSERVED INTO WALL CAVITY.

F. STEADY-STATE HEAT FLUX AND THERMAL TRANSMISSION PROPERTIES TEST (ASTM C518): 16MM THICK PANEL THERMAL RESISTANCE R VALUE OF 0.47.

G. FIRE RESISTANT (ASTM E119): THE WALL ASSEMBLY MUST SUCCESSFULLY ENDURE 60-MINUTE FIRE EXPOSURE WITHOUT DEVELOPING EXCESSIVE UNEXPOSED SURFACE TEMPERATURE OR ALLOWING FLAMING ON THE UNEXPOSED SIDE OF THE ASSEMBLY.

H. IGNITION RESISTANCE (NFPA 268): NO SUSTAINED FLAMING OF PANELS, ASSEMBLY WHEN SUBJECTED TO A MINIMUM RADIANT HEAT FLUX OF 12.5 KW/M2 ± 5% IN THE PRESENCE OF A PILOT IGNITION SOURCE FOR A 20-MINUTE PERIOD.

I. FIRE PROPAGATION (NFPA 285): WALL ASSEMBLY OF NICHIHA AWP, ULTIMATE CLIPS AND STARTER TRACK, TYVEK COMMERCIAL WRAP, ½" DENSGLASS GOLD SHEATHING, 16" O.C. 18 GAUGE STEEL STUDS, MINERAL WOOL IN-CAVITY INSULATION, AND INTERIOR 5/8" TYPE X GYPSUM MET THE ACCEPTANCE CRITERIA OF NFPA 285.

J. FIRE PROPAGATION (CAN/ULC S134): WALL ASSEMBLY OF NICHIHA AWP, ULTIMATE CLIPS AND STARTER TRACK, TYVEK HOUSEWRAP, 5/8" FRT PLYWOOD, 16" O.C. 2X WOOD STUDS, FIBERGLASS IN-CAVITY INSULATION, AND INTERIOR 5/8" TYPE X GYPSUM MET THE ACCEPTANCE CRITERIA OF CAN/ULC S134.

K. DRAINED AND BACK VENTILATED RAINSCREEN (AAMA 509): SYSTEM CLASSIFICATIONS: W1, V1.

L. FLORIDA BUILDING CODE - TEST PROTOCOL HVHZ (TAS 202, 203): HORIZONTAL APPLICATION DESIGN PRESSURE: 95 PSF, VERTICAL APPLICATION DESIGN PRESSURE: 85 PSF.

2.4 INSTALLATION COMPONENTS

A. ULTIMATE CLIP SYSTEM:

1. STARTER TRACK:

a. HORIZONTAL PANEL INSTALLATIONS - FA 700 - 3,030MM (L) GALVALUME COATED STEEL.

b. VERTICAL PANEL INSTALLATIONS (AWP-3030 ONLY) - FA 710T - 3,030MM (L) GALVALUME COATED STEEL.

2. PANEL CLIPS: JEL 778 "ULTIMATE CLIP II" (10MM RAINSCREEN FOR 16MM AWP) - ZINC-ALUMINUM-MAGNESIUM ALLOY COATED STEEL.

a. JOINT TAB ATTACHMENTS (INCLUDED) - USED AT ALL AWP-1818 PANEL TO PANEL VERTICAL JOINTS, NOT USED WITH AWP-3030 INSTALLATIONS.

3. CORNER CLIPS: JE 777C (10MM RAINSCREEN FOR 5/8" AWP MANUFACTURED CORNERS) -- ZINC-ALUMINUM-MAGNESIUM ALLOY COATED STEEL.

4. SINGLE FLANGE SEALANT BACKER - FHK 1015 R (10MM) - 6.5' (L) FLUORINE COATED GALVALUME.

5. DOUBLE FLANGE SEALANT BACKER - FH 1015 R (10MM) - 10' (L) FLUORINE COATED GALVALUME.

6. CORRUGATED SPACER - FS 1005 (5MM), FS 1010 (10MM) - 4' (L).

B. ALUMINUM TRIM (OPTIONAL): PAINT PRIMED TRIM AS SPECIFIED IN FINISH SCHEDULE.

C. ESSENTIAL FLASHING SYSTEM (OPTIONAL):

1. STARTER - MAIN SEGMENTS (3,030MM), INSIDE CORNERS, OUTSIDE CORNERS

2. OVERHANG - MAIN SEGMENTS (3,030MM), INSIDE CORNERS, OUTSIDE CORNERS, JOINT CLIPS

D. FASTENERS: CORROSION RESISTANT FASTENERS, SUCH AS HOT-DIPPED GALVANIZED SCREWS APPROPRIATE TO LOCAL BUILDING CODES AND PRACTICES MUST BE USED. USE STAINLESS STEEL FASTENERS IN HIGH HUMIDITY AND HIGH-MOISTURE REGIONS. PANEL MANUFACTURER IS NOT LIABLE FOR CORROSION RESISTANCE OF FASTENERS. DO NOT USE ALUMINUM FASTENERS, STAPLES OR FASTENERS THAT ARE NOT RATED OR DESIGNED FOR INTENDED USE. SEE MANUFACTURER'S INSTRUCTIONS FOR APPROPRIATE FASTENERS FOR CONSTRUCTION METHOD USED.

E. FLASHING: FLASH ALL AREAS SPECIFIED IN MANUFACTURER'S INSTRUCTIONS. DO NOT USE RAW ALUMINUM FLASHING. FLASHING MUST BE GALVANIZED, ANODIZED, OR PVC COATED.

F. SEALANT: SEALANT SHALL COMPLY WITH ASTM C920, CLASS 35.

PART III: EXECUTION

3.1 EXAMINATION

A. VERIFICATION OF CONDITIONS:

1. FIBER CEMENT PANELS CAN BE INSTALLED OVER BRACED WOOD, STEEL STUDS AND SHEATHING INCLUDING PLYWOOD, OSB, PLASTIC FOAM (1" OR LESS) OR FIBERBOARD SHEATHING. FIBER CEMENT PANELS CAN ALSO BE INSTALLED OVER STRUCTURAL INSULATED PANELS (SIP'S), CONCRETE MASONRY UNITS (CMU'S) AND CONCRETE BLOCK STRUCTURES (CBS'S) WITH FURRING STRIPS, AND PRE-ENGINEERED METAL CONSTRUCTION. INSULATED CONCRETE FORMS (ICFS) REQUIRE ADDED MEASURES. CONSULT WITH NICHIHA TECHNICAL SERVICES.

2. ALLOWABLE STUD SPACING: 16" O.C. MAXIMUM.

3. A WEATHER RESISTIVE BARRIER IS REQUIRED WHEN INSTALLING FIBER CEMENT PANELS. USE AN APPROVED WEATHER RESISTIVE BARRIER (WRB) AS DEFINED BY THE IBC OR IRC. REFER TO LOCAL BUILDING CODES.

4. APPROPRIATE METAL FLASHING SHOULD BE USED TO PREVENT MOISTURE PENETRATION AROUND ALL DOORS, WINDOWS, WALL BOTTOMS, MATERIAL TRANSITIONS AND PENETRATIONS. REFER TO LOCAL BUILDING CODES FOR BEST PRACTICES.

B. EXAMINE SITE TO ENSURE SUBSTRATE CONDITIONS ARE WITHIN ALIGNMENT TOLERANCES FOR PROPER INSTALLATION.

C. DO NOT BEGIN INSTALLATION UNTIL UNACCEPTABLE CONDITIONS HAVE BEEN CORRECTED.

D. DO NOT INSTALL PANELS OR COMPONENTS THAT APPEAR TO BE DAMAGED OR DEFECTIVE. DO NOT INSTALL WET PANELS.

3.2 TOLERANCE

A. WALL SURFACE PLANE MUST BE PLUMB AND LEVEL WITHIN +/- ¼ INCH IN 20 FEET IN ANY DIRECTION.

1. ONE LAYER OF NICHIHA 5MM (~3/16") SPACER MAY BE USED AS SHIM.

3.3 INSTALLATION

A. GENERAL: INSTALL PRODUCTS IN ACCORDANCE WITH THE LATEST INSTALLATION GUIDELINES OF THE MANUFACTURER AND ALL APPLICABLE BUILDING CODES AND OTHER LAWS, RULES, REGULATIONS AND ORDINANCES. REVIEW ALL MANUFACTURER INSTALLATION, MAINTENANCE INSTRUCTIONS, AND OTHER APPLICABLE DOCUMENTS BEFORE INSTALLATION.

1. CONSULT WITH YOUR LOCAL DEALER OR NICHIHA TECHNICAL DEPARTMENT BEFORE INSTALLING ANY NICHIHA FIBER CEMENT PRODUCT ON A BUILDING HIGHER THAN 45 FEET OR THREE STORIES OR FOR CONDITIONS NOT MATCHING PRESCRIBED STANDARD INSTALLATION GUIDE REQUIREMENTS AND METHODS. A **TECHNICAL DESIGN REVIEW (TDR)** PROCESS IS AVAILABLE TO EVALUATE PROJECT FEASIBILITY.

2. ***VERTICAL CONTROL/EXPANSION JOINTS*** ARE REQUIRED WITH AWP-1818, FOR WALLS WIDER THAN 30 FEET, WITHIN 2-12 FEET OF OUTSIDE CORNERS FINISHED WITH METAL TRIM *AND* APPROXIMATELY EVERY 30 FEET THEREAFTER.

A. ***VERTICAL CONTROL/EXPANSION JOINTS*** ARE REQUIRED AT EACH AWP-3030 VERTICAL JOINT, OR H-MOLD TRIM MAY BE USED INSTEAD.

3. ***HORIZONTAL/COMPRESSION JOINTS*** ARE REQUIRED FOR MULTI-STORY INSTALLATIONS OF AWP. LOCATE JOINTS AT FLOOR LINES. JOINTS ARE FLASHED MINIMUM ½" BREAKS. DO NOT CAULK. REFER TO INSTALLATION GUIDE(S).

4. WOOD FRAMED BUILDINGS OF THREE OR MORE FLOORS REQUIRE A COMPRESSION JOINT AT EACH FLOOR.

5. STEEL FRAMED BUILDINGS (INCLUDING REINFORCED CONCRETE CORE WITH LGMF EXTERIOR WALLS) OF MORE THAN THREE FLOORS (OR 45 FEET) REQUIRE A COMPRESSION JOINT EVERY 25 FEET AT A FLOOR LINE.

6. PANEL CUTTING

7. ALWAYS CUT FIBER CEMENT PANELS OUTSIDE OR IN A WELL VENTILATED AREA. DO NOT CUT THE PRODUCTS IN AN ENCLOSED AREA.

8. ALWAYS WEAR SAFETY GLASSES AND NIOSH/OSHA APPROVED RESPIRATOR WHENEVER CUTTING, DRILLING, SAWING, SANDING OR ABRADING THE PRODUCTS. REFER TO MANUFACTURER SDS FOR MORE INFORMATION.

9. USE A DUST-REDUCING CIRCULAR SAW WITH A DIAMOND-TIPPED OR CARBIDE-TIPPED BLADE.

a. RECOMMENDED CIRCULAR SAW: MAKITA 7-1/4" CIRCULAR SAW WITH DUST COLLECTOR (#5057KB).

b. RECOMMENDED BLADE: TENRYU BOARD-PRO PLUS PCD BLADE (#BP-18505).

c. SHEARS (ELECTRIC OR PNEUMATIC) OR JIG SAW CAN BE USED FOR COMPLICATED CUTTINGS, SUCH AS SERVICE OPENINGS, CURVES, RADII AND SCROLLWORK.

10. **SILICA DUST WARNING:** FIBER CEMENT PRODUCTS MAY CONTAIN SOME AMOUNTS OF CRYSTALLINE SILICA, A NATURALLY OCCURRING, POTENTIALLY HAZARDOUS MINERAL WHEN AIRBORNE IN DUST FORM. CONSULT PRODUCT SDS OR VISIT HTTPS://WWW.OSHA.GOV/DSG/TOPICS/SILICACRYSTALLINE/.

11. IMMEDIATELY CLEAN DUST FROM CUT PANELS AS IT MAY BIND TO THE FINISH.

3.4 CLEANING AND MAINTENANCE

A. REVIEW MANUFACTURER GUIDELINES FOR DETAILED CARE INSTRUCTIONS.

END OF SECTION 07 42 43.

MEMBRANE ROOFING SECTION 07 50 00

1.0 GENERAL

1.1 REFERENCE:

.1 COMPLY WITH GENERAL CONDITIONS OF THE CONTRACT AND WITH SECTION 010100 GENERAL REQUIREMENTS.

.2 COMPLY WITH THE GENERAL REQUIREMENTS OF THE NBC, PROVINCIAL BUILDING CODE LATEST EDITION, LOCAL CODES, AND SAFETY ACTS.

.3 RELATED WORK SPECIFIED ELSEWHERE:

.1 SUPPLY OF ROOF HOPPERS, ROOF DRAINS, PLUMBING, AND CONNECTIONS TO R.W.L. - SECTION 220000.

.2 SHEET METAL FLASHING MATERIALS - SECTION 076000.

.4 REFERENCE STANDARDS:

.1 ALL ROOFING TO BE COMPLETE IN ACCORDANCE WITH THE NATIONAL ROOFING CONTRACTORS ASSOCIATION ROOFING MANUAL.

1.2 SCOPE OF WORK INCLUDES:

.1 SUBSTRATE PREPARATION.

.2 WOOD BLOCKING.

.3 ROOFING ACCESSORY INSTALLATION.

.4 VAPOUR RETARDER INSTALLATION.

.5 INSULATION INSTALLATION.

.6 MEMBRANE INSTALLATION.

.7 MEMBRANE FLASHING.

.8 METAL FLASHING.

.9 ROOF HATCH.

1.3 DESCRIPTION:

.1 FURNISH AND INSTALL A FIRESTONE MECHANICALLY FASTENED ULTRAPLY TPO ROOFING SYSTEM AND RELATED ROOFING ACCESSORIES IN STRICT ACCORDANCE WITH SPECIFICATIONS AND DETAILS APPROVED BY FIRESTONE. INSULATION IS TO BE MECHANICALLY FASTENED OVER A VAPOUR RETARDER TO THE ROOF DECK ACCORDING TO MANUFACTURER REQUIREMENTS. TPO MEMBRANE SHEETS ARE TO BE MECHANICALLY FASTENED TO THE ROOF DECK WITH MANUFACTURER MEMBRANE FASTENERS AND HEAT WELDED TOGETHER.

1.4 QUALITY ASSURANCE:

.1 THE ROOF AND PROPOSED ROOF CONSTRUCTION IS TO MEET ALL THE "ROOF DESIGN CONSIDERATIONS" REQUIREMENTS DETAILED IN MEMBRANE MECHANICALLY FASTENED ROOF SYSTEM, UNLESS SPECIFICALLY APPROVED IN WRITING BY MANUFACTURER.

.2 GENERAL CONTRACTOR SHALL RESTRICT ACCESS TO THE ROOF BY ALL OTHER TRADES DURING AND AFTER THE ROOFING SYSTEM CONSTRUCTION. GENERAL CONTRACTOR SHALL ENSURE THAT OTHER TRADE PERSONNEL PERMITTED ACCESS TO THE ROOF TAKE PROPER CARE TO PREVENT DAMAGE TO WORK DONE UNDER THIS SECTION.

.3 ROOFING CONTRACTOR SHALL BE AN APPROVED APPLICATOR OF FIRESTONE ROOFING SYSTEMS AS DETERMINED BY FIRESTONE BUILDING PRODUCTS.

.4 WORKMEN SHALL BE TRAINED AND EXPERIENCED IN THE INSTALLATION OF THIS TYPE OF ROOFING SYSTEM AND SHALL BE UNDER FULL TIME COMPETENT SUPERVISION.

1.5 SUBMITTALS:

.1 SHOP DRAWINGS ARE TO BE PREPARED DETAILING ROOF SIZE, MEMBRANE SHEET PLACEMENT, QUANTITY, TYPE AND SPACING OF MEMBRANE FASTENERS, LOCATION AND TYPE OF PENETRATIONS AND TYPE OF VAPOUR RETARDER, INSULATION AND INSULATION FASTENER TO BE USED.

.2 SUBMIT SHOP DRAWINGS AND ANY PROPOSED NON-STANDARD DETAILS TO FIRESTONE A MINIMUM OF TWO WEEKS PRIOR TO JOB START FOR APPROVAL.

.3 SUBMIT SHOP DRAWINGS, CURRENT MANUFACTURER INSTALLATION INSTRUCTIONS AND DETAIL DRAWINGS BEING USED ON THIS PROJECT TO THE OWNER.

1.6 DELIVERY, STORAGE & HANDLING:

.1 DELIVER ALL ROOFING MATERIALS IN ORIGINAL, UNOPENED CONTAINERS, COMPLETE WITH LABELS INDICATING BRAND NAME, CONTENTS, USAGE INSTRUCTIONS AND SAFETY PRECAUTIONS. MEMBRANE ROLLS ARE TO BE LEFT IN THEIR UNOPENED PACKAGING UNTIL IMMEDIATELY PRIOR TO USE.

.2 PROTECT MEMBRANES FROM CUTS, ABRASION OR OTHER ABUSE THAT MIGHT ADVERSELY AFFECT PERFORMANCE IN SERVICE.

.3 WHIMS SAFETY BULLETINS ON ALL HAZARDOUS PRODUCTS ARE TO BE READILY AVAILABLE TO THE WORK CREW AT ALL TIMES.

.4 ADHESIVES, SEALANTS AND FLASHING ACCESSORIES ARE TO BE STORED IN A CLEAN, DRY AREA AT A TEMPERATURE BETWEEN 5°C AND 27°C. IF EXPOSED TO A LOWER TEMPERATURE, RESTORE TO AN ACCEPTABLE LEVEL BEFORE USING.

.5 DO NOT WORK DURING PERIODS OF RAIN, FOG, SLEET, SNOW OR COLD TEMPERATURES (BELOW - 15°C).

.6 ENSURE INSULATION AND MEMBRANE FASTENERS WILL NOT DAMAGE OR PENETRATE UNDER DECK WIRES,CONDUITS,PIPES ETC.

1.7 WARRANTY:

.1 CONTRACTOR SHALL ENTER PRE-INSTALLATION NOTICE WITH FIRESTONE IN WRITING A MINIMUM OF TWO WEEKS PRIOR TO JOB START THAT A WARRANTY HAS BEEN REQUESTED FOR THIS PROJECT AND THE PROBABLE START DATE OF ROOFING WORK.

.2 ROOFING SYSTEM SUPPLIER SHALL PROVIDE A WRITTEN WATERTIGHT WARRANTY ON SUPPLIER'S STANDARD FORM FOR A PERIOD OF 20 YEARS FROM THE DATE OF ROOFING SYSTEM COMPLETION.

.3 ROOFING CONTRACTOR SHALL PROVIDE A WRITTEN WARRANTY AGAINST LEAKS OR WORKMANSHIP DEFECTS FOR A PERIOD OF 5 YEARS FROM THE DATE OF ROOFING SYSTEM COMPLETION.

2.0 PRODUCTS

2.1 SUBSTITUTIONS:

.1 PRODUCT SUBSTITUTIONS MUST BE APPROVED IN ADVANCE BY BOTH THE SPECIFIER AND THE ROOFING SYSTEM SUPPLIER TO VERIFY COMPATIBILITY AND ACCEPTABILITY. THE MANUFACTURER OF THE SUBSTITUTE PRODUCT MUST SPECIFICALLY RECOMMEND THEIR PRODUCT FOR THIS TYPE OF APPLICATION.

2.2 VAPOUR RETARDER:

.1 MINIMUM 10 MIL THICK POLYETHYLENE VAPOUR RETARDER MEETING CGSB 51-34-M86 AND WITH A MOISTURE VAPOUR TRANSMISSION RATE LESS THAN 2.4 NG/PAS M2 (0.04 PERMS) WHEN TESTED IN ACCORDANCE WITH ASTM E-96, PROCEDURE B.

2.3 INSULATION FASTENERS:

.1 STRUCTURAL STEEL OR WOOD DECKS: INSULATION SECUREMENT SCREWS ARE TO BE FACTORY MUTUAL LISTED AND APPROVED #12 DIAMETER WITH ROUND OR FLAT HEAD, CORROSION TREATED TO WITHSTAND 30 CYCLES OF THE KESTERNICH TEST WITH ONLY A MINIMUM AMOUNT OF RED RUST SHOWING. FASTENER MUST BE OF SUFFICIENT LENGTH TO PENETRATE PLATE, INSULATION, VAPOUR RETARDER, EXISTING ROOF AND STRUCTURAL [STEEL OR PLYWOOD DECK A MINIMUM OF 13 MM (0.5"); WOOD PLANK A MINIMUM OF 38 MM (1.5").

.2 ACCEPTABLE PRODUCT FOR WOOD OR METAL DECKS:FIRESTONE PRE-ASSEMBLED INSULATION FASTENERS TREATED WITH CX-5 COATING, COMPLETE WITH METAL STRESS PLATE.

A. INSULATION

1. PROVIDE OVERALL THERMAL RESISTANCE FOR ROOFING SYSTEM AS FOLLOWS

a. MINIMUM R-VALUE: 27.7.

2. INSTALL USING A MINIMUM OF TWO LAYERS. CONFIGURATION AS INDICATED ON THE DRAWINGS.

2.5 ROOFING MEMBRANE SYSTEM:

.1 MEMBRANE: WHITE, 1.5 MM THICK POLYESTER SCRIM REINFORCED ULTRAPLY TPO MEMBRANE MEETING THE PHYSICAL CHARACTERISTICS SPECIFIED IN MANUFACTURERS "MECHANICALLY FASTENED FIRESTONE ULTRAPLY TPO ROOF SYSTEM SPECIFICATIONS. MINIMUM SOLAR REFLECTIVE INDEX (SRI) VALUES FOR LOW SLOPED ROOF (< 2:12) TO BE: INITIAL SRI VALUE: 82; 3 YEAR AGED SRI VALUE: 64.

.2 PERIMETER SHEETS: ULTRAPLY TPO MEMBRANE SHEETS AS DESCRIBED IN 2.2.1, WIDTH LIMITED AS REQUIRED BY MANUFACTURER.

.3 PARAPET / WALL FLASHING: ULTRAPLY TPO MEMBRANE AS DESCRIBED IN 2.2.1, CUT TO APPROPRIATE WIDTHS AND LENGTHS.

.4 CORNER & PROTRUSION FLASHING: ULTRAPLY TPO NON-REINFORCED FLASHING.

.5 MEMBRANE CLEANER: ULTRAPLY TPO SEAM CLEANER.

.6 CUT MEMBRANE EDGE SEALANT: ULTRAPLY TPO CUT EDGE SEALANT.PACKAG

.7 MEMBRANE FASTENERS: STEEL OR WOOD DECKS:MEMBRANE FASTENERS (PRE-ASSEMBLED OR LOOSE), TREATED WITH CX-5 COATING AND COMPLETE WITH 60 MM (2-3/8") DIAMETER BARBED LAP PLATE. FASTENER MUST BE OF SUFFICIENT LENGTH TO PENETRATE PLATE, MEMBRANE, INSULATION, VAPOUR RETARDER, EXISTING ROOF AND STRUCTURAL [STEEL OR PLYWOOD DECK A MINIMUM OF 13 MM (0.5"); WOOD PLANK A MINIMUM OF 38 MM (1.5")].

.8 BONDING ADHESIVES: ULTRAPLY TPO BONDING ADHESIVE.

.9 WATER CUT-OFF MASTIC: ULTRAPLY TPO GENERAL PURPOSE SEALANT.

.10 POURABLE SEALER: ULTRAPLY TPO GENERAL PURPOSE SEALANT.

.11 TERMINATION SEALER TAPE: ULTRAPLY TERMINATION SEALER TAPE.

.12 TERMINATION BAR: FIRESTONE TERMINATION BAR.

.13 PIPE / CONDUIT FLASHINGS: ULTRAPLY TPO PRE-FORMED PIPE BOOTS OR SPLIT PIPE BOOTS.

.14 IRREGULAR ROOF PROTRUSIONS: ULTRAPLY TPO GENERAL PURPOSE SEALANT.

.15 TRAFFIC PADS: ULTRAPLY TPO PREMIUM WALKWAY PADS OR X-TREDS

2.6 WOOD NAILERS:

.1 WOOD NAILERS SHALL BE NEW, #2 WOOD OR BETTER WOOD, FACTORY TREATED FOR ROT RESISTANCE. CREOSOTE OR ASPHALT TREATED WOOD IS NOT ACCEPTABLE. NAILERS ARE REQUIRED AT ALL ROOF EDGES OR GRAVEL STOPS AND SHALL BE INSTALLED SO THAT THE TOP IS FLUSH WITH THE TOP OF THE MEMBRANE UNDERLAYMENT, ± 5 MM (1/4").

2.7 FLASHING:

.1 REFER TO SECTION 076000 - SHEET METAL FLASHING.

2.8 FLASHING ACCESSORIES:

.1 HVAC & ELECTRICAL FLASHINGS : TO BE FABRICATED FROM SEAMLESS SPUN ALUMINIUM, COMPLETE WITH PRIMER COATED FLANGES. USE APPROPRIATE FLASHING FOR EACH APPLICATION.

2.9 ROOF DRAINS:

.1 TO SUIT ROOFING. REFER TO MECHANICAL.

~~2.10 ROOF HATCH:~~

~~.1 30" X 36" BILCO TYPE S ROOF HATCH. 14 GA. PRIMER COATED GALVANIZED STEEL COMPLETE WITH 75MM BEADED FLANGE, NEATLY WELDED. INSULATION TO BE 25MM GLASS FIBRE FULLY COVERED BY PRIMER COATED METAL LINER - 22 GA. THICKNESS. PROVIDE 300MM HIGH 14 GA. PRIMER COATED GALVANIZED STEEL CURB COMPLETE WITH INTEGRAL CAP FLASHING. HATCH SHALL BE COMPLETELY ASSEMBLED WITH HEAVY DUTY PINTLE HINGES, TORSION BAR OPERATED DOORS, NEOPRENE DRAFT SEAL, LATCHING MECHANISM, PADLOCK HASP AND AN AUTOMATIC HOLD-OPEN HANDLE WITH RUBBER GRIP. ALL HARDWARE SHALL BE CADMIUM PLATED. SAFETY BAR: 35 MM DIAMETER SAFETY BAR COATED WITH 20 MIL PVC, COLOR COATED ROOF SAFETY GREEN. SAFETY BAR SHALL BE MOUNTED ON THE RIGHT CORNER OF HATCH CURB WITHOUT IMPEDING DOOR OPERATION.~~

2.11 KITCHEN EXHAUST VENTS:

.1 REFER TO MECHANICAL.

2.12 SUPPORTS:

.1 REFER TO MECHANICAL FOR PIPING, DUCTING, ETC. SUPPORTS.

.2 REFER TO ROOF DETAILS ON DRAWINGS FOR SLEEPER DETAILS.

3.0 EXECUTION

3.1 INSTALLATION:

.1 ONLY INSTALL AS MUCH VAPOUR RETARDER AND INSULATION AS CAN BE COMPLETELY AND PROPERLY COVERED BY THE WATERPROOFING MEMBRANE BY THE END OF EACH WORK PERIOD.

.2 COMPLY WITH CURRENT FIRESTONE PUBLISHED INSTALLATION INSTRUCTIONS AND DETAILS THROUGHOUT THE ROOFING MEMBRANE INSTALLATION.

.3 THERE SHALL BE NO SMOKING BY ANY PERSONNEL WHILE ON THE ROOF. PROTECT THE ROOF MEMBRANE AT ALL TIMES FROM HIGH HEAT SOURCES SUCH AS CIGARETTE BUTTS OR SPARKS FROM NEARBY WELDING.

3.2 INSPECTION:

.1 EXAMINE ROOF DECK TO VERIFY PROPER PLACEMENT OF ALL ROOF OPENINGS, PIPES, CURBS, SLEEVES, DUCTS, VENTS AND DRAINS. ENSURE ALL WOOD BLOCKING IS INSTALLED WHERE REQUIRED. ENSURE ROOF DECK IS CLEAN, DRY AND FREE FROM DEBRIS THAT MIGHT BE DETRIMENTAL TO THE PERFORMANCE OF THE VAPOUR RETARDER, INSULATION OR MEMBRANE.

3.3 VAPOUR RETARDER & NAILER INSTALLATION:

.1 INSTALL VAPOUR RETARDER MEMBRANE ACCORDING TO THE VAPOUR RETARDER SUPPLIER'S INSTALLATION INSTRUCTIONS. ENSURE VAPOUR RETARDER MEMBRANE IS COMPLETELY SEALED TO ALL ROOF PROTRUSIONS AND AROUND THE PERIMETER.

.2 FASTEN NAILERS WHERE SHOWN ON THE SHOP DRAWINGS. WOOD NAILERS SHALL BE FASTENED TO RESIST A MINIMUM FORCE OF 300 KG/M IN ANY DIRECTION.

3.4 INSULATION INSTALLATION:

.1 POSITION THE APPROVED INSULATION PANELS WITH THEIR LONGEST DIMENSION PERPENDICULAR TO THE DIRECTION OF THE MEMBRANE SEAMS AND WITH THEIR ENDS STAGGERED. ON FLUTED STEEL DECKS, THE LONGER DIMENSION OF THE INSULATION PANELS SHOULD RUN PARALLEL WITH THE FLUTES. PANELS ARE TO BE BUTT-EDGED TIGHTLY TOGETHER WITH A MAXIMUM SPACE BETWEEN PANELS OF 5/64". VOIDS IN THE INSULATION ARE TO BE FILLED WITH FIRESTONE SEALANT OR ANOTHER COMPATIBLE FILLER. INSULATION INSTALLED IN MULTIPLE LAYERS SHALL HAVE ALL EDGES STAGGERED FROM THE ADJACENT LAYER. INSULATION THAT HAS BECOME DAMAGED IN ANY WAY, INCLUDING FACER DELAMINATION OR COLLAPSE, SHALL BE CUT OUT AND REPLACED WITH STRUCTURALLY SOUND INSULATION.

.2 ALL INSULATION PANELS MUST BE MECHANICALLY ATTACHED TO THE STRUCTURAL DECK WITH FIRESTONE INSULATION FASTENERS AS PER MANUFACTURER MINIMUM REQUIREMENTS. REFER TO MANUFACTURERS SPECIFICATIONS.

.3 FASTENERS MUST BE A MINIMUM OF 15 CM (6") FROM INSULATION PANEL'S EDGE. BOARDS MUST CONFORM TO THE DECK SURFACE. IRREGULAR SURFACES WILL REQUIRE ADDITIONAL FASTENERS. IF THE INSULATION MANUFACTURER'S FASTENING REQUIREMENTS EXCEED THOSE OF FIRESTONE, THEY MUST BE USED IN LIEU OF FIRESTONE'S .

3.5 POSITIONING & FASTENING OF MEMBRANE:

.1 THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE SUITABILITY OF THE SUBSTRATE SURFACE TO ACCEPT THE MEMBRANE. ENSURE INSULATION SURFACE OR SUBSTRATE IS CLEAN, FLAT AND FREE FROM DIRT, DEBRIS OR SHARP OBJECTS THAT MIGHT BE DETRIMENTAL TO THE PERFORMANCE OF THE MEMBRANE.

.2 MEMBRANE SHEETS SHALL BE INSTALLED IN ACCORDANCE WITH FIRESTONE REQUIREMENTS - REFER TO MANUFACTURERS SPECIFICATIONS & FACTORY MUTUAL. IF USING FIRESTONE REQUIREMENTS, PERIMETER SHEETS MUST BE FASTENED IN A PICTURE FRAME PATTERN AROUND THE PERIMETER. FIELD SHEETS SHALL BE INSTALLED PERPENDICULAR TO THE UNDERLYING INSULATION'S GREATER DIMENSION AND, IF ON A STEEL DECK, PERPENDICULAR TO THE FLUTE DIRECTION UNLESS THE DECK SLOPE EXCEEDS 3:1, WHEREUPON THE FIELD SHEETS MUST BE INSTALLED PERPENDICULAR TO THE SLOPE.

.3 UNROLL MEMBRANE SHEETS AND POSITION ACCORDING TO THE APPROVED SHOP DRAWINGS. OUTSIDE PERIMETER SHEETS SHALL BE BROUGHT FLUSH TO THE BASE OF THE PERIMETER PARAPET OR WALL, OR IN THE CASE OF A ROOF EDGE, EXTEND OVER THE OUTSIDE EDGE A MINIMUM OF 75 MM (3"). ADJOINING SHEETS ARE TO OVERLAP A MINIMUM OF 140 MM (5.5") ON SIDES AND WHEREVER FASTENERS ARE INCLUDED WITHIN THE SEAM. END LAPS WITHOUT FASTENERS ARE TO BE LAPPED A MINIMUM OF 6 CM (2"). EXTEND MEMBRANE UP AND OVER A PARAPET WALL OR A ROOF EDGE & SECURE IT ALONG THE PERIMETER EDGE USING THE STRIPBOND™ METHOD OF PERIMETER SECUREMENT.

.4 FIRESTONE MEMBRANE FASTENERS FOR THE TYPE OF DECK ARE TO BE FASTENED 50 MM (2") IN FROM THE SIDE EDGE OF BOTH PERIMETER AND FIELD MEMBRANE SHEETS, ON MAXIMUM 305 MM (12") CENTRES. FASTENER PLATES AND HEADS SHALL BE FLUSH WITH THE MEMBRANE AND SHALL PENETRATE THE MEMBRANE, INSULATION (EXISTING ROOF, IF APPLICABLE) AND STRUCTURAL DECK ACCORDING TO THE SPECIFIC REQUIREMENTS OF THE TYPE OF FASTENER. DO NOT OVERDRIVE FASTENERS TO THE POINT WHERE THE MEMBRANE PLATE IS DEFORMED.

.5 EACH MEMBRANE SHEET SHALL BE COMPLETELY FASTENED BEFORE PROCEEDING TO THE NEXT SHEET.

3.6 SPLICING MEMBRANE SHEETS:

.1 FIELD SEAMS MUST BE WELDED WITH AN AUTOMATIC HOT AIR WELDER OPERATED BY AN INDIVIDUAL THOROUGHLY TRAINED AND COMPETENT IN THE MACHINE'S OPERATION. SMALL WORK AND REPAIRS CAN BE DONE EFFICIENTLY WITH A HAND WELDER, HOWEVER, HAND-HELD WELDERS ARE NOT AN ACCEPTED MEANS OF FIELD SEAMING.

.2 HOT AIR WELD ALL SEAMS A MINIMUM OF 38 MM (1.5") WIDE.

.3 DIRTY, DUSTY OR CONTAMINATED MEMBRANE OR MEMBRANE EXP FOR MORE THAN SEVEN DAYS PRIOR TO WELDING MUST BE CLEANI TPO WEATHERED MEMBRANE CLEANER. WITH A CLEAN SCRUB PAI SATURATED WITH TPO WEATHERED MEMBRANE CLEANER, AGGRE SCRUB THE SEAM AREA OF THE ROOF MEMBRANE. FOLLOW WITH A ONE SWIPE PASS, BEING CAREFUL NOT TO RE-DEPOSIT CONTAMINA BACK ONTO THE CLEANED AREA. ENSURE THAT THE CLEANER AND ADJACENT BONDING ADHESIVE HAS COMPLETELY FLASHED OFF BE WELDING. FOLLOW STANDARD WELDING PROCEDURES WITH A 20% REDUCTION IN SPEED.

.4 ALL SPLICES ARE TO BE PROBED ALONG THEIR ENTIRE LENGTH W SEAM PROBING TOOL TO VERIFY THAT THE WELDER IS OPERATING EFFECTIVELY. THE MEMBRANE MUST BE ALLOWED TO COOL PRIOR TESTING. IN ADDITION, THERE SHOULD BE A DESTRUCTIVE PEEL ST TEST PERFORMED AT THE START OF EACH DAY AND EACH TIME THE WELDER IS REUSED AFTER BEING ALLOWED TO COOL. THE DESTRU TEST SAMPLE SHOULD BE 5 CM (2") WIDE AND SHOULD SHOW MEME DELAMINATION FROM THE SCRIM PRIOR TO WELD FAILURE.

.5 CUT MEMBRANE EDGES SHALL BE SEALED BY APPLYING TPO CUT SEALANT ALONG THE EXPOSED EDGE.

3.7 PERIMETER FLASHING & SECUREMENT:

.1 INSTALL THE [ROOF EDGE SYSTEM; GRAVEL STOP; DRIP EDGE] ACCORDING TO AN APPROVED MANUFACTURER'S DETAIL AND IN ACCORDANCE WITH THE MANUFACTURER'S DIRECTIONS. NAILERS REQUIRED AT ALL ROOF EDGES, GRAVEL STOPS OR DRIP EDGES.

.2 DIRECT FASTENER PERIMETER SECUREMENT METHOD: ULTRAPL MEMBRANE SHALL BE BROUGHT FLUSH TO ROOF EDGES, PARAPET WALLS, EXPANSION JOINTS, CURBS AND ALL OTHER ROOF PENETR THAT EXCEED 60 CM (24") IN ANY DIMENSION AND BE MECHANICALL FASTENED PARALLEL TO THE PERIMETER THROUGH THE INSULATIC VAPOUR RETARDER [EXISTING ROOFING] TO THE STRUCTURAL DEC CM (12") CENTRES WITH MEMBRANE FASTENERS AND PLATES. THE PERIMETER FASTENER ROW SHALL BE CENTRED NO FURTHER THAI (6") FROM THE PERIMETER.

.3 ULTRAPLY QUICKSEAM REINFORCED PERIMETER FASTENING (RFF UNROLL THE ULTRAPLY QUICKSEAM REINFORCED PERIMETER FAST STRIP (UPQSRPF STRIP) WITH THE RELEASE PAPER UP AND THE TA PORTION FARTHEST AWAY FROM THE WALL OR PENETRATION. ANC UPQSRPF STRIP USING HEAVY DUTY OR HEAVY DUTY PLUS SEAM P AND FASTENERS 12" (305MM) O.C. MAXIMUM PER CURRENT BASE TI DETAILS. POSITION ULTRAPLY TPO MEMBRANE OVER UPQSRPF ST RELEASE PAPER IN PLACE AND ALLOW MEMBRANE TO RELAX. FOLD ULTRAPLY TPO MEMBRANE TO EXPOSE THE TAPE. PRIME THE ULTF TPO TO BE SPLICED TO THE TAPE USING ULTRAPLY QUICKPRIME AN QUICKSCRUBBER OR QUICKSCRUBBER PLUS PAD AND HANDLE PER CURRENT PROCEDURES. USE TOUCH-PUSH TEST TO DETERMINE W THE ULTRAPLY QUICKPRIME IS READY TO BE MATED WITH THE TAPI REMOVE THE RELEASE PAPER. ROLL THE PRIMED ULTRAPLY TPO MEMBRANE INTO THE TAPE. THE PORTION OF THE UPQSRPF WITHC MAY BE BONDED TO THE MEMBRANE USING ULTRAPLY BONDING AD OR WATER-BASED BONDING ADHESIVE. ROLL THE ULTRAPLY TPO MEMBRANE OVER THE UPQSRPF STRIP WITH A 1 ½" (51MM) WIDE SIL HAND ROLLER TO ENSURE PROPER ADHESION. REFER TO INSTALL INSTRUCTIONS FOR SPECIFICS

.4 REINFORCED FLASHING MEMBRANE SHALL BE EXTENDED UP ALL WALLS, CURBS, ROOF EDGES, ETC. IF USING THE DIRECT FASTENE METHOD OF PERIMETER SECUREMENT, THE FLASHING MEMBRANE EXTEND A MINIMUM OF 51 MM (2") BEYOND THE PERIMETER FASTEN PLATES OUT ONTO THE FLAT AREA OF THE ROOF.

.5 WHERE REQUIRED, ENHANCED SECUREMENT IN PERIMETER AREA BE ACHIEVED BY SECURING THE MEMBRANE UNDER COVER STRIPS WITH DOUBLE P.S. STRIPBOND STRIPS.

.6 ADHERING ULTRAPLY TPO TO CONCRETE, WOOD, METAL OR ACCI INSULATIONS: FLASHING MEMBRANE IS TO BE FULLY BONDED TO A VERTICAL WALLS AND PARAPETS. APPLY TPO BONDING ADHESIVE ROLLER TO THE UNDERSIDE OF THE FLASHING MEMBRANE AND TO SUBSTRATE AT THE NET COVERAGE RATE OF 5.7 M2 (60 SQ.FT.) / GA DO NOT APPLY THE BONDING ADHESIVE TO AREAS ON THE MEMBRA THAT ARE TO BE HEAT WELDED. APPLY ADHESIVE EVENLY, WITHOU OR PUDDLES. ALLOW THE ADHESIVE TO FLASH-OFF UNTIL IT IS TAC DOES NOT STRING WHEN TOUCHED WITH A DRY FINGER. ROLL THE MEMBRANE ONTO THE SUBSTRATE, BEING CAREFUL NOT TO WRINK MEMBRANE OR BRIDGE IT AT THE VERTICAL / HORIZONTAL JUNCTUF (CREASE THE MEMBRANE FIRST). BRUSH THE MEMBRANE HEAVILY PUSH BROOM TO ASSURE COMPLETE CONTACT OVER ALL BONDED

.7 UNLESS APPROVED DETAIL SHOWS OTHERWISE, MEMBRANE MUS TERMINATE IN A REGLET, BE FASTENED ACCORDING TO PARAGRAP BELOW, OR BE CARRIED OVER TOP OF WALL OR PARAPET AND COUNTER-FLASHED WITH SHEET METAL OR A STONE CAP. ALL MET WORK MUST BE INSTALLED TO BE WIND RESISTANT AND SEALED AN WATERPROOFED IN AN ACCEPTABLE MANNER.

.8 IF TERMINATING MEMBRANE PART WAY UP A WALL OR PARAPET, A TERMINATION SEALER TAPE TO BACKSIDE OF MEMBRANE EDGE. PI MEMBRANE AGAINST WALL AND ROLL WITH A STEEL HAND ROLLER. TERMINATION BAR ALONG THE UPPER EDGE OF THE MEMBRANE IN WALL, USING APPROPRIATE FASTENERS ON 15 CM (6") CENTRES. A PURPOSE SEALANT ALONG UPPER EDGE OF BAR AND OVER TOP OF FASTENER HEADS.

3.8 PROTRUSION & CORNER FLASHINGS:

.1 INSTALL PRE-FORMED METAL FLASHINGS, DRAIN HOPPERS ETC. ACCORDING TO THE MANUFACTURER'S INSTALLATION INSTRUCTIO EXISTING FLASHINGS MUST BE THOROUGHLY CLEANED OF ALL CONTAMINANTS OR REPLACED WITH NEW FLASHINGS. DO NOT FLA LEAD.

.2 FLASH ALL CORNERS, VENT PIPES, POSTS, CURBS AND PRE-FORM FLASHINGS IN STRICT ACCORDANCE WITH CURRENT FIRESTONE INSTALLATION INSTRUCTIONS AND DETAILS. USE ADHESIVES AND SEALANTS IN CONJUNCTION WITH PRE-MOLDED FLASHINGS, INSTAL ACCORDANCE WITH INSTALLATION REQUIREMENTS AND DETAILS. APPLY ADHESIVES TO AREAS ON THE FLASHING THAT ARE TO BE SI SEAM AS PER SECTION 3.5 ABOVE.

.3 ALL FLASHING SHALL BE MECHANICALLY FASTENED AT THE TOP, OR THROUGH APPROPRIATE COUNTERFLASHING WITH APPROVED FASTENERS AND IN ACCORDANCE WITH MANUFACTURERS DETAILS

.4 MEMBRANE CONNECTIONS TO DRAINS ARE TO BE SEALED WITH A PURPOSE SEALANT OR TERMINATION SEALER TAPE AND CLAMPED CLAMPING RING TO ASSURE A 100% CONTINUOUS SEAL, AS PER MANUFACTURER DETAILS. FIELD SEAMS SHALL NOT RUN THROUGH

3.9 TRAFFIC WALKWAYS

.1 ENSURE MEMBRANE TO RECEIVE TRAFFIC PADS IS CLEAN AND DR THE MEMBRANE IS NOT CLEAN AND DRY, FOLLOW THE STEPS IN SE 3.5.3 BEFORE PROCEEDING WITH THE REMAINDER OF THIS SECTION

.2 POSITION THE WALKWAY PAD AND CUT TO DESIRED LENGTH. WHI POSSIBLE, WALKWAY PAD SHALL NOT COVER SEAMS. WHEN INSTAI ADJACENT TO A SEAM, THE PAD SHOULD BE KEPT A MINIMUM 50 MM FROM THE EDGE OF THE SEAM ON THE BOTTOM SHEET AND 15 CM AWAY FROM THE EDGE OF THE SEAM ON THE TOP SHEET. WHEN CO SEAMS IS UNAVOIDABLE, THE LAP SEAM SHOULD BE COMPLETED PI SECTION 3.5 ABOVE AND THOROUGHLY PROBED, WITH ANY DEFICIE CORRECTED PRIOR TO PAD INSTALLATION. WHERE DRAINAGE ARO PADS IS DESIRED, CUT PADS TO A UNIFORM LENGTH AND SPACE TH SECTIONS 50 MM (2") APART.

.3 WELD THE PERIMETER OF THE WALKWAY PAD TO THE MEMBRANE FOLLOWING STANDARD WELDING PROCEDURES. LEAVE 25 MM TO TO 2") GAPS IN THE WELD ON THE LOW SLOPE EDGE EVERY 60 CM (PREVENT THE ACCUMULATION OF WATER UNDER THE PAD.

3.10 TEMPORARY NIGHT SEAL:

.1 AT THE END OF EACH DAY OR AT THE THREAT OR ONSET OF INCLE WEATHER, THE INSULATION SHALL BE PROTECTED BY EXTENDING MEMBRANE BEYOND THE INSULATION AND SEALING IT TO THE DECK MANUFACTURER NIGHT SEALANT OR ANOTHER APPROVED TEMPOF SEALANT. ENSURE MEMBRANE EDGE IS EITHER MECHANICALLY FA OR SUFFICIENTLY BALLASTED TO PROTECT AGAINST WIND UPLIFT.

.2 WHEN RESUMING WORK, CUT AND DISPOSE OF PORTION OF MEME CONTAMINATED WITH THE NIGHT SEALANT.

3.11 CLEAN-UP

.1 REMOVE ALL CUT PIECES, WRAPPINGS, WASTE AND DEBRIS FROM JOB SITE.

.2 ENSURE THAT THE MEMBRANE IS CLEANED OF ALL SPILLED ADHE OR RESIDUES AND PRESENTS AN AESTHETICALLY ATTRACTIVE APPEA

3.12 WARRANTY INSPECTION:

.1 UPON COMPLETION OF THE ROOFING SYSTEM, AN AUTHORIZED FIRESTONE REPRESENTATIVE WILL MAKE AN INSPECTION OF THE INSTALLATION FOR WARRANTY ACCEPTANCE.

3.13 SCUPPERS:

.1 PROVIDE PRE-FINISHED METAL SCUPPERS, TO MATCH METAL FLU AT LOCATIONS AND AS DETAILED ON DRAWINGS.

.2 MOP ROOF FELTS INTO SCUPPERS TO FORM WATERTIGHT PENETI THROUGH PARAPET WALL.

END OF SECTION 07 50 00

ISSUE TABLE

No.	Date (mm/dd/yy)	Description
01	09-26-25	DTGO PROTOTYPE DOCUMENTS

REVISIONS

No.	Date	Description

DRAWINGS REVISED AS PER DESIGN BULLETIN

No.	Date	Description

THIS DRAWING IS OWNED BY OR LICENSED FOR USE BY POPEYES LOUISIANA KITCHEN (OR ITS AFFILIATED OR RELATED COMPANIES) AND MAY NOT BE REPRODUCED, USED, DOWNLOADED, DISSEMINATED, PUBLISHED, OR TRANSFERRED IN ANY FORM OR BY ANY MEANS, EXCEPT WITH THE PRIOR WRITTEN CONSENT OF POPEYES LOUISIANA KITCHEN . COPYRIGHT INFRINGEMENT IS A VIOLATION OF FEDERAL LAW SUBJECT TO CRIMINAL AND CIVIL PENALTIES.

THE CONTRACTOR IS TO VERIFY ALL DIMENSIONS AND CONDITIONS ON THE PROJECT AND TO REPORT ANY DISCREPANCIES TO THE POPEYES LOUISIANA KITCHEN REPRESENTATIVE PRIOR TO COMMENCING WORK. THESE DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION PURPOSES UNLESS INDICATED BY POPEYES LOUISIANA KITCHEN AS "ISSUED FOR CONSTRUCTION".

Professional Seal

DESIGNER NOTES:
DESIGN GUIDELINE ONLY - NOT FOR PERMIT OR CONSTRUCTION

THESE DOCUMENTS MUST BE COMPLETED AND / OR MODIFIED BY A LICENSED ARCHITECT AND ENGINEER TO CONFORM TO ALL APPLICABLE CODES, AND SPECIFIC SITE CONDITIONS. THERE IS NO WARRANTY, WHETHER IMPLIED OR EXPRESSED THAT THESE DOCUMENTS MEET THE APPLICABLE CODE REQUIREMENTS. LIABILITY FOR THE DESIGN AND ANY USE OF THE DOCUMENTS IS THE SOLE RESPONSIBILITY OF THE ARCHITECT AND ENGINEER OF RECORD.

Company Logo

Project

LOUISIANA 19 72 KITCHEN
POPEYES

Store Type: US DTGO PROTOTYPE

Location: PROTOTYPE DTGO (U.S.) CITY, STATE

Drawing Title: ARCHITECTURAL SPECIFICATIONS

Drawn	Checked
XX	XX

Scale	Date
	##.##.####

Project No.	Drawing No.
XX	SP4

POPEYES LOUISIANA KITCHEN MODEL DTGO, ADDRESS, CITY, STATE: DTGO PROTOTYPE DOCUMENTS (OCTOBER, 2025) STORE NO. XXXXX

SHEET METAL FLASHING AND TRIM SECTION 07 62 00

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. DRAWINGS AND GENERAL PROVISIONS OF CONTRACT APPLY TO THIS SECTION.

PART 2 - PRODUCTS

2.1 MANUFACTURER'S

A. COUNTER FLASHINGS: FRY REGLET: TYPE M-A MASONRY SPRINGLOCK FLASHING OR CHENEY: TYPE B, SNAPLOCK SYSTEM OR O'KEEFFE'S, INC.: TYPE MI, MASONRY REGLET.

B. PARAPET CAP/COPINGS: PAC-CLAD PETERSON ALUMINUM; PAC-CONTINUOUS CLEAT COPING.

C. VENTED SOFFIT: DIMENSIONAL METALS, INC. OR PETERSON ALUMINUM CORPORATION OR ATLAS ALUMINUM, INC.

2.2 SHEET METAL FLASHING AND TRIM MATERIALS

A. ZINC-COATED STEEL: COMMERCIAL QUALITY WITH 0.20 PERCENT COPPER, ASTM A526, EXCEPT ASTM A527 FOR LOCK FORMING, G90 HOT-DIPPED GALVANIZED, MILL PHOSPHATISED WHERE INDICATED FOR PAINTING.

B. MATERIAL GAUGES TO BE AS FOLLOWS:

4. METAL FLASHING: 26 GA.

5. METAL CAP/COPING: 24 GA.

6. MISCELLANEOUS TRIM: 24 GA.

7. LOUVER RAIN HOODS: 22 GA.

C. ALL FLASHINGS AND COPINGS TO BE SELF-LOCKING WITH PERMANENT HOLD-DOWN CLIPS. ALL EXPOSED EDGES TO BE HEMMED.

D. ALL EXPOSED METALS SHALL BE PRE-FINISHED IN "KYNAR 500" AND SHALL HAVE A 20 YEAR LIMITED PAINT WARRANTY. COLOR: AS INDICATED ON DRAWINGS OR AS CHOSEN BY ARCHITECT FROM MANUFACTURER'S STANDARD SELECTION.

2.3 MISCELLANEOUS MATERIALS AND ACCESSORIES

A. SOLDER: FOR USE WITH STEEL OR COPPER, PROVIDE 50-50 TIN/LEAD SOLDER (ASTM B32), WITH ROSIN FLUX.

B. FASTENERS: SAME METAL AS FLASHING /SHEET METAL OR OTHER NON-CORROSIVE METAL AS RECOMMENDED BY SHEET MANUFACTURER. MATCH FINISH OF EXPOSED HEADS WITH MATERIAL BEING FASTENED.

C. BITUMINOUS COATING: SSPC - PAINT 12, SOLVENT TYPE BITUMINOUS MASTIC, NOMINALLY FREE OF SULFUR, COMPOUNDED OF 15 MIL DRY FILM THICKNESS PER COAT.

D. MASTIC SEALANT: POLYISOBUTYLENE; NON-HARDENING, NON-SKINNING, NON-DRYING, NON-MIGRATING SEALANT.

E. ELASTOMERIC SEALANT: GENERIC TYPE RECOMMENDED BY MANUFACTURER OF METAL AND FABRICATED COMPONENTS BEING SEALED AND COMPLYING WITH REQUIREMENTS FOR JOINT SEALANTS AS SPECIFIED IN DIVISION 7 - SEALANTS.

F. EPOXY SEAM SEALER: TWO-PART NON-CORROSIVE METAL SEAM CEMENTING COMPOUND, RECOMMENDED BY THE METAL MANUFACTURER FOR EXTERIOR/INTERIOR NON-MOVING JOINTS INCLUDING RIVETED JOINTS.

G. ADHESIVE: TYPE RECOMMENDED BY FLASHING SHEET MANUFACTURER FOR WEATHERPROOF/WEATHER-RESISTANT SEAMING AND ADHESIVE APPLICATION FOR FLASHING SHEET.

H. PAPER SLIP SHEET: 5-LB. ROSIN - SIZED BUILDING PAPER.

I. POLYETHYLENE UNDERLAYMENT: MINIMUM 6 MIL CARBONATED POLYETHYLENE FILM; RESISTANT TO DECAY WHEN TESTED IN ACCORDANCE WITH ASTM E154.

J. REGLETS: METAL UNITS OF TYPE AND PROFILE INDICATED, COMPATIBLE WITH FLASHING INDICATED, NON-CORROSIVE.

K. METAL ACCESSORIES: PROVIDE SHEET METAL CLIPS, STRAPS, ANCHORING DEVICES, AND SIMILAR ACCESSORY UNITS AS REQUIRED FOR INSTALLATION OF WORK, MATCHING OR COMPATIBLE WITH MATERIAL BEING INSTALLED, NON-CORROSIVE, SIZE, AND GAUGE REQUIRED FOR PERFORMANCE.

L. ELASTIC FLASHING FILLER: CLOSED CELL POLYETHYLENE OR OTHER SOFT CELL MATERIAL RECOMMENDED BY ELASTIC FLASHING MANUFACTURER AS FILLER UNDER FLASHING LOOPS TO ENSURE MOVEMENT WITH MINIMUM STRESS ON FLASHING SHEET.

M. ROOFING CEMENT: ASTM D2822, ASPHALTIC.

2.4 FABRICATED UNITS

A. GENERAL METAL FABRICATION: COMPLY WITH DETAILS SHOWN AND WITH APPLICABLE REQUIREMENTS OF SMACNA "ARCHITECTURAL SHEET METAL MANUAL" AND OTHER RECOGNIZED INDUSTRY PRACTICES. FABRICATE WATERPROOF AND WEATHER RESISTANT PERFORMANCE; WITH EXPANSION PROVISIONS FOR RUNNING WORK, SUFFICIENT TO PERMANENTLY PREVENT LEAKAGE, DAMAGE, OR DETERIORATION OF THE WORK. FORM WORK TO SUBSTRATES. COMPLY WITH MATERIAL MANUFACTURER'S INSTRUCTIONS AND RECOMMENDATIONS FOR FORMING MATERIAL. FORM EXPOSED SHEET METAL WORK WITHOUT EXCESSIVE OIL-CANNING, BUCKLING OR TOOL MARKS, TRUE TO LINE AND LEVELS INDICATED WITH ALL EXPOSED EDGES FOLDED BACK TO FORM SEAMS AND SOLDER.

B. SEAMS: FABRICATE NON-MOVING SEAMS IN SHEET METAL WITH FLAT-LOCK SEAMS. TIN EDGES TO BE SEAMED, FORM SEAMS, AND SOLDER.

C. EXPANSION PROVISIONS: WHERE LAPPED OR BAYONET-TYPE EXPANSION PROVISIONS IN WORK CANNOT BE USED, OR WOULD NOT BE SUFFICIENTLY WATER/WEATHERPROOF, FORM EXPANSION JOINTS OF INTERMESHING HOOKED FLANGES, NOT LESS THAN 1 INCH DEEP, FILLED WITH MASTIC SEALANT (CONCEALED WITH JOINT).

D. SEALANT JOINTS: WHERE MOVABLE, NON-EXPANSION TYPE JOINTS ARE INDICATED OR REQUIRED FOR PROPER PERFORMANCE OF WORK, FORM METAL TO PROVIDE FOR PROPER INSTALLATION OF ELASTOMERIC SEALANT, IN COMPLIANCE WITH SMACNA STANDARDS.

E. SEPARATIONS: PROVIDE FOR SEPARATION OF METAL FROM NONCOMPATIBLE METAL OR CORROSIVE SUBSTRATE BY COATING CONCEALED SURFACES AT LOCATIONS OF CONTACT, WITH BITUMINOUS COATING OR OTHER PERMANENT SEPARATION AS RECOMMENDED BY THE MANUFACTURER/FABRICATOR.

PART 3 - EXECUTION

3.1 INSTALLATION

A. GENERAL: UNLESS OTHERWISE INDICATED, COMPLY WITH THE MANUFACTURER'S INSTRUCTIONS AND RECOMMENDATIONS, AND WITH SMACNA "ARCHITECTURAL SHEET METAL MANUAL". ANCHOR UNITS OF WORK SECURELY IN PLACE BY METHODS INDICATED, PROVIDING FOR THERMAL EXPANSION OF METAL UNITS; CONCEAL FASTENERS WHERE POSSIBLE, SET UNITS TRUE TO LINE AND LEVEL AS INDICTED. INSTALL WORK WITH LAPS, JOINTS, AND SEAMS TO BE PERMANENTLY WATERTIGHT
AND WEATHERPROOF.

B. UNDERLAYMENT: WHERE STAINLESS STEEL OR ALUMINUM IS TO BE INSTALLED DIRECTLY ON CEMENT OR WOOD SUBSTRATES, INSTALL A SLIP SHEET OF RED ROSIN PAPER AND A COURSE OF POLYETHYLENE UNDERLAYMENT.

C. BED FLANGES OF WORK IN A THICK COAT OF BITUMINOUS ROOFING CEMENT WHERE REQUIRED FOR WATERPROOF PERFORMANCE.

D. INSTALL REGLETS TO RECEIVE COUNTERFLASHING IN A MANNER AND BY METHODS INDICATED. WHERE SHOWN IN CONCRETE, FURNISH REGLETS TO TRADES OF CONCRETE WORK FOR INSTALLATIONS WORK OF DIVISION 3. WHERE SHOWN IN MASONRY, FURNISH REGLETS TO TRADES OF MASONRY WORK, FOR INSTALLATION AS WORK OF DIVISION 4.

1. INSTALL COUNTERFLASHING IN REGLETS, EITHER BY SNAP-IN SEAL ARRANGEMENT, OR BY WELDING IN PLACE OF ANCHORAGE AND FILLING REGLET WITH MASTIC OR ELASTOMERIC SEALANT. AS INDICATED AND DEPENDING ON DEGREE OF SEALANT EXPOSURE.

E. INSTALL ELASTIC FLASHING IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS. WHERE REQUIRED, PROVIDE FOR MOVEMENT AT JOINTS BY FORMING LOOPS OF BELLOWS IN WIDTH OF FLASHING. LOCATE COVER OR FILLER STRIPS AT JOINTS TO FACILITATE COMPLETE DRAINAGE OF WATER FROM FLASHING. SEAM ADJACENT FLASHING SHEETS WITH ADHESIVE, SEAL AND ANCHOR EDGES IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS.

3.2 CLEANING

A. CLEAN EXPOSED METAL SURFACES, REMOVING SUBSTANCES THAT MIGHT CAUSE CORROSION OF METAL OR DETERIORATION OF FINISHES.

B. ADVISE THE CONTRACTOR OF REQUIRED PROCEDURES FOR SURVEILLANCE AND PROTECTION OF FLASHING AND SHEET METAL WORK DURING CONSTRUCTION, TO ENSURE THAT WORK WILL BE WITHOUT DAMAGE OR DETERIORATION, OTHER THAT NATURAL WEATHERING AT TIME OF SUBSTANTIAL COMPLETION.

END OF SECTION 07 62 00

GUTTERS AND DOWNSPOUTS SECTION 07 71 23

PART 1 - GENERAL

1.1 SECTION INCLUDES

A. PRE-FINISHED GALVANIZED STEEL, DOWNSPOUTS, GUTTERS, COLLECTOR BOXES AND SCUPPERS.

1.2 RELATED SECTIONS

A. DIVISION 7

1.3 REFERENCES

A. ASTM A526/A526M-STANDARD SPECIFICATION FOR STEEL SHEET, ZINC COATED (GALVANIZED) BY HOT-DIP PROCESS, COMMERCIAL QUALITY.

1.4 DESIGN REQUIREMENTS

A. CONFORM TO APPLICABLE CODE FOR SIZE AND METHOD OF RAINWATER DISCHARGE.

1.5 PROJECT CONDITIONS

A. COORDINATE THE WORK WITH DOWNSPOUT DISCHARGE PIPE INLET.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. DIMENSIONAL METALS INC.

B. APPROVED EQUALS BY PETERSON ALUMINUM CO. OR BERRIDGE MANUFACTURING CO.

2.2 MATERIALS

A. PRE-FINISHED GALVANIZED STEEL SHEET: ASTM A361/A361M, ASTM A446/A446M, GRADE A, OR ASTM A526/A526M, G90 ZINC COATING; 24 GAUGE CORE STEEL, SHOP PRE-COATED WITH THERMO-CURED FLUOROCARBON "KYNAR" 500 RESIN COATING. COLOR: TO BE CHOSEN BY OWNER. SUBMIT SAMPLE TO OWNER FOR APPROVAL.

2.3 COMPONENTS

A. GUTTERS, COLLECTOR BOXES AND SCUPPERS: SMACNA PROFILE TO MATCH EXISTING.

B. DOWNSPOUTS: SMACNA PROFILE TO MATCH EXISTING.

C. ANCHORS AND SUPPORTS: PROFILED TO SUIT GUTTERS AND DOWNSPOUTS.

1. ANCHORING DEVICES: IN ACCORDANCE WITH SMACNA REQUIREMENTS.

2. GUTTER SUPPORTS: SPIKES AND FERRULES.

3. DOWNSPOUT SUPPORTS: STRAPS.

D. FASTENERS: SAME MATERIAL AND FINISH AS GUTTERS AND DOWNSPOUTS.

SPLASH BLOCK: CONCRETE, 12" W. X 24" L. (MIN.)

2.4 FABRICATION

A. FORM GUTTERS AND DOWNSPOUTS OF PROFILES AND SIZE INDICATED.

B. FABRICATE WITH REQUIRED CONNECTION PIECES.

C. FORM SECTIONS SQUARE, TRUE, AND ACCURATE IN SIZE, IN MAXIMUM POSSIBLE LENGTHS, FREE OF DISTORTION OR DEFECTS DETRIMENTAL TO APPEARANCE OR PERFORMANCE. ALLOW FOR EXPANSION AT JOINTS.

D. HEM EXPOSED EDGES OF METAL MIN 1/2" FOLD OVER.

E. FABRICATE GUTTER AND DOWNSPOUT ACCESSORIES; SEAL WATERTIGHT.

2.5 FACTORY FINISHING

A. THERMO CURED FLUOROCARBON "KYNAR 500" RESIN COATING.

B. PRIMER COAT: FINISH CONCEALED SIDE OF METAL SHEETS WITH WASH COAT AND PRIMER COMPATIBLE WITH FINISH SYSTEM, AS RECOMMENDED BY FINISH SYSTEM MANUFACTURER.

PART 3 - EXECUTION

3.1 EXAMINATION

A. VERIFY THAT SURFACES ARE READY TO RECEIVE WORK.

3.2 PREPARATION

A. PAINT CONCEALED METAL SURFACES AND SURFACES IN CONTACT WITH DISSIMILAR METALS WITH PROTECTIVE BACKING PAINT TO A MINIMUM DRY FILM THICKNESS OF 15 MIL.

3.3 INSTALLATION

A. INSTALL GUTTERS, DOWNSPOUTS, AND ACCESSORIES AS SPECIFIED.

B. SHEET METAL: JOIN LENGTHS WITH SEAMS SEALED WATERTIGHT. FLASH AND SEAL GUTTERS TO DOWNSPOUTS (PROVIDE POSITIVE DRAINAGE TO DOWNSPOUTS).

C. SLOPE GUTTERS TO DOWNSPOUTS (PROVIDE POSITIVE DRAINAGE TO DOWNSPOUTS).

D. CONNECT DOWNSPOUTS TO DOWNSPOUT BOOTS AT STORM SEWER SYSTEM. SEAL CONNECTION WATERTIGHT. PROVIDE SPLASH BLOCKS AT ALL LOCATIONS WHERE DOWNSPOUTS DO NOT TIE INTO A STORM SEWER.

END OF SECTION 07 71 23

FIRESTOPPING SECTION 07 84 00

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. DRAWINGS AND GENERAL PROVISIONS OF CONTRACT APPLY TO THIS SECTION.

1.2 QUALITY ASSURANCE

A. FIRE-TEST-RESPONSE CHARACTERISTICS: PROVIDE FIRESTOPPING THAT COMPLIES WITH THE FOLLOWING REQUIREMENTS AND THOSE SPECIFIED UNDER THE "SYSTEM PERFORMANCE REQUIREMENTS" ARTICLE:

3. FIRESTOPPING TESTS ARE PERFORMED BY A QUALIFIED TESTING AND INSPECTING AGENCY. A QUALIFIED TESTING AND INSPECTING AGENCY IS UL, WAMOCK HERSEY, OR ANOTHER AGENCY PERFORMING TESTING AND FOLLOW-UP INSPECTION SERVICES FOR FIRESTOP SYSTEMS THAT IS ACCEPTABLE TO AUTHORITIES HAVING JURISDICTION.

4. THROUGH-PENETRATION FIRESTOP SYSTEMS ARE IDENTICAL TO THOSE TESTED PER ASTM E 814 UNDER CONDITIONS WHERE POSITIVE FURNACE PRESSURE DIFFERENTIAL OF AT LEAST 0.01 INCH OF WATER IS MAINTAINED AT
A DISTANCE OF 0.78 INCH BELOW THE FILL MATERIALS SURROUNDING THE PENETRATING ITEMS IN THE TEST ASSEMBLY. PROVIDE RATED SYSTEMS COMPLYING WITH THE FOLLOWING REQUIREMENTS:

a. THROUGH-PENETRATION FIRESTOP SYSTEM PRODUCTS BEAR CLASSIFICATION MARKING OF QUALIFIED TESTING AND INSPECTING AGENCY.

b. THROUGH-PENETRATION FIRESTOP SYSTEMS CORRESPOND TO THOSE INDICATED BY REFERENCE TO THROUGH-PENETRATION FIRESTOP
SYSTEM DESIGNATIONS LISTED BY UL IN THEIR "FIRE RESISTANCE DIRECTORY," BY WAMOCK HERSEY.

5. FIRE-RESISTIVE JOINT SEALANT SYSTEMS ARE IDENTICAL TO THOSE TESTED
FOR FIRE-RESPONSE CHARACTERISTICS PER ASTM E 119 UNDER CONDITIONS WHERE THE POSITIVE FURNACE PRESSURE DIFFERENTIAL IS AT LEAST 0.01
INCH OF WATER, AS MEASURED 0.78 INCH FROM THE FACE EXPOSED TO FURNACE FIRE. PROVIDE SYSTEMS COMPLYING WITH THE FOLLOWING REQUIREMENTS:

a. FIRE-RESISTANCE RATINGS OF JOINT SEALANTS: AS INDICATED BY REFERENCE TO DESIGN DESIGNATIONS LISTED BY UL IN THEIR "FIRE RESISTANCE DIRECTORY" OR BY ANOTHER QUALIFIED TESTING AND INSPECTING AGENCY.

b. JOINT SEALANTS, INCLUDING BACKING MATERIALS, BEAR CLASSIFICATION MARKING OF QUALIFIED TESTING AND INSPECTION AGENCY.

B. INSTALLER QUALIFICATIONS: ENGAGE AN EXPERIENCED INSTALLER WHO HAS COMPLETED FIRESTOPPING THAT IS SIMILAR IN MATERIAL, DESIGN, AND EXTENT TO THAT INDICATED FOR PROJECT AND THAT HAS PERFORMED SUCCESSFULLY.

C. SINGLE-SOURCE RESPONSIBILITY: OBTAIN THROUGH-PENETRATION FIRESTOP SYSTEMS FOR EACH KIND OF PENETRATION AND CONSTRUCTION CONDITION INDICATED FROM A SINGLE MANUFACTURER.

D. PROVIDE FIRESTOPPING PRODUCTS CONTAINING NO DETECTABLE ASBESTOS AS DETERMINED BY THE METHOD SPECIFIED IN 40 CFR PART 763, SUBPART F, APPENDIX
A, SECTION 1, "POLARIZED LIGHT MICROSCOPY."

1.3 DELIVERY, STORAGE AND HANDLING

A. DELIVER FIRESTOPPING PRODUCTS TO PROJECT SITE IN ORIGINAL, UNOPENED CONTAINERS OR PACKAGES WITH INTACT AND LEGIBLE MANUFACTURERS' LABELS IDENTIFYING PRODUCT AND MANUFACTURER; DATE OF MANUFACTURE; LOT NUMBER; SHELF LIFE, IF APPLICABLE; QUALIFIED TESTING AND INSPECTING AGENCY'S CLASSIFICATION MARKING APPLICABLE TO PROJECT; CURING TIME: AND MIXING INSTRUCTIONS FOR MULTICOMPONENT MATERIALS.

B. STORE AND HANDLE FIRESTOPPING MATERIALS TO PREVENT THEIR DETERIORATION
OR DAMAGE DUE TO MOISTURE, TEMPERATURE CHANGES, CONTAMINANTS, OR OTHER CAUSES.

1.4 PROJECT CONDITIONS

A. ENVIRONMENTAL CONDITIONS: DO NOT INSTALL FIRESTOPPING WHEN AMBIENT OR SUBSTRATE TEMPERATURES ARE OUTSIDE LIMITS PERMITTED BY FIRESTOPPING MANUFACTURERS OR WHEN SUBSTRATES ARE WET DUE TO RAIN, FROST, CONDENSATION, OR OTHER CAUSES.

B. VENTILATION: VENTILATE FIRESTOPPING PER FIRESTOPPING MANUFACTURERS' INSTRUCTIONS BY NATURAL MEANS OR, WHERE THIS IS INADEQUATE, FORCED AIR CIRCULATION.

2.1 FIRESTOPPING, GENERAL

A. COMPATIBILITY: PROVIDE FIRESTOPPING COMPOSED OF COMPONENTS THAT ARE COMPATIBLE WITH EACH OTHER, THE SUBSTRATES FORMING OPENINGS, AND THE ITEMS, IF ANY, PENETRATING THE FIRESTOPPING UNDER CONDITIONS OF SERVICE AND APPLICATION, AS DEMONSTRATED BY FIRESTOPPING MANUFACTURER BASED ON TESTING AND FIELD EXPERIENCE.

B. ACCESSORIES: PROVIDE COMPONENTS FOR EACH FIRESTOPPING SYSTEM THAT ARE NEEDED TO INSTALL FILL MATERIALS AND TO COMPLY WITH "SYSTEM PERFORMANCE REQUIREMENTS" ARTICLE IN PART 1. USE ONLY COMPONENTS SPECIFIED BY THE FIRESTOPPING MANUFACTURER AND APPROVED BY THE QUALIFIED TESTING AND INSPECTING AGENCY FOR THE DESIGNATED FIRE-RESISTANCE-RATED SYSTEMS. ACCESSORIES INCLUDE BUT ARE NOT LIMITED TO THE FOLLOWING ITEMS:

1. PERMANENT FORMING/DAMMING/BACKING MATERIALS INCLUDING THE FOLLOWING:

a. SEMIREFRACTORY FIBER (MINERAL WOOL) INSULATION.

b. CERAMIC FIBER.

c. SEALANTS USED IN COMBINATION WITH OTHER FORMING/DAMMING MATERIALS TO PREVENT LEAKAGE OF FILL MATERIALS IN LIQUID STATE.

d. FIRE-RATED FORMBOARD.

e. JOINT FILLERS FOR JOINT SEALANTS.

2.2 MATERIALS FOR THROUGH-PENETRATION FIRESTOP SYSTEMS

A. INTUMESCENT WRAP STRIPS: SINGLE-COMPONENT, ELASTOMERIC SHEET WITH ALUMINUM FOIL ON ONE SIDE.

B. SILICONE FOAM: TWO-COMPONENT, SILICONE-BASED LIQUID ELASTOMER THAT, WHEN MIXED, EXPANDS AND CURES IN PLACE TO PRODUCE A FLEXIBLE, NONSHRINKING FOAM.

C. SILICONE SEALANT: MOISTURE-CURING, SINGLE-COMPONENT, SILICONE-BASED, NEUTRAL-CURING ELASTOMERIC SEALANT OF NONSAG GRADE FOR OPENINGS IN VERTICAL AND OTHER SURFACES.

D. INTUMESCENT WRAP STRIPS: PROVIDE ONE OF THE FOLLOWING PRODUCTS: FIRE STOP INTUMESCENT WRAP STRIP 2002 BY DOW CORNING CORP. OR CS2420 INTUMESCENT WRAP BY HILTI CONSTRUCTION CHEMICALS. INC. OR FIRE BARRIER FS-195 WRAP/STRIP, 3M FIRE PROTECTION PRODUCTS.

E. SILICONE FOAMS: FIRE STOP FOAM 2001 BY DOW CORNING CORP. OR PENSIL 200 FOAM BY GENERAL ELECTRIC CO.

F. SILICONE SEALANTS: FIRESTOP SEALANT 2003 BY DOW CORNING CORP. OR PENSIL
100 FIRESTOP SEALANT BY GENERAL ELECTRIC CO. OR CS240 FIRESTOP SEALANT BY HILTI CONSTRUCTION CHEMICALS, INC.

2.3 FIRE-RESISTIVE ELASTOMERIC JOINT SEALANTS

A. ELASTOMERIC SEALANT STANDARD: PROVIDE MANUFACTURER'S STANDARD CHEMICALLY CURING, ELASTOMERIC SEALANTS OF BASE POLYMER INDICATED THAT COMPLIES WITH ASTM C 920 REQUIREMENTS, INCLUDING THOSE REFERENCED FOR TYPE, GRADE, CLASS, AND USES, AND REQUIREMENTS SPECIFIED IN THIS SECTION APPLICABLE TO FIRE-RESISTIVE JOINT SEALANTS.

B. SEALANT COLORS: PROVIDE COLOR OF EXPOSED JOINT SEALANT. COLOR SELECTIONS MADE BY ARCHITECT FROM MANUFACTURER'S FULL RANGE OF STANDARD COLORS FOR PRODUCTS OF TYPE INDICATED.

C. SINGLE-COMPONENT, NEUTRAL-CURING SILICONE SEALANT: TYPE S: GRADE NS: CLASS 25: EXPOSURE-RELATED USE NT, AND JOINT-SUBSTRATE-RELATED USES M, G, A, AND (AS APPLICABLE TO JOINT SUBSTRATES INDICATED) O.

1. ADDITIONAL MOVEMENT CAPABILITY: PROVIDE SEALANT WITH THE CAPABILITY TO WITHSTAND THE FOLLOWING PERCENTAGE CHANGES IN JOINT WIDTH EXISTING AT TIME OF INSTALLATION, WHEN TESTED FOR ADHESION AND COHESION UNDER MAXIMUM CYCLIC MOVEMENT PER ASTM C 719, AND REMAIN
IN COMPLIANCE WITH OTHER REQUIREMENTS OF ASTM C 920 FOR USES INDICATED:

2. 100 PERCENT MOVEMENT IN EXTENSION AND 50 PERCENT MOVEMENT IN COMPRESSION FOR A TOTAL OF 150 PERCENT MOVEMENT.

D. SINGLE-COMPONENT, NEUTRAL-CURING, SILICONE SEALANT: DOW CORNING 790 BY DOW CORNING CORP. OR SPECTRUM 1 BY TREMCO.

PART 3 - EXECUTION

3.1 EXAMINATION

A. EXAMINE SUBSTRATES AND CONDITIONS, WITH INSTALLER PRESENT, FOR COMPLIANCE WITH REQUIREMENTS FOR OPENING CONFIGURATIONS, PENETRATING ITEMS, SUBSTRATES, AND OTHER CONDITIONS AFFECTING PERFORMANCE OF FIRESTOPPING. DO NOT PROCEED WITH INSTALLATION UNTIL UNSATISFACTORY CONDITIONS HAVE BEEN CORRECTED.

3.2 PREPARATION

A. SURFACE CLEANING: CLEAN OUT OPENINGS AND JOINTS IMMEDIATELY PRIOR TO INSTALLING FIRESTOPPING TO COMPLY WITH RECOMMENDATIONS OF FIRESTOPPING MANUFACTURER AND THE FOLLOWING REQUIREMENTS: REMOVE ALL FOREIGN MATERIALS FROM SURFACES OF OPENING AND JOINT SUBSTRATES AND FROM PENETRATING ITEMS THAT COULD INTERFERE WITH ADHESION OF FIRESTOPPING. CLEAN OPENING AND JOINT SUBSTRATES AND PENETRATING ITEMS TO PRODUCE CLEAN, SOUND SURFACES CAPABLE OF DEVELOPING OPTIMUM BOND WITH FIRESTOPPING. REMOVE LOOSE PARTICLES REMAINING FROM CLEANING OPERATION. REMOVE LAITANCE AND FORM RELEASE AGENTS FROM CONCRETE.

B. PRIMING: PRIME SUBSTRATES WHERE RECOMMENDED BY FIRESTOPPING MANUFACTURER USING THAT MANUFACTURER'S RECOMMENDED PRODUCTS AND METHODS. CONFINE PRIMERS TO AREAS OF BOND: DO NOT ALLOW SPILLAGE AND MIGRATION ONTO EXPOSED SURFACES.

C. MASKING TAPE: USE MASKING TAPE TO PREVENT FIRESTOPPING FROM CONTACTING ADJOINING SURFACES THAT WILL REMAIN EXPOSED UPON COMPLETION OF WORK AND THAT WOULD OTHERWISE BE PERMANENTLY STAINED OR DAMAGED BY SUCH CONTACT OR BY CLEANING METHODS USED TO REMOVE SMEARS FROM FIRESTOPPING MATERIALS. REMOVE TAPE AS SOON AS IT IS POSSIBLE TO DO SO WITHOUT DISTURBING FIRESTOPPING'S SEAL WITH SUBSTRATES.

3.3 INSTALLING THROUGH-PENETRATION FIRESTOPS

A. GENERAL: COMPLY WITH THE "SYSTEM PERFORMANCE REQUIREMENTS" ARTICLE IN PART 1 AND THE THROUGH-PENETRATION FIRESTOP MANUFACTURER'S INSTALLATION INSTRUCTIONS AND DRAWINGS PERTAINING TO PRODUCTS AND APPLICATIONS INDICATED.

B. INSTALL FORMING/DAMMING MATERIALS AND OTHER ACCESSORIES OF TYPES REQUIRED TO SUPPORT FILL MATERIALS DURING THEIR APPLICATION AND IN THE POSITION NEEDED TO PRODUCE THE CROSS-SECTIONAL SHAPES AND DEPTHS REQUIRED TO ACHIEVE FIRE RATINGS OF DESIGNATED THROUGH-PENETRATION FIRESTOP SYSTEMS. AFTER INSTALLING FILL MATERIALS, REMOVE COMBUSTIBLE FORMING MATERIALS AND OTHER ACCESSORIES NOT INDICATED AS PERMANENT COMPONENTS OF FIRESTOP SYSTEMS.

3.4 INSTALLING FIRE-RESISTIVE JOINT SEALANTS

A. GENERAL: COMPLY WITH THE "SYSTEM PERFORMANCE REQUIREMENTS' ARTICLE IN PART 1, WITH ASTM C 1193 AND WITH THE SEALANT MANUFACTURER'S INSTALLATION INSTRUCTIONS AND DRAWINGS PERTAINING TO PRODUCTS AND APPLICATIONS INDICATED.

B. INSTALL JOINT FILLERS TO PROVIDE SUPPORT OF SEALANTS DURING APPLICATION AND AT POSITION REQUIRED TO PRODUCE THE CROSS-SECTIONAL SHAPES AND DEPTHS OF INSTALLED SEALANTS RELATIVE TO JOINT WIDTHS THAT ALLOW OPTIMUM SEALANT MOVEMENT CAPABILITY AND DEVELOP FIRE-RESISTANCE RATING REQUIRED.

C. INSTALL SEALANTS BY PROVEN TECHNIQUES THAT RESULT IN SEALANTS DIRECTLY CONTACTING AND FULLY WETTING JOINT SUBSTRATES, COMPLETELY FILLING RECESSES PROVIDED FOR EACH JOINT CONFIGURATION, AND PROVIDING UNIFORM, CROSS-SECTIONAL SHAPES AND DEPTHS RELATIVE TO JOINT WIDTH THAT OPTIMUM SEALANT MOVEMENT CAPABILITY. INSTALL SEALANTS AT THE SAME TIME JOINT FILLERS ARE INSTALLED.

3.5 CLEANING

A. CLEAN OFF EXCESS FILL MATERIALS AND SEALANTS ADJACENT TO OPENINGS AND JOINTS AS WORK PROGRESSES BY METHODS AND WITH CLEANING MATERIALS APPROVED BY MANUFACTURERS OF FIRESTOPPING PRODUCTS AND OF PRODUCTS IN WHICH OPENING AND JOINTS OCCUR.

B. PROTECT FIRESTOPPING DURING AND AFTER CURING PERIOD FROM CONTACT WITH CONTAMINATING SUBSTANCES OR FROM DAMAGE RESULTING FROM CONSTRUCTION OPERATIONS OR OTHER CAUSES SO THAT THEY ARE WITHOUT DETERIORATION OR DAMAGE AT TIME OF CONTRACT COMPLETION. IF, DESPITE SUCH PROTECTION, DAMAGE OR DETERIORATION OCCURS, CUT OUT AND REMOVE DAMAGED OR DETERIORATED FIRESTOPPING IMMEDIATELY AND INSTALL NEW MATERIALS TO PRODUCE FIRESTOPPING COMPLYING WITH SPECIFIED REQUIREMENTS.

END OF SECTION 07 84 00

JOINT SEALANTS SECTION 07 92 00

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. DRAWINGS AND GENERAL PROVISIONS OF CONTRACT APPLY TO THIS SECTION.

1.2 QUALITY ASSURANCE

A. INSTALLER QUALIFICATIONS: ENGAGE AN EXPERIENCED INSTALLER WHO HAS COMPLETED JOINT SEALANT APPLICATIONS SIMILAR IN MATERIAL, DESIGN, AND EXTENT TO THAT INDICATED FOR PROJECT THAT HAVE RESULTED IN CONSTRUCTION WITH A RECORD OF SUCCESSFUL IN-SERVICE PERFORMANCE.

B. SINGLE SOURCE RESPONSIBILITY FOR JOINT SEALANT MATERIALS: OBTAIN JOINT SEALANT MATERIALS FROM A SINGLE MANUFACTURER FOR EACH DIFFERENT PRODUCT REQUIRED.

C. PRODUCT TESTING: PROVIDE COMPREHENSIVE TEST DATA FOR EACH TYPE OF JOINT SEALANT BASED ON TESTS CONDUCTED BY A QUALIFIED INDEPENDENT TESTING LABORATORY ON CURRENT PRODUCT FORMULATIONS WITHIN A 24-MONTH PERIOD PRECEDING DATE OF CONTRACTOR'S SUBMITTAL OF TEST RESULTS TO ASSOCIATE.

1. TEST ELASTOMERIC SEALANTS FOR COMPLIANCE WITH REQUIREMENTS SPECIFIED BY REFERENCE TO ASTM C 920. INCLUDE TEST RESULTS FOR HARDNESS; STAIN RESISTANCE, ADHESION AND COHESION UNDER CYCLIC MOVEMENT (PER ASTM C 719), LOW-TEMPERATURE FLEXIBILITY, AND MODULUS OF ELASTICITY AT 100 PERCENT STRAIN, EFFECTS OF HEAT AGING, AND EFFECTS OF ACCELERATED WEATHERING.

2. INCLUDES TEST RESULTS PERFORMED ON JOINT SEALANTS AFTER THEY HAVE CURED FOR 1 YEAR.

D. PRECONSTRUCTION FIELD TESTING: PRIOR TO INSTALLATION OF JOINT SEALANTS, FIELD-TEST THEIR ADHESION TO JOINT SUBSTRATES AS FOLLOWS: LOCATE TEST JOINTS WHERE INDICATED OR, IF NOT INDICATED, AS DIRECTED BY ASSOCIATE. CONDUCT FIELD TESTS FOR EACH APPLICATION INDICATED FOR EACH TYPE OF ELASTOMERIC SEALANT AND JOINT SUBSTRATE INDICATED.

1.3 DELIVERY, STORAGE AND HANDLING

A. DELIVER MATERIALS TO PROJECT SITE IN ORIGINAL UNOPENED CONTAINERS OR BUNDLES WITH LABELS INDICATING MANUFACTURER, PRODUCT NAME AND DESIGNATION, COLOR, EXPIRATION PERIOD FOR USE, POT LIFE, CURING TIME, AND MIXING INSTRUCTIONS FOR MULTICOMPONENT MATERIALS.

B. STORE AND HANDLE MATERIALS IN COMPLIANCE WITH MANUFACTURER'S RECOMMENDATIONS TO PREVENT THEIR DETERIORATION OR DAMAGE DUE TO MOISTURE, HIGH OR LOW TEMPERATURES, CONTAMINANTS, OR OTHER CAUSES.

1.4 WARRANTY

A. SPECIAL INSTALLER'S WARRANTY: MANUFACTURER'S STANDARD FORM IN WHICH INSTALLER AGREES TO REPAIR OR REPLACE JOINT SEALANTS THAT DO NOT COMPLY WITH PERFORMANCE AND OTHER REQUIREMENTS SPECIFIED IN THIS SECTION WITHIN SPECIFIED WARRANTY PERIOD.

1. WARRANTY PERIOD: FIVE YEARS FROM DATE OF SUBSTANTIAL COMPLETION.

B. SPECIAL MANUFACTURER'S WARRANTY: MANUFACTURER'S STANDARD FORM IN WHICH JOINT-SEALANT MANUFACTURER AGREES TO FURNISH JOINT SEALANTS TO REPAIR OR REPLACE THOSE THAT DO NOT COMPLY WITH PERFORMANCE AND OTHER REQUIREMENTS SPECIFIED IN THIS SECTION WITHIN SPECIFIED WARRANTY PERIOD.

1. WARRANTY PERIOD: 20 YEARS FROM DATE OF SUBSTANTIAL COMPLETION.

C. SPECIAL WARRANTIES SPECIFIED IN THIS ARTICLE EXCLUDE DETERIORATION OR FAILURE OF JOINT SEALANTS FROM THE FOLLOWING:

1. MOVEMENT OF THE STRUCTURE CAUSED BY STRUCTURAL SETTLEMENT OR ERRORS ATTRIBUTABLE TO DESIGN OR CONSTRUCTION RESULTING IN STRESSES ON THE SEALANT EXCEEDING SEALANT MANUFACTURER'S WRITTEN SPECIFICATIONS FOR SEALANT ELONGATION AND COMPRESSION.

2. DISINTEGRATION OF JOINT SUBSTRATES FROM NATURAL CAUSES EXCEEDING DESIGN SPECIFICATIONS.

3. MECHANICAL DAMAGE CAUSED BY INDIVIDUALS, TOOLS, OR OTHER OUTSIDE AGENTS.

4. CHANGES IN SEALANT APPEARANCE CAUSED BY ACCUMULATION OF DIRT OR OTHER ATMOSPHERIC CONTAMINANTS.

PART 2 - PRODUCTS

2.1 MATERIALS, GENERAL

A. COMPATIBILITY: PROVIDE JOINT SEALANTS, BACKINGS, AND OTHER RELATED MATERIALS THAT ARE COMPATIBLE WITH ONE ANOTHER AND WITH JOINT SUBSTRATES UNDER CONDITIONS OF SERVICE AND APPLICATION, AS DEMONSTRATED BY JOINT-SEALANT MANUFACTURER, BASED ON TESTING AND FIELD EXPERIENCE.

B. LIQUID-APPLIED JOINT SEALANTS: COMPLY WITH ASTM C 920 AND OTHER REQUIREMENTS INDICATED FOR EACH LIQUID-APPLIED JOINT SEALANT SPECIFIED, INCLUDING THOSE REFERENCING ASTM C 920 CLASSIFICATIONS FOR TYPE, GRADE, CLASS, AND USES RELATED TO EXPOSURE AND JOINT SUBSTRATES.

C. STAIN-TEST-RESPONSE CHARACTERISTICS: WHERE SEALANTS ARE SPECIFIED TO BE NONSTAINING TO POROUS SUBSTRATES, PROVIDE PRODUCTS THAT HAVE UNDERGONE TESTING ACCORDING TO ASTM C 1248 AND HAVE NOT STAINED POROUS JOINT SUBSTRATES INDICATED FOR PROJECT.

D. SUITABILITY FOR CONTACT WITH FOOD: WHERE SEALANTS ARE INDICATED FOR JOINTS THAT WILL COME IN REPEATED CONTACT WITH FOOD, PROVIDE PRODUCTS THAT COMPLY WITH 21 CFR 177.2600.

E. COLORS OF EXPOSED JOINT SEALANTS: AS SELECTED BY ARCHITECT FROM MANUFACTURER'S FULL RANGE.

SILICONE JOINT SEALANTS

A. 'JS-1'-SINGLE-COMPONENT, NONSAG, NEUTRAL-CURING SILICONE JOINT SEALANT: ASTM C 920, TYPE S, GRADE NS, CLASS 50, FOR USE NT.

1. PRODUCTS: SUBJECT TO COMPLIANCE WITH REQUIREMENTS, PROVIDE ONE OF THE FOLLOWING:

a. GE ADVANCED MATERIALS - SILICONES; SILPRUF SCS2000.

b. PECORA CORPORATION; 898.

c. POLYMERIC SYSTEMS, INC.; PSI-641.

d. TREMCO INCORPORATED; SPECTREM 3.

B. 'JS-2'-SINGLE-COMPONENT, MILDEW RESISTANT, NEUTRAL-CURING SILICONE JOINT SEALANT: ASTM C 920, TYPE S, GRADE NS, CLASS 25, FOR USE NT.

1. PRODUCTS: SUBJECT TO COMPLIANCE WITH REQUIREMENTS, PROVIDE ONE OF THE FOLLOWING:

a. PECORA CORPORATION; 898.

b. TREMCO INCORPORATED; TREMSIL 200 CLEAR.

2.3 URETHANE JOINT SEALANTS

A. 'JS-3'- SINGLE-COMPONENT, NONSAG, URETHANE JOINT SEALANT: ASTM C 920, TYPE S, GRADE NS, CLASS 100/50, FOR USE NT.

1. PRODUCTS: SUBJECT TO COMPLIANCE WITH REQUIREMENTS, PROVIDE ONE OF THE FOLLOWING:

a. POLYMERIC SYSTEMS, INC.; PSI-901.

b. SIKA CORPORATION, CONSTRUCTION PRODUCTS DIVISION; SIKAFLEX - 15LM.

c. TREMCO INCORPORATED; VULKEM 921 OR DYMONIC FC.

B. 'JS-4'- SINGLE-COMPONENT, POURABLE, MOISTURE CURING, POLYURETHANE JOINT SEALANT: ASTM C 920, TYPE S, GRADE P, CLASS 100/50, FOR USE NT.

1. PRODUCTS: SUBJECT TO COMPLIANCE WITH REQUIREMENTS, PROVIDE ONE OF THE FOLLOWING:

a. DOW CORNING CORPORATION; 890-SL.

b. PECORA CORPORATION; 300 PAVEMENT SEALANT (SELF-LEVELING).

c. TREMCO INCORPORATED; VULKEM 45.

2.4 LATEX JOINT SEALANTS

A. 'JS-5'- LATEX JOINT SEALANT: ACRYLIC LATEX OR SILICONIZED ACRYLIC LATEX, ASTM C 834, TYPE OP, GRADE NF.

1. PRODUCTS: SUBJECT TO COMPLIANCE WITH REQUIREMENTS, PROVIDE ONE OF THE FOLLOWING:

a. BOSTIK, INC.; CHEM-CALK 600.

b. PECORA CORPORATION; AC-20+.

c. TREMCO INCORPORATED; TREMFLEX 834.

2.5 METALLIC PUTTY SEALANTS

A. 'JS-7' - METALLIC PUTTY: RIGID, TWO-PART EPOXY RESIN BASED PUTTY SYSTEM.

1. PRODUCTS: SUBJECT TO COMPLIANCE WITH REQUIREMENTS, PROVIDE ONE OF THE FOLLOWING:

a. PEERLESS INDUSTRIAL SYSTEMS; EPIGEM 2008.

b. EQUAL PRODUCTS AS APPROVED BY ARCHITECT.

2.6 ACOUSTICAL JOINT SEALANTS

A. ACOUSTICAL JOINT SEALANT: MANUFACTURER'S STANDARD NONSAG, PAINTABLE, NONSTAINING LATEX SEALANT COMPLYING WITH ASTM C 834. PRODUCT EFFECTIVELY REDUCES AIRBORNE SOUND TRANSMISSION THROUGH PERIMETER JOINTS AND OPENINGS IN BUILDING CONSTRUCTION AS DEMONSTRATED BY TESTING REPRESENTATIVE ASSEMBLIES ACCORDING TO ASTM E 90.

1. PRODUCTS: SUBJECT TO COMPLIANCE WITH REQUIREMENTS, PROVIDE ONE OF THE FOLLOWING:

a. PECORA CORPORATION; AC-20 FTR OR AIS-919.

b. USG CORPORATION; SHEETROCK ACOUSTICAL SEALANT.

2.7 JOINT SEALANT BACKING

A. GENERAL: PROVIDE SEALANT BACKINGS OF MATERIAL AND TYPE THAT ARE NON-STAINING; ARE COMPATIBLE WITH JOINT SUBSTRATES, SEALANTS, PRIMERS AND OTHER JOINT FILLERS; AND ARE APPROVED FOR APPLICATIONS INDICATED BY SEALANT MANUFACTURER BASED ON FIELD EXPERIENCE AND LABORATORY TESTING.

B. CYLINDRICAL SEALANT BACKINGS: ASTM C 1330, TYPE C (CLOSED-CELL MATERIAL WITH A SURFACE SKIN) OR ANY TYPE, AS APPROVED IN WRITING BY JOINT-SEALANT MANUFACTURER FOR JOINT APPLICATION INDICATED, AND OF SIZE AND DENSITY TO CONTROL SEALANT DEPTH AND OTHERWISE CONTRIBUTE TO PRODUCING OPTIMUM SEALANT PERFORMANCE.

C. BOND-BREAKER TAPE: POLYETHYLENE TAPE OR OTHER PLASTIC TAPE AS RECOMMENDED BY SEALANT MANUFACTURER FOR PREVENTING SEALANT FROM ADHERING TO RIGID, INFLEXIBLE JOINT FILLER MATERIALS OR JOINT SURFACES AT BACK OF JOINT WHERE SUCH ADHESION WOULD RESULT IN SEALANT FAILURE. PROVIDE SELF-ADHESIVE TAPE WHERE APPLICABLE.

2.8 MISCELLANEOUS MATERIALS

A. PRIMER: MATERIAL RECOMMENDED BY JOINT SEALANT MANUFACTURER WHERE REQUIRED FOR ADHESION OF SEALANT TO JOINT SUBSTRATES INDICATED, AS DETERMINED FROM PRECONSTRUCTION JOINT SEALANT-SUBSTRATE TESTS AND FIELD TESTS.

B. CLEANERS FOR NONPOROUS SURFACES: CHEMICAL CLEANERS ACCEPTABLE TO MANUFACTURERS OF SEALANTS AND SEALANT BACKING MATERIALS, FREE OF OILY RESIDUES OR OTHER SUBSTANCES CAPABLE OF STAINING OR HARMING IN ANY WAY JOINT SUBSTRATES AND ADJACENT NONPOROUS SURFACES, AND FORMULATED TO PROMOTE OPTIMUM ADHESION OF SEALANTS WITH JOINT SUBSTRATES.

C. MASKING TAPE: NONSTAINING, NONABSORBENT MATERIAL COMPATIBLE WITH JOINT SEALANTS AND SURFACES ADJACENT TO JOINTS.

PART 3 - EXECUTION

3.1 EXAMINATION

A. EXAMINE JOINTS INDICATED TO RECEIVE JOINT SEALANTS, WITH INSTALLER PRESENT, FOR COMPLIANCE WITH REQUIREMENTS FOR JOINT CONFIGURATION, INSTALLATION TOLERANCES, AND OTHER CONDITIONS AFFECTING JOINT SEALANT PERFORMANCE. DO NOT PROCEED WITH INSTALLATION OF JOINT SEALANTS UNTIL UNSATISFACTORY CONDITIONS HAVE BEEN CORRECTED.

3.2 PREPARATION

A. SURFACE CLEANING OF JOINTS: CLEAN OUT JOINTS IMMEDIATELY BEFORE INSTALLING JOINT SEALANTS TO COMPLY WITH RECOMMENDATIONS OF JOINT SEALANT MANUFACTURER.

3.3 INSTALLATION OF JOINT SEALANTS

A. GENERAL: COMPLY WITH JOINT SEALANT MANUFACTURER'S PRINTED INSTALLATION INSTRUCTIONS APPLICABLE TO PRODUCTS AND APPLICATIONS INDICATED, EXCEPT WHERE MORE STRINGENT REQUIREMENTS APPLY.

B. SEALANT INSTALLATION STANDARD: COMPLY WITH RECOMMENDATIONS OF ASTMC 1193 FOR USE OF JOINT SEALANTS AS APPLICABLE TO MATERIALS, APPLICATIONS, AND CONDITIONS INDICATED.

3.4 CLEANING

A. CLEAN OFF EXCESS SEALANTS OR SEALANT SMEARS ADJACENT TO JOINTS AS WORK PROGRESSES BY METHODS AND WITH CLEANING MATERIALS APPROVED BY MANUFACTURERS OF JOINT SEALANTS AND OF PRODUCTS IN WHICH JOINTS OCCUR.

END OF SECTION 07 92 00

DIVISION 8 - OPENINGS

METAL DOORS & FRAMES SECTION 08 11 00

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. DRAWINGS AND GENERAL PROVISIONS OF CONTRACT APPLY TO THIS SECTION.

1.2 QUALITY ASSURANCE

A. PROVIDE FRAMES COMPLYING WITH STEEL DOOR INSTITUTE "RECOMMENDED SPECIFICATIONS STANDARD STEEL DOORS AND FRAMES" ANSI/SDI-100 AND AS HEREIN SPECIFIED.

B. FIRE-RATED DOOR ASSEMBLIES: UNITS THAT COMPLY WITH NFPA 80, ARE IDENTICAL TO DOOR AND FRAME ASSEMBLIES WHOSE FIRE RESISTANCE CHARACTERISTICS HAVE BEEN DETERMINED PER ASTM E 152 AND WHICH ARE LABELED AND LISTED BY UL, FACTORY MUTUAL, WAMOCK HERSEY, OR OTHER TESTING AND INSPECTING ORGANIZATION ACCEPTABLE TO AUTHORITIES HAVING JURISDICTION.

1.3 DELIVERY, STORAGE AND HANDLING

A. DELIVER FRAMES CARDBOARD-WRAPPED OR CRATED TO PROVIDE PROTECTION DURING TRANSIT AND JOB STORAGE. PROVIDE ADDITIONAL PROTECTION TO PREVENT DAMAGE TO FINISH OF FACTORY-FINISHED FRAMES.

B. INSPECT FRAMES UPON DELIVERY FOR DAMAGE. MINOR DAMAGES MAY BE REPAIRED PROVIDED REFINISHED ITEMS ARE EQUAL IN ALL RESPECTS TO NEW WORK AND ACCEPTABLE TO ARCHITECT; OTHERWISE, REMOVE AND REPLACE DAMAGED ITEMS AS DIRECTED.

C. STORE FRAMES AT BUILDING SITE UNDER COVER. PLACE UNITS ON MINIMUM 4-INCHES HIGH WOOD BLOCKING. AVOID USE OF NON-VENTED PLASTIC OR CANVAS SHELTERS WHICH COULD CREATE HUMIDITY CHAMBER. IF CARDBOARD WRAPPER ON DOOR BECOMES WET, REMOVE CARTON IMMEDIATELY. PROVIDE SPACES BETWEEN STACKED DOORS TO PROMOTE AIR CIRCULATION.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. PROVIDE PRODUCTS FROM ONE OF THE FOLLOWING:
AMWELD CORPORATION
1500 SERIES

2.2 MATERIALS

A. HOT-ROLLED STEEL SHEETS AND STRIP: COMMERCIAL QUALITY CARBON STEEL, PICKLED AND OILED, COMPLYING WITH ASTM A 569 AND ASTM A 568.

B. COLD-ROLLED STEEL SHEETS: COMMERCIAL QUALITY CARBON STEEL, COMPLYING WITH ASTM A 366 AND ASTM A 568.

C. GALVANIZED STEEL SHEETS: ZINC-COATED CARBON STEEL SHEETS OF COMMERCIAL QUALITY, COMPLYING WITH ASTM A 526, OR DRAWING QUALITY, ASTM A 642, HOT DIPPED GALVANIZED IN ACCORDANCE WITH ASTM A 525, WITH A60 OR G60 COATING DESIGNATION, MILL PHOSPHATIZED.

D. SUPPORTS AND ANCHORS: FABRICATE OF NOT LESS THAN 18-GAGE SHEET STEEL; GALVANIZED WHERE USED WITH GALVANIZED FRAMES.

E. INSERTS, BOLTS AND FASTENERS: MANUFACTURER'S STANDARD UNITS. WHERE ITEMS ARE TO BE BUILT INTO EXTERIOR WALLS, HOT-DIP GALVANIZE IN COMPLIANCE WITH ASTM A 153, CLASS C OR D AS APPLICABLE.

F. SHOP APPLIED PAINT: APPLY AFTER FABRICATION. PRIMER RUST-INHIBITIVE ENAMEL OR PAINT, EITHER AIR-DRYING OR BAKING, SUITABLE AS A BASE FOR SPECIFIED FINISH PAINTS COMPLYING WITH ANSI A224.1, "TEST PROCEDURE AND ACCEPTANCE CRITERIA FOR PRIME PAINTED STEEL SURFACES FOR STEEL DOORS AND FRAMES."

G. ALL STEEL PRODUCTS SHALL BE FABRICATED UTILIZING ONLY DOMESTICALLY PRODUCED STEEL.

2.3 FRAMES

A. PROVIDE METAL FRAMES FOR DOORS OF TYPES AND STYLES AS SHOWN ON DRAWINGS AND SCHEDULES. CONCEAL FASTENINGS, UNLESS OTHERWISE INDICATED. FABRICATE FRAMES OF MINIMUM 18-GAGE COLD-ROLLED STEEL.

1. FABRICATE FRAMES WITH MITERED OR COPED CORNERS, WELDED CONSTRUCTION.

2. FORM EXTERIOR FRAMES FROM 18-GAGE GALVANIZED STEEL.

3. MECHANICAL INTERLOCK NOT ACCEPTED.

4. REFER TO DOOR SCHEDULE.

B. DOOR SILENCERS: EXCEPT ON WEATHERSTRIPPED FRAMES, DRILL STOPS TO RECEIVE 3 SILENCERS ON STRIKE JAMBS OF SINGLE-DOOR FRAMES AND 2 SILENCERS ON HEADS OF DOUBLE-DOOR FRAMES.

2.4 DOORS (AS APPLICABLE)

A. EXTERIOR DOORS: 1-3/4" THICK, FLUSH TYPE, ANSI/SDI-100, GRADE III, HEAVY-DUTY, MODEL 4, MINIMUM 18-GAGE GALVANIZED STEEL FACES WITH POLYSTYRENE CORE INSULATION, ETC. AND MANUFACTURED AS FRAMES ABOVE. REFER TO DOOR SCHEDULE.

PART 3 - EXECUTION

3.1 INSTALLATION

A. GENERAL: INSTALL STANDARD STEEL FRAMES AND ACCESSORIES IN ACCORDANCE WITH FINAL SHOP DRAWINGS, MANUFACTURERS DATA, AND AS HEREIN SPECIFIED.

B. PLACING FRAMES: COMPLY WITH PROVISIONS OF SDI-105 "RECOMMENDED ERECTION INSTRUCTIONS FOR STEEL FRAMES," UNLESS OTHERWISE INDICATED.

3.2 ADJUST AND CLEAN

A. PRIME COAT TOUCH-UP: IMMEDIATELY AFTER ERECTION, SAND SMOOTH ANY RUSTED OR DAMAGED AREAS OF PRIME COAT AND APPLY TOUCH-UP OF COMPATIBLE AIR-DRYING PRIMER.

B. PROTECTION REMOVAL: IMMEDIATELY PRIOR TO FINAL INSPECTION, REMOVE PROTECTIVE PLASTIC WRAPPINGS FROM PREFINISHED DOORS.

C. FINAL ADJUSTMENTS: CHECK AND READJUST OPERATING HARDWARE ITEMS, LEAVING STEEL DOORS AND FRAMES UNDAMAGED AND IN COMPLETE AND PROPER OPERATING CONDITION.

END OF SECTION 08 11 00

ALUMINUM ENTRANCES AND STOREFRONT WINDOWS SECTION 08 41 13

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. DRAWINGS AND GENERAL PROVISIONS OF CONTRACT APPLY TO THIS SECTION.

1.2 QUALITY ASSURANCE

A. INSTALLER QUALIFICATIONS: ENGAGE AN EXPERIENCED INSTALLER WITH NOT LESS THAN 5 YEARS SUCCESSFUL EXPERIENCE WHO HAS COMPLETED INSTALLATIONS OF ALUMINUM STOREFRONT AND ENTRANCES SIMILAR IN DESIGN AND EXTENT TO THOSE REQUIRED FOR THE PROJECT AND WHOSE WORK HAS RESULTED IN CONSTRUCTION WITH A RECORD OF SUCCESSFUL IN-SERVICE PERFORMANCE.

B. FABRICATOR QUALIFICATIONS: PROVIDE ALUMINUM ENTRANCES AND STOREFRONT SYSTEMS FABRICATED BY A FIRM EXPERIENCED IN PRODUCING SYSTEMS THAT ARE SIMILAR TO THOSE INDICATED FOR THIS PROJECT, AND THAT HAVE A RECORD OF SUCCESSFUL IN-SERVICE PERFORMANCE. THE FABRICATOR SHALL HAVE SUFFICIENT PRODUCTION CAPACITY TO PRODUCE COMPONENTS REQUIRED WITHOUT CAUSING DELAY IN PROGRESS OF THE WORK.

C. SINGLE SOURCE RESPONSIBILITY: OBTAIN ALUMINUM ENTRANCE, OPERATING HARDWARE, AND STOREFRONT SYSTEMS FROM ONE SOURCE AND FROM A SINGLE MANUFACTURER, UNLESS NOTED OTHERWISE.

D. DESIGN CRITERIA: THE DRAWINGS INDICATE THE SIZE, PROFILE AND DIMENSIONAL REQUIREMENTS OF ALUMINUM ENTRANCE AND STOREFRONT WORK REQUIRED AND ARE BASED ON THE SPECIFIC TYPES AND MODELS INDICATED.

E. SYSTEM PERFORMANCE REQUIREMENTS.

1. STRUCTURAL PERFORMANCE: DESIGN, ENGINEER, FABRICATE, AND INSTALL THE GLAZED ALUMINUM CURTAIN WALL SYSTEM TO WITHSTAND THE EFFECTS OF A WIND LOAD OF SPEED AT HEIGHT OF INSTALLATION AS REQUIRED BY THE APPLICABLE BUILDING CODE, WITH NO MATERIAL FAILURES OR PERMANENT DEFORMATION OF STRUCTURAL MEMBERS.

a. STRUCTURAL TEST PRESSURE SHALL BE EQUAL TO 150 PERCENT OF THE INWARD AND OUTWARD ACTING DESIGN WIND PRESSURES.

b. MAXIMUM DEFLECTION SHALL BE 1/175 OF THE SPAN.

c. ALLOWABLE STRESS WITH A SAFETY FACTOR OF 1.65.

d. MANUFACTURER SHALL PROVIDE INTERNAL STEEL REINFORCING AS REQUIRED FOR INDICATED SPANS AND CODE REQUIRED WIND LOADS.

2. AIR INFILTRATION RATE SHALL NOT EXCEED 0.06 CFM/FT(2) AT A STATIC PRESSURE DIFFERENTIAL OF 6.24 PSF, PER ASTM E283.

3. WATER RESISTANCE: SYSTEM SHALL COMPLY WITH ASTM E331. THERE SHALL BE NO AIR LEAKAGE AT A MIN. STATIC AIR PRESSURE DIFFERENTIAL OF 8 PSI AS DEFINED IN AAMA 501.

1.3 DELIVERY, STORAGE AND HANDLING

A. DELIVER ALUMINUM ENTRANCE AND STOREFRONT COMPONENTS IN THE MANUFACTURER'S ORIGINAL PROTECTIVE PACKAGING.

B. STORE ALUMINUM COMPONENTS IN A CLEAN DRY LOCATION AWAY FROM UNCURED MASONRY OR CONCRETE. COVER COMPONENTS WITH WATERPROOF PAPER, TARPAULIN OR POLYETHYLENE SHEETING IN A MANNER TO PERMIT CIRCULATION OF AIR. STACK FRAMING COMPONENTS IN A MANNER THAT WILL PREVENT BENDING AND AVOID SIGNIFICANT OR PERMANENT DAMAGE.

1.4 PROJECT CONDITIONS

A. FIELD MEASUREMENTS: SHOW RECORD MEASUREMENTS ON SHOP DRAWINGS. CHECK OPENINGS BY ACCURATE FIELD MEASUREMENT BEFORE FABRICATION. COORDINATE FABRICATION SCHEDULE WITH CONSTRUCTION PROGRESS TO AVOID DELAY OF THE WORK.

1.5 WARRANTY

A. WARRANTY: SUBMIT A WRITTEN WARRANTY, EXECUTED BY THE MANUFACTURER, AGREEING TO REPAIR OR REPLACE UNITS THAT FAIL IN MATERIALS OR WORKMANSHIP WITHIN THE SPECIFIED WARRANTY PERIOD. FAILURES INCLUDE, BUT ARE NOT NECESSARILY LIMITED TO:

1. STRUCTURAL FAILURE OF FRAMING MEMBERS.

2. EXCESSIVE DEFLECTION, EXCESSIVE LEAKAGE OR AIR INFILTRATION.

3. FAULTY OPERATION OF SWING DOORS.

4. DETERIORATION OF GASKETS AND SEALS.

5. FAILURE OF SEALANT.

B. WARRANTY PERIOD: FIVE (5) YEARS AFTER THE DATE OF SUBSTANTIAL COMPLETION.

PART 2 - PRODUCTS

2.1 MANUFACTURERS AND PRODUCTS

A. KAWNEER
(770) 449-5555
ATTENTION: CHERYL WILKERSON

B. CRL-US ALUMINUM
(800) 421-6144, EXT. 17780

C. YKK AP COMMERCIAL
(687) 838-6000

C. EXTERIOR STOREFRONT:

1. KAWNEER TRIFAB VERSAGLAZE 451T, THERMALLY BROKEN, 2" X 4 1/2" WITH 1" INSULATED CLASS LOW E GLASS UNIT. (IMPACT RESISTANT)

2. CRL-US ALUMINUM SERIES IT600 STOREFRONT SYSTEM, THERMALLY BROKEN, 2" X 4-1/2" WITH 1" INSULATED CLASS LOW E GLASS UNIT. (IMPACT RESISTANT)

3. YKK AP YHS 50 TU Center Set Flush Glazed Storefront System, Thermally Broken, 2" x 4-1/2" with 1" Insulated Class Low E Glass Unit. (IMPACT RESISTANT)

D. INTERIOR STOREFRONT:

1. KAWNEER TRIFAB VERSAGLAZE 451, 2" X 4 1/2" WITH 1/4" GLASS.

2. CRL-US ALUMINUM SERIES 451 STOREFRONT SYSTEM, NON-THERMAL, 2" X 4-1/2" WITH 1/4" GLASS.

3. YKK AP 45 FI CENTER SET FLUSH GLAZED STOREFRONT SYSTEM W/ GLAZING ADAPTER, NON-THERMAL, 2" X 4-1/2" WITH 1/4" GLASS.

E. SWING DOORS (AS APPLICABLE): (BASIS OF DESIGN)

1. KAWNEER 250T SERIES SINGLE ACTING NARROW STILE DOOR WITH 1" TEMPERED GLASS AND 10" BOTTOM RAIL.

2. CRL-US ALUMINUM NARROW STILE SERIES DH-350 DOOR SYSTEM WITH 1" TEMPERED GLASS AND 10" BOTTOM RAIL.

3. YKK AP 35H ENTRANCE SYSTEM WITH 1" TEMPERED GLASS AND 10" BOTTOM RAIL.

2.2 MATERIALS

A. ALUMINUM MEMBERS: ALLOY AND TEMPER RECOMMENDED BY THE MANUFACTURER FOR STRENGTH, CORROSION RESISTANCE, AND APPLICATION OF REQUIRED FINISH; EXTRUSIONS SHALL BE 6063 T5 ALLOY AND TEMPER TO COMPLY WITH ASTM B 221 FOR ALUMINUM EXTRUSIONS, ASTM B 209 FOR ALUMINUM SHEET OR PLATE, AND ASTM B 211 FOR ALUMINUM BARS, RODS AND WIRE.

B. CARBON STEEL REINFORCEMENT OF ALUMINUM FRAMING MEMBERS SHALL COMPLY WITH ASTM A 36 FOR STRUCTURAL SHAPES, PLATES AND BARS, ASTM A 611 FOR COLD ROLLED SHEET AND STRIP, OR ASTM A 570 FOR HOT ROLLED SHEET AND STRIP.

C. GLASS AND GLAZING MATERIALS: COMPLY WITH REQUIREMENTS OF SECTION 08800, OF THESE SPECIFICATIONS.

D. FASTENERS: PROVIDE FASTENERS OF ALUMINUM, NONMAGNETIC STAINLESS STEEL, IN ACCORDANCE WITH ASTM A 164.

1. REINFORCEMENT: WHERE FASTENERS SCREW-ANCHOR INTO ALUMINUM MEMBERS LESS THAN 0.125 INCHES THICK, REINFORCE THE INTERIOR WITH ALUMINUM OR NONMAGNETIC STAINLESS STEEL TO RECEIVE SCREW THREADS, OR PROVIDE STANDARD NONCORROSIVE PRESSED-IN SPLINED GROMMET NUTS.

2. EXPOSED FASTENERS: DO NOT USED EXPOSED FASTENERS EXCEPT FOR APPLICATION OF HARDWARE. FOR APPLICATION OF HARDWARE, USE PHILLIPS FLAT-HEAD MACHINE SCREWS THAT MATCH THE FINISH OF MEMBER OR HARDWARE BEING FASTENED.

E. CONCEALED FLASHING: 0.040-INCH-THICK ALUMINUM BRAKE METAL TRIM. ANODIZED FINISH TO MATCH STOREFRONT.

F. BRACKETS AND REINFORCEMENTS: HIGH-STRENGTH ALUMINUM BRACKETS AND REINFORCEMENTS; WHERE USE OF ALUMINUM IS NOT FEASIBLE PROVIDE NONMAGNETIC STAINLESS STEEL OR HOT-DIP GALVANIZED STEEL COMPLYING WITH ASTM A 123.

G. CONCRETE AND MASONRY INSERTS: CAST IRON, MALLEABLE IRON, OR HOT-DIP GALVANIZED STEEL INSERTS COMPLYING WITH ASTM A 123 (WHERE APPLICABLE).

H. COMPRESSION WEATHER-STRIPPING: MANUFACTURER'S STANDARD REPLACEABLE COMPRESSIBLE WEATHER-STRIPPING GASKETS OF MOLDED NEOPRENE COMPLYING WITH ASTM D 2000 OR MOLDED PVC COMPLYING WITH ASTM D 2287.

2.3 ALUMINUM FINISHES

A. FRAME AND DOOR FINISHES SHALL BE: BLACK ANODIZED (CLASS I, .7 MILS MINIMUM) ALUMINUM.

2.4 HARDWARE

A. PROVIDE HEAVY-DUTY HARDWARE UNITS AS INDICATED, SCHEDULED, OR REQUIRED FOR OPERATION OF EACH DOOR, PROVIDE ITEMS OF SIZES, NUMBER, QUANTITY AND TYPE RECOMMENDED BY MANUFACTURER FOR SERVICE REQUIRED; FINISH TO MATCH DOOR. SUBMIT SHOP DRAWINGS WITH STANDARD HARDWARE COMPONENTS AND PROVISIONS FOR SPECIAL SECURITY HARDWARE COMPONENT. FOUR (4) SETS OF KEYS FOR HOLD OPEN DEVICES ARE REQUIRED WITH HARDWARE PACKAGE.

1. SEE DOOR HARDWARE SCHEDULE.

2.5 COMPONENTS

B. STOREFRONT FRAMING SYSTEM: PROVIDE STOREFRONT AND ENTRANCE FRAMING SYSTEMS FABRICATED FROM EXTRUDED ALUMINUM MEMBERS OF SIZE AND PROFILE INDICATED. INCLUDE SUBFRAMES AND OTHER REINFORCING MEMBERS AS REQUIRED BY STRUCTURAL LOADS.

C. ENTRANCE DOOR FRAMES: PROVIDE TUBULAR AND CHANNEL FRAME ENTRANCE DOOR FRAME ASSEMBLIES, AS INDICATED, WITH WELDED OR MECHANICAL JOINTS IN ACCORDANCE WITH MANUFACTURER'S STANDARDS. REINFORCE AS NECESSARY TO SUPPORT REQUIRED LOADS.

2.6 FABRICATION

A. GENERAL: FABRICATE ALUMINUM ENTRANCE AND STOREFRONT COMPONENTS TO DESIGNS, SIZES AND THICKNESSES INDICATED AND TO COMPLY WITH INDICATED STANDARDS. SIZES AND PROFILE REQUIREMENTS ARE INDICATED ON THE DRAWINGS. VARIABLE DIMENSIONS ARE INDICATED, WITH MAXIMUM AND MINIMUM DIMENSIONS REQUIRED, TO ACHIEVE DESIGN REQUIREMENTS AND COORDINATION WITH OTHER WORK.

B. PREFABRICATION: COMPLETE FABRICATION, ASSEMBLY, FINISHING, HARDWARE APPLICATION, AND OTHER WORK TO THE GREATEST EXTENT POSSIBLE BEFORE SHIPMENT TO THE PROJECT SITE. DISASSEMBLY COMPONENTS ONLY AS NECESSARY FOR SHIPMENT AND INSTALLATION.

1. PERFORM FABRICATION OPERATIONS, INCLUDING CUTTING, FITTING, FORMING, DRILLING AND GRINDING OF METAL WORK TO PREVENT DAMAGE TO EXPOSED FINISH SURFACES. COMPLETE THESE OPERATIONS FOR HARDWARE PRIOR TO APPLICATION OF FINISHES.

2. PREGLAZE DOOR AND FRAME UNITS TO GREATEST EXTENT POSSIBLE.

C. WELDING: COMPLY WITH AWS RECOMMENDATIONS. GRIND EXPOSED WELDS SMOOTH TO REMOVE WELD SPATTER AND WELDING OXIDES. RESTORE MECHANICAL FINISH.

D. REINFORCING: INSTALL REINFORCING AS REQUIRED FOR HARDWARE AND AS NECESSARY FOR PERFORMANCE REQUIREMENTS, SAG RESISTANCE AND RIGIDITY.

E. DISSIMILAR METALS: SEPARATE DISSIMILAR METALS WITH BITUMINOUS PAINT, OR A SUITABLE SEALANT, OR A NON-ABSORPTIVE PLASTIC OR ELASTOMERIC TAPE, OR A GASKET BETWEEN THE SURFACES. DO NOT USE COATINGS CONTAINING LEAD.

F. CONTINUITY: MAINTAIN ACCURATE RELATION OF PLANES AND ANGLE WITH WEATHERPROOF, HAIRLINE FIT OF CONTACTING MEMBERS. UNIFORMITY OF METAL FINISH: ABUTTING EXTRUDED ALUMINUM MEMBERS SHALL NOT HAVE AN INTEGRAL COLOR TEXTURE VARIATION GREATER THAN HALF THE RANGE INDICATED IN THE SAMPLE PAIR SUBMITTAL.

G. FASTENERS: CONCEAL FASTENERS WHEREVER POSSIBLE.

PART 3 - EXECUTION

3.1 EXAMINATION

A. EXAMINE SUBSTRATES AND SUPPORTS, WITH THE INSTALLER PRESENT, FOR COMPLIANCE WITH REQUIREMENTS INDICATED, INSTALLATION TOLERANCES, AND OTHER CONDITIONS THAT AFFECT INSTALLATION OF ALUMINUM ENTRANCES AND STOREFRONTS. CORRECT UNSATISFACTORY CONDITIONS BEFORE PROCEEDING WITH THE INSTALLATION. DO NOT PROCEED WITH INSTALLATION UNTIL UNSATISFACTORY CONDITIONS ARE CORRECTED.

B. VERIFY ALL MEASUREMENTS/OPENINGS BY FIELD MEASUREMENTS BEFORE FABRICATION. COORDINATE W/ FABRICATION SCHEDULE AND CONSTRUCTION PROGRESS TO AVOID CONSTRUCTION DELAYS.

3.2 INSTALLATION

A. COMPLY WITH MANUFACTURER'S INSTRUCTIONS AND RECOMMENDATIONS FOR INSTALLATION.

B. SET UNITS PLUMB, LEVEL, AND TRUE TO LINE, WITHOUT WARP OR RACK OF FRAMING MEMBERS, DOORS, OR GLAZING PANELS. INSTALL COMPONENTS IN PROPER ALIGNMENT AND RELATION TO ESTABLISHED LINES AND GRADES INDICATED. PROVIDE PROPER SUPPORT AND ANCHOR SECURELY IN PLACE.

C. CONSTRUCTION TOLERANCES: INSTALL ALUMINUM ENTRANCE AND STOREFRONT TO COMPLY WITH THE FOLLOWING TOLERANCES:

1. VARIATION FROM PLANE: DO NOT EXCEED 1/8 INCH IN 12 FEET OF LENGTH OR 1/4 INCH IN ANY TOTAL LENGTH.

2. OFFSET FROM ALIGNMENT: THE MAXIMUM OFFSET FROM TRUE ALIGNMENT BETWEEN TWO IDENTICAL MEMBERS ABUTTING END TO END INLINE SHALL NOT EXCEED 1/64 INCH.

3. DIAGONAL MEASUREMENTS: THE MAXIMUM DIFFERENCE IN DIAGONAL MEASUREMENTS SHALL NOT EXCEED 1/16 INCH.

4. OFFSET AT CORNERS: THE MAXIMUM OUT-OF-PLANE OFFSET OF FRAMING AT CORNERS SHALL NOT EXCEED 1/32 INCH.

D. SEPARATE ALUMINUM AND OTHER CORRODIBLE METAL SURFACES FROM SOURCES OF CORROSION OR ELECTROLYTIC ACTION AT POINTS OF CONTACT WITH OTHER MATERIALS.

1. ZINC OR CADMIUM PLATE STEEL ANCHORS AND OTHER UNEXPOSED FASTENERS AFTER FABRICATION.

2. PAINT DISSIMILAR METALS WHERE DRAINAGE FROM THEM PASSES OVER ALUMINUM.

3. PAINT ALUMINUM SURFACES IN CONTACT WITH MORTAR, CONCRETE OR OTHER MASONRY WITH ALKALI RESISTANT COATING.

E. DRILL AND TAP FRAMES AND DOORS AND APPLY SURFACE-MOUNTED HARDWARE ITEMS. COMPLY WITH HARDWARE MANUFACTURER'S INSTRUCTIONS AND TEMPLATE REQUIREMENTS. USE CONCEALED FASTENERS WHEREVER POSSIBLE.

F. SET SILL MEMBERS IN BED OF SEALANT AS INDICATED, OR WITH JOINT FILLERS OR GASKETS AS INDICATED TO PROVIDE WEATHER TIGHT CONSTRUCTION. COMPLY WITH REQUIREMENTS OF DIVISION 7 FOR SEALANTS, FILLERS, AND GASKETS.

3.3 CLEANING

A. CLEAN THE COMPLETED SYSTEM, INSIDE AND OUT, PROMPTLY AFTER INSTALLATION, EXERCISING CARE TO AVOID DAMAGE TO COATINGS.

B. CLEAN GLASS SURFACES AFTER INSTALLATION, COMPLYING WITH REQUIREMENTS CONTAINED IN SECTION 08800 FOR CLEANING AND MAINTENANCE. REMOVE EXCESS GLAZING AND SEALANT COMPOUNDS, DIRT AND OTHER SUBSTANCES FROM ALUMINUM SURFACES.

3.4 PROTECTION

A. INSTITUTE PROTECTIVE MEASURES REQUIRED THROUGHOUT THE REMAINDER OF THE CONSTRUCTION PERIOD TO ENSURE THAT ALUMINUM ENTRANCES AND STOREFRONTS WILL BE WITHOUT DAMAGE OR DETERIORATION, OTHER THAN NORMAL WEATHERING, AT TIME OF ACCEPTANCE.

END OF SECTION 08 41 13

PASS-THRU WINDOWS SECTION 08 56 19

PART 1 - GENERAL

1.1 SUMMARY

A. SECTION INCLUDES:

1. AUTOMATIC OPERATED PASS WINDOW UNITS.

B. RELATED SECTIONS:

1. DRAWINGS AND GENERAL PROVISIONS OF CONTRACT APPLY TO THIS SECTION.

1.2 REFERENCES

A. AMERICAN ARCHITECTURAL MANUFACTURERS ASSOCIATION SPECIFICATIONS

B. AMERICAN SOCIETY MECHANICAL ENGINEERS STANDARDS SPECIFICATIONS

C. ASTM INTERNATIONAL SPECIFICATIONS

D. CONSUMER PRODUCTS SAFETY COMMISSION.

E. DUPONT POWDER COATING TEST METHOD.

F. H.P. WHITE LABORATORY, INC.

G. NATIONAL ASSOCIATION OF ARCHITECTURAL METAL MANUFACTURERS.

H. SAE INTERNATIONAL.

I. STEEL STRUCTURES PAINTING COUNCIL.

J. UNDERWRITERS LABORATORY.

1.3 PERFORMANCE REQUIREMENTS

A. SYSTEM DESIGN: DESIGN AND SIZE COMPONENTS TO WITHSTAND DEAD LOADS AND LIVE LOADS CAUSED BY PRESSURE AND NEGATIVE WIND LOADS ACTING NORMAL TO PLANE OF WINDOW AS CALCULATED IN ACCORDANCE WITH APPLICABLE CODE.

B. SYSTEM INTERNAL DRAINAGE: DRAIN WATER ENTERING JOINTS, CONDENSATION OCCURRING IN GLAZING CHANNELS, AND MIGRATING MOISTURE OCCURRING WITHIN SYSTEM, TO EXTERIOR BY WEEP DRAINAGE NETWORK.

C. AIR AND VAPOR SEAL: MAINTAIN CONTINUOUS AIR BARRIER AND VAPOR RETARDER THROUGHOUT ASSEMBLY, PRIMARILY IN LINE WITH [INSIDE] PANE OF GLASS AND HEEL BEAD OF GLAZING COMPOUND. [POSITION THERMAL INSULATION ON EXTERIOR SURFACE OF AIR BARRIER AND VAPOR RETARDER.]

D. PROVIDE GLASS AND GLAZING MATERIALS FOR CONTINUITY OF BUILDING ENCLOSURE VAPOR RETARDER AND AIR BARRIER:

1. TO UTILIZE THE INNER PANE OF MULTIPLE PANE SEALED UNITS FOR THE CONTINUITY OF THE AIR BARRIER AND VAPOR RETARDER SEAL.

2.

1.4 SUBMITTALS

E. SHOP DRAWINGS:

1. INDICATE CONFIGURATION, SIZES, ROUGH-IN, MOUNTING, CONSTRUCTION AND GLAZING DETAILS AS WELL AS INSTALLATION CLEARANCES AND FINISHES.

F. PRODUCT DATA:

1. SUBMIT MANUFACTURER'S PRODUCT DATA FOR SPECIFIED PRODUCTS INDICATING MATERIALS, OPERATION CHARACTERISTICS, AND FINISHES.

C. SAMPLES:

1. SUBMIT TWO SAMPLES, 4 X 4 INCHES (100 X 100 MM) IN SIZE ILLUSTRATING METAL FINISHES FOR EACH FINISH SPECIFIED.

D. MANUFACTURER'S INSTALLATION INSTRUCTIONS:

1. SUBMIT INSTALLATION INSTRUCTIONS WITH REQUIREMENTS TO ACCOMMODATE SPECIFIC SITE CONDITIONS.

1.5 QUALITY ASSURANCE

A. PRODUCTS REQUIRING ELECTRICAL CONNECTION: LISTED AND CLASSIFIED BY UL OR TESTING FIRM ACCEPTABLE TO AUTHORITY HAVING JURISDICTION.

1.6 QUALIFICATIONS

A. MANUFACTURER: EASISERV CORPORATION, (604) 422-8611.

B. INSTALLER: COMPANY SPECIALIZING IN INSTALLATION OF WINDOW SYSTEMS SPECIFIED WITH MINIMUM THREE YEARS DOCUMENTED EXPERIENCE.

1.7 DELIVERY, STORAGE, AND PROTECTION

A. ORDERING: TO AVOID CONSTRUCTION DELAYS COMPLY WITH ORDERING INSTRUCTIONS AND LEAD TIME REQUIREMENTS AS SET BY WINDOW SYSTEM MANUFACTURER.

B. PACK WINDOW UNITS AND ACCESSORIES IN MANUFACTURER'S STANDARD SHIPPING CONTAINERS AND PROTECTIVE PACKAGING. DELIVER UNITS IN MANUFACTURER'S ORIGINAL PACKAGING AND UNOPENED CONTAINERS WITH IDENTIFICATION LABELS INTACT.

C. STORE WINDOW UNITS AND ACCESSORIES ON RAISED BLOCKS TO PREVENT MOISTURE DAMAGE PROTECTED FROM EXPOSURE TO WEATHER AND VANDALISM.

1.8 FIELD MEASUREMENTS

A. VERIFY FIELD MEASUREMENTS PRIOR TO FABRICATION AND RECORD ON SHOP DRAWINGS.

1.9 COORDINATION

A. COORDINATE WORK WITH ADJACENT MATERIALS SPECIFIED IN OTHER SECTIONS AND AS INDICATED ON DRAWINGS AND APPROVED SHOP DRAWINGS.

B. COORDINATE INSTALLATION OF ANCHORAGES FOR SECURITY WINDOWS. FURNISH SETTING DRAWINGS, TEMPLATES, AND DIRECTIONS FOR INSTALLING ANCHORAGES, INCLUDING SLEEVES, CONCRETE INSERTS, ANCHOR BOLTS, AND ITEMS WITH INTEGRAL ANCHORS, THAT ARE TO BE EMBEDDED IN CONCRETE OR MASONRY. DELIVER SUCH ITEMS TO PROJECT SITE IN TIME FOR INSTALLATION.

1.10 WARRANTY

A. FURNISH MANUFACTURER'S STANDARD WARRANTY DOCUMENT, EXECUTED BY AN AUTHORIZED QUIKSERV CORP. OFFICER IN WHICH MANUFACTURER AGREES TO REPAIR OR REPLACE WINDOWS, DRAWERS AND AIR CURTAINS THAT FAIL IN MATERIALS OR WORKMANSHIP WITHIN SPECIFIED WARRANTY PERIOD. THIS WARRANTY IS IN ADDITION TO, AND NOT A LIMITATION OF OTHER RIGHTS OWNER HAS UNDER THE CONTRACT.

1. WARRANTY PERIOD:

a. ONE YEAR PARTS AND LABOR FROM DATE OF INSTALLATION.

2. FAILURES INCLUDE, BUT ARE NOT LIMITED TO, THE FOLLOWING:

a. DETERIORATION OF METALS, METAL FINISHES, AND OTHER MATERIALS BEYOND NORMAL WEATHERING AND USE.

b. STRUCTURAL FAILURES INCLUDING DEFLECTIONS EXCEEDING 1/4 INCH.

c. FAILURE OF WELDS.

d. EXCESSIVE AIR LEAKAGE.

e. FAULTY OPERATION OF SLIDING WINDOW HARDWARE.

f. FAULTY OPERATION OF TRANSACTION DRAWERS.

g. FAULTY OPERATION OF AIR CURTAINS.

PART 2 - PRODUCTS

2.1 MATERIALS

A. ALUMINUM EXTRUSIONS: ASTM B221/B221M. PROVIDE ALLOY AND TEMPER RECOMMENDED BY MANUFACTURER FOR STRENGTH, CORROSION RESISTANCE, AND APPLICATION OF REQUIRED FINISH, BUT NOT LESS THAN 22,000-PSI (150-MPA) ULTIMATE TENSILE STRENGTH AND NOT LESS THAN 0.125 INCH (3.2 MM) THICK AT ANY LOCATION FOR MAIN FRAME AND SASH MEMBERS.

B. STEEL PLATES, SHAPES, AND BARS: ASTM A36/A36M.

C. METALLIC-COATED STEEL SHEET:

1. ASTM A653/A653M, CS (COMMERCIAL STEEL), TYPE B; WITH G90 (Z275)ZINC (GALVANIZED) COATING DESIGNATION.

2. AMS5511, STEEL, CORROSION-RESISTANT, SHEET, STRIP, AND PLATE, 19CR - 9.5NI (304L), SOLUTION HEAT TREATED.

3. AMS5513, STEEL, CORROSION-RESISTANT, SHEET, STRIP, AND PLATE 19CR 9.2NI (SAE 30304) SOLUTION HEAT TREATED.

D. STAINLESS STEEL SHEET, STRIP, PLATE, AND FLAT BARS:

1. ASTM A666, AUSTENITIC STAINLESS STEEL, TYPE 304, STRETCHER- LEVELED STANDARD OF FLATNESS.

2. ASME SA-240/SA-240M, CHROMIUM AND CHROMIUM-NICKEL STAINLESS STEEL PLATE, SHEET, AND STRIP FOR GENERAL APPLICATIONS.

E. CONCEALED BOLTS: ASTM A307, GRADE A UNLESS OTHERWISE INDICATED.

F. CAST-IN-PLACE ANCHORS IN CONCRETE: FABRICATED FROM CORROSION-RESISTANT MATERIALS CAPABLE OF SUSTAINING, WITHOUT FAILURE, A LOAD EQUAL TO FOUR TIMES THE LOAD IMPOSED, AS DETERMINED BY TESTING PER ASTM E488, CONDUCTED BY A QUALIFIED TESTING AGENCY.

1. THREADED OR WEDGE TYPE; GALVANIZED FERROUS CASTINGS, EITHER ASTM A27/A27M CAST STEEL OR ASTM A47/A47M MALLEABLE IRON. PROVIDE BOLTS, WASHERS, AND SHIMS AS REQUIRED; HOT-DIP GALVANIZED PER ASTM A153/A153M OR ASTM F2329.

G. EMBEDDED PLATE ANCHORS: FABRICATED FROM STEEL SHAPES AND PLATES, MINIMUM 3/16 INCH (4.8 MM) THICK; WITH MINIMUM 1/2-INCH- (12.7-MM-) DIAMETER, HEADED STUDS WELDED TO BACK OF PLATE.

H. WELDING RODS AND BARE ELECTRODES: SELECT ACCORDING TO AWS SPECIFICATIONS FOR METAL ALLOY WELDED.

I. BITUMINOUS PAINT: COLD-APPLIED, ASPHALT-MASTIC PAINT COMPLYING WITH SSPC-PAINT 12 REQUIREMENTS EXCEPT CONTAINING NO ASBESTOS; FORMULATED FOR 30-MIL
(0.76-MM) THICKNESS PER COAT.

J. SEALANTS: FOR SEALANTS REQUIRED WITHIN FABRICATED SECURITY WINDOWS, PROVIDE TYPE RECOMMENDED BY MANUFACTURER FOR JOINT SIZE AND MOVEMENT. SEALANT SHALL REMAIN PERMANENTLY ELASTIC, NONSHRINKING, AND NONMIGRATING.

K. GASKETS: FOR GASKETS REQUIRED WITHIN FABRICATED SECURITY WINDOWS, PROVIDE TYPE RECOMMENDED BY MANUFACTURER FOR JOINT SIZE AND MOVEMENT. GASKETS SHALL REMAIN PERMANENTLY ELASTIC, NONSHRINKING, AND NONMIGRATING.

2.2 WINDOW COMPONENTS

A. GLASS:

1. INSULATED GLASS: 5/8 INCH THICK OVERALL THICKNESS.

B. TRACK/SLIDES: STAINLESS STEEL BALL BEARING SLIDES ALL WINDOWS AND DRAWERS.

C. MISCELLANEOUS GLAZING MATERIALS: PROVIDE MATERIAL, SIZE, AND SHAPE COMPLYING WITH REQUIREMENTS OF GLASS MANUFACTURERS, AND WITH A PROVEN RECORD OF COMPATIBILITY WITH SURFACES CONTACTED IN INSTALLATION:

1. CLEANERS, PRIMERS, AND SEALERS: TYPE RECOMMENDED BY SEALANT OR GASKET MANUFACTURER.

2. SETTING BLOCKS: ELASTOMERIC MATERIAL WITH A TYPE A SHORE DUROMETER HARDNESS OF 85, PLUS OR MINUS 5.

3. SPACERS: ELASTOMERIC BLOCKS OR CONTINUOUS EXTRUSIONS WITH A TYPE A SHORE DUROMETER HARDNESS REQUIRED BY GLASS MANUFACTURER TO MAINTAIN GLASS LITES IN PLACE FOR INSTALLATION INDICATED.

4. EDGE BLOCKS: ELASTOMERIC MATERIAL OF HARDNESS NEEDED TO LIMIT GLASS LATERAL MOVEMENT (SIDE WALKING).

B. FLASHING.

C. WELDING MATERIALS.

D. ANCHORS, CLIPS, AND WINDOW ACCESSORIES: STAINLESS STEEL; HOT-DIP, ZINC-COATED STEEL OR IRON, OF SUFFICIENT STRENGTH TO WITHSTAND DESIGN PRESSURE INDICATED.

2.3 MANUAL PASS, SERVICE AND TELLER WINDOW UNITS

A. MANUFACTURERS:

1. QUICK SERVICE.

B. MODEL DP-7241E AUTOMATIC.

C. SERVICE OPENING: 29 1/2 INCHES (W) X 32 INCHES (H).

D. ROUGH OPENING: 72 1/2 INCHES (W) X 41 1/2 INCHES (H).

E. GLAZING: 1" INSULATED GLASS WITH SOLARBAN 60 LOW-E.

F. FINISH: BRONZE ANODIZED.

2.4 GLAZING

A. INSULATING GLASS:

1. INSULATING GLASS: ASTM E2190 CERTIFIED BY INSULATING GLASS CERTIFICATION COUNCIL AND INSULATING GLASS MANUFACTURERS ALLIANCE; WITH LOW E COATING ON SURFACE 2 AND GLASS ELASTOMER EDGE SEAL; PURGE INTERPANE SPACE WITH DRY AIR; TESTED IN ACCORDANCE WITH ASTM E2188 FOR UNIT PERFORMANCE AND ASTM E2189 FOR RESISTANCE TO FOGGING.

a. INSULATING GLASS UNIT EDGE SEAL CONSTRUCTION: ALUMINUM, BENT AND SPOT WELDED CORNERS.

2.5 SECURITY DEVICE ACCESSORIES

A. SECURITY LOCK BAR: SLIDING ALUMINUM LOCK BAR.

B. HOOK-LOCK: MAXIMUM SECURITY ADAMS RITE STYLE HOOK LOCK ON ALL SLIDERS.

2.7 FABRICATION

A. FABRICATE WINDOW TO DIMENSIONS INDICATED ON DRAWINGS.

B. FABRICATE WINDOWS, DRAWERS AND ACCESSORIES TO PROVIDE A COMPLETE SYSTEM FOR ASSEMBLY OF COMPONENTS AND ANCHORAGE OF WINDOW, DRAWERS AND ACCESSORIES.

1. PROVIDE UNITS THAT ARE REGLAZABLE FROM THE SECURE SIDE WITHOUT DISMANTLING THE NONSECURE SIDE OF FRAMING.

2. PREPARE SECURITY WINDOWS FOR GLAZING UNLESS PREGLAZING AT THE FACTORY IS INDICATED.

C. PROVIDE WEEP HOLES AND INTERNAL WATER PASSAGES FOR EXTERIOR SECURITY WINDOWS TO CONDUCT INFILTRATING WATER TO THE EXTERIOR.

D. RIGIDLY FIT AND SECURE JOINTS AND CORNERS WITH INTERNAL REINFORCEMENT. MAKE JOINTS AND CONNECTIONS FLUSH, HAIRLINE, AND WEATHERPROOF. FULLY WELD CORNERS.

1. FABRICATE FRAMING WITH MANUFACTURER'S STANDARD, INTERNAL OPAQUE ARMORING IN THICKNESSES REQUIRED FOR SECURITY WINDOWS TO COMPLY WITH BALLISTICS-RESISTANCE PERFORMANCE INDICATED.

E. PREPARE COMPONENTS WITH REINFORCEMENT REQUIRED FOR HARDWARE.

F. WELDING: TO GREATEST EXTENT POSSIBLE, WELD BEFORE FINISHING AND IN CONCEALED LOCATIONS TO MINIMIZE DISTORTION OR DISCOLORATION OF FINISH. REMOVE WELD SPATTER AND WELDING OXIDES FROM EXPOSED SURFACES BY DESCALING OR GRINDING.

G. METAL PROTECTION: SEPARATE DISSIMILAR METALS TO PROTECT AGAINST GALVANIC ACTION BY PAINTING CONTACT SURFACES WITH PRIMER OR BY APPLYING SEALANT OR TAPE RECOMMENDED BY MANUFACTURER FOR THIS PURPOSE.

H. FACTORY-CUT OPENINGS IN GLAZING FOR SPEAKING APERTURES.

I. PREGLAZED FABRICATION: PREGLAZE WINDOW UNITS AT FACTORY, WHERE REQUIRED FOR APPLICATIONS INDICATED.

J. WEATHER STRIPPING: FACTORY APPLIED.

K. BOTTOM SILLS: STAINLESS STEEL CONSTRUCTION, NO BOTTOM TRACKS AND NO POP RIVETS.

L. HANDLES: STAINLESS STEEL, MANUFACTURER'S STANDARD PROFILE AND FINISH.

2.8 SHOP FINISHING

A. ALUMINIUM FINISHES:

1. BRONZE ANODIZED ALUMINIUM SURFACES: AA-M10C22A31 NON-SPECULAR AS FABRICATED MECHANICAL FINISH, MEDIUM MATTE CHEMICAL FINISH, AND ARCHITECTURAL CLASS II 0.7 MILS (0.018 MM) CLEAR ANODIZED COATING.

a. CONFORM TO AAMA 611

B. CONCEALED STEEL ITEMS: GALVANIZED IN ACCORDANCE WITH ASTM A123 TO THICKNESS GRADE 85, 2.0 OZ/SQ FT (610 GM/SQ M).

C. STAINLESS STEEL: 304 STAINLESS STEEL WITH NAAMM NO. 3 FINISH.

D. APPLY BITUMINOUS PAINT TO CONCEALED METAL SURFACES IN CONTACT WITH CEMENTITIOUS OR DISSIMILAR MATERIALS.

E. TOUCH-UP PRIMER FOR GALVANIZED STEEL SURFACES: SSPC PAINT 20 ZINC RICH.

F. EXTENT OF FINISH:

1. APPLY FACTORY COATING TO ALL SURFACES EXPOSED AT COMPLETED ASSEMBLIES.

2. APPLY FINISH TO SURFACES CUT DURING FABRICATION SO THAT NO NATURAL ALUMINUM IS VISIBLE IN COMPLETED ASSEMBLIES, INCLUDING JOINT EDGES.

3. APPLY TOUCH-UP MATERIALS RECOMMENDED BY COATING MANUFACTURER FOR FIELD APPLICATION TO CUT ENDS AND MINOR DAMAGE TO FACTORY APPLIED FINISH.

PART 3 - EXECUTION

3.1 EXAMINATION

A. VERIFY CONSTRUCTION IS READY TO RECEIVE PRODUCTS SPECIFIED IN THIS SECTION.

B. VERIFY ROUGH OPENINGS ARE CORRECT SIZE AND IN CORRECT LOCATION.

C. EXAMINE ROUGHING-IN FOR EMBEDDED AND BUILT-IN ANCHORS TO VERIFY ACTUAL LOCATIONS OF SECURITY WINDOW CONNECTIONS BEFORE SECURITY WINDOW INSTALLATION.

D. INSPECT BUILT-IN AND CAST-IN ANCHOR INSTALLATIONS, BEFORE INSTALLING SECURITY WINDOWS, TO VERIFY THAT ANCHOR INSTALLATIONS COMPLY WITH REQUIREMENTS. PREPARE INSPECTION REPORTS.

1. REMOVE AND REPLACE ANCHORS WHERE INSPECTIONS INDICATE THAT THEY DO NOT COMPLY WITH SPECIFIED REQUIREMENTS. REINSPECT AFTER REPAIRS OR REPLACEMENTS ARE MADE.

2. PERFORM ADDITIONAL INSPECTIONS TO DETERMINE COMPLIANCE OF REPLACED OR ADDITIONAL WORK. PREPARE ANCHOR INSPECTION REPORTS.

E. FOR GLAZING MATERIALS WHOSE ORIENTATION IS CRITICAL FOR PERFORMANCE, VERIFY INSTALLATION ORIENTATION.

F. PROCEED WITH INSTALLATION ONLY AFTER UNSATISFACTORY CONDITIONS HAVE BEEN CORRECTED.

3.2 PREPARATION

A. FURNISH FRAMES AND ANCHORS TO OTHER SECTIONS AS REQUIRED FOR INSTALLATION IN SURROUNDING PARTITION AND CASEWORK CONSTRUCTION.

3.3 INSTALLATION

A. INSTALL PRODUCTS IN ACCORDANCE WITH MANUFACTURER'S INSTRUCTIONS.

B. ALIGN PRODUCTS PLUMB, LEVEL AND SQUARE.

C. RIGIDLY SECURE PRODUCTS TO ADJACENT SUPPORTING CONSTRUCTION.

D. GLAZE WINDOWS IN ACCORDANCE WITH MANUFACTURER'S INSTRUCTIONS.

E. SEAL PERIMETER JOINTS.

F. CONNECT ELECTRICAL COMPONENTS TO POWER SOURCE.

G. PROTECTION: WHERE DISSIMILAR METALS WILL CONTACT EACH OTHER, PROTECT AGAINST GALVANIC ACTION BY PAINTING CONTACT SURFACES WITH PRIMER OR BY APPLYING SEALANT OR TAPE RECOMMENDED IN WRITING BY MANUFACTURER FOR THIS PURPOSE. WHERE ALUMINUM WILL CONTACT CONCRETE OR MASONRY, PROTECT AGAINST CORROSION BY PAINTING CONTACT SURFACES WITH BITUMINOUS PAINT.

3.4 ADJUSTING

A. ADJUST HORIZONTAL-SLIDING, TRANSACTION SECURITY WINDOWS TO PROVIDE A TIGHT FIT AT CONTACT POINTS FOR SMOOTH OPERATION AND A SECURE ENCLOSURE.

B. LEFT BLANK INTENTIONALLY.

C. REMOVE AND REPLACE DEFECTIVE WORK, INCLUDING SECURITY WINDOWS THAT ARE WARPED, BOWED, OR OTHERWISE UNACCEPTABLE.

3.5 CLEANING AND PROTECTION

A. SECTION 01 70 00 - EXECUTION AND CLOSEOUT REQUIREMENTS {01700 - EXECUTION REQUIREMENTS}: REQUIREMENTS FOR CLEANING.

B. REMOVE PROTECTIVE MATERIAL FROM FACTORY FINISHED SURFACES.

C. WASH SURFACES BY METHOD RECOMMENDED AND ACCEPTABLE TO SEALANT AND WINDOW MANUFACTURER; RINSE AND WIPE SURFACES CLEAN.

D. REMOVE EXCESS SEALANT BY MODERATE USE OF MINERAL SPIRITS OR OTHER SOLVENT ACCEPTABLE TO SEALANT AND WINDOW MANUFACTURER.

C. CLEAN METAL AND GLASS SURFACES TO POLISHED CONDITION.

1. LUBRICATE SLIDING SECURITY WINDOW HARDWARE.

2. LUBRICATE TRANSACTION DRAWER HARDWARE.

F. PROVIDE TEMPORARY PROTECTION TO ENSURE THAT SECURITY WINDOWS ARE WITHOUT DAMAGE AT TIME OF SUBSTANTIAL COMPLETION.

END OF SECTION 08 56 19

DOOR HARDWARE SECTION 08 70 00

PART 1 - GENERAL

1.1 SUMMARY

A. DEFINITION: "FINISH HARDWARE" INCLUDES ITEMS KNOWN COMMERCIALLY AS FINISH HARDWARE WHICH ARE REQUIRED FOR SWING, SLIDING AND FOLDING DOORS, EXCEPT SPECIAL TYPES OF UNIQUE AND NON-MATCHING HARDWARE SPECIFIED IN THE SAME SECTION AS THE DOOR AND DOOR FRAME.

B. PROVIDE LABOR, MATERIALS, TRANSPORTATION, SERVICES AND APPLIANCES NECESSARY TO COMPLETE THE FOLLOWING WORK:

1. FINISH DOOR HARDWARE INSTALLATION INCLUDING NECESSARY SCREWS, BOLTS, SPECIAL FASTENERS, EXPANSION SHIELD AND OTHER DEVICES NECESSARY AND REQUIRED FOR PROPER HARD WARE APPLICATION AND USE.

2. FURNISH AND INSTALL CYLINDERS AND LATCHES AT EXTERIOR STOREFRONT ENTRANCE AS INDICATED. COORDINATING KEYING WITH OTHER LOCKSETS.

3. PROVIDE TEMPORARY LOCKSETS AT EXTERIOR DOORS DURING CONSTRUCTION.

4. IF ITEMS OF HARDWARE ARE NOT DEFINITELY SPECIFIED BUT REQUIRED FOR COMPLETION OF THE WORK, FURNISH ITEMS OF TYPE OF QUALITY SUITABLE TO THE SERVICE AND FUNCTION REQUIRED AND COMPARABLE TO ADJACENT HARDWARE.

1.2 INTENT

A. THIS SPECIFICATION CONTEMPLATES PROVIDING PROPER HARDWARE, IN ACCORD
WITH APPLICABLE CODES FOR ALL DOORS AS LISTED. FINISH HARDWARE CONTRACTOR'S RESPONSIBILITY IS TO EXAMINE PLANS AND SPECIFICATIONS AND CALL CONFLICTS, OMISSIONS OR OBVIOUS REQUIREMENTS NOT LISTED TO THE ATTENTION OF THE GENERAL CONTRACTOR OR ARCHITECT FOR INSTRUCTIONS.

ISSUE TABLE

No.	Date (mm/dd/yy)	Description
01	09-26-25	DTGO PROTOTYPE DOCUMENTS

REVISIONS

No.	Date	Description

DRAWINGS REVISED AS PER DESIGN BULLETIN

No.	Date	Description

THIS DRAWING IS OWNED BY OR LICENSED FOR USE BY POPEYES LOUISIANA KITCHEN (OR ITS AFFILIATED OR RELATED COMPANIES) AND MAY NOT BE REPRODUCED, USED, DOWNLOADED, DISSEMINATED, PUBLISHED, OR TRANSFERRED IN ANY FORM OR BY ANY MEANS, EXCEPT WITH THE PRIOR WRITTEN CONSENT OF POPEYES LOUISIANA KITCHEN . COPYRIGHT INFRINGEMENT IS A VIOLATION OF FEDERAL LAW SUBJECT TO CRIMINAL AND CIVIL PENALTIES.

THE CONTRACTOR IS TO VERIFY ALL DIMENSIONS AND CONDITIONS ON THE PROJECT AND TO REPORT ANY DISCREPANCIES TO THE POPEYES LOUISIANA KITCHEN REPRESENTATIVE PRIOR TO COMMENCING WORK. THESE DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION PURPOSES UNLESS INDICATED BY POPEYES LOUISIANA KITCHEN AS "ISSUED FOR CONSTRUCTION".

Professional Seal

DESIGNER NOTES:
DESIGN GUIDELINE ONLY - NOT FOR PERMIT OR CONSTRUCTION

THESE DOCUMENTS MUST BE COMPLETED AND / OR MODIFIED BY A LICENSED ARCHITECT AND ENGINEER TO CONFORM TO ALL APPLICABLE CODES, AND SPECIFIC SITE CONDITIONS. THERE IS NO WARRANTY, WHETHER IMPLIED OR EXPRESSED THAT THESE DOCUMENTS MEET THE APPLICABLE CODE REQUIREMENTS. LIABILITY FOR THE DESIGN AND ANY USE OF THE DOCUMENTS IS THE SOLE RESPONSIBILITY OF THE ARCHITECT AND ENGINEER OF RECORD.

Company Logo

Project

LOUISIANA 19 72 KITCHEN
POPEYES

Store Type
US DTGO PROTOTYPE

Location
PROTOTYPE
DTGO (U.S.)
CITY, STATE

Drawing Title
ARCHITECTURAL SPECIFICATIONS

Drawn	Checked
XX	XX
Scale	Date
	##.##.####
Project No.	Drawing No.
XX	SP5

POPEYES LOUISIANA KITCHEN MODEL DTGO, ADDRESS, CITY, STATE: DTGO PROTOTYPE DOCUMENTS (OCTOBER, 2025) STORE NO. XXXXX

(CONTINUED FROM PREVIOUS SHEET)

1.3 QUALITY ASSURANCE

A. ALL HARDWARE SHALL MEET ALL STATE AND LOCAL CODES, AND COMPLY WITH AMERICANS WITH DISABILITIES ACT (ADA), SECTION 4.13, DOORS.

1.4 SUBMITTALS

A. SUPPLIERS SHALL SUBMIT FOR APPROVAL SIX (6) COPIES OF A PROPOSED HARDWARE SCHEDULE LISTING COMPLETE ARCHITECTURAL FINISH HARDWARE DERIVED FROM THE DRAWINGS AND THESE SPECIFICATIONS.

1.5 PRODUCT HANDLING

A. SUPPLIER IS RESPONSIBLE FOR DELIVERY OF PROPER ITEMS TO PROPER INSTALLER, WITH TAG ATTACHED IDENTIFYING: CATALOG NUMBER, SPECIFIC LOCATION, AND MANUFACTURER.

1.6 WARRANTY

A. THIS CONTRACTOR SHALL WARRANT AND GUARANTEE ALL MATERIALS FOR WHICH HE IS RESPONSIBLE UNDER THIS SECTION THAT ALL MATERIALS WILL BE FREE FROM DEFECTS OF MATERIAL, WORKMANSHIP AND FUNCTION FOR A PERIOD OF ONE (1) YEAR FROM THE DATE OF INSTALLATION. THIS CONTRACTOR FURTHER AGREES THAT HE WILL AT HIS OWN EXPENSE REPLACE ANY DEFECTIVE ITEMS AND DAMAGED ARTICLES RESULTING FROM SUCH DEFECTIVE MATERIALS. THIS CONTRACTOR MUST NOTIFY THE GENERAL CONTRACTOR IN WRITING IF ANY OF THE MATERIALS AND/OR ITEMS HE HAS SUPPLIED HAVE BEEN DAMAGED BY OTHER TRADES ON THE PROJECT.

PART 2 - PRODUCTS

2.1 MATERIALS AND FABRICATION

A. HARDWARE SUPPLIER SHALL FURNISH PAPER TEMPLATES WITH COPIES OF APPROVED HARDWARE SCHEDULE TO INSTALLERS.

B. MISCELLANEOUS ITEMS: FURNISH HARDWARE WITH ALL INCIDENTAL ITEMS, I.E. SCREWS, BOLTS, EXPANSION SLEEVES, OR SHIELDS, ANCHORS, AND OTHER FASTENERS, AS RECOMMENDED BY MANUFACTURER TO INSURE HEAVY USAGE AND LONG LIFE.

C. INSTRUCTIONS: FULL MANUFACTURER'S PRINTED INSTRUCTIONS AND SPECIAL INFORMATION NEEDED FOR THE PROPER INSTALLATION AND ADJUSTMENT OF HARDWARE AND ANY ASSISTANCE NECESSARY TO MAKE HARDWARE FUNCTION AS INTENDED SHALL BE PROVIDED BY THE SUPPLIER TO INSURE PROPER OPERATION.

2.2 MANUFACTURERS

A. SUBJECT TO CODE COMPLIANCE AND THESE SPECIFICATIONS, PROVIDE HARDWARE BY MANUFACTURERS SCHEDULED ON DRAWINGS.

2.3 HINGES, BUTTS AND PIVOTS

A. SCREWS: FINISH PHILLIPS FLAT-HEAD OR MACHINE SCREWS FOR INSTALLATION OF UNITS, EXCEPT FURNISH PHILLIPS FLAT-HEAD WOOD SCREWS FOR INSTALLATION INTO WOODS. FINISH SCREW HEADS TO MATCH SURFACE OF HINGES OR PIVOTS.

B. HINGE PINS: EXCEPT AS OTHERWISE INDICATED, PROVIDE HINGE PINS AS FOLLOWS:

1. HINGES: FIVE-KNUCKLE.

2. EXTERIOR DOORS: NON-REMOVABLE PINS.

C. NUMBER OF HINGES: PROVIDE NUMBER OF HINGES INDICATED BUT NOT LESS THAN 3 FOR DOOR LEAF 90" OR LESS IN HEIGHT AND ONE ADDITIONAL HINGE FOR EACH 30" OF ADDITIONAL HEIGHT.

2.4 LOCK CYLINDERS AND KEYING

A. GENERAL: SUPPLIER WILL MEET WITH OWNER TO FINALIZE KEYING AND OBTAIN FINAL INSTRUCTIONS IN WRITING.

B. ALL LOCKABLE DOORS TO RECEIVE INTERCHANGEABLE CORES KEYED TO OWNERS EXISTING SYSTEM.

C. KEYING: PROVIDE A MASTER-KEYED SYSTEM WITH KEYING ARRANGEMENTS AS SCHEDULED. PROVIDE THREE (3) MASTER KEYS AND THREE (3) KEYS PER LOCK CLEARLY LABELED WITH LOCATION OF LOCKSET THEY OPERATE.

2.5 SOUND STRIPPING

A. PROVIDE SOUND STRIPPING AT ALL TOILET AND MECHANICAL ROOM DOORS.

2.6 MISCELLANEOUS PROVISIONS

A. SILENCERS: PROVIDE THREE (3) SILENCERS PER DOOR UNLESS OTHERWISE SPECIFIED.

B. PROVIDE ONE PAIR OF FLUSH BOLTS AT INACTIVE LEAF OF ALL DOUBLE DOORS.

C. PROVIDE A WALL STOP AT EACH DOOR UNLESS A FLOOR STOP IS REQUIRED OR OTHERWISE SPECIFIED.

D. NO STICK-ON ADHERED WEATHERSTRIPPING WILL BE ACCEPTED.

2.7 HARDWARE SCHEDULE - REFER TO SCHEDULE ON DRAWINGS.

PART 3 - EXECUTION

3.1 INSTALLATION

A. MOUNT HARDWARE UNITS AT HEIGHTS INDICATED IN "RECOMMENDED LOCATIONS FOR BUILDERS HARDWARE" (DHI - WHA-83 EDITION) AND FRAMEY BY THE DOOR AND HARDWARE INSTITUTE, EXCEPT AS SPECIFICALLY INDICATED OR REQUIRED TO COMPLY WITH GOVERNING REGULATIONS, AND AS MAY BE OTHERWISE DIRECTED BY ARCHITECT.

B. INSTALL EACH HARDWARE ITEM IN COMPLIANCE WITH THE MANUFACTURER'S INSTRUCTION AND RECOMMENDATIONS USING FULLY EXPERIENCED AND QUALIFIED PERSONNEL. WHEREVER CUTTING AND FITTING IS REQUIRED TO INSTALL HARDWARE ONTO OR INTO SURFACES WHICH HAVE BEEN PAINTED OR FINISHED IN ANOTHER WAY, COORDINATE REMOVAL, STORAGE AND REINSTALLATION OR APPLICATION OF HARDWARE WITH FINISHING WORK SPECIFIED IN DIVISION 9 SECTIONS. DO NOT INSTALL SURFACE-MOUNTED ITEMS UNTIL FINISHES HAVE BEEN COMPLETED ON THE SUBSTRATE.

C. COORDINATE WITH DOOR AND FRAME SUPPLIERS TO OBTAIN DOORFRAMAN HARDWARE INSTALLATIONS WHICH ARE LISTED BY APPROVED TESTING AGENCY.

D. SET UNITS LEVEL, PLUMB AND TRUE TO LINE LOCATION. ADJUST AND REINFORCE THE ATTACHMENT SUBSTRATE NECESSARY FOR PROPER INSTALLATION AND OPERATION.

E. ALL SURFACE MOUNTED CLOSER TO BE MOUNTED ON THE ROOM SIDE OF DOORS IN ALL CORRIDORS, LOBBIES AND OTHER PUBLIC SPACES.

1. PROVIDE ARCHITECTURAL BINDING (SEX) BOLTS FOR MOUNTING.

3.2 ADJUST AND CLEAN

A. ADJUST AND CHECK EACH OPERATING ITEM OF HARDWARE AND EACH DOOR, TO ENSURE PROPER OPERATION OF FUNCTION OF EVERY UNIT. REPLACE UNITS THAT CANNOT BE ADJUSTED TO OPERATE FREELY AND SMOOTHLY AS DETERMINED BY THE ARCHITECT.

1. UPON COMPLETION, DOOR SHALL LATCH WITHOUT FORCING AND CLOSE LATCH UNDER THE FORCE OF THE CLOSER.

2. PROVIDE DOOR CONTROL EQUIPMENT AS REQUIRED. MOUNT EQUIPMENT SO AS TO PERMIT MAXIMUM DOOR OPENING, BUT TO PREVENT CONTACT OF THE DOOR WITH BUILDING CONSTRUCTION AND EQUIPMENT.

B. REMOVE ALL HARDWARE FROM DOORS PRIOR TO PAINTING.

C. CLEAN ADJACENT SURFACES SOILED BY HARDWARE INSTALLATION.

D. FINAL ADJUSTMENT: WHEREVER HARDWARE INSTALLATION IS MADE MORE THAN ONE MONTH PRIOR TO ACCEPTANCE OR OCCUPANCY OF A SPACE OR AREA, RETURN TO THE WORK DURING THE WEEK PRIOR TO ACCEPTANCE OR OCCUPANCY, AND MAKE FINAL CHECK AND ADJUSTMENT OF ALL HARDWARE ITEMS IN SUCH SPACE OR AREA. CLEAN OPERATING ITEMS AS NECESSARY TO RESTORE FUNCTION AND FINISH OF HARDWARE AND DOORS. ADJUST DOOR DEVICES TO COMPENSATE FOR FINAL OPERATION OF HEATING AND VENTILATING EQUIPMENT.

E. INSTRUCT OWNER'S PERSONNEL IN PROPER ADJUSTMENT AND MAINTENANCE OF HARDWARE AND HARDWARE FINISHES, DURING THE FINAL ADJUSTMENTS.

F. PROVIDE TO THE OWNER SIX (6) DOOR ADJUSTMENT TOOLS AT THE PROJECT CLOSE-OUT.

END OF SECTION 08 70 00

GLAZING SECTION 08 80 00

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. DRAWINGS AND GENERAL PROVISIONS OF CONTRACT APPLY TO THIS SECTION.

1.2 DEFINITIONS

A. MANUFACTURER IS USED IN THIS SECTION TO REFER TO A FIRM THAT PRODUCES PRIMARY GLASS OR FABRICATED GLASS AS DEFINED IN THE REFERENCED GLAZING STANDARD.

B. DETERIORATION OF INSULATING GLASS: FAILURE OF THE HERMETIC SEAL UNDER NORMAL USE DUE TO CAUSES OTHER THAN ACCIDENT AND IMPROPER PRACTICES FOR MAINTAINING, AND CLEANING INSULATING GLASS. EVIDENCE OF FAILURE IS THE OBSTRUCTION OF VISION BY MOISTURE OR FILM ON THE INTERIOR SURFACES OF GLASS. IMPROPER PRACTICES FOR MAINTAINING AND CLEANING GLASS DO NOT COMPLY WITH THE MANUFACTURER'S DIRECTIONS.

1.3 SYSTEM PERFORMANCE REQUIREMENTS

A. GENERAL: PROVIDE GLAZING SYSTEMS THAT ARE PRODUCED, FABRICATED, AND INSTALLED TO WITHSTAND NORMAL THERMAL MOVEMENT, WIND LOADING, AND IMPACT LOADING (WHERE APPLICABLE), WITHOUT FAILURE INCLUDING LOSS OR GLASS BREAKAGE ATTRIBUTABLE TO THE FOLLOWING: DEFECTS IN THE MANUFACTURE, FABRICATION, AND INSTALLATION; FAILURE OF SEALANTS OR GASKETS TO REMAIN WATERTIGHT AND AIRTIGHT; DETERIORATION OF GLAZING MATERIALS; AND OTHER DEFECTS IN CONSTRUCTION.

B. GLASS DESIGN: GLASS THICKNESSES INDICATED ON DRAWINGS ARE FOR DETAILING ONLY. CONFIRM GLASS THICKNESSES BY ANALYZING PRODUCT LOADS AND IN-SERVICE CONDITIONS. PROVIDE GLASS LITES FOR THE VARIOUS SIZE OPENINGS IN THE THICKNESSES AND PROPERTIES INDICATED OR HEAT-TREATED TO MEET OR EXCEED THE FOLLOWING CRITERIA:

1. MINIMUM GLASS THICKNESS, NOMINALLY, OF LITES IN EXTERIOR WALLS IS 6.0 MM (0.23 INCH).

2. MINIMUM GLASS THICKNESSES OF LITES WHETHER COMPOSED OF ANNEALED OR HEAT-TREATED GLASS, ARE SELECTED SO THE WORST-CASE PROBABILITY OF FAILURE DOES NOT EXCEED THE FOLLOWING: 8 LITES PER 1000 FOR LITES SET VERTICALLY OR NOT OVER 15 DEGREES OFF VERTICAL AND UNDER UNIFORM LOADS DETERMINE MINIMUM THICKNESS OF MONOLITHIC ANNEALED GLASS ACCORDING TO ASTM E 1300. FOR OTHER THAN MONOLITHIC ANNEALED GLASS, DETERMINE THICKNESS PER GLASS MANUFACTURER'S STANDARD METHOD OF ANALYSIS INCLUDING APPLYING ADJUSTMENT FACTORS TO ASTM E 1300 BASED ON TYPE OF GLASS.

3. NORMAL THERMAL MOVEMENTS RESULTS FROM AMBIENT AND SURFACE TEMPERATURES CHANGES ACTING ON GLASS-FRAMING MEMBERS AND GLAZING COMPONENTS. BASE ENGINEERING CALCULATION ON MATERIALS' ACTUAL SURFACE TEMPERATURES DUE TO BOTH SOLAR HEAT GAIN AND NIGHTTIME SKY HEAT LOSS.

a. TEMPERATURE CHANGE: 120 DEG F (67 DEG C), AMBIENT; 180 DEG F (100 DEG C), MATERIAL SURFACES.

1.4 QUALITY ASSURANCE

A. GLAZING PUBLICATIONS: COMPLY WITH PUBLISHED RECOMMENDATIONS OF GLASS PRODUCT MANUFACTURERS AND ORGANIZATIONS BELOW, EXCEPT WHERE MORE STRINGENT REQUIREMENTS ARE INDICATED. REFER TO THESE PUBLICATIONS FOR GLAZING TERMS NOT OTHERWISE DEFINED IN THIS SECTION OR IN REFERENCED STANDARDS.

1. FGMA PUBLICATIONS: "FGMA GLAZING MANUAL."

2. SIGMA PUBLICATIONS: TM-3000 "VERTICAL GLAZING GUIDELINES" AND TB-3001 "SLOPED GLAZING GUIDELINES." (IF APPLICABLE)

B. SAFETY GLASS: PRODUCTS COMPLYING WITH ANSI Z97.1 AND TESTING REQUIREMENTS OF 16 CFR PART 1201 FOR CATEGORY II MATERIALS.

C. FIRE-RESISTIVE GLAZING PRODUCTS FOR DOOR AND INTERIOR WINDOW ASSEMBLIES: PRODUCTS IDENTICAL TO THOSE TESTED PER ASTM E 152. LABELED AND LISTED BY UL OR ANOTHER TESTING AND INSPECTING AGENCY ACCEPTABLE TO AUTHORITIES HAVING JURISDICTION.

D. FIRE-RESISTIVE GLAZING PRODUCTS FOR WINDOW ASSEMBLIES: PRODUCTS IDENTICAL TO THOSE TESTED PER ASTM E 163. LABELED AND LISTED BY UL OR ANOTHER TESTING AND INSPECTING AGENCY ACCEPTABLE TO AUTHORITIES HAVING JURISDICTION.

E. INSULATING GLASS CERTIFICATION PROGRAM: PROVIDE INSULATING GLASS UNITS PERMANENTLY MARKED EITHER ON SPACERS OR AT LEAST ONE LITE OF EACH UNIT WITH APPROPRIATE CERTIFICATION LABEL OF THE INSULATING GLASS CERTIFICATION COUNCIL (IGCC).

F. GLAZIER QUALIFICATIONS: ENGAGE AN EXPERIENCED GLAZIER WHO HAS COMPLETED GLAZING SIMILAR IN MATERIAL, DESIGN, AND EXTENT TO THAT INDICATED FOR PROJECT WITH A RECORD OF SUCCESSFUL IN-SERVICE PERFORMANCE.

G. SINGLE-SOURCE RESPONSIBILITY FOR GLASS: OBTAIN GLASS FROM ONE SOURCE FOR EACH PRODUCT INDICATED BELOW:

1. PRIMARY GLASS OF EACH (ASTM C 1036) TYPE AND CLASS INDICATED.

2. HEAT-TREATED GLASS OF EACH (ASTM C 1048) CONDITION INDICATED.

3. INSULATING GLASS OF EACH CONSTRUCTION INDICATED.

H. SINGLE-SOURCE RESPONSIBILITY FOR GLAZING ACCESSORIES: OBTAIN GLAZING ACCESSORIES FROM ONE SOURCE FOR EACH PRODUCT AND INSTALLATION METHOD INDICATED.

1.5 DELIVERY, STORAGE AND HANDLING

A. PROTECT GLAZING MATERIALS TO COMPLY WITH MANUFACTURER'S DIRECTIONS AND AS NEEDED TO PREVENT DAMAGE TO GLASS AND GLAZING MATERIALS FROM CONDENSATION, TEMPERATURE CHANGES, DIRECT EXPOSURE TO SUN OR OTHER CAUSES.

1.6 PROJECT CONDITIONS

A. ENVIRONMENTAL CONDITIONS: DO NOT PROCEED WITH GLAZING WHEN AMBIENT AND SUBSTRATE TEMPERATURE CONDITIONS ARE OUTSIDE THE LIMITS PERMITTED BY GLAZING MATERIALS MANUFACTURER OR WHEN FRAMES OR CHANNEL SUBSTRATES ARE WET FROM RAIN, FROST, CONDENSATION, OR OTHER CAUSES.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. SUBJECT TO COMPLIANCE WITH REQUIREMENTS, PROVIDE PRODUCTS FROM ONE OF THE FOLLOWING: PPG, OR GLACIERS.

2.2 INSULATING GLASS PRODUCTS - GENERAL

A. SEALED INSULATING GLASS UNITS: PRESASSEMBLED UNITS CONSISTING OF ORGANICALLY SEALED LITES OF GLASS SEPARATED BY HERMETICALLY DRY AIR SPACES COMPLYING WITH ASTM E 774 AND WITH OTHER REQUIREMENTS INDICATED.

1. FOR PROPERTIES OF INDIVIDUAL GLASS LITES MAKING UP UNITS, REFER TO REQUIREMENTS SPECIFIED ELSEWHERE IN THIS SECTION APPLICABLE TO TYPES, CLASSES, KINDS, AND CONDITIONS OF GLASS PRODUCTS COMPRISING LITES OF INSULATING GLASS UNITS.

2. PROVIDE HEAT-TREATED, COATED FLOAT GLASS OF KIND FT (FULLY TEMPERED).

3. SAFETY GLAZING LABELING: WHERE SAFETY GLAZING IS INDICATED, PERMANENTLY MARK GLAZING WITH CERTIFICATION LABEL, LABEL SHALL INDICATE MANUFACTURER'S NAME, TYPE OF GLASS, THICKNESS AND SAFETY GLAZING STANDARD WITH WHICH GLASS COMPLIES.

4. U-VALUES ARE EXPRESSED AS BTU/HOUR X SQ. FT. X DEG F.

5. INSULATING-GLASS CERTIFICATION PROGRAM: PERMANENTLY MARKED ON SPACERS WITH CERTIFICATION LABEL OF IGCC.

2.3 1-INCH, CLEAR, INSULATED GLASS: GL-1

A. CLASSIFICATION OF UNITS: CLASS C, B, A PER ASTM E 774 (WITHDRAWN).

B. AIR SPACE WIDTH: NOMINAL 1/2 INCH MEASURED PERPENDICULARLY FROM SURFACES OF GLASS LITES AT UNIT'S EDGE.

C. GAS FILLING: AIR.

D. SEALING SYSTEM: DUAL SEAL, PRIMARY AND SECONDARY SEALANTS: MANUFACTURER'S STANDARD SEALANTS.

E. SPACER SPECIFICATIONS: ALUMINUM WITH MILL OR CLEAR-ANODIZED FINISH.

F. DESICCANT: EITHER MOLECULAR SIEVE OR SILICA GEL OR BLEND OF BOTH.

G. CORNER CONSTRUCTION: MANUFACTURER'S STANDARD CORNER CONSTRUCTION.

H. THICKNESS OF EACH LITE: 6.0 MM (0.23 INCH).

I. INDOOR LITE: CLEAR.

1. KIND: ANNEALED FLOAT GLASS: ASTM C 1036, TYPE 1, CLASS 1 (CLEAR), QUALITY-Q3.

J. OUTDOOR LITE: CLEAR WITH "SOLARBAN 60" LOW-E PYROLYTIC COATED ON SURFACE 2, BY PPG INDUSTRIES, INC.

1. KIND: ANNEALED FLOAT GLASS: ASTM C 1036, COATED, TYPE 1, CLASS 2, QUALITY-Q3.

K. AVAILABLE MANUFACTURER(S):

1. OLDCASTLE GLASS.

2. PPG INDUSTRIES, INC.

2.5 1/4-INCH, CLEAR GLASS: GL-3

A. CLASS: CLASS 1.

B. AVAILABLE MANUFACTURERS:

1. OLDCASTLE GLASS.

2. PPG INDUSTRIES, INC.

2.6 1/4-INCH, CLEAR, TEMPERED GLASS: GL-4

A. CLASS: CLASS 1, FULLY TEMPERED.

B. AVAILABLE MANUFACTURERS:

1. OLDCASTLE GLASS.

2. PPG INDUSTRIES, INC.

2.7 ELASTOMERIC GLAZING SEALANTS

A. GENERAL: PROVIDE PRODUCTS OF TYPE INDICATED, COMPLYING WITH THE FOLLOWING REQUIREMENTS:

1. COMPATIBILITY: SELECT GLAZING SEALANTS AND TAPES OF PROVEN COMPATIBILITY WITH OTHER MATERIALS THEY WILL CONTACT, INCLUDING GLASS PRODUCTS, SEALS OF INSULATING GLASS UNITS, AND GLAZING CHANNEL SUBSTRATES, UNDER CONDITIONS OF USE AND EXPOSURE TO WEATHER AND SERVICE, AS DEMONSTRATED BY TESTING AND FIELD EXPERIENCE.

2. SUITABILITY: COMPLY WITH SEALANT AND GLASS MANUFACTURER'S RECOMMENDATIONS FOR SELECTING GLAZING SEALANTS AND TAPES THAT ARE SUITABLE FOR APPLICATIONS INDICATED AND CONDITIONS EXISTING AT TIME OF INSTALLATION.

3. PROVIDE COLOR OF EXPOSED JOINT SEALANTS TO COMPLY WITH THE FOLLOWING: PROVIDE SELECTIONS MADE BY ARCHITECT FROM MANUFACTURER'S FULL RANGE OF STANDARD COLORS FOR PRODUCTS OF TYPE INDICATED.

B. MANUFACTURERS: PROVIDE PRODUCTS FROM ONE OF THE FOLLOWING: SPECTRUM BY TREMCO OR 790 BUILDING SEALANT BY DOW CORNING, INC.

C. ELASTOMERIC GLAZING SEALANT STANDARD: PROVIDE MANUFACTURER'S STANDARD CHEMICAL-CURED, ELASTOMERIC SEALANTS OF BASE POLYMER INDICATED THAT COMPLY WITH ASTM C 920 REQUIREMENTS INDICATED ON EACH ELASTOMERIC GLAZING SEALANT PRODUCT DATA SHEET AT THE END OF THIS SECTION, INCLUDING THOSE REFERENCING ASTM CLASSIFICATIONS FOR TYPE, GRADE, CLASS AND USES.

D. ELASTOMERIC GLAZING SEALANT TYPE: PROVIDE PRODUCTS THAT COMPLY WITH ASTM C 920 REQUIREMENTS INDICATED FOR EACH ELASTOMERIC GLAZING SEALANT PRODUCT DATA SHEET AT THE END OF THIS SECTION, INCLUDING THOSE REFERENCING ASTM CLASSIFICATIONS FOR TYPE, GRADE, CLASS AND USES.

E. ELASTOMERIC GLAZING SEALANT COLOR: PROVIDE SELECTIONS MADE BY ARCHITECT FROM MANUFACTURER'S FULL RANGE OF STANDARD COLORS FOR PRODUCTS OF TYPE INDICATED.

2.8 GLAZING TAPES

A. EXPANDED CELLULAR GLAZING TAPE: CLOSED-CELL, POLYVINYL CHLORIDE FOAM TAPE, FACTORY COATED WITH ADHESIVE ON BOTH SURFACES, PACKAGED ON ROLLS WITH RELEASE LINER PROTECTING ADHESIVE, AND COMPLYING WITH AAMA 806 FOR PRODUCT 810.5.

B. SUBJECT TO COMPLIANCE WITH REQUIREMENTS, PROVIDE PRODUCTS AS FOLLOWS: NORSEAL V-980 CLOSED-CELL GLAZING TAPE, NORTON COMPANY.

2.9 MISCELLANEOUS GLAZING MATERIALS

A. GENERAL: PROVIDE PRODUCTS OF MATERIAL, SIZE, AND SHAPE COMPLYING WITH REFERENCED GLAZING STANDARD, REQUIREMENTS OF MANUFACTURERS OF GLASS AND OTHER GLAZING MATERIALS INVOLVED FOR GLAZING APPLICATION INDICATED, AND WITH A PROVEN RECORD OF COMPATIBILITY WITH SURFACES CONTACTED IN INSTALLATION.

B. CLEANERS, PRIMERS AND SEALERS: TYPE RECOMMENDED BY SEALANT OR GASKET MANUFACTURER.

C. SETTING BLOCKS: ELASTOMERIC MATERIAL WITH A SHORE A DUROMETER HARDNESS OF 85 PLUS OR MINUS 5.

D. SPACERS: ELASTOMERIC BLOCKS OR CONTINUOUS EXTRUSIONS WITH A SHORE A DUROMETER HARDNESS REQUIRED BY GLASS MANUFACTURER TO MAINTAIN GLASS LITES IN PLACE FOR INSTALLATION INDICATED.

E. EDGE BLOCKS: ELASTOMERIC MATERIAL OF HARDNESS NEEDED TO LIMIT GLASS LATERAL MOVEMENT (SIDE-WALKING).

F. PERIMETER INSULATION FOR FIRE-RESISTIVE GLAZING: IDENTICAL TO PRODUCT USED IN TEST ASSEMBLY TO OBTAIN FIRE-RESISTIVE RATING.

2.10 FABRICATION OF GLASS AND OTHER GLAZING PRODUCTS

A. FABRICATE GLASS AND OTHER GLAZING PRODUCTS IN SIZES REQUIRED TO GLAZE OPENINGS INDICATED FOR PROJECT, WITH FINISHED EDGE AND FACE CLEARANCES, EDGE AND SURFACE CONDITIONS, AND BITE COMPLYING WITH RECOMMENDATIONS OF PRODUCT MANUFACTURER AND REFERENCED GLAZING STANDARD AS REQUIRED TO COMPLY WITH SYSTEM PERFORMANCE REQUIREMENTS.

B. CLEAN OUT OR FLAT GRIND VERTICAL EDGES OF BUTT-GLAZED MONOLITHIC LITES IN A MANNER THAT PRODUCES SQUARE EDGES WITH SLIGHT KERFS AT JUNCTIONS WITH INDOOR AND OUTDOOR FACES.

PART 3 - EXECUTION

3.1 EXAMINATION

A. EXAMINE GLASS FRAMING, WITH GLAZIER PRESENT, FOR COMPLIANCE WITH THE FOLLOWING:

1. MANUFACTURING AND INSTALLATION TOLERANCES, INCLUDING THOSE FOR SIZE, SQUARENESS, OFFSETS AT CORNERS.

2. PRESENCE AND FUNCTIONING OF WEEP SYSTEM.

3. MINIMUM REQUIRED FACE OR EDGE CLEARANCES.

4. EFFECTIVE SEALING BETWEEN JOINTS OF GLASS-FRAMING MEMBERS.

B. DO NOT PROCEED WITH GLAZING UNTIL UNSATISFACTORY CONDITIONS HAVE BEEN CORRECTED.

3.2 PREPARATION

A. CLEAN GLAZING CHANNELS AND OTHER FRAMING MEMBERS RECEIVING GLASS IMMEDIATELY BEFORE GLAZING. REMOVE COATINGS THAT ARE NOT FIRMLY BONDED TO SUBSTRATES.

3.3 GLAZING, GENERAL

A. COMPLY WITH COMBINED RECOMMENDATIONS OF MANUFACTURERS OF GLASS, SEALANTS, GASKETS, AND OTHER GLAZING MATERIALS, EXCEPT WHERE MORE STRINGENT REQUIREMENTS ARE INDICATED, INCLUDING THOSE IN REFERENCED GLAZING PUBLICATIONS.

B. GLAZING CHANNEL DIMENSIONS AS INDICATED ON DRAWINGS PROVIDE NECESSARY BITE ON GLASS, MINIMUM EDGE AND FACE CLEARANCES, AND ADEQUATE SEALANT THICKNESSES, WITH REASONABLE TOLERANCES. ADJUST AS REQUIRED BY PROJECT CONDITIONS DURING INSTALLATION.

C. PROTECT GLASS FROM EDGE DAMAGE DURING HANDLING AND INSTALLATION AS FOLLOWS:

1. USE A ROLLING BLOCK IN ROTATING GLASS LITES TO PREVENT DAMAGE TO GLASS CORNERS. DO NOT IMPACT GLASS WITH METAL FRAMING. USE SUCTION CUPS TO SHIFT GLASS LITES WITHIN OPENINGS; DO NOT RAISE OR DRIFT GLASS WITH A PRY BAR. INSTALL GLASS LITES WITH FLAWS OR BEVELS ON BOTTOM HORIZONTAL EDGES SO EDGES ARE LOCATED AT TOP OF OPENING. UNLESS OTHERWISE INDICATED BY MANUFACTURER'S LABEL.

2. REMOVE DAMAGED GLASS FROM PROJECT SITE AND LEGALLY DISPOSE OF OFF SITE. DAMAGED GLASS IS GLASS WITH EDGE DAMAGE OR OTHER IMPERFECTIONS THAT, WHEN INSTALLED, WEAKEN GLASS AND IMPAIR VISUAL PERFORMANCE AND APPEARANCE.

D. PLACE JOINTS IN TAPES AT CORNERS OF OPENING WITH ADJOINING LENGTHS BUTTED TOGETHER, NOT LAPPED. SEAL JOINTS IN TAPES WITH COMPATIBLE SEALANT APPROVED BY TAPE MANUFACTURER.

E. DO NOT REMOVE RELEASE PAPER FROM TAPE UNTIL JUST BEFORE EACH LITE IS INSTALLED.

F. CENTER GLASS LITES IN OPENINGS ON SETTING BLOCKS AND PRESS FIRMLY AGAINST TAPE BY INSERTING DENSE COMPRESSION GASKETS FORMED AND INSTALLED TO COVER EDGES OF GLASS IN A MANNER TO ACHIEVE FULL-START GASKET APPLICATIONS AT CORNERS AND WORK TOWARD CENTERS OF OPENINGS.

G. AT EXTERIOR EXPOSURES, APPLY CAP BEAD OF ELASTOMERIC GLAZING SEALANT OVER EXPOSED EDGE OF TAPE.

3.5 PROTECTION AND CLEANING

A. PROTECT EXTERIOR GLASS FROM BREAKAGE IMMEDIATELY AFTER INSTALLATION BY ATTACHING CONSPICUOUS STREAMERS TO PROVIDE WARNING FROM GLASS. DO NOT APPLY MARKERS TO GLASS SURFACE. REMOVE NONPERMANENT LABELS, AND CLEAN SURFACES.

B. PROTECT GLASS FROM CONTACT WITH CONTAMINATING SUBSTANCES RESULTING FROM CONSTRUCTION OPERATIONS INCLUDING WELD SPLATTER. IF, DESPITE SUCH PROTECTION, CONTAMINATING SUBSTANCES DO COME INTO CONTACT WITH GLASS, REMOVE THEM IMMEDIATELY AS RECOMMENDED BY GLASS MANUFACTURER.

C. EXAMINE GLASS SURFACES ADJACENT TO OR BELOW EXTERIOR CONCRETE AND OTHER MASONRY SURFACES AT FREQUENT INTERVALS DURING CONSTRUCTION, BUT NOT LESS THAN ONCE A MONTH, FOR BUILDUP OF DIRT, SCUM, ALKALI DEPOSITS, OR STAINS, AND REMOVE AS RECOMMENDED BY GLASS MANUFACTURER.

D. REMOVE AND REPLACE GLASS THAT IS BROKEN, CHIPPED, CRACKED, ABRADED, OR DAMAGED IN ANY WAY, INCLUDING NATURAL CAUSES, ACCIDENTS AND VANDALISM, DURING CONSTRUCTION PERIOD.

E. WASH GLASS ON BOTH FACES IN EACH AREA OF PROJECT NOT MORE THAN 4 DAYS PRIOR TO DATE SCHEDULED FOR INSPECTIONS THAT ESTABLISH DATE OF CONTRACT COMPLETION. WASH GLASS AS RECOMMENDED BY GLASS MANUFACTURER.

END OF SECTION 08 80 00

DIVISION 09 - FINISHES

GYPSUM BOARD ASSEMBLIES SECTION 09 21 00

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. DRAWINGS AND GENERAL PROVISIONS OF CONTRACT APPLY TO THIS SECTION.

1.2 DEFINITIONS

A. GYPSUM BOARD CONSTRUCTION TERMINOLOGY: REFER TO ASTM C 11 AND GA-505 FOR DEFINITIONS OF TERMS FOR GYPSUM BOARD ASSEMBLIES NOT DEFINED IN THIS SECTION OR IN OTHER REFERENCED STANDARDS.

1.3 ASSEMBLY PERFORMANCE REQUIREMENTS

A. FIRE RESISTANCE: PROVIDE GYPSUM BOARD ASSEMBLIES WITH FIRE-RESISTANCE RATINGS INDICATED.

1.4 QUALITY ASSURANCE

A. SINGLE-SOURCE RESPONSIBILITY FOR PANEL PRODUCTS: OBTAIN EACH TYPE OF GYPSUM BOARD AND OTHER PANEL PRODUCTS FROM A SINGLE MANUFACTURER.

B. SINGLE-SOURCE RESPONSIBILITY FOR FINISHING MATERIALS: OBTAIN FINISHING MATERIALS FROM EITHER THE SAME MANUFACTURER THAT SUPPLIES GYPSUM BOARD AND OTHER PANEL PRODUCTS OR FROM A MANUFACTURER ACCEPTABLE TO GYPSUM BOARD MANUFACTURER.

C. FIRE-TEST-RESPONSE CHARACTERISTICS: WHERE FIRE-RESISTANCE-RATED GYPSUM BOARD ASSEMBLIES ARE INDICATED, PROVIDE GYPSUM BOARD ASSEMBLIES THAT COMPLY WITH THE FOLLOWING REQUIREMENTS: FIRE-RESISTANCE RATINGS: AS INDICATED BY GA FILE NUMBERS IN GA-600 FIRE RESISTANCE DESIGN MANUAL OR DESIGN DESIGNATIONS IN UL "FIRE RESISTANCE DIRECTORY" OR IN THE LISTING OF ANOTHER TESTING AND INSPECTING AGENCY ACCEPTABLE TO AUTHORITIES HAVING JURISDICTION.

1.5 DELIVERY, STORAGE, AND HANDLING

A. DELIVER MATERIALS IN ORIGINAL PACKAGES, CONTAINERS, OR BUNDLES BEARING BRAND NAME AND IDENTIFICATION OF MANUFACTURER OR SUPPLIER.

B. STORE MATERIALS INSIDE UNDER COVER AND KEEP THEM DRY AND PROTECTED AGAINST DAMAGE FROM WEATHER, DIRECT SUNLIGHT, SURFACE CONTAMINATION, CORROSIVE CONDITIONS, EXCESSIVE HUMIDITY, AND OTHER CAUSES. NEATLY STACK GYPSUM PANELS FLAT TO PREVENT SAGGING.

1.6 PROJECT CONDITIONS

A. ENVIRONMENTAL CONDITIONS, GENERAL: ESTABLISH AND MAINTAIN ENVIRONMENTAL CONDITIONS FOR APPLYING AND FINISHING GYPSUM BOARD TO COMPLY WITH ASTM C 840 REQUIREMENTS OR GYPSUM BOARD MANUFACTURER'S RECOMMENDATIONS, WHICHEVER ARE MORE STRINGENT.

B. ROOM TEMPERATURES: FOR NONADHESIVE ATTACHMENT OF GYPSUM BOARD TO FRAMING, MAINTAIN NOT LESS THAN 40 DEG F. FOR ADHESIVE ATTACHMENT AND FINISHING OF GYPSUM BOARD, MAINTAIN NOT LESS THAN 50 DEG F FOR 48 HOURS BEFORE APPLICATION AND CONTINUOUSLY AFTER UNTIL DRY. DO NOT EXCEED 95 DEG F WHEN USING TEMPORARY HEAT SOURCES.

C. VENTILATION: VENTILATE BUILDING SPACES AS REQUIRED TO DRY JOINT TREATMENT MATERIALS. AVOID DRAFTS DURING HOT, DRY WEATHER TO PREVENT FINISHING MATERIALS FROM DRYING TOO RAPIDLY.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. SUBJECT TO COMPLIANCE WITH REQUIREMENTS, PROVIDE PRODUCTS FROM ONE OF THE FOLLOWING: NATIONAL GYPSUM COMPANY, GOLD BOND BUILDING PRODUCTS DIVISION, OR UNITED STATES GYPSUM CO.

2.2 GYPSUM BOARD PRODUCTS

A. GENERAL: PROVIDE GYPSUM BOARD OF TYPES INDICATED IN MAXIMUM LENGTHS AVAILABLE THAT WILL MINIMIZE END-TO-END BUTT JOINTS IN EACH AREA INDICATED TO RECEIVE GYPSUM BOARD APPLICATION. WIDTHS: PROVIDE GYPSUM BOARD IN WIDTHS OF 48 INCHES.

B.

DIVISION 10 - SPECIALTIES

SIGNAGE SECTION 10 14 23

PART 1 - GENERAL

1.1 SUMMARY

A. SECTION INCLUDES:

1. ILLUMINATED PANEL SIGNS.
2. ROOM-IDENTIFICATION SIGNS.

1.2 ACTION SUBMITTALS

A. PRODUCT DATA: FOR EACH TYPE OF PRODUCT.

B. SHOP DRAWINGS: FOR PANEL SIGNS.

1. INCLUDE FABRICATION AND INSTALLATION DETAILS AND ATTACHMENTS TO OTHER WORK.
2. SHOW SIGN MOUNTING HEIGHTS, LOCATIONS OF SUPPLEMENTARY SUPPORTS TO BE PROVIDED BY OTHERS, AND ACCESSORIES.
3. SHOW MESSAGE LIST, TYPE STYLES, GRAPHIC ELEMENTS, INCLUDING RAISED CHARACTERS AND BRAILLE, AND LAYOUT FOR EACH SIGN AT LEAST [HALF SIZE] <1:2>.
4. SHOW LOCATIONS OF ELECTRICAL SERVICE CONNECTIONS.
5. INCLUDE DIAGRAMS FOR POWER, SIGNAL, AND CONTROL WIRING.

C. SAMPLES: FOR EACH EXPOSED PRODUCT AND FOR EACH COLOR AND TEXTURE SPECIFIED.

D. SIGN SCHEDULE: USE SAME DESIGNATIONS SPECIFIED OR INDICATED ON DRAWINGS OR IN A SIGN SCHEDULE.

1.3 INFORMATIONAL SUBMITTALS

A. SAMPLE WARRANTY.

1.4 CLOSEOUT SUBMITTALS

A. MAINTENANCE DATA.

1.5 WARRANTY

A. SPECIAL WARRANTY: MANUFACTURER AGREES TO REPAIR OR REPLACE COMPONENTS OF SIGNS THAT FAIL IN MATERIALS OR WORKMANSHIP WITHIN SPECIFIED WARRANTY PERIOD.

1. WARRANTY PERIOD: FIVE YEARS FROM DATE OF SUBSTANTIAL COMPLETION.

PART 2 - PRODUCTS

2.1 SIGNS

A. MANUFACTURER: APPROVED POPEYES SIGNAGE MANUFACTURER.

B. PANEL SIGN: SIGN WITH SMOOTH, UNIFORM SURFACES; WITH MESSAGE AND CHARACTERS HAVING UNIFORM FACES, SHARP CORNERS, AND PRECISELY FORMED LINES AND PROFILES; AND AS FOLLOWS:

1. ILLUMINATED PANEL SIGN: BACKLIT CONSTRUCTION LIGHTING INCLUDING TRANSFORMERS, INSULATORS, AND/OR OTHER ACCESSORIES FOR OPERABILITY, WITH PROVISION FOR SERVICING AND CONCEALING CONNECTIONS TO BUILDING ELECTRICAL SYSTEM. USE TIGHT OR SEALED JOINT CONSTRUCTION TO PREVENT UNINTENTIONAL LIGHT LEAKAGE. SPACE LAMPS APART FROM EACH OTHER AND AWAY FROM SIGN SURFACES AS NEEDED TO ILLUMINATE EVENLY.
   a. POWER: AS INDICATED ON ELECTRICAL DRAWINGS.
2. MOUNTING: MANUFACTURER'S STANDARD METHOD FOR SUBSTRATES INDICATED ON EXTERIOR ELEVATIONS.

C. RESTROOM-IDENTIFICATION SIGN: SIGN WITH SMOOTH, UNIFORM SURFACES; WITH MESSAGE AND CHARACTERS HAVING UNIFORM FACES, SHARP CORNERS, AND PRECISELY FORMED LINES AND PROFILES; AND AS FOLLOWS:

1. LAMINATED-SHEET SIGN: FACE SHEET WITH RAISED GRAPHICS LAMINATED TO BACKING SHEET TO PRODUCE COMPOSITE SHEET.
   a. COLOR AS PER AUTHORITIES HAVING JURISDICTION.
2. MOUNTING: SURFACE MOUNTED TO WALL WITH ADHESIVE.

PART 3 - EXECUTION

3.1 INSTALLATION

A. GENERAL: INSTALL SIGNS USING MOUNTING METHODS INDICATED AND ACCORDING TO MANUFACTURER'S WRITTEN INSTRUCTIONS.

1. INSTALL SIGNS LEVEL, PLUMB, TRUE TO LINE, AND AT LOCATIONS AND HEIGHTS INDICATED, WITH SIGN SURFACES FREE OF DISTORTION AND OTHER DEFECTS IN APPEARANCE.
2. INSTALL SIGNS SO THEY DO NOT PROTRUDE OR OBSTRUCT ACCORDING TO THE ACCESSIBILITY STANDARD.
3. BEFORE INSTALLATION, VERIFY THAT SIGN SURFACES ARE CLEAN AND FREE OF MATERIALS OR DEBRIS THAT WOULD IMPAIR INSTALLATION.
4. CORROSION PROTECTION: COAT CONCEALED SURFACES OF EXTERIOR
   ALUMINUM IN CONTACT WITH GROUT, CONCRETE, MASONRY, WOOD, OR DISSIMILAR METALS, WITH A HEAVY COAT OF BITUMINOUS PAINT.

B. MOUNTING METHODS:

1. EXTERIOR ILLUMINATED BUILDING SIGNS: MOUNTING METHOD TO BE PROVIDED BY MANUFACTURER.
2. RESTROOM-IDENTIFICATION SIGN:
   a. ADHESIVE: CLEAN BOND-BREAKING MATERIALS FROM SUBSTRATE
      SURFACE AND REMOVE LOOSE DEBRIS. APPLY LINEAR BEADS OR SPOTS OF ADHESIVE SYMMETRICALLY TO BACK OF SIGN AND OF SUITABLE QUANTITY TO SUPPORT WEIGHT OF SIGN AFTER CURE WITHOUT SLIPPAGE. KEEP ADHESIVE AWAY FROM EDGES TO PREVENT ADHESIVE EXTRUSION AS SIGN IS APPLIED AND TO PREVENT VISIBILITY OF CURED ADHESIVE AT SIGN EDGES. PLACE SIGN IN POSITION, AND PUSH TO ENGAGE ADHESIVE. TEMPORARILY SUPPORT SIGN IN POSITION UNTIL ADHESIVE FULLY SETS.
   b. TWO-FACE TAPE: CLEAN BOND-BREAKING MATERIALS FROM SUBSTRATE SURFACE AND REMOVE LOOSE DEBRIS. APPLY TAPE STRIPS SYMMETRICALLY TO BACK OF SIGN AND OF SUITABLE QUANTITY TO SUPPORT WEIGHT OF SIGN WITHOUT SLIPPAGE. KEEP STRIPS AWAY FROM EDGES TO PREVENT VISIBILITY AT SIGN EDGES. PLACE SIGN IN POSITION, AND PUSH TO ENGAGE TAPE ADHESIVE.

C. REMOVE TEMPORARY PROTECTIVE COVERINGS AND STRIPPABLE FILMS AS SIGNS ARE INSTALLED.

END OF SECTION 10 14 23

WALL PROTECTION SECTION 10 26 00

PART 1 - GENERAL

1.1 SUMMARY

A. SECTION INCLUDES:

1. CORNER GUARDS.

1.2 ACTION SUBMITTALS

A. PRODUCT DATA: FOR EACH TYPE OF PRODUCT INDICATED.

B. SAMPLES: FOR EACH EXPOSED PRODUCT AND FOR EACH COLOR AND TEXTURE SPECIFIED, 12 INCHES LONG.

1.3 INFORMATIONAL SUBMITTALS

A. MATERIAL CERTIFICATES.

B. MATERIAL TEST REPORTS.

C. WARRANTY: SAMPLE OF SPECIAL WARRANTY.

1.4 CLOSEOUT SUBMITTALS

A. MAINTENANCE DATA.

1.5 QUALITY ASSURANCE

A. INSTALLER QUALIFICATIONS: AN EMPLOYER OF WORKERS TRAINED AND APPROVED BY MANUFACTURER.

B. SURFACE-BURNING CHARACTERISTICS: AS DETERMINED BY TESTING IDENTICAL PRODUCTS PER ASTM E 84, NFPA 255, OR UL 723 BY UL OR ANOTHER QUALIFIED TESTING AGENCY.

1.6 WARRANTY

A. SPECIAL WARRANTY: MANUFACTURER'S STANDARD FORM IN WHICH MANUFACTURER AGREES TO REPAIR OR REPLACE COMPONENTS OF IMPACT-RESISTANT WALL PROTECTION UNITS THAT FAIL IN MATERIALS OR WORKMANSHIP WITHIN SPECIFIED WARRANTY PERIOD.

1. FAILURES INCLUDE, BUT ARE NOT LIMITED TO, THE FOLLOWING:
   a. STRUCTURAL FAILURES.
   b. DETERIORATION OF PLASTIC AND OTHER MATERIALS BEYOND NORMAL USE.
2. WARRANTY PERIOD: FIVE YEARS FROM DATE OF SUBSTANTIAL COMPLETION.

PART 2 - PRODUCTS

2.1 MATERIALS

A. PVC PLASTIC: ASTM D 1784, CLASS 1, TEXTURED, CHEMICAL- AND STAIN-RESISTANT, HIGH-IMPACT-RESISTANT PVC OR ACRYLIC-MODIFIED VINYL PLASTIC WITH INTEGRAL COLOR THROUGHOUT.

1. IMPACT RESISTANCE TO MEET ASTM D 256, TEST METHOD A.
2. CHEMICAL AND STAIN RESISTANCE PER ASTM STANDARDS.
3. SELF-EXTINGUISHING WHEN TESTED ACCORDING TO ASTM D 635.
4. FLAME-SPREAD INDEX: 25 OR LESS.
5. SMOKE-DEVELOPED INDEX: 450 OR LESS.

B. POLYCARBONATE PLASTIC SHEET: ASTM D 6098, S-PC01, CLASS 1 OR 2, ABRASION RESISTANT; WITH A MINIMUM IMPACT-RESISTANCE RATING PER ASTM D 256, TEST METHOD A.

C. FASTENERS: ALUMINUM, NONMAGNETIC STAINLESS-STEEL, OR OTHER NONCORROSIVE METAL SCREWS, BOLTS, AND OTHER FASTENERS COMPATIBLE WITH ITEMS BEING FASTENED. USE SECURITY-TYPE FASTENERS WHERE EXPOSED TO VIEW.

D. ADHESIVE: AS RECOMMENDED BY IMPACT-RESISTANT PLASTIC WALL PROTECTION MANUFACTURER AND WITH A VOC CONTENT LIMIT LISTED ON TABLE 1 (VOC CONTENT LIMITS FOR ADHESIVES) LISTED IN EPA CHAPTER 159 STANDARD: CONTROL OF VOLATILE ORGANIC COMPOUNDS FROM ADHESIVES AND SEALANTS)..

2.2 CORNER GUARDS

A. SURFACE-MOUNTED, RESILIENT, CORNER GUARDS: ASSEMBLY CONSISTING OF COVER INSTALLED OVER CONTINUOUS RETAINER; INCLUDING MOUNTING HARDWARE; FABRICATED WITH 90-DEGREE TURN.

1. CRANE COMPOSITES, INC.
2. MARLITE PRODUCTS, INC.

B. COLOR AND TEXTURE (TO BE VERIFIED WITH OWNER):

1. STAINLESS STEEL.
2. PVC PLASTIC - WHITE .

C. RETAINER CLIPS: MANUFACTURER'S STANDARD IMPACT-ABSORBING CLIPS.

1. TOP AND BOTTOM CAPS: PREFABRICATED, INJECTION-MOLDED PLASTIC; COLOR MATCHING COVER; FIELD ADJUSTABLE FOR CLOSE ALIGNMENT WITH SNAP-ON COVER.

PART 3 - EXECUTION

3.1 INSTALLATION

A. GENERAL: INSTALL IMPACT-RESISTANT WALL PROTECTION UNITS LEVEL, PLUMB, AND TRUE TO LINE WITHOUT DISTORTIONS. DO NOT USE MATERIALS WITH CHIPS, CRACKS, VOIDS, STAINS, OR OTHER DEFECTS THAT MIGHT BE VISIBLE IN THE FINISHED WORK.

1. INSTALL IMPACT-RESISTANT WALL PROTECTION UNITS IN LOCATIONS AND AT MOUNTING HEIGHTS INDICATED ON DRAWINGS.
2. PROVIDE SPLICES, MOUNTING HARDWARE, ANCHORS, AND OTHER ACCESSORIES REQUIRED FOR A COMPLETE INSTALLATION.
   a. PROVIDE ANCHORING DEVICES TO WITHSTAND IMPOSED LOADS.

B. IMMEDIATELY AFTER COMPLETION OF INSTALLATION, CLEAN PLASTIC COVERS AND ACCESSORIES USING A STANDARD, AMMONIA-BASED, HOUSEHOLD CLEANING AGENT.

C. REMOVE EXCESS ADHESIVE USING METHODS AND MATERIALS RECOMMENDED IN WRITING BY MANUFACTURER.

END OF SECTION 10 26 00

TOILET ACCESSORIES SECTION 10 28 00

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. DRAWINGS AND GENERAL PROVISIONS OF CONTRACT APPLY TO THIS SECTION.

1.2 QUALITY ASSURANCE

A. SINGLE-SOURCE RESPONSIBILITY: PROVIDE PRODUCTS OF SAME MANUFACTURER FOR EACH TYPE OF ACCESSORY UNIT AND FOR UNITS EXPOSED TO VIEW IN SAME AREAS.

1.3 PROJECT CONDITIONS

A. COORDINATION: COORDINATE ACCESSORY LOCATIONS, INSTALLATION, AND SEQUENCING WITH OTHER WORK TO AVOID INTERFERENCE AND TO ASSURE PROPER INSTALLATION, OPERATION, ADJUSTMENT, CLEANING, AND SERVICING OF TOILET ACCESSORY ITEMS.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. SEE EQUIPMENT PLAN AND SCHEDULE FOR TOILET ACCESSORIES INFORMATION.

2.2 MATERIALS GENERAL

A. STAINLESS STEEL: AISI TYPE 302/304, WITH POLISHED NO. 4 FINISH, 22 GAUGE (.034 INCH) MINIMUM THICKNESS.

B. BRASS: LEADED AND UNLEADED, FLAT PRODUCTS, ASTM B19; RODS, SHAPES, FORGINGS, AND FLAT PRODUCTS WITH FINISHED EDGES, ASTM B16; CASTINGS, ASTM B30.

C. CHROMIUM PLATING: NICKEL AND CHROMIUM ELECTRO-DEPOSITED ON BASE METAL, ASTM B 456, TYPE SC2.

D. FASTENERS: SCREWS, BOLTS, AND OTHER DEVICES OF SAME MATERIAL AS ACCESSORY UNIT OR OF GALVANIZED STEEL WHERE CONCEALED.

E. ALL STEEL PRODUCTS SHALL BE FABRICATED UTILIZING ONLY DOMESTICALLY PRODUCED STEEL.

2.3 RECESSED SANITARY NAPKIN DISPOSAL

A. SATIN-FINISH STAINLESS STEEL. SEAMLESS BEVELED FLANGE. DOOR HAS TUMBLER LOCK. SELF-CLOSING PANEL COVERS DISPOSAL OPENING. REMOVABLE, LEAK-PROOF, 1.2 GAL. PLASTIC RECEPTACLE.

2.4 BABY-CHANGING TABLE

A. SURFACE MOUNTED TYPE, HORIZONTAL. POLYPROPYLENE AND UNIBODY STEEL CHASSIS. STEEL ON STEEL HINGE WITH GAS SPRING MECHANISM.

2.5 SEMI-RECESSED GARBAGE

A. TYPE 304 STAINLESS STEEL ALLOY 18-8 WITH SATIN FINISH. 18 GAUGE DOOR MOUNTED ON STAINLESS STEEL PIANO HINGE AND SHALL BE HELD CLOSED WITH TUMBLER. 20 GAUGE PUSH DOOR WITH INTERNATIONAL GRAPHIC SYMBOL IDENTIFYING WASTE DISPOSAL.

2.6 GRAB BARS

A. STAINLESS STEEL TYPE: PROVIDE GRAB BARS WITH WALL THICKNESS NOT LESS THAN 0.05 INCH (18 GAUGE). MOUNTING: CONCEALED, MANUFACTURER'S STANDARD FLANGES AND ANCHORAGE. MOUNTING PER MANUFACTURER'S STANDARD FLANGES AND ANCHORAGE. CLEARANCE: 1-1/2 INCH CLEARANCE BETWEEN WALL SURFACE AND INSIDE FACE OF BAR. GRIPPING SURFACES: MANUFACTURER'S STANDARD. HEAVY-DUTY SIZE: OUTSIDE DIAMETER OF 1-1/2 INCHES. PROVIDE ONE 18" LONG GRAB BAR; ONE 36" LONG GRAB BAR; ONE 42"
LONG GRAB BAR; PER RESTROOM.

2.7 HAND DRYER

A. WARM AIR, RAPID DRYING, ENERGY EFFICIENT ELECTRIC HAND DRYER. SURFACE MOUNTED. RECESSED KIT. POWER SOURCE 110/120V, 12.5AMP.

2.8 MIRROR UNIT

A. STAINLESS STEEL FRAMED MIRROR UNITS: FABRICATE FRAME WITH ANGLE SHAPES NOT LESS THAN 0.05 INCH (18 GAUGE), WITH SQUARE CORNERS MITERED, WELDED, AND GROUND SMOOTH. PROVIDE IN NO. 4 SATIN POLISHED FINISH. ONE REQUIRED OVER EACH TOILET ROOM SINK.

2.9 MISCELLANEOUS ACCESSORIES

A. MOP AND BROOM HOLDER: WALL MOUNTING. 0.062 INCH (16 GAUGE) STAINLESS STEEL WITH SPRING-LOADED, RUBBER HAT, CAM-TYPE MOP/BROOM HOLDERS. PROVIDE UNIT 24 INCHES LONG AND COMPLETE WITH FOUR MOP/BROOM HOLDERS.

B. DOUBLE-PRONG ROBE HOOK: HEAVY-DUTY SATIN FINISHED STAINLESS STEEL DOUBLE-PRONG ROBE HOOK. RECTANGULAR WALL BRACKET WITH BACKPLATE FOR CONCEALED MOUNTING. ONE REQUIRED FOR EACH TOILET ROOM.

2.10 FABRICATION

A. GENERAL: A MAXIMUM 1-1/2 INCH DIAMETER, UNOBTRUSIVE STAMPED LOGO OF MANUFACTURER, AS APPROVED BY ARCHITECT, IS PERMITTED ON EXPOSED FACE OF TOILET OR BATH ACCESSORY UNITS. ON EITHER INTERIOR SURFACE NOT EXPOSED TO VIEW OR BACK SURFACE, PROVIDE ADDITIONAL IDENTIFICATION BY MEANS OF EITHER A PRINTED, WATERPROOF LABEL OR A STAMPED NAMEPLATE, INDICATING MANUFACTURER'S NAME AND PRODUCT MODEL NUMBER.

B. SURFACE-MOUNTED TOILET ACCESSORIES, GENERAL: EXCEPT WHERE OTHERWISE INDICATED, FABRICATE UNITS WITH TIGHT SEAMS AND JOINTS, EXPOSED EDGES ROLLED. HANG DOORS OR ACCESS PANELS WITH CONT. STAINLESS STEEL PIANO HINGE. PROVIDE CONCEALED ANCHORAGE WHEREVER POSSIBLE.

C. KEYS: PROVIDE UNIVERSAL KEYS FOR ACCESS TO TOILET ACCESSORY UNITS REQUIRING INTERNAL ACCESS FOR SERVICING, RE-SUPPLY, ETC. PROVIDE MINIMUM OF SIX KEYS TO OWNER'S REPRESENTATIVE.

PART 3 - EXECUTION

3.1 INSTALLATION

A. INSTALL TOILET ACCESSORY UNITS IN ACCORDANCE WITH MANUFACTURER'S INSTRUCTIONS, USING FASTENERS APPROPRIATE TO SUBSTRATE AS RECOMMENDED BY MANUFACTURER. INSTALL UNITS PLUMB AND LEVEL, FIRMLY ANCHORED IN LOCATIONS AND AT HEIGHTS INDICATED.

B. IN LOCATIONS MARKED FOR HANDICAPPED ACCESSIBILITY, INSTALL TOILET ACCESSORIES IN COMPLIANCE WITH REQUIREMENTS OF THE AMERICAN WITH DISABILITIES ACT ACCESSIBILITY GUIDELINES (ADAAG).

C. SECURE MIRRORS TO WALLS IN CONCEALED, TAMPERPROOF MANNER WITH SPECIAL HANGERS, TOGGLE BOLTS OR SCREWS. SET UNITS PLUMB, LEVEL, AND SQUARE AT LOCATIONS INDICATED, IN ACCORDANCE WITH MANUFACTURER'S INSTRUCTION FOR TYPE OF SUBSTRATE INVOLVED.

D. INSTALL GRAB BARS TO WITHSTAND A DOWNWARD LOAD OF AT LEAST 250 LBF, COMPLYING WITH ASTM F446.

3.2 ADJUSTING AND CLEANING

A. ADJUST TOILET ACCESSORIES FOR PROPER OPERATION AND VERIFY THAT MECHANISMS FUNCTION SMOOTHLY. REPLACE DAMAGED OR DEFECTIVE ITEMS.

B. CLEAN AND POLISH ALL EXPOSED SURFACES IN STRICT ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS AFTER REMOVING TEMPORARY LABELS AND PROTECTIVE COATINGS.

END OF SECTION 10 28 00

FIRE PROTECTION SPECIALTIES SECTION 10 44 00

(AS APPLICABLE)

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. DRAWINGS AND GENERAL PROVISIONS OF CONTRACT APPLY TO THIS SECTION.

1.2 QUALITY ASSURANCE

A. SINGLE-SOURCE RESPONSIBILITY: OBTAIN EXTINGUISHERS AND CABINETS FROM A SINGLE MANUFACTURER.

B. COORDINATION: VERIFY THAT CABINETS ARE SIZED TO ACCOMMODATE TYPE AND CAPACITY
OF EXTINGUISHERS INDICATED.

C. UL-LISTED PRODUCTS: FIRE EXTINGUISHERS SHALL BE UL LISTED WITH UL LISTING MARK FOR TYPE, RATING, AND CLASSIFICATION OF FIRE EXTINGUISHER.

D. NFPA COMPLIANCE: FABRICATE AND LABEL FIRE EXTINGUISHERS TO COMPLY WITH NFPA 10, "STANDARD FOR PORTABLE FIRE EXTINGUISHERS".

E. FIRE EXTINGUISHERS: LISTED AND LABELED FOR TYPE, RATING, AND CLASSIFICATION BY AN INDEPENDENT TESTING AGENCY ACCEPTABLE TO AUTHORITIES HAVING JURISDICTION.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. PORTABLE FIRE EXTINGUISHES AND CABINETS: SUBJECT TO COMPLIANCE WITH REQUIREMENTS, PROVIDE PRODUCTS BY ONE OF THE FOLLOWING: POTTER ROEMER.

2.2 MATERIALS

A. COLD-ROLLED STEEL SHEET: CARBON STEEL, COMPLYING WITH ASTM A366/A366M, COMMERCIAL QUALITY, STRETCHED LEVELED, TEMPER ROLLED.

B. ALUMINUM: ALLOY AND TEMPER RECOMMENDED BY ALUMINUM PRODUCER AND MANUFACTURER FOR TYPE OF USE AND FINISH INDICATED AS FOLLOWS:

1. SHEET: ASTM B209.
2. EXTRUDED SHAPES: ASTM B221.

STAINLESS-STEEL SHEET: ASTM A666, TYPE 302 OR TYPE 304 ALLOY.

2.3 PORTABLE FIRE EXTINGUISHERS

A. GENERAL: PROVIDE FIRE EXTINGUISHERS OF TYPE, SIZE, AND CAPACITY FOR EACH CABINET AND OTHER LOCATIONS INDICATED.

B. MULTIPURPOSE DRY-CHEMICAL TYPE: UL-RATED 4-A:60-B:C, 10-LB NOMINAL CAPACITY, IN ENAMELED STEEL CONTAINER.

2.4 FIRE - PROTECTION CABINETS

A. CABINET CONSTRUCTION: PROVIDE MANUFACTURER'S STANDARD BOX (TUB), WITH TRIM, FRAME, DOOR, AND HARDWARE TO SUIT CABINET TYPE, TRIM STYLE, AND DOOR STYLE INDICATED. WELD JOINTS AND GRIND SMOOTH. MITER AND WELD PERIMETER DOOR FRAMES. CONTRACTOR TO VERIFY COLOR SELECTION OF ALL FIRE-PROTECTION CABINETS WITH OWNER PRIOR TO ANY WORK.

1. FIRE-RATED CABINETS: LISTED AND LABELED TO MEET REQUIREMENTS OF ASTM E814 FOR FIRE-RESISTANCE RATING OF WALL WHERE IT IS INSTALLED. CONSTRUCTION FIRE-RATED CABINETS WITH DOUBLE WALLS FABRICATED FROM 0.0478 INCH THICK, COLD-ROLLED STEEL SHEET LINED WITH MINIMUM 5/8 INCH THICK, FIRE-BARRIER MATERIAL. PROVIDE FACTORY DRILLED MOUNTING HOLES.
2. CABINET METAL: ENAMELED STEEL HOLES.

B. CABINET TYPE: SUITABLE FOR FIRE EXTINGUISHER.

C. CABINET MOUNTING: PROVIDE SEMI-RECESSED CABINET BOX PARTIALLY TO SUIT STYLE OF TRIM INDICATED. LOCATE CABINET PER ADAAG'S REACH REQUIREMENTS. FOR AN UNOBSTRUCTED APPROACH, THE MAXIMUM REACH IS 48 INCHES (1220 MM) ABOVE THE FLOOR. THE MAXIMUM REACH FOR A SIDE APPROACH IS 54 INCHES (1370 MM).

D. CABINET TRIM STYLE: FABRICATE TRIM IN ONE PIECE WITH CORNERS MITERED, WELDED, AND GROUND SMOOTH. EXPOSED TRIM: ONE-PIECE COMBINATION TRIM AND PERIMETER DOOR FRAME OVERLAPPING SURROUNDING WALL SURFACE WITH EXPOSED TRIM FACE AND WALL RETURN AT OUTER EDGE (BACKEND). ROLLED-EDGE TRIM: 2-1/2 INCH BACKBEND DEPTH.

E. CABINET TRIM MATERIAL: MANUFACTURER'S STANDARD, SAME METAL AND FINISH AS DOOR.

F. DOOR MATERIAL: MANUFACTURER'S STANDARD, SHEET METAL.

G. DOOR STYLE: MANUFACTURER'S STANDARD DESIGN, SOLID OPAQUE PANEL WITH FRAME.

H. DOOR CONSTRUCTION: FABRICATE DOORS ACCORDING TO MANUFACTURER'S STANDARDS, OF MATERIALS INDICATED, AND COORDINATED WITH CABINET TYPES AND TRIM STYLES SELECTED.

I. DOOR HARDWARE: PROVIDE MANUFACTURER'S STANDARD DOOR-OPERATING HARDWARE OF PROPER TYPE FOR CABINET TYPE, TRIM STYLE, AND DOOR MATERIAL AND STYLE INDICATED. PROVIDE EITHER LEVER HANDLE WITH CAM-ACTION LATCH, OR EXPOSED OR CONCEALED DOOR PULL AND FRICTION LATCH. PROVIDE CONCEALED OR CONTINUOUS-TYPE HINGE PERMITTING DOOR TO OPEN 180 DEGREES.

2.5 ACCESSORIES

A. MOUNTING BRACKETS: MANUFACTURER'S STANDARD STEEL, DESIGNED TO SECURE EXTINGUISHER, OF SIZES REQUIRED FOR TYPES AND CAPACITIES OF EXTINGUISHERS INDICTED, WITH PLATED OR BAKED ENAMEL FINISH.

1. PROVIDE BRACKETS FOR EXTINGUISHERS NOT LOCATED IN CABINETS.
2. PROVIDE BRACKETS FOR EXTINGUISHERS LOCATED IN CABINETS.

B. IDENTIFICATION: PROVIDE LETTERING TO COMPLY WITH AUTHORITIES HAVING JURISDICTION FOR LETTER STYLE, COLOR, SIZE, SPACING, AND LOCATION. LOCATE AS DIRECTED BY THE OWNERS REPRESENTATIVE.

1. IDENTIFY FIRE EXTINGUISHER IN CABINET WITH THE WORDS "FIRE EXTINGUISHER" APPLIED TO DOOR. APPLY BLACK VINYL LETTERS, HORIZONTALLY.

2.6 COLORS AND TEXTURES

A. COLORS AND TEXTURES: AS SELECTED BY OWNER FROM MANUFACTURER'S FULL RANGE FOR CHARACTERISTICS.

2.7 FINISHES, GENERAL

A. COMPLY WITH NAAMM'S "METAL FINISHES MANUAL" FOR RECOMMENDATIONS FOR APPLYING AND DESIGNATION FINISHES.

B. PROTECT MECHANICAL FINISHES ON EXPOSED SURFACES FROM DAMAGE BY APPLYING A STRIPPABLE, TEMPORARY PROTECTIVE COVERING BEFORE SHIPPING.

C. APPEARANCE OF FINISHED WORK: VARIATIONS IN APPEARANCE OF ABUTTING OR ADJACENT PIECES ARE ACCEPTABLE IF THEY ARE WITHIN ONE-HALF OF THE RANGE OF APPROVED SAMPLES. NOTICEABLE VARIATIONS IN THE SAME PIECE ARE NOT ACCEPTABLE. VARIATIONS IN APPEARANCE OF OTHER COMPONENTS ARE ACCEPTABLE IF THEY ARE WITHIN THE RANGE OF THE APPROVED SAMPLES AND ARE ASSEMBLED OR INSTALLED TO MINIMIZE CONTRAST.

D. CABINET AND DOOR FINISHES: PROVIDE MANUFACTURER'S STANDARD BAKED-ENAMEL PAINT FOR THE FOLLOWING:

1. EXTERIOR OF CABINETS AND DOORS.
2. INTERIOR OF CABINETS AND DOORS.

2.8 STEEL FINISHES

A. SURFACE PREPARATION: CLEANING SURFACES OF DIRT, OIL, GREASE, MILL SCALE, RUST, AND CONTAMINANTS THAT COULD IMPAIR PAINT BOND USING MANUFACTURER'S STANDARD METHODS.

B. FACTORY PRIMING FOR FIELD PAINTED FINISH: APPLY SHOP PRIMER SPECIFIED BELOW IMMEDIATELY AFTER SURFACE PREPARATION AND PRETREATMENT.

1. SHOP PRIMER: MANUFACTURER'S OR FABRICATOR'S STANDARD, FAST-CURING, LEAD AND CHROMATE-FREE, UNIVERSAL PRIMER, SELECTED FOR RESISTANCE TO NORMAL ATMOSPHERIC CORROSION, FOR COMPATIBILITY TO PROVIDE A SOUND FOUNDATION FOR FIELD-APPLIED
   TOPCOATS DESPITE PROLONGED EXPOSURE.

C. BAKED-ENAMEL FINISH: IMMEDIATELY AFTER CLEANING PRETREATING, APPLY MANUFACTURER'S STANDARD TWO-COAT, BAKED-ENAMEL FINISH CONSISTING OF PRIME COAT AND THERMOSETTING TOPCOAT. COMPLY WITH PAINT MANUFACTURER'S WRITTEN INSTRUCTIONS FOR APPLYING AND BAKING TO ACHIEVE A MINIMUM DRY FILM THICKNESS OF 2 MILS.

1. COLOR AND GLOSS: AS SELECTED BY OWNER FROM MANUFACTURER'S FULL RANGE.

PART 3 - EXECUTION

3.1 EXAMINATION

A. EXAMINE WALLS ROUGH-IN FOR HOSE VALVES, HOSE RACKS, AND CABINETS TO VERIFY ACTUAL
LOCATIONS OF PIPING CONNECTIONS BEFORE CABINET INSTALLATION.

B. EXAMINE WALLS AND PARTITIONS FOR SUITABLE FRAMING DEPTH AND BLOCKING WHERE RECESSED AND SEMI-RECESSED CABINETS ARE TO INSTALLED.

C. EXAMINE FIRE EXTINGUISHERS FOR PROPER CHARGING AND TAGGING.

1. REMOVE AND REPLACE DAMAGE, DEFECTIVE, OR UNDERCHARGED UNITS.

D. PROCEED WITH INSTALLATION ONLY AFTER UNSATISFACTORY CONDITIONS HAVE BEEN CORRECTED.

3.2 INSTALLATION

A. COMPLY WITH MANUFACTURER'S WRITTEN INSTRUCTIONS FOR INSTALLING FIRE-PROTECTION
SPECIALTIES.

B. INSTALL IN LOCATIONS AND AT MOUNTING HEIGHTS INDICATED OR, IF NOT INDICATED, AT HEIGHTS ACCEPTABLE TO AUTHORITIES HAVING JURISDICTION.

1. PREPARE RECESSES FOR CABINETS AS REQUIRED BY TYPE AND SIZE OF CABINET AND TRIM STYLE.
2. FASTEN MOUNTING BRACKETS TO STRUCTURE AND CABINETS, SQUARE AND PLUMB.
3. FASTEN CABINETS TO STRUCTURE, SQUARE AND PLUMB.

3.3 ADJUSTING, CLEANING AND PROTECTION

A. ADJUST CABINET DOORS THAT DO NOT SWING OR OPERATE FREELY.

B. REFINISH OR REPLACE CABINETS AND DOORS DAMAGED DURING INSTALLATION.

C. PROVIDE FINAL PROTECTION AND MAINTAIN CONDITIONS THAT ENSURE THAT CABINETS AND DOORS ARE WITHOUT DAMAGE OR DETERIORATION AT THE TIME OF SUBSTANTIAL COMPLETION.

3.4 FIRE-PROTECTION CABINET SCHEDULE

A. FIRE-PROTECTION CABINET PROVIDE FIRE-PROTECTION CABINET COMPLYING WITH THE FOLLOWING:

1. CONSTRUCTION: NONRATED.
2. CABINET MATERIAL: STEEL-COLD ROLLED STEEL W/ RECOATABLE WHITE POLYESTER FINISH.
3. TYPE: FIRE EXTINGUISHER.
4. MOUNTING: SEMIRECESSED.
5. TRIM STYLE: EXPOSED, 2 INCH.
6. CABINET TRIM MATERIAL: SAME MATERIAL AND FINISH AS CABINET.
7. DOOR MATERIAL: SAME MATERIAL AND FINISH AS CABINET.
8. DOOR STYLE: FULL GLASS W/ TEMPERED SAFETY GLASS.
9. ACCESSORIES: MOUNTING BRACKETS, AND INDENTIFICATION LETTERING.

END OF SECTION 10 44 00

DIVISION 12 - WINDOW TREATMENTS

ROLL-DOWN BLINDS SECTION 12 21 23

(AS APPLICABLE - CONFIRM W/ POPEYES DESIGN MANAGER)

PART 1 - GENERAL

1.1 SUMMARY

A. MANUAL ROLLER SHADES AND HARDWARE.

1.2 SYSTEM DESCRIPTION

A. CLUTCH OPERATED ROLLER SHADES WITH BEAD CHAIN CONTROL.

1.3 SUBMITTALS

A. PRODUCT DATA: SUBMIT AN ELECTRONIC PDF COPY OF MANUFACTURER'S TECHNICAL DATA AND INSTALLATION INSTRUCTIONS.

B. SAMPLES: SUBMIT THREE SAMPLES OF EACH SHADE CLOTH WITH COMPLETE COLOR SWATCH.

C. SHOP DRAWINGS: SUBMIT DRAWINGS OF MECHANICAL PRODUCTS WITH APPROPRIATE DIMENSIONS.

1.4 QUALITY ASSURANCE

A. THE MANUFACTURER OF THESE PRODUCTS SHALL SHOW A MINIMUM OF 20 YEARS DOCUMENTED EXPERIENCE.

B. THE INSTALLER SHALL SHOW A MINIMUM OF 3 YEARS EXPERIENCE WITH THESE SYSTEMS.

PART 2 - PRODUCTS

2.1 MANUFACTURER

A. SOS "SUN OR SHADE" A DIVISION OF INSIDE OUTFITTERS, INC.
8333 GREEN MEADOWS DRIVE N., STE B, LEWIS CENTER, OH, 43085
P: 800.742.3372, F: 877.880.3496, E:INFO@SOSSHADES.COM

2.2 MATERIALS

A. SHADE FABRICS: TRANSLUCENT FABRICS HAVE AN OPENNESS FACTOR OF 10%. THE FABRIC SHALL HAVE A HIGH DEGREE OF OPACITY FOR EFFECTIVE CONTROL OF LIGHT. THE FABRIC MUST HAVE SUFFICIENT RIGIDITY TO INSURE STRAIGHT HANGING, RESIST CURL, TWIST, BOWING AND DISTORTION. IT MUST BE DIMENSIONALLY STABLE AND WILL NOT SHRINK OR STRETCH. THE FABRIC IS TO BE COLORFAST AND SHALL NOT BE AFFECTED BY MOISTURE OR HEAT. THE COLOR SHALL BE SELECTED FROM STANDARD COLORS. ALL SEAMS ARE TO BE HEAT-SEALED. SEWING IS NOT ACCEPTED. THE FABRIC COLOR SHALL BE SELECTED FROM THE MANUFACTURER'S STANDARD COLOR LINE.
SHEERWEAVE 4100 - COLOR PEBBLESTONE
FABRIC STYLE (10% OPENNESS)

B. TUBE: THE FABRIC SHADES SHALL BE MOUNTED ON TO A 1-1/4", 1-1/2", 2", OR 2-1/2" OR 3.1 DIAMETER ALUMINUM TUBE DEPENDING ON THE WIDTH OF THE SHADE AND FABRIC CHOSEN FOR THE SHADE.

C. BEAD CHAIN CLUTCH: THE CLUTCH INCORPORATES AN ADJUSTABLE SLIP CLUTCH TO CONTROL THE RATE OF FALL FROM FREE RUNNING ZERO FRICTION FACTOR TO A FACTOR OF 100%. THE SHADE MAY BE ADJUSTED TO STOP AND HOLD AT ANY POSITION. THE BEAD CHAIN SHALL CONTAIN AUTOMATIC STOPS TO PREVENT THE SHADE FROM OVER WINDING OR UNROLLING. THE BEAD CHAIN WILL BE SECURED BY A HOLD DOWN CLIP.

1. BEAD CHAIN: BEAD CHAIN WILL NICKEL BALL TYPE.

D. EASY LIFT: THIS OPTION IS ADDED TO ALL SHADES THAT ARE OVER 30 POUNDS.

E. HEMBAR: SHALL BE A CONTINUOUS ALUMINUM BAR 1" X 3/16" WITH SUFFICIENT WEIGHT TO ALLOW THE SHADE TO CLOSE WITHOUT BUCKLING OR SAGGING. STANDARD HEMBAR IS WRAPPED IN FABRIC AND SEALED AROUND ALL EDGES.

F. SHADE MOUNTING BRACKETS: SHADE MOUNTING BRACKETS: SHALL BE MANUFACTURED FROM .060" GALVANIZED STEEL, REVERSIBLE FOR RIGHT AND LEFT HAND MOUNTING. THE BRACKETS MAY BE FIELD MOUNTED INSIDE, OUTSIDE OR CEILING MOUNTED. FASCIA BRACKETS SHALL MATCH FASCIA COLOR.

G. FASCIA SYSTEM: ALL FASCIA SYSTEMS SHALL BE PRIME PAINTED WITH BAKED ENAMEL UTILIZING THE POWDER PAINT METHOD TO ENSURE AN ENVIRONMENTAL FRIENDLY APPLICATION. WET PAINT METHOD SHALL NOT BE ACCEPTED.

1. L-ANGLE FASCIA: FASCIA PANELS SHALL BE MADE FROM EXTRUDED ALUMINUM. FASCIA FACE SHALL BE 3" OR 4" TO ACCOMMODATE SHADE ROLL. FASCIA SHALL CLIP TO BRACKETS AND SNAP EASILY INTO PLACE. IT SHALL BE EASILY REMOVED FOR ANY NECESSARY MAINTENANCE.
   a. FASCIA COLOR: VANILLA.

PART 3 - EXECUTION

3.1 INSTALLATION

A. INSTALL THE SHADES WHERE SHOWN ON THE CONTRACT DRAWINGS IN ACCORDANCE WITH PRINTED INSTRUCTIONS PROVIDED BY THE MANUFACTURER, SOS SHADE SYSTEMS, OR A MODIFICATION AS APPROVED BY THE MANUFACTURER.

B. THE SHADE FABRIC SHALL HANG FLAT WITHOUT BUCKLING OR DISTORTION. THE EDGE WHEN TRIMMED, SHALL HANG STRAIGHT WITHOUT CURLING OR RAVELING. UNGUIDED ROLLER FABRICS SHALL ROLL WITHOUT SHIFTING SIDEWAYS MORE THAN 1/4" IN EITHER DIRECTION. TOLERANCE FOR BRACKETS SHALL NOT EXCEED 3/4" ON EITHER SIDE.

C. VERIFY THAT ALL SURFACES AND OPENINGS ARE READY TO RECEIVE THE WORK. DO NOT COMMENCE THE WORK UNTIL THE INSTALLER VERIFIES FIELD MEASUREMENTS.

D. BEGINNING THE INSTALLATION INDICATES THE INSTALLER ACCEPTS THE SUBSTRATE.

3.2 ADJUSTING

A. THE SYSTEM SHALL BE ADJUSTED BY THE INSTALLER FOR SMOOTH OPERATION. ALL COMPLETED SHADES WILL BE OPERATED BY THE INSTALLER TO ENSURE THAT THEY FUNCTION CORRECTLY.

B. INSTRUCT THE OWNERS OR HIS REPRESENTATIVE AS TO THE PROPER OPERATING PROCEDURES AND MAINTENANCE OF THE SYSTEM.

END OF SECTION 12 21 23

ISSUE TABLE

No.	Date (mm/dd/yy)	Description
01	09-26-25	DTGO PROTOTYPE DOCUMENTS

REVISIONS

No.	Date	Description

DRAWINGS REVISED AS PER DESIGN BULLETIN

No.	Date	Description

THIS DRAWING IS OWNED BY OR LICENSED FOR USE BY POPEYES LOUISIANA KITCHEN (OR ITS AFFILIATED OR RELATED COMPANIES) AND MAY NOT BE REPRODUCED, USED, DOWNLOADED, DISSEMINATED, PUBLISHED, OR TRANSFERRED IN ANY FORM OR BY ANY MEANS, EXCEPT WITH THE PRIOR WRITTEN CONSENT OF POPEYES LOUISIANA KITCHEN . COPYRIGHT INFRINGEMENT IS A VIOLATION OF FEDERAL LAW SUBJECT TO CRIMINAL AND CIVIL PENALTIES.

THE CONTRACTOR IS TO VERIFY ALL DIMENSIONS AND CONDITIONS ON THE PROJECT AND TO REPORT ANY DISCREPANCIES TO THE POPEYES LOUISIANA KITCHEN REPRESENTATIVE PRIOR TO COMMENCING WORK. THESE DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION PURPOSES UNLESS INDICATED BY POPEYES LOUISIANA KITCHEN AS "ISSUED FOR CONSTRUCTION".

Professional Seal

DESIGNER NOTES:
DESIGN GUIDELINE ONLY - NOT FOR PERMIT OR CONSTRUCTION

THESE DOCUMENTS MUST BE COMPLETED AND / OR MODIFIED BY A LICENSED ARCHITECT AND ENGINEER TO CONFORM TO ALL APPLICABLE CODES, AND SPECIFIC SITE CONDITIONS. THERE IS NO WARRANTY, WHETHER IMPLIED OR EXPRESSED THAT THESE DOCUMENTS MEET THE APPLICABLE CODE REQUIREMENTS.
LIABILITY FOR THE DESIGN AND ANY USE OF THE DOCUMENTS IS THE SOLE RESPONSIBILITY OF THE ARCHITECT AND ENGINEER OF RECORD.

Company Logo

Project

Store Type: US DTGO PROTOTYPE

Location: PROTOTYPE DTGO (U.S.)
CITY, STATE

Drawing Title: ARCHITECTURAL SPECIFICATIONS

Drawn	Checked
XX	XX
Scale	Date
	##.##.####
Project No.	Drawing No.
XX	SP7

POPEYES LOUISIANA KITCHEN MODEL DTGO, ADDRESS, CITY, STATE: DTGO PROTOTYPE DOCUMENTS (OCTOBER, 2025) STORE NO. XXXXX

PROJECT SPECIFICATIONS

DIVISION 01 - GENERAL REQUIREMENTS

GENERAL REQUIREMENTS — SECTION 01 01 00

DIVISION 02 - EXISTING CONDITIONS (NOT INCLUDED)

DIVISION 03 - CONCRETE

REINFORCED CONCRETE — SECTION 03 30 00

DIVISION 04 - MASONRY

UNIT MASONRY — SECTION 04 20 00

DIVISION 05 - METALS

DECORATIVE METAL RAILING — SECTION 05 73 00

DIVISION 06 - WOOD, PLASTICS AND COMPOSITES

ROUGH CARPENTRY — SECTION 06 10 00
SHEATHING — SECTION 06 16 00
SHOP FABRICATED WOOD TRUSSES — SECTION 06 17 53
FINISH CARPENTRY — SECTION 06 20 00

DIVISION 07 - THERMAL AND MOISTURE PROTECTION

THERMAL INSULATION — SECTION 07 21 00
EXTERIOR INSULATION AND FINISH SYSTEMS — SECTION 07 24 00
FLUID APPLIED MEMBRANE AIR BARRIER — SECTION 07 27 26
EXTRUDED ALUMINUM SIDING — SECTION 07 46 16
MEMBRANE ROOFING — SECTION 07 50 00
SHEET METAL FLASHING AND TRIM — SECTION 07 62 00
GUTTERS AND DOWNSPOUTS — SECTION 07 71 23
FIRESTOPPING — SECTION 07 84 00
JOINT SEALANTS — SECTION 07 92 00

DIVISION 08 - OPENINGS

METAL DOORS AND FRAMES — SECTION 08 11 00
ALUMINUM ENTRANCES AND STOREFRONT WINDOWS — SECTION 08 41 13
PASS-THRU WINDOWS — SECTION 08 56 19
DOOR HARDWARE — SECTION 08 70 00
GLAZING — SECTION 08 80 00

DIVISION 09 - FINISHES

GYPSUM BOARD ASSEMBLIES — SECTION 09 21 00
CERAMIC TILING — SECTION 09 30 13
ACOUSTIC TILE CEILINGS — SECTION 09 51 23
FIBERGLASS REINFORCED PANELS — SECTION 09 77 50
PAINTING — SECTION 09 91 00

DIVISION 10 - SPECIALTIES

SIGNAGE — SECTION 10 14 23
WALL PROTECTION — SECTION 10 26 00
TOILET ACCESSORIES — SECTION 10 28 00
FIRE PROTECTION SPECIALTIES — SECTION 10 44 00

DIVISION 12 - WINDOW TREATMENTS

ROLL-DOWN BLINDS — SECTION 12 21 23

DIVISION 22 - PLUMBING

SEE MECHANICAL DRAWINGS

DIVISION 23 - HEATING, VENTILATING AND AIR CONDITIONING (HVAC)

SEE MECHANICAL DRAWINGS

DIVISION 26 - ELECTRICAL

SEE ELECTRICAL DRAWINGS

APPROVED SUPPLIERS LIST

BIDDING REQUIREMENTS; INSTRUCTIONS TO BIDDERS

EXAMINATION OF SITE:
ALL BIDDERS SUBMITTING PROPOSALS FOR THIS WORK SHALL FIRST EXAMINE THE SITE (PREMISES) AND ALL SUCH CONDITIONS AS MAY AFFECT THE WORK UNDER THIS CONTRACT. FAILURE TO EXAMINE THE SITE WILL NOT RELIEVE THE SUCCESSFUL BIDDER FROM THE NECESSITY TO PROVIDE WORK THAT MAY BE REQUIRED TO COMPLETE THE WORK WITHOUT ADDITIONAL COST TO THE OWNER.

EXPLANATION TO BIDDERS:
A. NO ORAL EXPLANATION IN REGARD TO THE MEANING OF THE DRAWINGS AND SPECIFICATIONS WILL BE MADE AND NO ORAL INSTRUCTIONS WILL BE GIVEN BEFORE THE AWARD OF THE CONTRACT.
DISCREPANCIES, OMISSIONS, OR DOUBTS AS TO MEANING OF THE DRAWINGS AND SPECIFICATIONS SHALL BE COMMUNICATED IN WRITING TO THE OWNER FOR INTERPRETATION.
IN THE EVENT OF UNRESOLVED DISCREPANCIES OR AMBIGUITY, ARCHITECT OF RECORD WILL BE THE FINAL JUDGE ON PLAN INTERPRETATION. BIDDERS SHOULD ACT PROMPTLY AND ALLOW SUFFICIENT TIME FOR A REPLY TO REACH THEM BEFORE THE SUBMISSION OF THEIR BIDS. ANY REVISION MADE WILL BE IN THE FORM OF AN ADDENDUM TO THE SPECIFICATIONS BEARING THE APPROVAL OF THE OWNER AND WILL BE FORWARDED TO ALL BIDDERS AND ITS RECEIPT BY THE BIDDER SHOULD BE ACKNOWLEDGED BY THE BIDDER BY HIS SIGNATURE AFFIXED THERETO AT THE TIME OF RECEIPT AND VERIFIED BY HIS ACKNOWLEDGMENT ON THE BID FORM.
B. EACH PROSPECTIVE BIDDER WILL BE FURNISHED BIDDING DOCUMENTS TO COMPLETE THEIR BID.

PREPARATION & SUBMISSION OF BIDS:
A. THE BIDDER IS REQUIRED TO BID ON ALL ALTERNATES AND/OR ALLOWANCES OR ON ALL ITEMS CALLED FOR IN THE BID FORM, EXCEPT WHEN ALTERNATES ARE CALLED FOR ON A TYPE OR METHOD OF CONSTRUCTION AS TO WHICH BIDDER DOES NOT DESIRE TO BID, HE MAY INSERT THE WORDS "NO BID" IN THE SPACE PROVIDED FOR PRICES ON SUCH ALTERNATE TYPE OR METHOD OF CONSTRUCTION.
B. BIDS SHALL BE SUBMITTED ON THE FORMS FURNISHED AND SHALL BE SIGNED IN INK. ERASURES OR OTHER CHANGES IN A BID MUST BE EXPLAINED OR NOTED OVER THE SIGNATURE OF THE BIDDER. BIDS CONTAINING ANY CONDITIONS, OMISSIONS, UNEXPLAINED ERASES OR ALTERNATES, OR ITEMS NOT CALLED FOR IN THE PROPOSAL, OR IRREGULARITIES OF ANY KIND, MAY BE REJECTED BY THE OWNER AS BEING INCOMPLETE.

BID ANALYSIS:
BIDS SHALL BE ACCOMPANIED BY ONE (1) SIGNED COPY OF POPEYE'S STANDARD "BID ANALYSIS" FORM. AS INDICATED ON THE FORM, INDIVIDUAL LINE ITEMS ARE TO BE SHOWN AT THE GENERAL CONTRACTOR'S COST WITH NO MARKUP FOR OVERHEAD OR PROFIT BY THE GENERAL CONTRACTOR. HOWEVER, EACH LINE ITEM SHALL INDICATE THE FULL VALUE OF SUBCONTRACTOR WORK INCLUDING SUBCONTRACTOR'S OVERHEAD AND PROFIT. SUPERVISION, OVERHEAD, AND PROFIT FOR THE GENERAL CONTRACTOR'S WORK SHALL BE SHOWN ON THE APPROPRIATE LINES.

AWARD OF CONTRACT:
THE OWNER RESERVES THE RIGHT TO DETERMINE WHAT ARE INFORMALITIES IN THE MAKING, RECEIVING, AND OPENING OF BIDS AND THE AWARDING OF CONTRACTS THEREON, AND THE FURTHER RIGHT TO WAIVE ANY SUCH INFORMALITY WHEN SUCH WAIVER IS, IN THE DISCRETION OF THE OWNER, TO THE BEST INTEREST, ALSO. TO ACCEPT ANY ITEM IN THE BID UNLESS OTHERWISE SPECIFIED.

REJECTION OF BIDS:
THE OWNER RESERVES THE RIGHT TO REJECT ANY AND ALL BIDS.

STANDARD FORMS:
1. AIA DOCUMENT A305 - CONTRACTORS QUALIFICATIONS STATEMENT.
2. AIA DOCUMENT G701 - CHANGE ORDER.
3. AIA DOCUMENT G702 - APPLICATION AND CERTIFICATE OF PAYMENT. THIS DOCUMENT SUMMARIZES THE CONTRACT AMOUNT, WORK COMPLETED, STORED MATERIALS, RETAINAGE, PREVIOUS CERTIFICATES OF PAYMENT, AND THE CURRENT AMOUNT DUE.
4. AIA DOCUMENT G703 - CONTINUATION SHEET (ONE (1) OR MORE SHEETS AS REQUIRED). THIS DOCUMENT DETAILS THE AMOUNTS SUMMARIZED ON DOCUMENTS G702. IT PROVIDES A PROJECT BREAKDOWN AND DISCLOSES THE NAME OF THE COMPANY PROVIDING LABOR AND MATERIALS. WHEN LABOR IS PAID BY THE CONTRACTOR DIRECTLY TO INDIVIDUAL WORKERS, IT SHOULD BE IDENTIFIED AS "G.C. LABOR". THIS DOES NOT INCLUDE ANY LABOR PAID TO A THIRD PARTY. MATERIALS TAKEN FROM THE CONTRACTOR'S INVENTORY SHOULD BE LISTED AS "G.C. MATERIALS". THIS MAY NOT INCLUDE MATERIALS DELIVERED DIRECTLY TO THE JOB SITE OR IDENTIFIED IN ANY WAY THE SUPPLIER WITH AFCE. CONTRACTOR'S OVERHEAD AND PROFIT SHALL BE SHOWN AS A SEPARATE LINE ITEM. IF SUBCONTRACTOR AMOUNTS CHANGE FROM AMOUNTS SHOWN ON THE ORIGINAL PROJECT BREAKDOWN, THE CHANGES SHALL BE SHOWN ON THE PAYMENT REQUEST WITH A CORRESPONDING CHANGE TO THE CONTRACTOR'S OVERHEAD AND PROFIT LINE. UNLESS A CHANGE ORDER IS INVOLVED, THE TOTAL CONTRACT AMOUNT SHALL REMAIN THE SAME.
5. CERTIFICATE OF SUBSTANTIAL COMPLETION, AIA DOCUMENT A704.
6. CERTIFICATE OF INSURANCE, AIA DOCUMENT G705.
7. AIA DOCUMENT G706 - CONTRACTOR'S AFFIDAVIT OF PAYMENT OF DEBTS AND CLAIMS - IN THIS DOCUMENT, THE CONTRACTOR SWEARS THAT ALL SUBCONTRACTORS AND MATERIALMEN ARE DISCLOSED ON G703 AND THAT EACH HAS BEEN PAID.
8. AIA DOCUMENT G706A - CONTRACTOR'S AFFIDAVIT OF RELEASE OF LIENS - IN THIS DOCUMENT, THE CONTRACTOR SWEARS THAT ALL SUBCONTRACTORS AND MATERIALMEN ARE LISTED ON G703 AND THAT WAIVERS OF LIENS, HIS OWN INCLUDED, ARE ATTACHED.
9. AIA DOCUMENT G805 - LIST OF SUBCONTRACTORS
10. AIA DOCUMENT G713 - CHANGE ORDER AUTHORIZATIONS.
11. CONSENT OF SURETY (SURETY COMPANY'S FORM).
12. PARTIAL WAIVER OF LIEN FORM - IN THIS FORM, THE CONTRACTOR, SUBCONTRACTORS AND MATERIALMEN WAIVE THEIR RIGHT TO FILE A LIEN FOR WORK PERFORMED TO DATE. THIS DOCUMENT IS ACCEPTABLE FOR INTERIM CERTIFICATES OF PAYMENT.
13. FINAL WAIVER OF LIEN FORM - IN THIS FORM, THE CONTRACTOR, SUBCONTRACTORS AND MATERIALMEN WAIVE THEIR RIGHT TO FILE A LIEN FOREVER.
14. CONTRACTOR'S AFFIDAVIT OF DISCLOSURE OF DEBTS AND CLAIMS. IN THIS DOCUMENT, THE CONTRACTOR SWEARS THAT ALL DEBTS AND CLAIMS ARE DISCLOSED. IT SUMMARIZES THE CURRENT AMOUNT DUE EACH FIRM (CONTRACTOR, SUBCONTRACTOR, OR MATERIALMEN) LISTED ON G703. IT ALSO PROVIDES THE ADDRESS, PHONE NUMBER, AND REPRESENTATIVE OF EACH FIRM.

CONTRACT FORMS
1. THE CONTRACT FOR CONSTRUCTION SHALL BE POPEYES LOUISIANA KITCHEN, INC. "CONSTRUCTION CONTRACT AGREEMENT" FOR ALL CONSTRUCTION.

GENERAL CONDITIONS

GENERAL:
A. THE "GENERAL CONDITIONS OF THE CONTRACT FOR CONSTRUCTION", STANDARD FORM OF THE AMERICAN INSTITUTE OF ARCHITECTS, FORM A-201, LATEST EDITION, ARE HEREBY, EXCEPT AS THE SAME MAY BE INCONSISTENT HEREWITH, MADE A PART OF THIS SPECIFICATION. COPIES ARE TO BE OBTAINED AND ARE INCORPORATED BY REFERENCE AND HEREBY MADE A PART OF THE CONTRACT.
B. WHERE ANY ARTICLE OF THE AIA "GENERAL CONDITIONS" IS SUPPLEMENTED HEREBY THE AIA PROVISION OF SUCH ARTICLE SHALL REMAIN IN EFFECT. ALL THE SUPPLEMENTARY CONDITIONS SHALL BE CONSIDERED AS IF ADDED THERETO. WHERE ANY PORTION OF SUCH ARTICLE IS AMENDED, VOIDED OR SUPERSEDED THEREBY, THE PROVISIONS OF SUCH ARTICLE NOT SO SPECIFICALLY AMENDED, VOIDED, OR SUPERSEDED SHALL REMAIN IN EFFECT.
C. THE GENERAL CONDITION SUPPLEMENTARY CONDITIONS AND APPLICABLE PORTIONS OF DIVISION I OF THE SPECIFICATIONS APPLY TO ANY AND ALL SUBSEQUENT SECTIONS OF THESE SPECIFICATIONS.
D. WHERE ANY ARTICLE OR PORTION OF AN ARTICLE CONFLICTS WITH THE LAWS OF THE STATE OF THE LOCATION OF THE PROJECT, SUCH ARTICLE, OR PORTION OF THE ARTICLE IS HEREBY STRICKEN.
E. "CONTRACTOR SHALL BE REQUIRED TO COMPLY WITH THE 1990 AMERICANS WITH DISABILITIES ACT (29CFR PART 1630). TITLE III AND THE REGULATIONS PROMULGATED IN ACCORDANCE THEREIN. CONTRACTOR SHALL INDEMNIFY AND HOLD OWNER AND ARCHITECT HARMLESS FROM ANY AND ALL LOSSES, SUITS, CLAIMS, COSTS, EXPENSES AND OTHER DAMAGES WHICH MAY BE INCURRED BY OWNER/ARCHITECT AS A RESULT OF CONTRACTOR'S FAILURE TO COMPLY WITH SAID ACT".

ARTICLE 3 - CONTRACTOR:
A. ARTICLE 3.4 LABOR AND MATERIALS OF SAID "GENERAL CONDITION" PARAGRAPH 4.4.3 IS HEREBY ADDED AS FOLLOWS:
"ALL CONTRACTORS AND SUBCONTRACTORS EMPLOYED UPON THE WORK SHALL BE REQUIRED TO CONFORM TO THE FEDERAL, STATE, AND LOCAL LABOR LAWS AND VARIOUS ACTS AMENDATORY AND SUPPLEMENTARY THERETO, AND TO ALL OTHER LAWS, ORDINANCES, AND LEGAL REQUIREMENTS APPLICABLE THERETO."
B. ARTICLE 3.6 TAXES OF SAID "GENERAL CONDITIONS" PARAGRAPH 3.6.1 IS HEREBY AMENDED AND SUPPLEMENTED AS FOLLOWS:
"THE CONTRACTOR SHALL PAY FOR ALL TAXES NECESSARY FOR THE PROPER EXECUTION AND COMPLETION OF THE WORK, BOTH TEMPORARY AND PERMANENT."
C. ARTICLE 3.7 PERMITS, FEES AND NOTICES OF SAID "GENERAL CONDITIONS" PARAGRAPH 4.7.3 DELETE IN ITS ENTIRETY AND SUBSTITUTE IN LIEU THEREOF AS FOLLOWS:
"THE CONTRACTOR SHALL BRING TO THE ATTENTION OF THE OWNER ANY CONFLICTS, OMISSIONS, DELETIONS, OR ERRORS IN THE DRAWINGS AND/OR SPECIFICATIONS WHICH DO NOT CONFORM TO APPLICABLE ZONING, CODE AND OTHER USE REGULATIONS AND/OR TO THE AMERICANS WITH DISABILITIES ACT AND REGULATIONS PROMULGATED THEREUNDER. THE CONTRACTOR SHALL NOT BE LIABLE TO THE OWNER OR THE ARCHITECT FOR ANY DAMAGES RESULTING FROM ANY SUCH ERRORS EXCEPT THAT CONTRACT SHALL BE FULLY AND EXCLUSIVELY LIABLE UPON FAILURE TO PUT ARCHITECT ON NOTICE OF SAID CONFLICTS, OMISSIONS, DELETIONS, OR ERRORS."
D. ARTICLE 3.15 CLEANING UP OF SAID "GENERAL CONDITIONS" PARAGRAPH 3.15.1 HEREBY AMENDED AND ADDED AS FOLLOWS:
"HE SHALL REMOVE FROM THE JOB SITE ALL CRATES, PACKING, DEBRIS, ETC. FROM KITCHEN EQUIPMENT. HE SHALL BROOM CLEAN THE BUILDING INTERIOR DAILY. AT THE COMPLETION OF THE PROJECT, THE CONTRACTOR SHALL LEAVE THE BUILDING CLEANED DUST FREE, CLEAN ALL GLASS, REPLACE ANY BROKEN GLASS, REMOVE STAINS, SPOTS, MARKS AND DIRT FROM DECORATED WORK, CLEAN HARDWARE, REMOVE PAINT SPOTS FROM ALL SURFACES, CLEAN FIXTURES, AND WASH ALL TILE FLOORS."

ARTICLE 11 - INSURANCE:
A. ARTICLE 11.1 CONTRACTOR'S LIABILITY INSURANCE OF SAID "GENERAL CONDITIONS" IS HEREBY MODIFIED AS FOLLOWS:
INSURANCE: COMPREHENSIVE, AUTOMOBILE, UMBRELLA LIABILITY CERTIFICATES OF INSURANCE FROM CARRIERS APPROVED BY THE OWNER SHALL BE FILED IN NOT LESS THAN THE FOLLOWING AMOUNTS OR GREATER AMOUNTS AS REQUIRED BY LAW PRIOR TO COMMENCEMENT OF THE WORK:
1. WORKMEN'S COMPENSATION:
AS REQUIRED BY LAW IN APPLICABLE STATE
2. COMPREHENSIVE GENERAL LIABILITY:
(A) $1,000,000 PER OCCURRENCE COMBINED- SINGLE LIMIT
(B) $2,000,000 AGGREGATE
3. OWNED AND NON-OWNED AUTOMOBILE LIABILITY:
$500,000 PER OCCURRENCE
4. 4. EXCESS (UMBRELLA) LIABILITY:
$2,000,000 PER OCCURRENCE ALL INSURANCE POLICIES AND CERTIFICATES FOR WORK PERFORMED FOR AFCE SHALL SHOW THE OWNER AS AN ADDITIONAL NAMED INSURED PARTY. THEY MUST ALSO STATE THAT THE COVERAGE AFFORDED UNDER THE POLICIES SHALL NOT BE CANCELED WITHOUT THIRTY (30) DAYS' PRIOR NOTICE TO THE OWNER AS EVIDENCED BY THE RETURN RECEIPT OF A REGISTERED LETTER AND BE IN FULL FORCE FOR 3 YEARS FOLLOWING COMPLETION EXPIRATION OR TERMINATION OF THIS CONTRACT.

B. ARTICLE 11.3 PROPERTY INSURANCE OF SAID "GENERAL CONDITIONS" IS HEREBY AMENDED AND MODIFIED AS FOLLOWS:
INSURANCE: FOR PROJECTS WHERE AFC ENTERPRISES IS THE OWNER, THE CONTRACTOR SHALL PROVIDE THE BUILDER'S RISK INSURANCE.
THE INSURANCE SHALL BE IN AN AMOUNT EQUAL TO THE TOTAL AMOUNT OF THE CONTRACT, LESS THE AMOUNT OF THE SITE WORK. INSURANCE WILL BE ON ALL RISK BASIS WITH $5,000.00 DEDUCTIBLE. THE $5,000 DEDUCTIBLE WILL BE PAID BY THE CONTRACTOR. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE TOTAL AMOUNT OF LOSSES OF ALL BUILDING MATERIAL, TOOLS AND EQUIPMENT IN HIS POSSESSION AND NOT PERMANENTLY AFFIXED TO THE BUILDING OR SITE.
BUILDERS' RISK INSURANCE CERTIFICATES WILL BE FURNISHED UPON REQUEST BY AFCE. ONE COPY WILL BE SENT DIRECTLY TO AFCE'S CONSTRUCTION COORDINATOR.
CLAIMS FOR DAMAGES MUST BE REPORTED TO AFCE'S INSURANCE DEPARTMENT. IMMEDIATELY BY TELEPHONE (404) 391-9500. TELEPHONE REPORTS MUST BE FOLLOWED UP WITHIN TWENTY FOUR (24) HOURS BY A WRITTEN REPORT. SEND THE FIRST COPY TO AFCE'S INSURANCE DEPARTMENT, 5555 GLENRIDGE CONNECTOR, NE, SUITE 300, ATLANTA, GA 30342, AND SEND THE COPY TO AFCE'S CONSTRUCTION DEPARTMENT (SAME ADDRESS). THE CONTRACTOR SHALL RETAIN THE THIRD COPY FOR HIS FILES. BLANK FORMS ARE AVAILABLE FROM AFCE'S INSURANCE DEPT.

ARTICLE 7 - CHANGES IN THE WORK:
A. ARTICLE 7.2 CHANGE ORDERS OF SAID "GENERAL CONDITIONS" SUBPARAGRAPH 7.2.1 IS HEREBY EXTENDED AS FOLLOWS:
4. IN CONSIDERING PROPOSALS FOR CHANGES INVOLVING ADDED WORK, OMITTED WORK, OR ANY COMBINATION OF THE TWO, CHECKING OF ESTIMATES WILL BE MADE BY THE OWNER, UTILIZING UNIT PRICES WHERE SPECIFIED OR AGREED UPON, WITH THE VIEW OF ARRIVING AT EQUITABLE ADJUSTMENTS".
5. WITH EACH PROPOSAL FOR A CHANGE INVOLVING INCREASE OR DECREASE IN THE AMOUNT OF THE CONTRACT, THE CONTRACTOR SHALL SUBMIT SEPARATELY AN ITEMIZED BREAKDOWN THAT WILL INCLUDE BUT NOT BE LIMITED TO THE FOLLOWING:
(A) MATERIAL QUANTITIES AND UNIT PRICES (SEPARATED INTO TRADES). PROVIDE BONA FIDE MANUFACTURER'S OR SUPPLIERS' PROPOSALS FOR MANUFACTURED OR PRE ASSEMBLED ITEMS.
(B) LABOR COST
(C) CONSTRUCTION EQUIPMENT
(D) WORKMEN'S COMPENSATION AND PUBLIC LIABILITY
(E) OVERHEAD
(F) PROFIT
(G) SOCIAL SECURITY TAX

SUPPLEMENTARY CONDITIONS

1. PAYMENT TO CONTRACTOR:
A. MONTHLY CONTRACT PAYMENT
MONTHLY PROGRESS PAYMENTS SHALL BE PAID BY THE OWNER FOR 90% OF THE WORK COMPLETED AND MATERIALS STORED AS OF THE LAST DAY OF EACH MONTH. PAYMENTS MAY BE MADE BY THE OWNER ON THE JOINT PAYEE BASIS, REIMBURSEMENT BASIS, OR CASH ADVANCE BASIS AT THE ELECTION OF THE OWNER. CONTRACTOR IS TO FORWARD AUTHORIZED CHANGE ORDER DIRECTIVES, AIA DOCUMENT G701, WHICH HAVE BEEN INCURRED TO THAT POINT, WITH APPLICATION FOR PAYMENT. CONTRACTOR IS TO ADVISE OWNER OR ITS AGENT OF ANY ITEM HE OR SUBCONTRACTOR BELIEVES IS AN ADDITIONAL COST OVER CONTRACT AMOUNT PRIOR TO DOING WORK.
(1) JOINT PAYEE BASIS
CONTRACTORS WILL MAKE APPLICATION TO AFCE ON OR BEFORE THE TENTH OF EACH MONTH FOR A CHECK PAYABLE JOINTLY TO THE SUBCONTRACTORS AND/OR MATERIAL SUPPLIERS AND THE CONTRACTOR. THE REQUEST WILL BE SUPPORTED BY THE ORIGINALS OF THE FOLLOWING DOCUMENTATION (EXPLANATION OF THESE FORMS ARE GIVEN UNDER STANDARD FORMS):
(A) AIA DOCUMENT G702 - APPLICATION AND CERTIFICATE OF PAYMENT
(B) AIA DOCUMENT G703 - CONTINUATION SHEET.
(C) CONTRACTOR'S AFFIDAVIT OF DISCLOSURE OF DEBTS AND CLAIMS. THIS FORM WILL BE PROVIDED BY POPEYES LOUISIANA KITCHEN , INC
(D) INVOICES AND/OR TIME SHEETS WILL ACCOMPANY THE CERTIFICATE OF PAYMENT IN SUPPORT OF WORK AND MATERIALS PROVIDED DURING THE PERIOD OF THE APPLICATION FOR THE CONTRACTOR AND FOR EACH SUBCONTRACTOR AND MATERIAL SUPPLIER REFLECTED ON THE APPLICATION.
CONTRACTOR'S PARTIAL WAIVER OF LIENS FOR ALL WORK AND MATERIALS COMPLETED THROUGH THE BILLING DATE FOR THE CONTRACTOR AND FOR EACH SUBCONTRACTOR AND MATERIAL SUPPLIER REFLECTED ON THE APPLICATION WILL BE EXECUTED BY THE JOINT PAYEE CHECK ENDORSEMENT AS FOLLOWS:
ALL PAYEES MUST SIGN THIS DISCHARGE
"ALL CLAIMS, INTEREST, AND DEMANDS OF THE UNDERSIGNED FOR LABOR DONE OR MATERIAL FURNISHED, AND FOR LIENS, JUDGMENTS, MORTGAGES, OR ANY ACCOUNT WHATSOEVER AGAINST THE PROPERTY (TO BE) OCCUPIED AS A POPEYE'S RESTAURANT AT: (ADDRESS HERE)
OR
"THE OWNER THEREOF, ARE PAID AND SATISFIED, RELEASED, AND DISCHARGED TO THE EXTENT OF THE AMOUNT OF THIS CHECK. THE ENDORSEMENT OF THIS CHECK IS FULL EXECUTION OF THE FOREGOING RELEASE AND SHALL BEAR MY SIGNATURE THEREON."
EXCEPT FOR ANNOTATING THE ADDRESS OF THE CONSTRUCTION SITE, THE ENDORSEMENT MUST NOT BE ALTERED OR QUALIFIED IN ANY WAY.
(2) REIMBURSEMENT BASIS
CONTRACTORS WILL PAY ALL SUBCONTRACTORS AND MATERIAL SUPPLIERS AND MAKE PRESENTATION TO POPEYES LOUISIANA KITCHEN ON OR BEFORE THE TENTH OF EACH MONTH FOR REIMBURSEMENT. THEIR REQUEST WILL BE SUPPORTED BY THE ORIGINALS OF THE FOLLOWING DOCUMENTS (EXPLANATIONS OF THESE FORMS ARE GIVEN UNDER STANDARD FORMS):
(A) AIA DOCUMENT G702 - APPLICATION AND CERTIFICATE FOR PAYMENT
(B) AIA DOCUMENT G703 - CONTINUATION SHEET.
(C) AIA DOCUMENT G706 - CONTRACTOR'S AFFIDAVIT OF PAYMENT OF DEBTS AND CLAIMS.
(D) AIA DOCUMENT G706A - CONTRACTOR'S AFFIDAVIT OF RELEASE OF LIENS.
(E) PARTIAL WAIVER OF LIEN FORM.
B. FINAL PAYMENT
CONTRACTORS WILL MAKE APPLICATION TO POPEYES LOUISIANA KITCHEN , INC. OR OWNER/FRANCHISEE FOR THE FINAL PAYMENT. THE REQUEST WILL BE SUPPORTED BY THE ORIGINALS OF THE FOLLOWING DOCUMENTATION (EXPLANATIONS OF THESE FORMS ARE GIVEN UNDER STANDARD FORMS):
(1) AIA DOCUMENT G702 - APPLICATION AND CERTIFICATE FOR PAYMENT
(2) AIA DOCUMENT G703 - CONTINUATION SHEET.
(3) AIA DOCUMENT G706, AIA DOCUMENT G706A AND FINAL WAIVER OF LIENS FORM PROPERLY EXECUTED AND ACKNOWLEDGED.
(4) AIA DOCUMENT G805 - LIST OF SUBCONTRACTORS
WITHIN THIRTY (30) DAYS AFTER RECEIPT OF THE FILING FOR FINAL PAYMENT, THE OWNER SHALL PAY TO THE CONTRACTOR THE AMOUNT THEREIN STATED, LESS ALL DEDUCTIONS AUTHORIZED BY THE TERMS OF THIS CONTRACT AND PRIOR PAYMENTS AND ADVANCES WHATSOEVER TO OR FOR THE ACCOUNT OF THE CONTRACTOR.
ALL PRIOR ESTIMATES AND PAYMENTS INCLUDING THOSE RELATING TO EXTRA WORK SHALL BE SUBJECT TO CORRECTION AT THE TIME OF THIS PAYMENT, WHICH IS THROUGHOUT THIS CONTRACT CALLED FINAL PAYMENT. FINAL PAYMENT SHALL BE SUBJECT TO INSPECTION AND ACCEPTANCE BY THE OWNER OR DULY AUTHORIZED REPRESENTATIVES OF THE OWNER, AND BY THE REPRESENTATIVES OF ALL AGENCIES HAVING DIRECT INTEREST IN THE PROJECT.
QUESTIONS REGARDING APPLICATIONS CAN BE RESOLVED BY CONTACTING POPEYE'S CONSTRUCTION MANAGER.

2. CERTIFICATE OF SUBSTANTIAL COMPLETION:
THE DATE OF THIS CERTIFICATE SHALL SERVE AS THE TIME FOR COMPUTING THE GUARANTEE PERIOD OF THE BUILDING UNLESS OTHERWISE AGREED UPON.
3. OWNER'S USE AND OCCUPANCY OF BUILDING BEFORE ACCEPTANCE OF CONSTRUCTION:
THE OWNER, FOR OCCUPANCY OF THE BUILDING DESCRIBED IN THE DRAWINGS, MAY TAKE POSSESSION OF AND USE SAME AS HE SO DESIRES UPON A SUBSTANTIAL COMPLETION OF THE CONTRACT, ALSO FURTHER UPON RELIEVING THE CONTRACTOR OF ANY DAMAGE DONE TO THE BUILDING DUE SOLELY TO SUCH OCCUPANCY BY SAID OWNER BUT UNDER NO CIRCUMSTANCES SHALL SUCH OCCUPANCY BE AN ACCEPTANCE OF THE WORK FOR THE COMPLETION OF THE CONTRACT OR AN ACCEPTANCE OF THE LABOR DONE AND MATERIALS USED OR INSTALLED.
4. MANUFACTURED ITEMS IN THE SPECIFICATIONS:
WHERE ITEMS ARE LISTED IN THE SPECIFICATIONS AND/OR "OR EQUAL" IS MENTIONED, THE MATERIALS LISTED SHALL BE USED. THESE MATERIALS SHALL BE INCLUDED IN THE BID SUBMITTED ON THE BID FORM. NO DEVIATION FROM THE MATERIALS LISTED SHALL BE MADE BY THE CONTRACTORS SUBMITTING BIDS. AFTER AWARD OF THE CONTRACT, THE CONTRACTOR MAY SUBMIT A SUBSTITUTE MATERIAL FOR THE ITEMS SPECIFIED AS AN "EQUAL" TO THE MATERIAL. SUCH REQUEST SHALL BE SUPPORTED BY TECHNICAL DATA SHOWING THAT THE MATERIALS OR SERVICE IS EQUAL TO THE ITEMS SPECIFIED AND STATING THE AMOUNT OF DECREASE OR INCREASE IN THE CONTRACT SUM. IF NO CHANGE IN THE CONTRACT SUM WILL BE MADE, STATE "NO CHANGE". THE CONSULTANT'S ARCHITECTURE AND ENGINEERING DEPARTMENT WILL DETERMINE IF THE MATERIAL IS ACCEPTABLE AS A SUBSTITUTE FOR THE SPECIFIED ITEM AND MAKE NOTIFICATION IN WRITING TO THE CONTRACTOR, THIS RULING BEING FINAL. CHANGES TO THE CONTRACT SUM WILL BE HANDLED BY CHANGE ORDER AUTHORIZATION OR CHANGE ORDER FORM.
5. SALES TAX:
A. THIS PROJECT IS SUBJECT TO STATE AND LOCAL SALES TAX. INCLUDE SALES TAX ON ALL MATERIALS USED IN THE PROJECT.
B. WITH EACH REQUEST FOR PAYMENT, PROVIDE A CERTIFIED STATEMENT OF THE AMOUNT PAID FOR SALES TAX IN THE REQUESTED SUM.
6. NONDISCRIMINATION CLAUSE:
THE CONTRACTOR, HIS AGENT, OR HIS EMPLOYEES SHALL NOT DISCRIMINATE IN ANY MANNER ON THE BASIS OF RACE, COLOR, CREED, SEX, OR NATIONAL ORIGIN WITH REFERENCE TO THE SUBJECT MATTER OF THIS CONTRACT, NO MATTER HOW REMOTE.

DIVISION 01 - GENERAL REQUIREMENTS

WORK OF CONTRACT — 01 01 00

PART 1 - GENERAL

1.1 CONTRACT DOCUMENTS
A. THE CONSTRUCTION CONTRACT DOCUMENT WILL BE PREPARED BY POPEYES. A COPY MAY NOT BE BOUND WITH THESE DOCUMENTS.
B. THE STANDARD FORM OF GENERAL CONDITIONS OF THE STIPULATED PRICE CONTRACT CCDC 2, 2008, AND SUPPLEMENTARY CONDITIONS THERETO FORM AN INTEGRAL PART OF THE SPECIFICATIONS.
C. PERFORM ALL WORK DESCRIBED IN THE CONTRACT DOCUMENTS UNDER ONE CONTRACT.
D. AN EXECUTED CCDC CONTRACT WILL BE REQUIRED BEFORE APPLICATION OF PERMIT.

1.2 CONTRACT WORK
A. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE INCLUSION OF ALL WORK REQUIRED FOR COMPLETION OF THE PROJECT AND SHALL CO-ORDINATE THE WORK OF HIS SUBCONTRACTORS SO THAT IT IS ACCOMPLISHED.
B. THE CONTRACTOR SHALL EXAMINE ALL DRAWINGS AND SPECIFICATIONS AND REPORT AND DISCREPANCIES TO THE OWNER PRIOR TO SUBMITTING TENDER.
C. THE CONTRACTOR IS RESPONSIBLE FOR CO-ORDINATION OF ALL SUB-TRADES AS OUTLINED IN INSTRUCTIONS TO BIDDERS.
D. **THE CONTRACTOR SHALL OFF-LOAD KITCHEN EQUIPMENT SUPPLIED BY STORE FIXTURE COMPANY AND POPEYES. **
E. **THE CONTRACTOR** IS TO CLEAN THE SITE AND BUILDING BEFORE THE STORE FIXTURES AND POPEYES EQUIPMENT DELIVERY.
F. CONTRACTOR AND SUB-TRADES TO BE ON SITE AT ALL TIMES DURING EQUIPMENT INSTALLATION.
G. THE CONTRACTOR IS RESPONSIBLE FOR PROVIDING REFUSE REMOVAL FOR DURATION OF PROJECT.
H. THE CONTRACTOR IS RESPONSIBLE FOR CLEANING ROOF OF ALL DEBRIS AT THE END OF CONSTRUCTION.
I. THE CONTRACTOR SHALL KEEP THE SITE CLEAN AND ORDERLY CLEAN THE BUILDING AND SITE AT THE END OF EACH DAY DURING THE CONSTRUCTION PERIOD.

1.3 CONSTRUCTION STANDARDS
A. CONSTRUCTION WORK TO EQUAL OR EXCEED MINIMUM STANDARDS SPECIFIED FOR MATERIALS, INSTALLATION METHODS, WORKMANSHIP AND CONSTRUCTION IN PART 3 OF THE BUILDING CODE, LATEST EDITION, EXCEPT WHERE ADDITIONAL OR MORE STRINGENT REQUIREMENTS ARE IMPOSED BY REFERENCE TO OTHER PARTS OF THE NATIONAL BUILDING CODE, BY PROVINCIAL CODES, BY LOCAL JURISDICTIONAL AUTHORITIES, OR BY THE DRAWINGS, SPECIFICATIONS, SPECIFIED REFERENCE STANDARDS, AND OTHER INSTRUCTIONS INCLUDED WITH, OR ISSUED IN RELATION TO, THE CONTRACT DOCUMENTS FOR THIS PROJECT.

1.4 GENERAL CONTRACTOR
A. GENERAL CONTRACTOR TO CO-ORDINATE AND OBTAIN ALL REQUIRED INSPECTION CERTIFICATES AND DELIVER TO THE OWNER A FINAL OCCUPANCY PERMIT.
B. GENERAL CONTRACTOR TO OBTAIN ALL REQUIRED SURVEYS TO MEET BUILDING LAYOUT AND BUILDING PERMIT REQUIREMENTS.
C. GENERAL CONTRACTOR TO OBTAIN A REGISTERED SURVEY FOR THE BUILDING AND SITE PRIOR TO RELEASE OF FINAL PAYMENT AS NOTED IN THE INSTRUCTION TO BIDDERS.

1.5 SECURITY
A. GENERAL CONTRACTOR TO BE RESPONSIBLE FOR SECURITY OF ALL AREAS AFFECTED BY WORK OF THIS CONTRACT UNTIL TAKEN OVER BY THE POPEYES, TO TAKE STEPS TO PREVENT ENTRY TO THE WORK BY UNAUTHORIZED PERSONS AND GUARD AGAINST THEFT, FIRE AND DAMAGE BY ANY CAUSE.
B. GENERAL CONTRACTOR IS RESPONSIBLE FOR THE PREVENTION OF VANDALISM AND THEFT OF ALL TOOLS, EQUIPMENT, MATERIALS AND OWNER'S CONTENTS.

1.6 SAFETY
A. BE GOVERNED BY PERTINENT SAFETY REQUIREMENTS OF FEDERAL, PROVINCIAL OR MUNICIPAL BODIES HAVING AUTHORITY, PARTICULARLY THE CONSTRUCTION SAFETY ACT, THE OCCUPATIONAL HEALTH AND SAFETY ACT, AND WORK IN CONJUNCTION WITH THE PROPER SAFETY ASSOCIATIONS OPERATING UNDER THE AUTHORITY OF EACH JURISDICTION.
B. PROTECT OWNER, OWNER'S EMPLOYEES, THE PUBLIC AND THOSE EMPLOYED ON THE WORK FROM BODILY INJURY AND TO PROTECT ADJACENT PUBLIC, PRIVATE AND OWNER'S PROPERTY FROM DAMAGE.
C. FURNISH AND MAINTAIN PROTECTION, SUCH AS WARNING SIGNS, TARPAULINS, GUARD RAILS, BARRIERS, NIGHT LIGHTS, RAILINGS AROUND SHAFTS, PIT AND STAIRWELLS, ETC. AS REQUIRED. REMOVE TEMPORARY PROTECTIVE MEASURES WHEN NO LONGER REQUIRED.

1.7 SHOP DRAWINGS
A. SUBMIT SHOP DRAWINGS FOR ALL NON-SPECIFIED MATERIALS AND PRODUCTS IN CONFORMANCE WITH INDUSTRY STANDARDS.
B. REFER TO DIVISION AND SECTIONS OF THE SPECIFICATION FOR WORK REQUIRING SHOP DRAWING SUBMISSION. SUCH WORK SHALL INCLUDE BUT NOT BE LIMITED TO THE FOLLOWING: ROOF JOISTS, ROOFING MATERIAL LIST, DOORS AND FRAMES, HARDWARE, ELECTRICAL PANELS AND CIRCUITING.

1.8 SHOP DRAWINGS
A. **THE CONTRACTOR TO PROVIDE AS BUILT DRAWINGS AND MAINTENANCE MANUALS AS DETAILED IN THE INSTRUCTION TO BIDDERS.**

DIVISION 02 - SITE WORK

SECTION 2A: CLEARING THE SITE

GENERAL PROVISIONS

1. SCOPE: FURNISH ALL MATERIALS, EQUIPMENT AND LABOR, CLEARING, EXCAVATING, REMOVAL OF RUBBISH, TRASH AND OTHER NOTED ITEMS, FILLING, GRADING AND RELATED ITEMS NECESSARY TO COMPLETE CLEARING OF SITE WHERE SHOWN AND SPECIFIED.

PERFORMANCE

REFER TO THE SITE PLAN AND GRADING PLAN TO DETERMINE EXTENT OF WORK NECESSARY UNDER THIS HEADING. WHERE DEMOLITION OF BUILDINGS AND REMOVAL OF TREES IS REQUIRED, A DEMOLITION PLAN SHOWING THE LOCATION OF THE NEW BUILDING, FINISH FLOOR ELEVATION, AND ITEMS TO REMAIN WHERE APPLICABLE.

FIRES, STORAGE OF MATERIALS, DEBRIS, OR PARKING OF EQUIPMENT SHALL NOT BE PERMITTED WITHIN THE SPREAD OF BRANCHES OF TREES TO REMAIN.

SECTION 2B: SITE DRAINAGE

GENERAL PROVISIONS

1. SCOPE: FURNISH AND INSTALL STORM DRAIN PIPES, CATCH BASINS, CURB INLETS, GRATING FRAMES, MANHOLES, AND RELATED ITEMS.

MATERIALS AND PERFORMANCE

1. CONCRETE PIPE SHALL CONFORM TO ASTM SPECIFICATIONS C76 CLASS III EXCEPT PIPE OVER 18" IN DIAMETER SHALL BE CLASS III AND/OR CLASS IV WHERE SURCHARGES REQUIRE.
2. CORRUGATED METAL PIPE SHALL CONFORM TO ASTM A-760, A761, OR A-762. FABRICATION AND INSTALLATION SHALL BE IN ACCORDANCE WITH AISI SPECIFICATIONS.
3. MANHOLES, YARD DRAINS, CURB INLETS, AND CATCH BASINS SHALL BE CONSTRUCTED OF CAST-IN-PLACE AND/OR PRECAST REINFORCED CONCRETE. GRATING AND FRAMES SHALL BE OF CAST IRON. PRECAST MANHOLES SHALL BE PER ASTM SPECIFICATION C-478.
4. VITRIFIED CLAY PIPE SHALL CONFORM TO ASTM SPECIFICATION C-200 FOR EXTRA STRENGTH PIPE.
5. THE HEIGHTS OF STORM DRAINAGE STRUCTURES SHALL BE ADJUSTED SO THAT THE SITE DRAINS PROPERLY AS INTENDED ON THE DRAWINGS WITHIN THE SLOPE LIMITS.

SECTION 2C: EARTHWORK

GENERAL PROVISIONS

1. SCOPE: FURNISH AND INSTALL/PERFORM ALL GENERAL EXCAVATION, FOOTING EXCAVATION, FILLING, BACKFILLING, STRIPPING OF TOPSOIL, SITE GRADING, AND RELATED ITEMS NECESSARY TO BRING THE SUB-GRADE TO PROPER CONTOUR.
2. QUALITY CONTROL: TO ASSURE COMPLIANCE WITH THE FILLING AND BACKFILLING COMPACTION REQUIREMENTS, A SOIL TESTING LABORATORY SHALL BE NOTIFIED BY THE CONTRACTOR TO CHECK COMPACTION WHEN SO INSTRUCTED BY THE OWNER OR HIS AGENT. PROVIDE THE OWNER WITH A COPY OF THE COMPACTION TEST RESULTS.
3. A SOIL REPORT WILL BE CONDUCTED AND FURNISHED BY OWNER AND SHALL BE REFERENCED FOR SPECIFIC SITE, SOIL, AND FOUNDATION MODIFICATIONS.

MATERIAL AND PERFORMANCE

1. FOOTING EXCAVATION: ALL FOOTING EXCAVATION SHALL EXTEND INTO UNDISTURBED VIRGIN SOIL OF 2000 PSF MINIMUM BEARING CAPACITY (UNLESS OTHERWISE NOTED ON THE DRAWINGS OR GEO-TECH REPORT), TO THE DEPTH OF THE FOOTING SHOWN, OR TO A MINIMUM DEPTH REQUIRED BY LOCAL CODE TO MEET FROST LINE OR OTHER RESTRICTIONS, WHICHEVER IS GREATER.

ALL EXCAVATION BELOW THE BOTTOM OF THE FOOTING SHALL BE BACKFILLED WITH 2000 PSI CONCRETE (UNLESS OTHERWISE NOTED ON THE DRAWINGS OR GEO-TECH REPORT), BUT EXCAVATION SHALL NOT EXCEED 10' WITHOUT THE APPROVAL OF THE ENGINEER.

ALL FOUNDATION EXCAVATIONS SHALL BE FREE OF MUD, WATER, AND ALL FOREIGN MATERIAL PRIOR TO POURING.

PROVIDE ADEQUATE PROTECTION AGAINST CAVE-IN.

EXCAVATION FOR PLUMBING, HEATING, AND ELECTRICAL WORK SHALL BE DONE BY THE TRADES INVOLVED.

2. GRADING: THE ENTIRE SITE SHALL BE GRADED TO DRAIN PROPERLY. EXISTING AND FINISH GRADES ARE SHOWN ON THE GRADING PLAN. GRADE AND PROVIDE NECESSARY CUT OR FILL TO BRING THE SUB-GRADE TO THE REQUIRED LEVEL FOR THE BUILDING AND PARKING LOT. ALL FILL MATERIAL AND COMPACTION SHALL BE AS RECOMMENDED IN SOIL ENGINEER'S REPORT. IN THE EVENT THAT NO SOIL ENGINEER'S REPORT IS PROVIDED, ALL FILL MATERIAL AND COMPACTION SHALL BE CLEAN YELLOW SAND OR OTHER BORROW MATERIAL AS SPECIFICALLY APPROVED IN WRITING BY THE OWNER.

IN THE EVENT OF CONFLICT BETWEEN GRADES ESTABLISHED ON THE POPEYE'S SITE AND EXISTING GRADES ON ADJACENT PROPERTIES, THE OWNER SHALL BE NOTIFIED IMMEDIATELY.

3. FILL MATERIAL: REFER TO SOIL REPORT FOR FILL MATERIAL AND COMPACTION SPECIFICATIONS. IF NO SOIL REPORT IS PROVIDED, FOR EACH TYPE OF BORROW MATERIAL DELIVERED TO THE SITE, ONE (1) OPTIMUM MAXIMUM DENSITY CURVE SHALL BE ESTABLISHED BY AN ACCEPTED LABORATORY. THESE DENSITIES SHALL BE DETERMINED BY ASTM D1557, MODIFIED PROCTOR DENSITY. COMPACTION SHALL BE 95% OF MAXIMUM DENSITY WITH MOISTURE CONTENT WITHIN 3% OF OPTIMUM AND CAPABLE OF SUPPORTING 2000 PSF. FILL MATERIAL TO BE LACED IN 6 TO 8 INCH LIFTS.

SECTION 2D: SOIL POISONING

GENERAL REQUIREMENTS

1. SCOPE: FURNISH AND INSTALL CHEMICAL TREATMENT TO PREVENT TERMITE INFESTATION FOR AREAS TO BE COVERED BY BUILDING SLABS, FOOTINGS, AND SIDEWALKS.
2. GUARANTEE: FURNISH WRITTEN GUARANTEE PROVIDING THAT (A) CHEMICAL AS APPLIED MEETS CONCENTRATION REQUIREMENTS AND APPLICATION RATE SPECIFIED HEREIN, (B) SOIL IS EFFECTIVELY TREATED AGAINST TERMITE INFESTATION FOR A PERIOD OF FIVE (5) YEARS FROM DATE OF TREATMENT, AND (C) IF ANY EVIDENCE OF INFESTATION OCCURS WITHIN FIVE (5) YEARS, ENTIRE PROJECT WILL BE COMPLETELY RETREATED AND ALL CONSTRUCTION DAMAGE CAUSED BY TERMITES WILL BE REPAIRED AT NO COST TO OWNER.

MATERIALS

SOIL AREAS DESIGNATED SHALL BE TREATED BY ON OF THE FOLLOWING CHEMICALS AT NOT LESS THAN THE CONCENTRATIONS AS SHOWN BELOW:

CHEMICAL	CONCENTRATION
ALDRIN	.5% IN WATER EMULSION
CHLORIANE	1.0% IN WATER EMULSION
DIELDRIN	.5% IN WATER EMULSION
HELPTACHLOR	.5% IN WATER EMULSION

PERFORMANCE

BECAUSE OF THE TOXIC NATURE OF THESE MATERIALS, THEY SHALL BE APPLIED CAREFULLY TO ONLY THE DESIGNATED AREAS BY AN EXPERIENCED APPLICATOR.

FOUNDATION, WALLS 4 GALLONS PER 10 MIX TO A DEPTH OF
PIERS, ETC. LINEAR FEET 1'0" MIN.
UNIT MASONRY AND 2 GALLONS PER 10 APPLY NEAR BOTTOM
PIERS UNDER LINEAR FEET OF FOUNDATION
FLOOR SLABS
SLABS 1.5 GALLONS PER 10 UNIFORM COVERAGE SQ. FT.

E. DURING - CONCRETE SHALL BE CURED BY PROTECTING IT AGAINST LOSS OF MOISTURE, RAPID TEMPERATURE CHANGE, AND MECHANICAL INJURY FOR AT LEAST THREE (3) DAYS AFTER PLACEMENT. MOIST CURING, WATERPROOF PAPER, WHITE POLYETHYLENE SHEETING, WHITE LIQUID MEMBRANE COMPOUND, OR A COMBINATION THEREOF MAY BE USED. AFTER FINISHING OPERATIONS HAVE BEEN COMPLETED, THE ENTIRE SURFACE OF THE NEWLY-PLACED CONCRETE SHALL BE COVERED BY WHATEVER CURING MEDIUM IS APPLICABLE TO LOCAL CONDITIONS AND APPROVED BY THE ENGINEER. THE EDGES OF CONCRETE SLABS EXPOSED BY THE REMOVAL OF FORMS SHALL BE PROTECTED IMMEDIATELY TO PROVIDE THESE SURFACES WITH CONTINUOUS CURING TREATMENT EQUAL TO THE METHOD SELECTED FOR CURING THE SLAB AND CURB SURFACE. THE CONTRACTOR SHALL HAVE AT HAND AND READY TO INSTALL BEFORE ACTUAL PLACEMENT BEGINS THE EQUIPMENT NEEDED FOR ADEQUATE CURING.

F. OPENING TO TRAFFIC - THE ENGINEER SHALL DECIDE WHEN THE PAVEMENT SHALL BE OPENED TO TRAFFIC. IT SHALL NOT BE OPENED TO TRAFFIC UNTIL THE FIELD-CURED CONCRETE HAS ATTAINED A FLEXURAL STRENGTH OF 550 PSI, OR A COMPRESSIVE STRENGTH OF 3,500 PSI. IF SUCH TEST ARE NOT CONDUCTED, THE PAVEMENT SHALL NOT BE OPENED TO TRAFFIC UNTIL FOURTEEN (14) DAYS AFTER THE CONCRETE WAS PLACED. BEFORE OPENING TO TRAFFIC, THE PAVEMENT SHALL BE CLEANED.

2. ASPHALT:

A. PAVEMENT PREPARATION FOR SUBGRADE: MATERIAL IN SOFT SPOTS SHALL BE REMOVED TO THE DEPTH REQUIRED TO PROVIDE A FIRM FOUNDATION AND REPLACED WITH A MATERIAL EQUAL TO THE BEST SUB-GRADE MATERIAL ON SITE. LOOSELY BONDED SUB-GRADE SHALL BE PRIMED WITH AN ASPHALT PRIMING MATERIAL. THE ENTIRE SUB-GRADE AREA SHALL BE COMPACTED BY AT LEAST FIVE (5) COVERAGES OF A PNEUMATIC-TIRED ROLLER. THE SURFACE OF THE SUB-GRADE AFTER COMPACTION SHALL BE HARD, UNIFORM, SMOOTH AND TRUE TO GRADE AND CROSS SECTION. IF ANY QUESTIONS ARISE AS TO THE CONDITION OF SUB-GRADE, A SOILS ENGINEERING FIRM EMPLOYED BY THE OWNER WILL DETERMINE CONDITION OF SUB-GRADE PRIOR TO PAVING AT THE REQUEST OF THE CONTRACTOR.

B. SPREADING BASE AND SURFACE COURSES - ASPHALT BASE AND SURFACE: FOR ALL AREAS OF MORE THAN 1000 SQUARE YARDS, ASPHALT BASE AND SURFACE COURSES SHALL BE SPREAD AND STRUCK OFF WITH A PAVER. ANY IRREGULARITIES IN SURFACE OF PAVEMENT COURSE SHALL BE CORRECTED DIRECTLY BEHIND THE PAVER. EXCESS MATERIAL FORMING HIGH SPOTS SHALL BE REMOVED WITH A SHOVEL OR LUTE. INTENDED AREAS SHALL BE FILLED WITH HOT MIX AND SMOOTHED WITH A LUTE OR THE EDGE OF A SHOVEL BEING PULLED OVER THE SURFACE. CASTING OF MIX OVER SUCH AREAS SHALL NOT BE PERMITTED.

C. COMPACTION - ASPHALT BASE AND SURFACE: ROLLING SHALL START AS SOON AS THE HOT MIX MATERIAL CAN BE COMPACTED WITHOUT DISPLACEMENT. ROLLING SHALL CONTINUE UNTIL THOROUGHLY COMPACTED AND ALL ROLLER MARKS HAVE DISAPPEARED.

D. SPECIFICATIONS FOR SAMPLING AND PATCHING NEW ASPHALTIC CONCRETE PAVEMENTS

1. AT COMPLETION OF PAVING, TEST CORES SHALL BE TAKEN BY AN INDEPENDENT LABORATORY SELECTED AND PAID BY THE OWNER, TO VERIFY THAT THE THICKNESS OF THE PAVING MATERIALS MEETS THE MINIMUM SPECIFICATION REQUIREMENTS.
2. SUFFICIENT CORES SHALL BE TAKEN IN BOTH PARKING STALLS AND DRIVES TO ENSURE REPRESENTATIVE SAMPLING. HOWEVER, NO LESS THAN FOUR (4) LOCATIONS SHALL BE TESTED.
3. THE TESTING LABORATORY SHALL NOTIFY THE GENERAL CONTRACTOR AT LEAST TWO (2) DAYS PRIOR TO CORING.
4. THE PAVING CONTRACTOR SHALL PATCH CORE HOLES IMMEDIATELY UPON COMPLETION.
5. IF THE ASPHALTIC CONCRETE PATCH CANNOT BE INSTALLED IMMEDIATELY AFTER COMPLETION OF CORING, A MINIMUM OF 5" OF PORTLAND CEMENT CONCRETE SHOULD BE PLACED IN THE TEST HOLE, SUCH THAT THE SURFACE CONCRETE SHOULD HAVE A MINIMUM TWENTY EIGHT (28) DAYS' COMPRESSIVE STRENGTH OF 3,000 PSI, WITH PROPER AIR ENTRAINMENT. SIX (6) TEST HOLES WITH DEPTH IN EXCESS OF 6" MAY BE BACKFILLED TO THE REQUIRED PATCH DEPTH WITH COMPACTED CRUSHED STONE OR PORTLAND CEMENT CONCRETE.
6. PATCHING METHOD:

A. A TACK COAT SHALL BE APPLIED TO THE SIDES OF THE CORE HOLES. THE TACK COAT MAY CONSIST OF SS-1, SS-1H, CSS-1H, RS-1, CRS-1, EMULSIFIED ASPHALT OR RC-70 CUTBACK ASPHALT.

B. AN ASPHALTIC CONCRETE PATCH WITH A MINIMUM THICKNESS EQUAL TO THE ORIGINAL ASPHALTIC CONCRETE OR 3", WHICHEVER IS GREATER, SHOULD BE INSTALLED IN THE CORE HOLE, FLUSH WITH THE EXISTING PAVEMENT SURFACE. THE MINIMUM THICKNESS MAY BE REDUCED TO 1" IF A TEMPORARY CONCRETE PATCH IS UTILIZED AS IN (5) ABOVE.

C. THE ASPHALTIC CONCRETE MAY CONSIST OF HOT MIX PLACED AT A TEMPERATURE OF AT LEAST 285 DEGREES F, OR COLD MIX UTILIZING EMULSIFIED OR CUTBACK ASPHALT. THE ASPHALTIC CONCRETE SHOULD MEET THE APPROPRIATE STATE SPECIFICATIONS FOR ASPHALTIC CONCRETE SURFACE COURSE, AND SHOULD BE PROPERLY COMPACTED.

D. PATCHING SHOULD BE PERFORMED AT TEMPERATURES ABOVE 40 DEGREES F TO ENSURE PROPER SETTING OF THE PORTLAND CEMENT CONCRETE, IF USED, AND CURING OF THE ASPHALTIC CONCRETE, IF COLD MIX IS USED.

3. MARKING: MARK ALL PARKING BAYS, ARROWS, AND OTHER TRAFFIC MARKINGS INDICATED ON SITE PLAN. PAINT TRAFFIC YELLOW REFER TO SITE PLAN. ALL PAINT PRODUCTS TO COMPLY WITH STATE HIGHWAY DEPARTMENT SPECIFICATIONS.

SECTION 2F: OPENING SOON SIGN (OPTIONAL)

GENERAL PROVISIONS

1. SCOPE: FURNISH AND INSTALL WOOD POSTS AND INSTALL SIGN FURNISHED BY OWNER.

MATERIALS

1. "OPENING SOON" LOGO SIGN: SUPPLIED AND SHIPPED TO THE SITE BY THE OWNER. THE SIGN CONSIST OF TWO (2) 4' X 8' WOOD SHEETS. INSTALL ON THREE (3) 4" X 4" X 8' WOOD POST IN "V" SHAPE SO THE SIGN MAY BE READ FROM EITHER DIRECTION. INSTALL THE DAY RECEIVED IN A LOCATION TO ENSURE PRIME VISIBILITY.

SECTION 2G: LANDSCAPING

GENERAL PROVISIONS

1. SCOPE: FURNISH AND INSTALL TOPSOIL TO PROPER CONTOUR FOR ALL AREAS NOTED ON THE SITE PLAN TO BE LANDSCAPED.
2. NOTES:

A. PLANTING MATERIALS AND INSTALLATION SHALL BE PROVIDED UNDER SEPARATE CONTRACT BY THE OWNER.

B. COORDINATE THE TIMING OF THE PLACEMENT OF TOPSOIL WITH THE OWNER IN ORDER TO PREVENT EROSION OF TOPSOIL.

MATERIALS

1. TOPSOIL: 6" MINIMUM TOPSOIL.

PERFORMANCE

THE TOPSOIL FILL SHALL BE PLACED AFTER THE COMPLETION OF ALL FOUNDATION AND SITE UTILITY WORK WHEN CONSTRUCTION IS NEARING COMPLETION. RAKE SMOOTH IN PREPARATION OF PLANT MATERIAL INSTALLATION, AND REMOVE ALL LUMPS AND TRASH. TOPSOIL SHALL BE BACKFILLED TO ALL PERIMETER CURBS, AND TO ANY PAVING. TOPSOIL SHALL BE PLACED IN THE OUTSIDE PLANTER.

2. NO MULCH SHALL BE USED WITHIN 5'-0" OF BUILDING ENVELOPE . USE VOLCANIC ROCK OR NON-FLAMMABLE MULCH WITHIN 5'-0". MULCH CAN BE USED OUTSIDE THIS DIMESION.A

ISSUE TABLE

No.	Date (mm/dd/yy)	Description
01	09-26-25	DTGO PROTOTYPE DOCUMENTS

REVISIONS

No.	Date	Description

DRAWINGS REVISED AS PER DESIGN BULLETIN

No.	Date	Description

THIS DRAWING IS OWNED BY OR LICENSED FOR USE BY POPEYES LOUISIANA KITCHEN (OR ITS AFFILIATED OR RELATED COMPANIES) AND MAY NOT BE REPRODUCED, USED, DOWNLOADED, DISSEMINATED, PUBLISHED, OR TRANSFERRED IN ANY FORM OR BY ANY MEANS, EXCEPT WITH THE PRIOR WRITTEN CONSENT OF POPEYES LOUISIANA KITCHEN . COPYRIGHT INFRINGEMENT IS A VIOLATION OF FEDERAL LAW SUBJECT TO CRIMINAL AND CIVIL PENALTIES.

THE CONTRACTOR IS TO VERIFY ALL DIMENSIONS AND CONDITIONS ON THE PROJECT AND TO REPORT ANY DISCREPANCIES TO THE POPEYES LOUISIANA KITCHEN REPRESENTATIVE PRIOR TO COMMENCING WORK. THESE DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION PURPOSES UNLESS INDICATED BY POPEYES LOUISIANA KITCHEN AS "ISSUED FOR CONSTRUCTION".

Professional Seal

DESIGNER NOTES:
DESIGN GUIDELINE ONLY - NOT FOR PERMIT OR CONSTRUCTION

THESE DOCUMENTS MUST BE COMPLETED AND / OR MODIFIED BY A LICENSED ARCHITECT AND ENGINEER TO CONFORM TO ALL APPLICABLE CODES, AND SPECIFIC SITE CONDITIONS. THERE IS NO WARRANTY, WHETHER IMPLIED OR EXPRESSED THAT THESE DOCUMENTS MEET THE APPLICABLE CODE REQUIREMENTS.
LIABILITY FOR THE DESIGN AND ANY USE OF THE DOCUMENTS IS THE SOLE RESPONSIBILITY OF THE ARCHITECT AND ENGINEER OF RECORD.

Company Logo

Project

Store Type
US DTGO PROTOTYPE

Location
PROTOTYPE
DTGO (U.S.)
CITY, STATE

Drawing Title
ARCHITECTURAL SPECIFICATIONS

Drawn	Checked
XX	XX

Scale	Date
	##.##.####

Project No.	Drawing No.
XX	SP1

POPEYES LOUISIANA KITCHEN MODEL DTGO, ADDRESS, CITY, STATE: DTGO PROTOTYPE DOCUMENTS (OCTOBER, 2025) STORE NO. XXXXX